

# Electronic Design 18

VOL. 20 NO.

FOR ENGINEERS AND ENGINEERING MANAGERS

SEPT. 2, 1972

RECEIVED  
AUG 30 1972

**Cassette or cartridge?** Which recorder for digital information? The choice isn't easy, as specs and pricing are confusing. And the performance of a unit can't be

judged from the spec sheet alone. There's controversy, too: A new cassette standard is in the offing, but some firms may ignore it. For confusion reduction, see page 40.






# broad band-rated™



**ferramic<sup>®</sup>  
components**  
for circuits  
that care

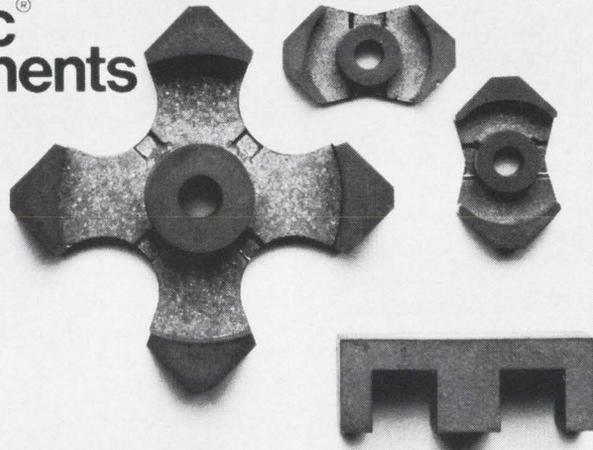

■ When bandwidth is critical, ferrite inductors and transformers must deliver electrical performance over your entire frequency spectrum. Or else your circuit is dead.

*Broad Band-Rated Ferramic* components guarantee the electrical performance required in critical circuits for communications, instrumentation, data transmission, telemetry, and radar applications.

First, we make this special breed of components specifically for broad band applications. So you get extra design latitude to begin with.

Then, we test our *Broad Band-Rated* components. Not as ordinary magnetic material, but as broad band components.

So we can specify bandwidth characteristics under your circuit conditions.

This testing gives you electrical data you need for precise, efficient design. You get pertinent design information, characteristic curves, response curves and applications data.

*Broad Band-Rated* components are part of our growing line of new ferrites designed to meet specific design needs. With guaranteed electrical specs to match their improved performance.

So get in touch with us for design samples. Or get our 24-page bulletin of applications data, performance curves, and specs that make sense. For design assistance in any ferrite problems, contact Indiana General, Electronic Products, Keasbey, N.J. 08832. Or phone (201) 826-5100.

*National distribution through seven Permag locations.*

**indiana general** 

a division of Electronic Memories & Magnetics Corp.

# From those wonderful folks who gave you clean waveforms...






## ...come some of the dirtiest waveforms ever.


Because the new Model 132 generates precise calibrated outputs of digital or analog noise. And because it's really two generators in one, the 132 also puts out super-clean sine, square and triangle waveforms over the frequency range of 0.2 Hz to 2 MHz. You can even mix the clean signals with noise and get calibrated signal-to-noise ratios. Cleans and dirties from Wavetek for only \$795.

### WAVETEK®

P.O. Box 651, San Diego, California 92112  
Telephone (714) 279-2200, TWX 910-335-2007

INFORMATION RETRIEVAL NUMBER 2

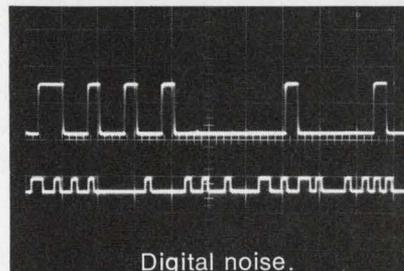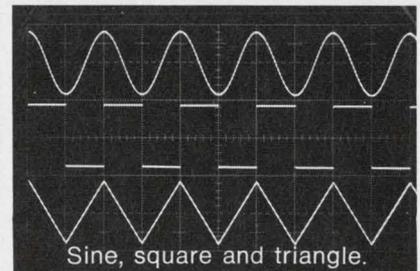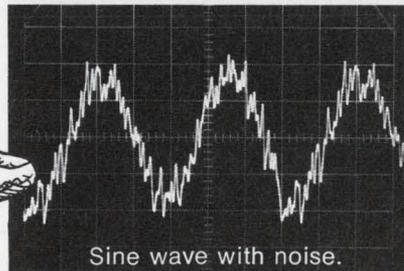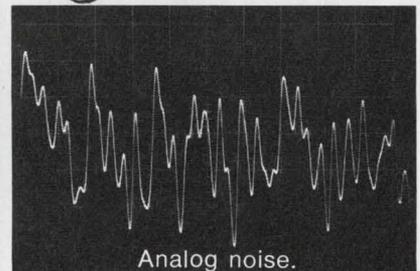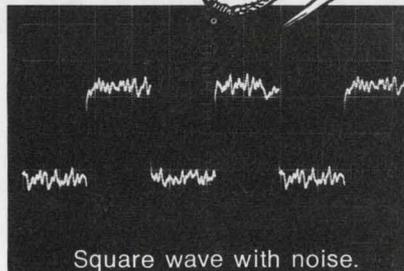

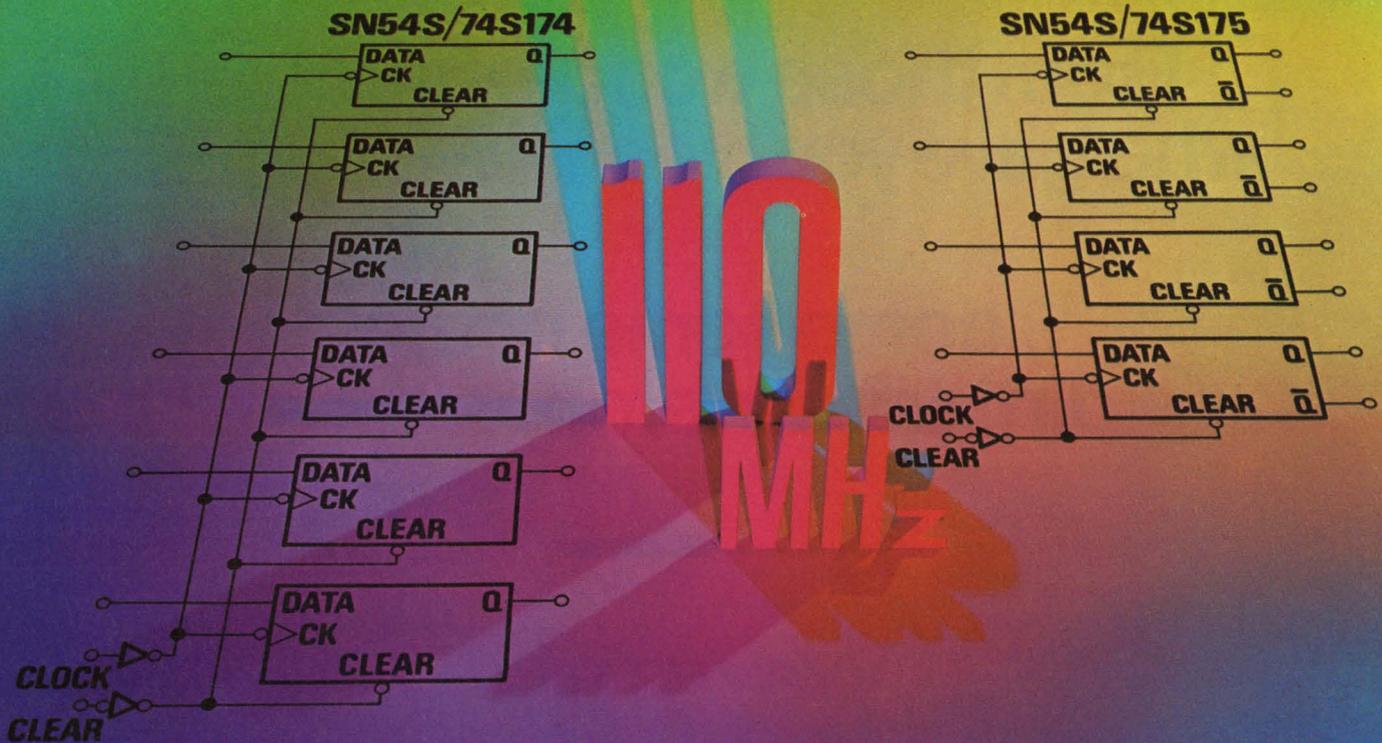

# SCHOTTKY

## Fastest TTL storage registers -- 3 times faster than standard TTL.

With clock frequencies of 110 MHz, these new additions to TI's Series 54S/74S Schottky MSI family are three times faster than the equivalent Series 54/74 TTL storage registers (see table).

The new SN54S/74S174 consists of six D-type flip-flops with single-rail outputs and the new SN54S/74S175 consists of four D-type flip-flops with double-rail outputs. Both are designed for use as buffer-register file memories, high-speed memory address registers, high-speed shift registers/counters and pattern generators.

Delay times are typically 2.5 ns per logic level and both devices have clear inputs. All inputs are buffered for a normalized fan-in of 1 to allow for easier system interconnection.

**TTL Storage Registers  
Speed/Power Comparison**

	Schottky S174/S175	Standard 174/175
Maximum clock frequency (typ)	110 MHz	35 MHz
Propagation delay (clock to output)	10 ns	20 ns
Power dissipation/flip-flop	75 mW	37.5 mW

### Full compatibility

As with all Schottky MSI circuits, these new ICs are fully compatible with all other TTL forms—standard, high-speed, low-power and low-power Schottky.

Not only will new systems benefit from these new storage registers, but also existing system performance can be easily upgraded. Both devices are pin-compatible and functionally identical to their

equivalent Series 54/74 standard TTL circuits.

The new S174 and S175 come in plastic or ceramic dual-in-line packages and in flat packs for use over the  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  and  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  temperature ranges. They're available now from authorized TI distributors or factory stocks.

### Send for Schottky brochure

For details on the fastest TTL storage registers available—as well as other new Series 54S/74S Schottky TTL functions—get Brochure CC-408. Circle 212 on the Service Card or write Texas Instru-



ments Incorporated, P. O. Box 5012, M/S 308, Dallas, Texas 75222.



TEXAS INSTRUMENTS  
INCORPORATED

---

## NEWS

- 19 **News Scope**
- 22 **Broadcasting studios** are installing a variety of new and automated equipment, from AM stereo to computer-controlled transmitters.
- 26 **Improved waveguide** built of graphite.
- 28 **War electronics** proving useful in search for oil in jungle.
- 30 **Flash-protection goggles** become opaque in microseconds.
- 32 **Technology Abroad**
- 35 **Washington Report**

---

## TECHNOLOGY

- 40 **Focus on Digital Cassette and Cartridge Recorders:** A special report on tradeoffs between types of recorders and on the impact of new standards.
- 48 **Avoid ECL-10,000 wiring problems** with board-to-board interconnects and Wire-Wrap techniques that preserve the performance of PC-board layouts.
- 54 **Need a hard-copy peripheral?** Before you select a printer/plotter, know how they work. Here is a quick review of the techniques used.
- 62 **Ideas for Design:**
  - Optical-trigger-link scheme minimizes standby power.
  - Synchronous gating controls complementary clock signals.
  - Digital sweep generator maintains constant output voltage at specified time.

---

## PRODUCTS

- 68 **Packaging & Materials:** Solderless-wrap board handles ECL 10,000 logic.
- 71 **Modules & Subassemblies:** Serial-output a/d converters make data-shuffling easier.
- 72 **ICs & Semiconductors:** Comparator costs slashed by introduction of quad.
- 75 **ICs & Semiconductors:** FIFO memory chip boasts improved data-buffer specs.
- 70 **Modules & Subassemblies**

---

## Departments

- |  |                               |
|--|-------------------------------|
| 39 <b>Editorial:</b> Why waste money on space? |                               |
| 7 Across the Desk                              | 77 New Literature             |
| 76 Evaluation Samples                          | 79 Advertisers' Index         |
| 76 Design Aids                                 | 82 Product Index              |
| 76 Application Notes                           | 82 Information Retrieval Card |

**Cover:** Designed and photographed by Art Director Bill Kelly

# ELIMINATE RESISTOR STOCKPILES


## WITH... BOURNS

# SFR<sup>TM</sup>

SELECTABLE FIXED RESISTOR\*

### 90 SELECTABLE RESISTANCE VALUES IN 1 TINY UNIT.

Model  
4002

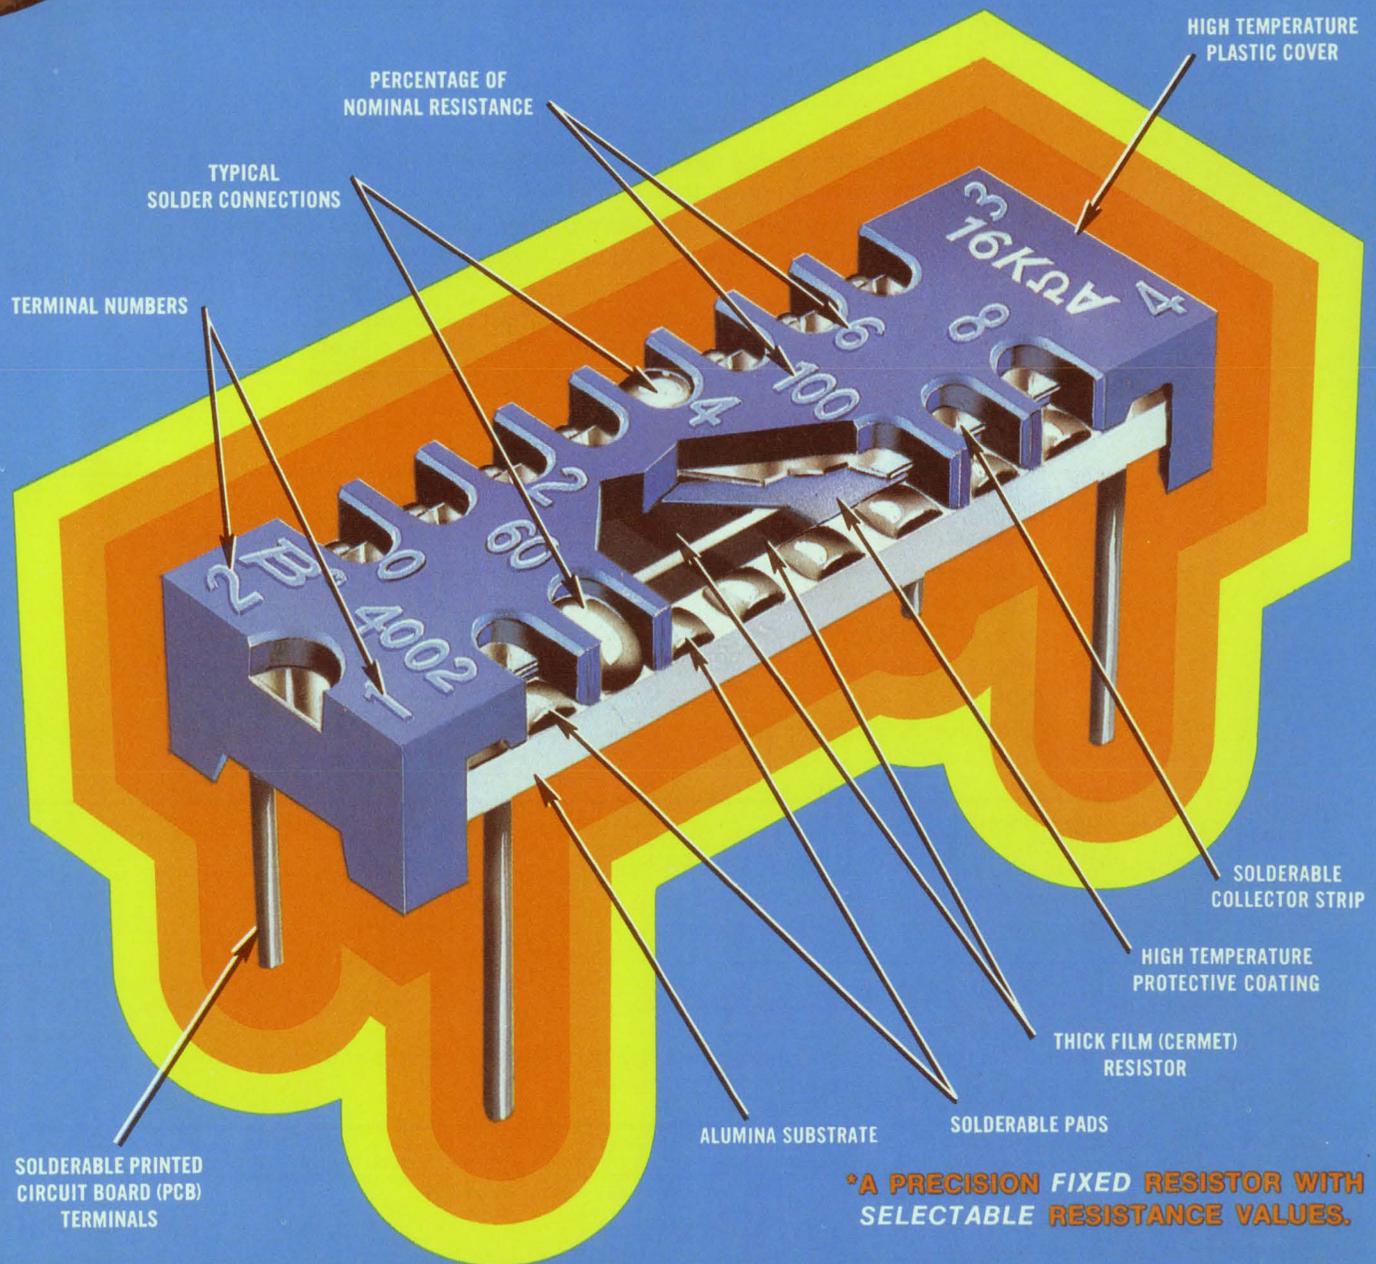

\*A PRECISION FIXED RESISTOR WITH  
SELECTABLE RESISTANCE VALUES.

# BOURNS NEW... UNIQUE CONCEPT IN RESISTIVE COMPONENTS ALSO OFFERS

- \* 33 ohm to 1.25 megohm combined resistance range over 15 units
- \* Selectability within  $\pm 1\%$  of required resistance value over the entire range

**BOURNS**  
**SFR**™  
SELECTABLE FIXED RESISTOR

- ... IS A STABLE, THICK-FILM, FIXED RESISTOR WITH ADJUSTABILITY OF  $\pm 1\%$  OR BETTER
- ... REPLACES STANDARD FIXED RESISTORS IN APPLICATIONS WHERE FINAL RESISTANCE VALUE REQUIRED CAN'T BE PRECISELY DETERMINED AT THE DESIGN STAGE
- ... REPLACES "ONE-TIME ADJUST" VARIABLE RESISTORS IN APPLICATIONS REQUIRING LONG-TERM STABILITY
- ... RESISTANCE VALUE IS SELECTED, THEN PERMANENTLY, RELIABLY SET BY SOLDERING

## LOOK AT THE \$\$ YOU SAVE ON INVENTORY!!

**FOR EXAMPLE:** Your application requires selection of individual resistance values from 550 ohms to 1000 ohms, or 40 different resistors at 10¢ each. One Model 4002 provides the same resistance selection within  $\pm 1\%$  at 76¢\*.

Result: 40 different resistor values:  $40 \times 10¢ = \$4.00$   
One Model 4002:  $1 \times 76¢ = .76$

**YOU SAVE... \$3.24!!**

\* 1,000 piece quantity price U.S. dollars, F.O.B., U.S.A.

### it's easy to use

After mounting on PCB; probe the COARSE and FINE adjustment taps (Figures 1 and 2) to determine the precise resistance required. Solder the selected taps (Figure 3) and the SFR RESISTOR is permanently set.

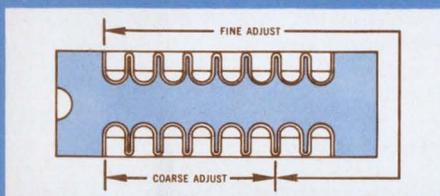


Figure 1



Figure 2

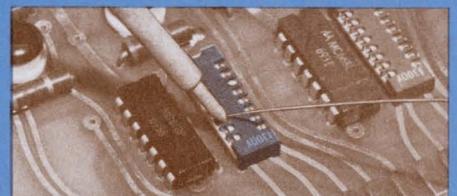


Figure 3

#### FOR COMPLETE DETAILS AND A BROCHURE:

- CALL SFR RESISTOR SALES COLLECT (714) 781-0270
- CONTACT YOUR LOCAL BOURNS REPRESENTATIVE.

FOR A FREE SAMPLE... write to the factory answering the following on your company letterhead.


- (a) My application for the Bourns SFR Resistor is . . .
- (b) It will replace (number) of fixed resistors in my inventory
- (c) Approximate anticipated annual quantity usage: (number)



"SFR" is a trademark of Bourns, Inc. Patents Pending

BOURNS, INC., TRIMPOT PRODUCTS DIVISION • 1200 COLUMBIA AVE., RIVERSIDE, CALIF. 92507

# One "no" and your power supply doesn't go.

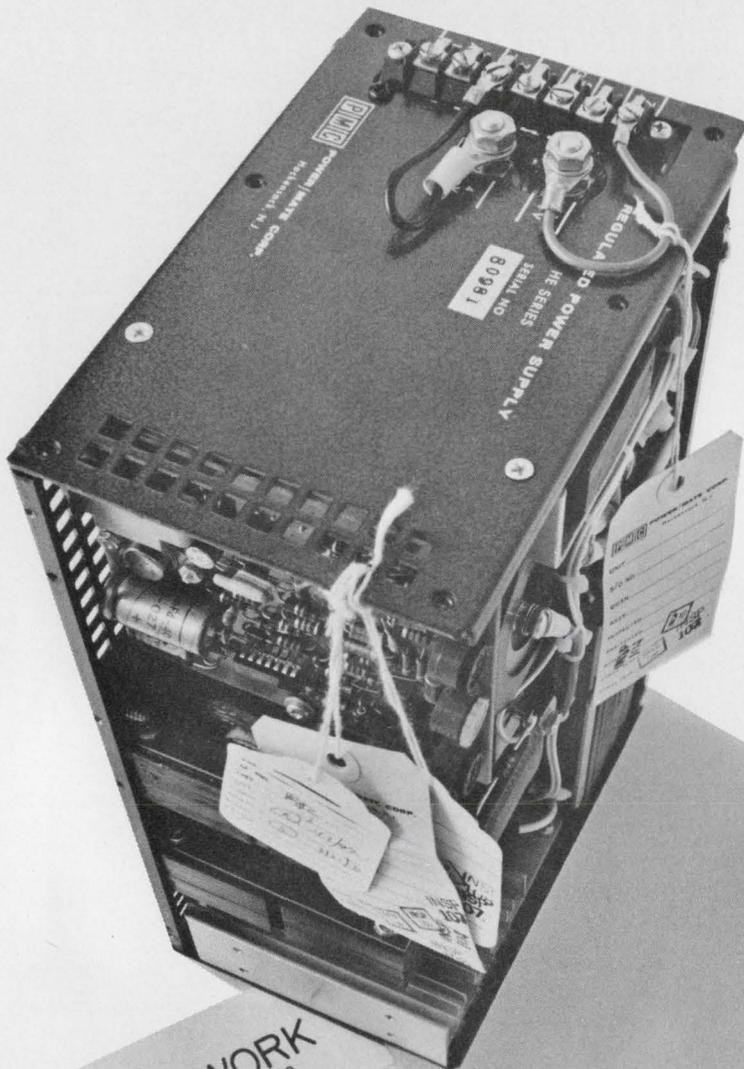

Did you know that each and every Power/Mate power supply gets 42 separate inspections?

A "no" in any one means that your power supply doesn't go out the door.

That's the insistence and emphasis that the new Power/Mate puts on quality. Sure, it costs us more, but that's how Power/Mate makes friends . . . and why Power/Mate is the world's largest producer of quality power supplies.

Send for the Power/Mate catalog . . . 32,500 models . . . most available for same-day shipment.



THE NEW

## POWER/MATE CORP.

514 S. River Street, Hackensack, N. J. 07601/Phone (201) 343-6294  
TWX 710-990-5023

### Publisher

Peter Coley

### Editors

Editorial Offices

50 Essex St.

Rochelle Park, N.J. 07662

(201) 843-0550

TWX: 710-990 5071

Cable: Hadyenpubs Rochellepark

**Editor:** George Rostky

### Managing Editors:

Ralph Dobriner

Michael Elphick

### Associate Editors:

Jules H. Gilder

Richard Lee Goldberg

Morris Grossman

John F. Mason

Stanley Runyon

Edward A. Torrero

Richard L. Turmail

### Contributing Editor:

Peter N. Budzilovich

### Editorial Field Offices

#### East

Jim McDermott, Eastern Editor

P.O. Box 272

Easthampton, Mass. 01027

(413) 527-3632

#### West

David N. Kaye, Senior Western Editor

2930 West Imperial Highway

Inglewood, Calif. 90303

(213) 757-0183

### Editorial Production

Marjorie A. Duffy

### Art

**Art Director,** William Kelly

Richard Luce

Anthony J. Fischetto

### Production

**Manager,** Dollie S. Viebig

Helen De Polo

Maxine Correal

Ann Molfetas

### Circulation

**Manager,** Nancy L. Merritt

Ron Deramo

### Information Retrieval

Peggy Long

## across the desk

### Can any reader help this doctor?

We are completing a design for an analog simulation of glucose metabolism, to be used to give diabetic patients an understanding of their problem by illustrating the effects of eating, exercise, insulin and insulin overdosages on blood sugar, fat stores and insulin response.

I write concerning display devices for showing the output parameters. The subtle interactions of the variables are such that they are difficult to follow on conventional panel meters. Edgewise panel meters offer some improvement. Somewhere I have seen display devices in which a meter movement is used to drive a loop of plastic with colored segments, which is displayed in a window. In another system a meter movement rotates a cylinder that has a colored triangle printed on it. A slot in the window presents a view of the long axis of one side of the cylinder. I think that a display device of this type, giving graphic, semiquantitative data, would be more appropriate for our application than conventional panel meters.

Can you suggest where we might find such devices?

*Dr. G. E. King*

Medical College of Georgia  
Biomedical Engineering  
Augusta, Ga. 30902

### Mislabeled detected in Idea for Design

I have read with interest the Idea for Design of "Edge-Triggered Sequence Generator Results From Johnson Counter" (ED 14, July 6, 1972, p. 78), and I have found that the first D flip-flop, as drawn (FF<sub>1</sub>) with the Event serving as the clock input, makes the

timing diagram, as drawn, incorrect. A possible solution would be to change the waveforms labeled FF<sub>1</sub> and FF<sub>2</sub> to FF<sub>2</sub> and FF<sub>3</sub>, respectively, for G<sub>1</sub> to decode the "delayed pulse output."

*Mike Kleidermacher*  
Digital Design Engineer

RCA  
Camden, N.J. 08102

### The author replies

Mr. Kleidermacher is right. The third and fourth lines of Fig. 2 are incorrectly labeled and should be FF<sub>2</sub> and FF<sub>3</sub>, respectively.

*T. L. Urquhart Jr.*

Radiation, Inc.  
Box 37  
Melbourne, Fla. 32901


### Anybody out there like to sell relays?

"Focus on Relays" in the July 6 issue was rather timely for me. In casting about for a general-purpose (pardon the expression) reed relay for our stores stock, the Electronics Stock Committee of the Brookhaven National Laboratory attempted to get specifications for Form A, Form B and Form C reed relays in a TO-116 package, with a coil voltage of 5 V. We found 13 manufacturers that advertised this kind of relay, and we wrote to each, enclosing a specification sheet we had developed.

The results were rather negative. Here we were, begging for information, begging to be sold relays, and some manufacturers couldn't have cared less. And that's just about par for the course. In all of the years that I've been contacting manufacturers and manufacturers' representatives, letters and phone calls of inquiry have been ignored, been misread, been referred elsewhere, etc. Of course, there have

*(continued on p. 10)*

Electronic Design welcomes the opinions of its readers on the issues raised in the magazine's editorial columns. Address letters to Managing Editor, Electronic Design, 50 Essex St. Rochelle Park, N. J. 07662. Try to keep letters under 200 words. Letters must be signed. Names will be withheld on request.

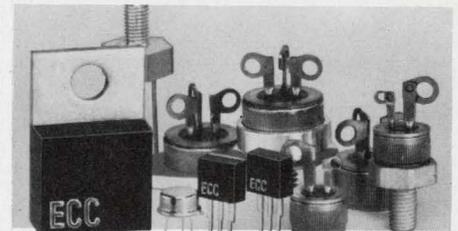

## THE LONG LINE OF ECC

Sensitive and Standard Gate

# SCR's

Fast delivery and competitive prices make ECC's extensive line of SCR's your best buy.

### SENSITIVE GATE SCR's

TO-5 Metal; 5/8" Hex Stud; THERMOPAK\* and THERMOTAB® Packages

I<sub>T(RMS)</sub> 0.8 - 10 amps

I<sub>GT</sub> 50, 200, 1500 μamps max

I<sub>TSM</sub> 50, 100 amps min

V<sub>DOM</sub> 30 - 600 volts min

### STANDARD GATE SCR's

TO-5 Metal; 5/8" Hex Stud; THERMOPAK and THERMOTAB; 1/2" Press-Fit and Stud; 3/4" Press-Fit, Stud and TO-3 Packages

I<sub>T(RMS)</sub> 0.8 - 35 amps

I<sub>GT</sub> 10, 25 ma max


I<sub>TSM</sub> 50 - 325 amps min

V<sub>DOM</sub> 30 - 800 volts min

5/8" Hex Stud; THERMOPAK and THERMOTAB; 3/4" Press-Fit, Stud and TO-3 Packages are electrically isolated.

All ECC SCR's feature heavily glass passivated junctions for high reliability. They are available from your nearest ECC Sales Representative or Authorized Distributor.

\*trademark of ECC



New Condensed Catalog contains technical data on these and other ECC semiconductors. To receive your copy, circle No. 240.

# ECC

CORPORATION

P.O. Box 669 • Euless, Texas 76039  
817/267-2601

# MORE THAN A TAPE MOVER

(Or why 167 OEM's and system builders  
choose CartriFile® over other  
cartridge/cassette tape memories)

## Complete subsystem, easy to install

Our 167 OEM and system-building customers are enthusiastic about CartriFile. It's a new way of life, free from the tape control and interfacing hassles of mere "tape movers."

Of all the tape mini-memories, they've found that CartriFile is the one add-on that's really complete. Supplied WITH: multiple drives in one unit, read/write electronics, controller, interface (available for ALL popular minicomputers), integral power supply, interconnecting cables, and basic software. It's plug-compatible, ready to go, and PROVEN (more than 1,000 CartriFiles shipped since 1968).


## True computer quality


CartriFile is no compromise, either. Unlike most small-sized tape memories, it was designed "from scratch" for on-line computer applica-

tions. It zings along at 18,000 bits per second. It effectively packs 1800 bpi on two tracks recorded in the center of a quarter-inch, computer-grade tape (where they're virtually invulnerable to error). A four-drive system, loaded with 150-foot cartridges, can hold nearly 13 million bits. Data reliability compares favorably to sophisticated, big-system drives—with bit-error rates approaching 1 part in  $10^9$ .

## A simple, straightforward machine

With more complete electronics than other tape memories, CartriFile is STILL a simple machine.

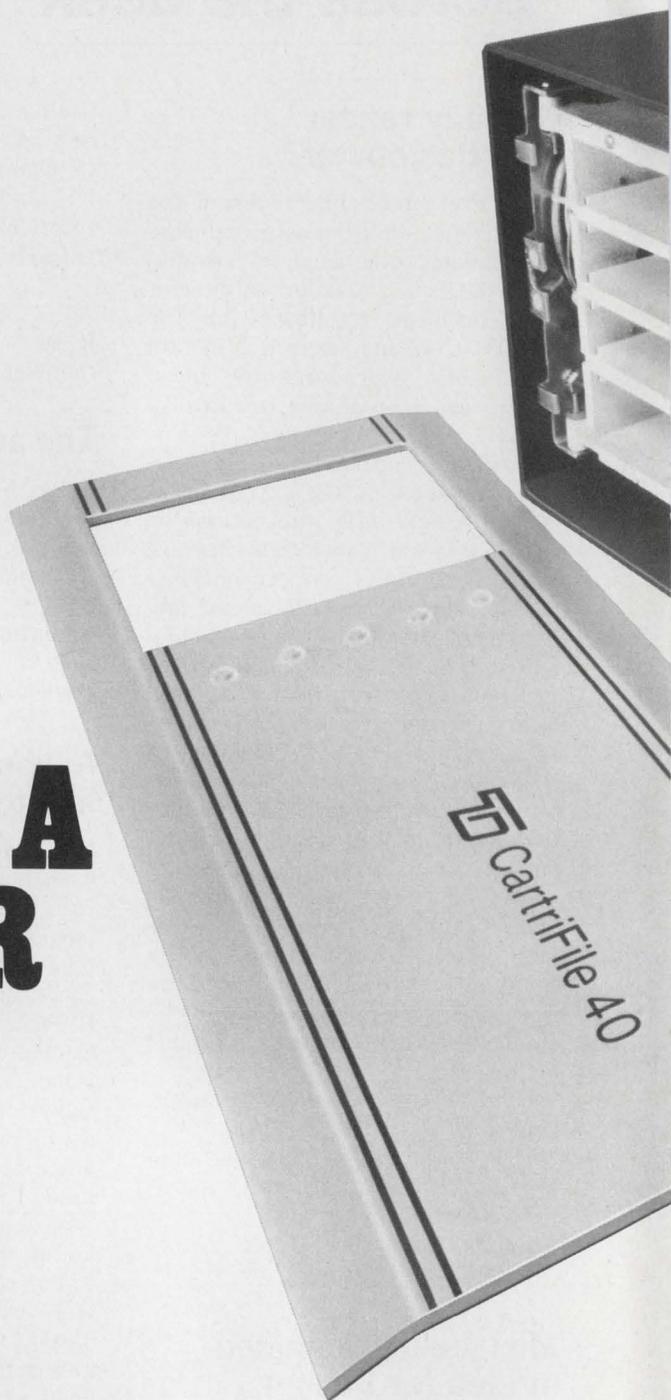

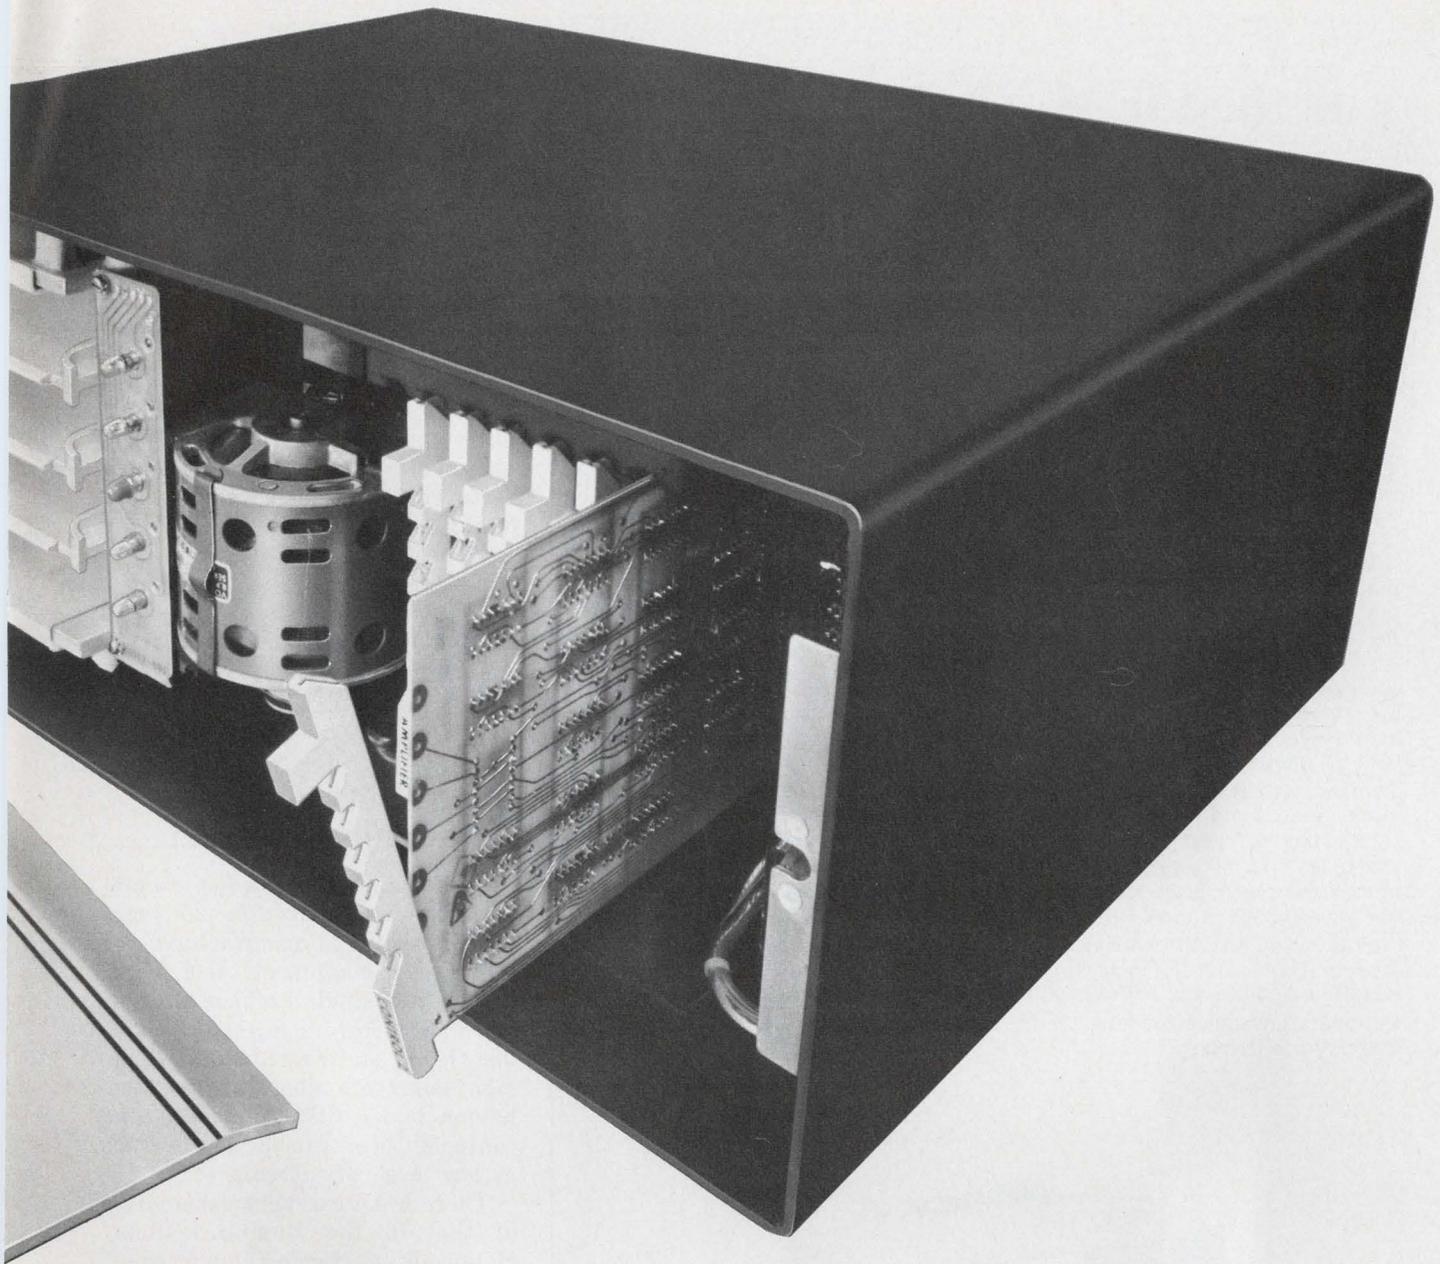

No mechanical gimmicks. Nothing exotic to go haywire. It uses only 3 parts to move tape: a motor, a capstan, and a pinchroller actuator (a pinchroller is built into each CartriFile cartridge). For each additional tape drive, we only add ONE more moving part: an actuator. CartriFile's mechanical simplicity results in unbelievably long MTBF. Just ask our customers.

**ONLY cartridge/cassette with  
6 months guarantee**

You'll get a nice, secure feeling with our certified Tri-Data 1000 Series endless-loop cartridge. It's good for MORE than the "several hundred" passes of a digital cassette. It performs so well, in fact, we've given it an unconditional 6-month guarantee. Typical life for a 50-foot cartridge is a conservative 12,000 passes at CartriFile's high reliability rates. Cartridges are available in 10-, 25-, 50-, and 150-foot lengths.

**Great price/performance family**

Investigate the CartriFile family. You'll find a pleasing array of mini-peripheral memory power. You can choose models with one, two or four tape drives. You can choose a complete subsystem, a system without interface, or a "bare essential" version that's just for OEM's. Prices range from \$750 for the smallest version (in OEM quantities) to \$4950 for a single, 4-drive subsystem. There's a model to fit just about every application.

End your "tape mover" hassles right now. Go CartriFile, a dependable system you can plug in and forget.



**TRI-DATA**

800 Maude Ave. / Mountain View / CA 94040  
Phone (415) 969-3700

INFORMATION RETRIEVAL NUMBER 5

# For the OEM who's been waiting until somebody got the bugs out of cassette tape drives...

Peripheral Dynamics Model 4200 Digital Cassette Transport has specs you can't tell from the reel thing.

Storage capacities of over 20 million bits, two- or four-track recording at speeds from 10ips to 75ips, NRZ or phase-encoded formats, read/write or read-after-write heads.

And no more tape-chewing. A reel-driven servo system, without capstans or pinch rollers, keeps tape velocity constant. A torque feedback tension servo maintains tape tension. A reference-edge tape guidance system provides precise tracking ( $\pm 0.001$  inch) and cuts skew to less than 2 microseconds at 37.5ips. So tape will last.


Single-gap read/write or dual gap read-after-write heads, with recording densities of up to 800 bpi NRZ or 1600 bpi phase-encoded will provide storage capacities as high as 22 million bits, four-track, phase-encoded with 5% gapping.

Standard speed is 37.5ips, though you can have up to 75ips or down to 10ips. Search and rewind speed is 120ips. Operates bidirectionally at high or low speeds, under local or remote control.

Reliability? It's the simplest cassette drive on the market. Two moving parts in the drive mechanism. No springs, capstans, pinch rollers or solenoids to get out of whack. It is as reliable as it is simple.

We'll give you an OEM version or one with all the bells and whistles. Interfaces and controllers for most minicomputers. Also communications terminal adapters. And multiple packaging, three cassette transports to a cabinet.

Peripheral Dynamics' Model 4200. The cassette drive with reel performance. Call us for a demo.

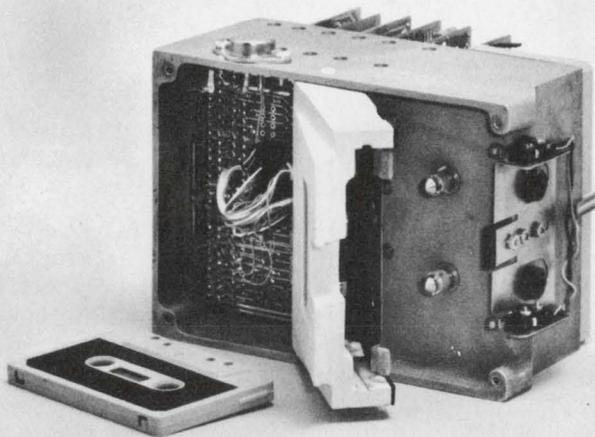

## DATUM PERIPHERAL DYNAMICS CORP.

170 E. Liberty Ave., Anaheim, California 92801 • Telephone (714) 879-3070

## ACROSS THE DESK

(continued from p. 7)

been some noble exceptions.

Why manufacturers are reluctant to sell their wares, I'll never understand. I've been complemented several times on the rather complete catalog library I maintain at Brookhaven, but I sure do have a time convincing some manufacturers to part with their precious catalogs. I know and appreciate what a really good catalog costs, but I also appreciate the fact that profits on our purchases with these manufacturers certainly cover all cataloging they can give us for years to come.

*James A. Hallock, Chairman  
Electronics Stock Committee*

Brookhaven National Laboratory  
Associated Universities, Inc.  
Upton, N.Y. 11973

## More about relays— from a manufacturer

As a manufacturer's representative, I have spent over 25 years selling relays to manufacturers of all types of equipment. As I see it, the biggest single problem that relay manufacturers face is a lack of knowledge on the part of the design engineers about contact behavior under different loads and confusion over various levels, such as low level, dry circuit, etc.

There is an excellent explanation of this in the Engineers Relay Handbook, a Hayden publication.

*J. F. McElligott*

Masin-ESCO, Inc.  
333 Jackson Ave.  
Syosset, N.Y.

## 'Tiger' approach to job stirs growl of protest

Herb Sobel's "tiger teams" (see "Put 'Tiger Teams' in your Managing Game," ED 13, June 22, 1972, p. 90) may sound like heroics to some, but it raises the following disturbing questions for me: If Sobel's six-man tiger team can replace as many as 30 engineers, why did Sobel's firm put 30 engineers on the job in the first place? The high standards that Sobel delineates for his tigers are the same

(continued on p. 14)

# Why invest in wire-wrapping facilities,



## when you can use ours?

We can handle your complete back-panel wire-wrapping including all inventories right up to and including final inspection. You just have to bolt it in. And you can be sure of a completely tested, 100%-error-free back panel.

All your back panels can be tested with an Omnitester 900 Wiring Analyzer. This unit, pictured here in the center, has forward scan capabilities to determine, for example, whether a missing wire went to some other point. It then identifies that point.

The unit further tests for continuity resistance,

insulation resistance, DC hipot, and features programmable dwell time.

All this at a price less than in-house fabrication. No costly inventories, no capital tied to costly equipment. You can furnish the back panels or we can supply our own.


Delivery? Just 2 to 8 weeks, depending on the job and material availability. And we have two locations: Longmont, Colorado or Endicott, New York. For more details just call your nearest Amphenol sales office or write us direct. Amphenol Cadre Division, Bunker Ramo Corporation, 20 Valley St., Endicott, N.Y. 13760.



# AMPHENOL

# Big problems


with size and weight in high-performance  
microwave amplifiers?



**Small solution.**

(shown actual size)

Avantek's leadership in microwave transistor development and thin-film technology has made possible the UDP Series of high-performance amplifiers in miniature dual inline packages.



Avantek semiconductors,  
a foundation for excellence.

These amplifiers, occupying only 0.1 cu. in. and weighing a mere 0.15 oz., set a new standard of miniaturization, a critical consideration in airborne applications.

Now you can connect amplifiers directly to mixers or detectors with no cables or connectors to degrade reliability. The UDP Series offers this unique advantage to designers of pod-mounted ECM equipment, collision avoidance and beacon sets as well as telemetry and

communications systems for aircraft and space vehicles.

Initially, Avantek is offering three models, covering the 1 to 4 GHz frequency range. Representative specifications include:


	Freq. (GHz)	Gain (dB)	N.F. (dB)	P <sub>out</sub> (dBm)
UDP-2032	1-2	24	5.5	+8
UDP-2332	2.2-2.3	22	5.5	+8
UDP-4003	2-4	6	9.0	+11

Models covering additional frequencies will be introduced later this year.

**Avantek...years ahead today.**

Avantek, Inc., 2981 Copper Road, Santa Clara, California 95051. Phone (408) 739-6170. TWX 910-339-9274. Cable: AVANTEK

INFORMATION RETRIEVAL NUMBER 8

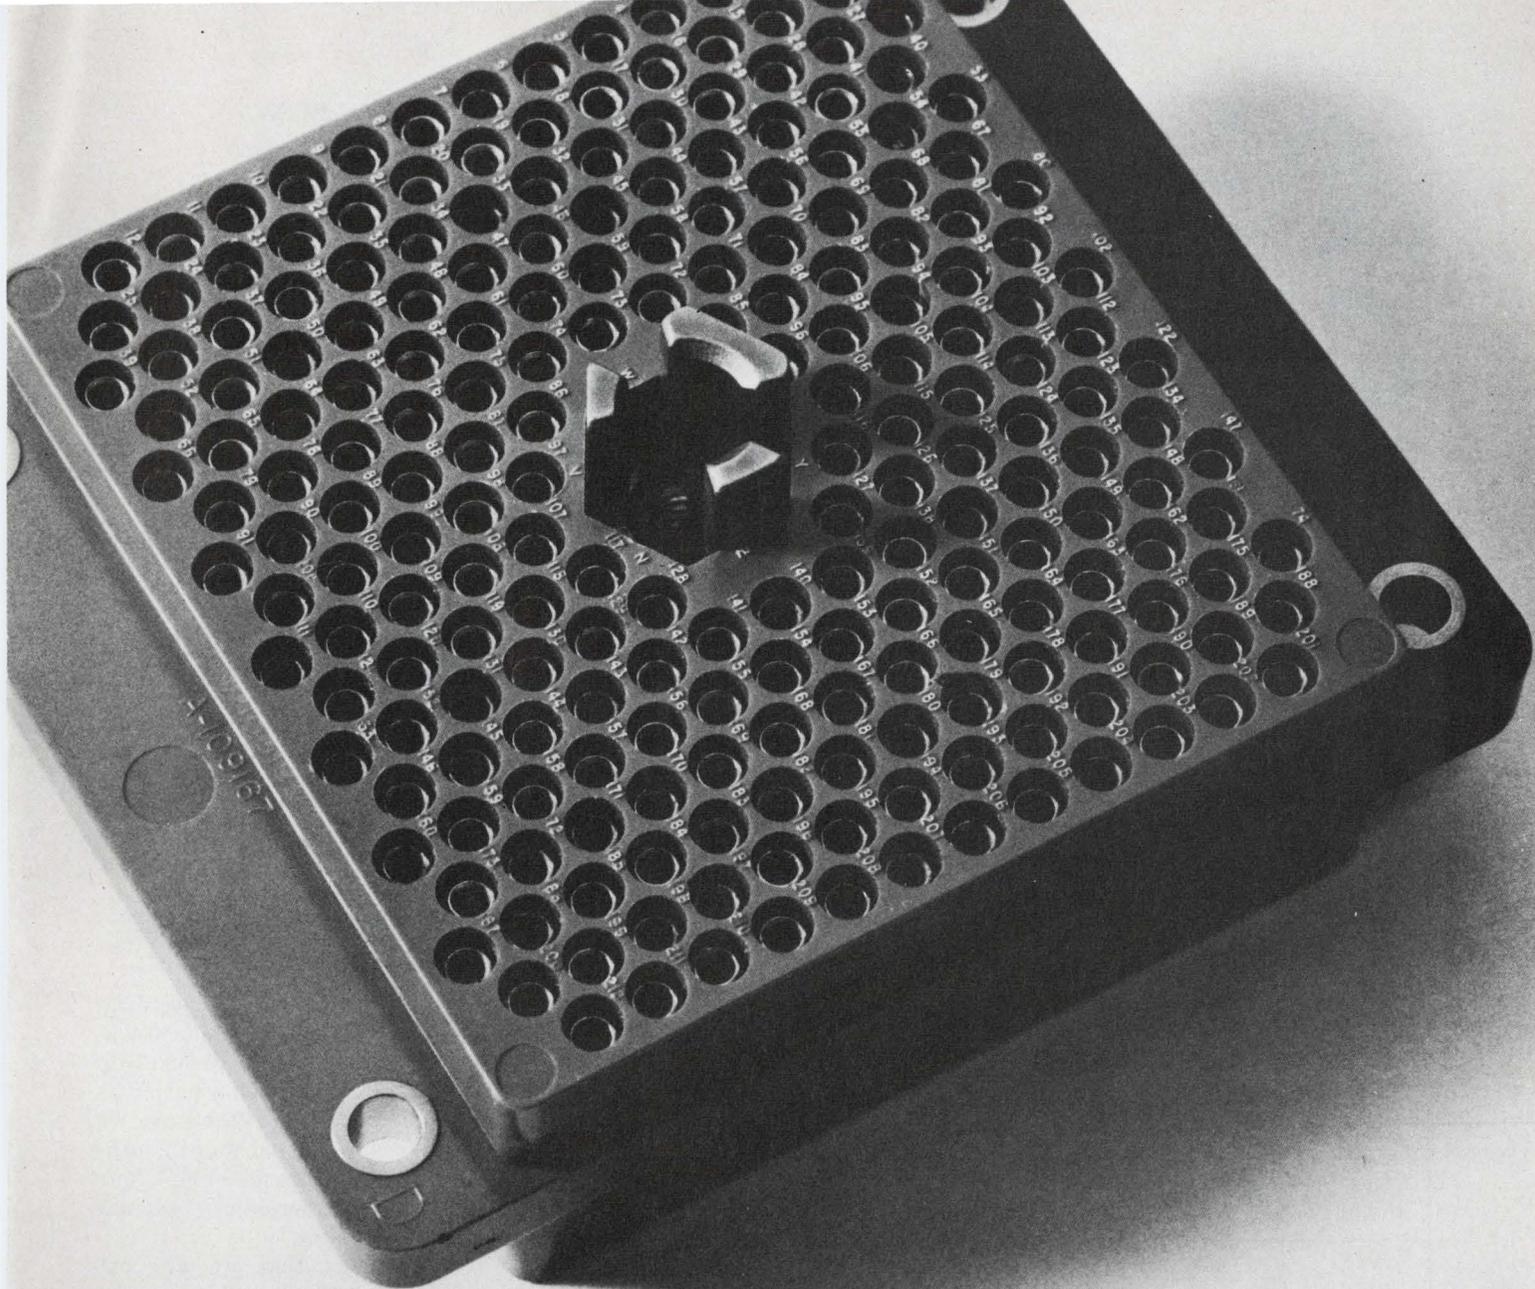

# LOOK MA, MORE CAVITIES!

More than any other connector its size.

Hughes rectangular connectors have the highest contact density in the business.

One of our 212-contact models, like the one shown here, does the job of four 55-pin circular mil-spec connectors.


And does it in one-fourth the space!

Plus greater reliability (thanks to 16-gage contacts) and better contact retention.

And besides standard sizes, miniature and subminiature sizes are available, too.

Hughes high-density connectors. One of the few times more cavities is something to smile about.

Call or write for our new catalogs:  
500 Superior Avenue,  
Newport Beach,  
California 92663.  
(714) 548-0671.



**HUGHES**

HUGHES AIRCRAFT COMPANY  
CONNECTING DEVICES

**CONNECTORS, CABLES, CIRCUITS... ONLY HUGHES PUTS IT ALL TOGETHER.**

**35 OEM's MAKE THEIR OWN  
Vishay Precision Resistors for  
Breadboarding, Prototyping, and final  
Adjustment...and they SAVE an  
average of \$6.10 PER UNIT by  
ELIMINATING ALL THESE PROCEDURES**

PROCEDURE	UNIT COST WHEN YOU BUY RESISTORS	UNIT COST WHEN YOU MAKE YOUR OWN RESISTORS WITH A VISHAY IN-PLANT FACILITY
Write Purchase Requisition \$5.00 for 10 units = 50¢ each	\$ .50	\$ .50
Write and issue Purchase Order for 10 units—\$15.00 ÷ 10 = \$1.50 each	\$1.50	None
Expedite by phone — cost based on 50% stock deliveries	\$1.00	None
Incur down time, interest on value of work in process, etc. based on 3 week delivery	\$4.50	Negligible—you can make your own Vishay resistor in less than 48 hours!
Labor and Material cost to make or buy resistors	\$ .60	\$1.50
<b>TOTAL</b>	<b>\$8.10 vs.</b>	<b>\$2.00</b>

Average Savings using Vishay's In-Plant Facility to make your own resistors:

**\$6.10**

**ADDITIONAL COST SAVINGS:**

- Eliminate large inventory of resistors. Only 20 basic chips are needed to make any value resistor to 75K ohms!
- Eliminate series-parallel configurations to get exact resistor values . . . Vishay chips can be adjusted to the exact values you want when you want them; and to ±0.005% tolerance!
- No schedule losses on Prototype Systems!

Write, wire or phone Tony Troianello, Vishay Senior Applications Engineer for your copy of Bulletin IP-100 describing this Vishay In-Plant Facility . . . or better still, ask him to arrange a demonstration.

**VISHAY RESISTOR PRODUCTS**  
63 LINCOLN HWY. ■ MALVERN, PENNSYLVANIA 19355  
TELEPHONE (215) 644-1300 ■ TWX: 510-688-8944

INFORMATION RETRIEVAL NUMBER 10

**ACROSS THE DESK**

(continued from p. 10)

standards that should apply to every engineer.

If U.S. industry would consider engineers as professionals pursuing a permanent career and would mandate continuing education as a part of every engineer's workday, most engineers could at least approach "tiger" status.

If managers like Sobel could only make use of all of their employees, they would see that tiger teams are only a temporary fix for a serious, industrywide problem.

*James P. Lynch*

*Assistant Electronics Engineer*  
Cornell Aeronautical Laboratory, Inc.  
Computer Center  
Cornell University  
P.O. Box 235  
Buffalo, N.Y. 14221

**Forget the self-praise;  
Let's compete, U.S.!**

With reference to the editorial in the July 20 issue ("Innovate in New Designs or Let the World Slip By," ED 15, p. 53): Our nation is nearly 200 years old. When are we going to grow up and stop mouthing infantile phrases like "our technological leadership," "exporting our know-how," etc.


It is obvious that we are not dummies, with our trips to the moon and solid-state development, but neither are the engineers abroad. How about the "know-how" that we have absorbed: steam engine, gas engine, jet engine, major automobile and aircraft innovations, sonar, radar, nuclear physics, electrical generators and motors, battery, radio, clock, hydraulics, synthetics, iron, steel, concrete, to name but a few. Prof. A. B. Usher of Harvard states that we have received about three times as much know-how from abroad as foreigners have from us.

Moral: Let's drop all this self-praise and the notion that everybody is taking advantage of our brilliance, and let's buckle down to deal with the competition.

*F. W. Stevens*

Naval Undersea Center  
Code 636  
San Diego, Calif. 92132

# Get a clock driver free...with each Static Shift Register you order.

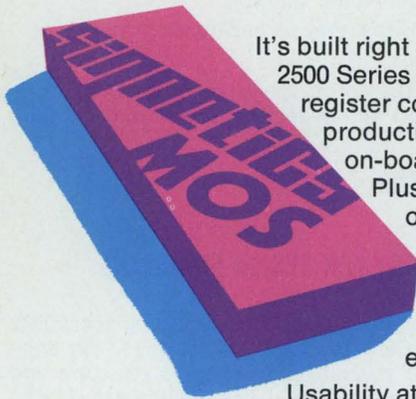

It's built right into the chip. Every 2500 Series MOS static shift register comes off Signetics' production line with its own on-board clock generator. Plus a real windfall of other major improvements. To help lower total systems cost, and make the parts easier to use.


Usability at a reasonable price.

That is what you've been after. And usability runs in the family of Signetics new MOS static shift registers, the most complete collection in the field.

Operating from DC up to 3 MHz, these optimized devices eliminate minimum frequency headaches. Go right down to DC without adding extra logic.

And because the Signetics line can be treated like TTL itself, no level shifters are necessary at either input or output—again lowering your overall component count and cost. Just as the built-in clock generator demands no expensive high-level clock drivers.

Power requirements are standard +5V, -12V. And you recirculate data without external logic.

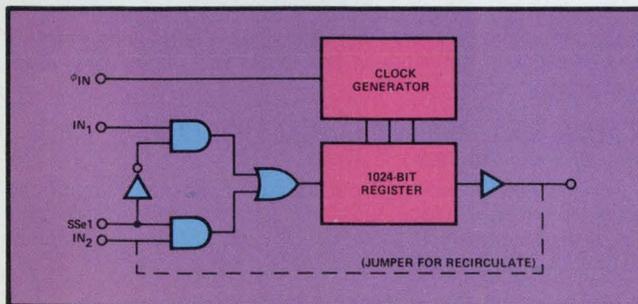

Signetics 1024-Bit Static Shift Register

For the first time, with the 1024-bit static shift register you can have the benefit of easy-to-use static shift registers for long bit length applications. And, a dual-128 for 128 column printers, or a quad-80 for 80 column CRTs.

Combine the on-board clock generator, with TTL compatibility and the wide range of bit density (from 50 up through 1024), and you've got more flexibility to work with, in both design and application, than you ever hoped to find in static shift registers.

PARTS LIST				
ORGANIZATION	DIP PACKAGE	CLOCK FREQUENCY	100 PIECE PRICE	SIGNETICS PART NUMBER
1024 x 1	8 pin	2.0	\$9.90	2533V
Quad 80	16 pin	2.0	4.00	2532B
Dual 256/250/240	8 pin	3.0	4.80	2527/28/29V
Dual 128/132	8 pin	3.0	4.50/4.00	2521/22V
Hex 32/40	16 pin	3.0	4.00	2518/19B
Dual 200/100/50	14 pin	3.0	5.00/4.00/3.00	2511/10/09A

You save on parts, on engineering no longer required. Yet end up with maximum memory on the board, at minimum cost in time, space and dollars.

Write Signetics for our helpful MOS Wall Chart and new Handbook, which organize the specs, technical data, and applications of all our MOS memory products—the broadest, most versatile line of static shift registers ever put on distributors' shelves, as well as optimized RAMs and ROMs.

Signetics/MOS  
811 E. Arques Avenue  
Sunnyvale, California 94086  
(408) 739-7700

Please send us your MOS Wall Chart and new Handbook, with complete technical and applications data on Signetics user-oriented static shift registers.

Name

Title

Company

Address

City

State

Zip


Telephone

Signetics Corporation—a subsidiary of Corning Glass Works.

## signetics

INFORMATION RETRIEVAL NUMBER 11

**How to select the  
right materials...  
assure your  
product's reliability,  
performance,  
safety, and  
profitability**

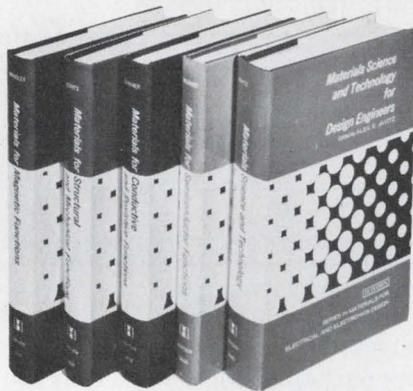

**Examine any of these volumes without risk! Simply check those you would like to review on 15-day free examination.**

Please send the book(s) checked on 15-day free examination. At the end of that time, I will remit payment plus postage, or return the book(s) with no further obligation.

5640-0    5635-4    5638-9  
 5636-2    5637-0

**Save Money!**

**Payment Enclosed.** Publisher will pay all shipping and handling charges. Same 15-day return privilege and full return if not satisfied.

Name \_\_\_\_\_

Firm \_\_\_\_\_

Address \_\_\_\_\_

City/State \_\_\_\_\_ Zip \_\_\_\_\_

ISBN Prefix 0-8104

**HAYDEN BOOK COMPANY, INC.  
116 W. 14th St., N.Y., N.Y. 10011**

**HAYDEN SERIES IN MATERIALS FOR ELECTRICAL & ELECTRONICS DESIGN**

**ALEX. E. JAVITZ**, Editor-in-Chief, Technical Consultant; Senior Member, Institute of Electrical and Electronics Engineers; American Chemical Society, Society of Plastics Engineers.

This series of practical design references has been specifically planned to help you and your colleagues meet the challenge of proper materials selection on all fronts. These volumes place at your disposal—in engineering terms—the concepts, data, and techniques you need in order to

- understand how fundamental properties of materials affect their ultimate performance
- exploit the potential of advanced materials
- make optimum use of conventional materials
- utilize the latest techniques in processing, fabrication, test and measurement
- specify materials that resist environmental damage
- guard against misuse of materials that may be hazardous or produce pollutants

One interdisciplinary volume surveys the entire spectrum of design considerations. Each of the others provides you with in-depth information on a major functional area.

**the overall perspective on the materials / design interface**

**MATERIALS SCIENCE AND TECHNOLOGY FOR DESIGN ENGINEERS**

*Edited by Alex E. Javitz*

In this comprehensive reference, Editor Javitz and 18 contributing specialists integrate the fundamentals of materials with the hard facts of day-to-day engineering practice. The coverage offered you ranges from basic structure and behavior through new materials and applications, to environmental effects, reliability concepts, and the important criteria of cost effectiveness. *560 pages, 6x9, illustrated, #5640-0, cloth, \$23.95.*

**specific functional areas covered in depth**

**MATERIALS FOR SEMICONDUCTOR FUNCTIONS**

*E. G. Bylander, Texas Instruments, Inc.*

Useful information pertinent to all levels of semiconductor fabrication and application. The book provides materials processing and selection criteria based on intended function for diodes and transistors, solar cells, thermo-electric and electro-optical devices, passive circuit components and transducers. *220 pages, 6x9, illustrated, #5638-9, cloth, \$13.50.*

**MATERIALS FOR MAGNETIC FUNCTIONS**

*Fennimore N. Bradley, Michigan Technological University*

This volume isolates physical concepts such as superexchange, sublattice magnetization, and anisotropy, which are critical to design applications. It covers key parameters of ferrite (ceramic) materials, and the magnetic metals . . . singles out a wide range of applications problems. *360 pages, 6x9, illustrated, #5635-4, cloth, \$14.95.*

**MATERIALS FOR STRUCTURAL AND MECHANICAL FUNCTIONS**

*Gabor Kovacs, IBM General Systems Division*

Clarifying the relation between device malfunction and failure and conditions such as shock, vibration, wear, fatigue, static and dynamic load, this volume deals with all classes of materials and treats specific application problems in detail. *360 pages, 6x9, illustrated, #5637-0, cloth, \$13.95.*

**MATERIALS FOR CONDUCTIVE AND RESISTIVE FUNCTIONS**

*G. W. A. Dummer, formerly British Ministry of Technology*

Exceptionally broad and detailed coverage of conductive, contacting, and resistive functions, as well as of the new field of superconductive functions and devices. Where combined materials are involved, brief data is given for such associated materials as dielectrics. *366 pages, 6x9, illustrated, #5636-2, cloth, \$13.95.*

**Forthcoming volumes**

Composite Materials for Combined Functions, *by E. Scala*  
Materials for Electrical Insulating and Dielectric Functions, *by H. L. Saums and W. W. Pendleton*



## How to squeeze 60 dB of swept frequency response from 10 mW of RF drive.

It's simple. Just use the new HP 8755 Frequency Response Test Set. Its extremely high sensitivity ( $-50$  dBm) delivers a full 60 dB dynamic measurement range from 100 MHz to 18 GHz using modern solid-state sweepers like the HP 8620.

But that's just the beginning. Its flat ( $\pm 0.5$  dB) response means that you can make accurate swept measurements of insertion loss/gain and return loss, even on frequency translation devices like mixers. And it doesn't drift with time and temperature because it's a modulated system. This high stability means

minimal recalibration. Isn't that what you need for production testing?

Yet with all of its sophistication, the system is really easy to use. It's direct reading and fully calibrated with push-button selection of operating functions. You can simultaneously display forward and return loss either as a ratio or an absolute response. Everything is designed for time-saving, error-free measurement.

You can take this lightweight, all solid-state and rugged system out into the field to test cable runs, antennas and the like. Another important and practical advantage for field use: you can operate

the detectors up to 200 feet away from the display!

There's economy too: a complete 8755 system with analyzer in an HP 182A large screen scope display, modulation unit and three detectors costs just \$3200.

Ask your HP field engineer for the new brochure on the 8755L. It'll give you the complete story on why it's so much system for so little money.

HEWLETT  PACKARD

04206

HP sales, service and support in 172 cities in 65 countries. For more information write: Hewlett-Packard, 1501 Page Mill Road, Palo Alto, California 94304; Europe: P.O. Box 85, CH-1217 Meyrin 2, Geneva, Switzerland; Japan: YHP, 1-59-1, Yoyogi, Shibuya-Ku, Tokyo, 151.

*(continued from p. 14)*

## Applied research aiding handicapped

The article "Space-Age Technology Opening New Doors for the Blind, Deaf and Crippled" (ED 11, May 25, 1972, p. 24) is excellent—at least for the material it covered. It would appear to us, as we have been aware of these projects previously, that the writer used as sources agencies that are funded by Government R&D grants.

We do not object to this coverage, but we feel a serious injustice was done to the handicapped—and also to engineers who might be interested in working in this field—by limiting the article to basic research and by omitting mention of our agency and others that provide a direct, low-cost engineering service to handicapped people.

We do have an applied-research program, but we do not do basic research. Under our applied research we have provided many total quadriplegics with breath-operated electric wheelchairs, with built-in respirators and waste-collection systems, at a cost of \$2800 per wheelchair. We make miniature electronic speaking aids (just recently perfected) to amplify and clarify the speech of the cerebral palsied, Parkinson's victims, etc., at a cost of \$400 per unit.

These items are not mass-produced; they are needed by small numbers of people only. We take pride in our quick-reaction capability; we make anything for anybody who needs it. Every case we handle is a research project—applied research, not basic research.

*Donald Selwyn*

*Executive/Technical Director*

National Institute for  
Rehabilitation Engineering  
Pompton Lakes, N.J. 07442

## 'New' idea turns up in an old Porsche

I think that I will never cease to be amazed at the reappearance of good ideas as new ideas. Shortly after reading about the new synthetic bridge in ELECTRONIC DESIGN's June 22 issue ("Replace

Your Bridge Circuit," ED 13, pp. 84 - 87), the temperature gauge in my 14-year-old Porsche failed. Upon disassembly of this vintage VDO instrument, what should I find but an old synthetic bridge. Possibly I have uncovered yet another area of engineering pioneered by Porsche.

*L. G. Smeins*

*Member of Technical Staff*

P.O. Box 1062  
Boulder, Colo. 80302

## The author replies

The possibility of similarities between "new" design techniques and existing methods always exists. If, as reader Smeins reports, my suggested metering system has fallen into this category, then I disclaim any credit for the basic novelty of this technique.

However, it should be noted that my article was geared to presenting an application that results in a flexible metering instrument that can cope with a wide range of current monitoring tasks. This variation of the basic concept, to the best of my knowledge, is not being exploited.

*Bernard J. Petrillo*

*Staff Engineer*

Rhodes Instrument Corp.  
Rye, N.Y. 10580

## Tough TO-5 relays

This isn't for everybody. But if you need a relay for a projectile you plan to launch from a cannon, you might look into a new TO-5 relay about to be introduced by Teledyne Relays. The 412K can tolerate a shocking 12,000 g for 6 ms—which is one heck of a lot rougher than 80 g for 11 ms that's called out by M5757. For very shaky environments, Teledyne has already introduced the 412V, which can take 250-g vibration up to 2000 Hz (vs M5757's 30 g to 3000 Hz). And for those really hot days in Hawthorne, California, the company has the 412H, which can tolerate 200 C continuously.

All three are electrically identical to the dpdt relays already available in the company's 412 series.

Interested?

CIRCLE NO. 280

# New too!

The new F.E.T. HA-2000 combines with the Harris HA-2520 and HA-2620 high performance op amps to provide two additional new F.E.T. Input devices:

### HA-2050/2055 High Slew Rate F.E.T. Input Op Amp

High slew rate	120/ $\mu$ s
Fast settling time	400 ns
Wide power bandwidth	20 MHz
High input impedance	10 <sup>12</sup> Ohms
Ultra-low bias current	1 pA

Operates inverting or non-inverting  
Supplied TO-99 pkgs.

	Input offset voltage	100-999 units
HA-2050		
-55°C to +125°C	15mV	\$19.25
HA-2050A		
-55°C to +125°C	7mV	\$24.00
HA-2055		
0°C to +75°C	30mV	\$11.75
HA-2055A		
0°C to +75°C	7mV	\$13.40

### HA-2060/2065 Wideband F.E.T. Input Op Amp

Widepower bandwidth	600 KHz
Gain bandwidth product	100 MHz
High input impedance	10 <sup>12</sup> Ohms
Low bias current	1 pA
High slew rate	35 V/ $\mu$ s

Operates inverting or non-inverting  
Supplied TO-99 pkgs.

	Input offset voltage	100-999 units
HA-2060		
-55°C to +125°C	15mV	\$15.40
HA-2060A		
-55°C to +125°C	7mV	\$19.90
HA-2065		
0°C to +75°C	15mV	\$10.20
HA-2065A		
0°C to +75°C	7mV	\$11.85



**HARRIS**  
**SEMICONDUCTOR**  
A DIVISION OF HARRIS-INTERTYPE CORPORATION

P.O. Box 883, Melbourne, Florida 32901  
(305) 727-5430

INFORMATION RETRIEVAL NUMBER 141

ELECTRONIC DESIGN 18, September 2, 1972

# Unique:

**Our new F.E.T. input preamp offers more design features and application possibilities than any alternative device.**

The HA-2000 is universal. A monolithic unity gain differential amplifier stage with junction F.E.T. inputs and bipolar transistor outputs, it can be combined with any op amp, comparator, and most linear circuit functions without compromising the features of these devices.

As a result, the HA-2000 offers almost limitless possibilities for

low-input current, high source impedance applications such as buffers for op amps and comparators. In addition, because of its compatibility with so many other components, the device permits the user great flexibility in systems design at optimum prices. Find out about our new "universal" F.E.T. preamp. See your Harris distributor or representative.

**Features:**

**Converts any op amp or comparator to F.E.T. input**


**Input bias current 1 pA**

**Input resistance 10<sup>12</sup> Ohms**

**Slew rate 100 Volts/ $\mu$ Sec.**

**Bandwidth flat to 10 MHz and -10db at 100 MHz**

**Supplied TO-99 pkgs.**

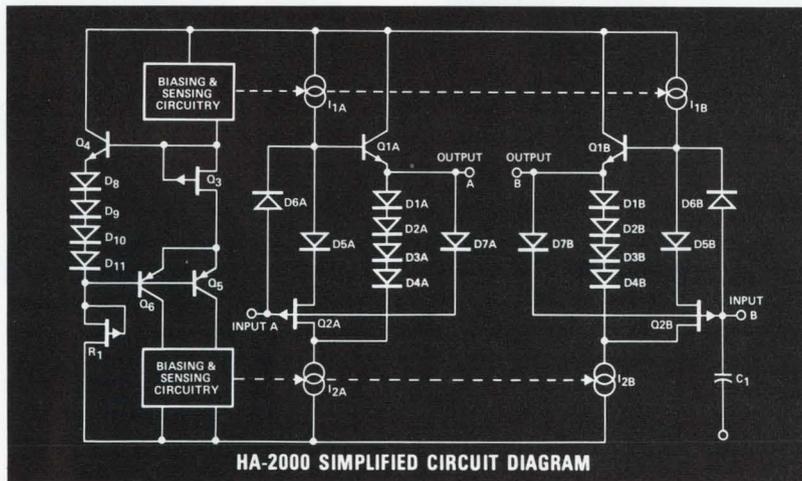

	Input offset voltage	100-999 units
HA-2000 -55°C to +125°C	12mV	\$ 6.50
HA-2000A -55°C to +125°C	5mV	\$ 10.95
HA-2005 0°C to +75°C	25mV	\$ 4.35
HA-2005A 0°C to +75°C	5mV	\$ 5.95

**For information on other new F.E.T. Op Amps incorporating the HA-2000, see the adjacent column.**

# Harris



P.O. Box 883, Melbourne, Florida 32901  
(305) 727-5430

**WHERE TO BUY THEM:** ARIZONA: Phoenix—Liberty, Weatherford; Scottsdale—HAR (602) 946-3556 CALIFORNIA: Anaheim—Weatherford; El Segundo—Liberty; Glendale—Weatherford; Long Beach—HAR (213) 426-7687; Mountain View—Elmar; Palo Alto—Weatherford, HAR (415) 321-2280; Pomona—Weatherford; San Diego—Weatherford; Western COLORADO: Denver—Elmar; Weatherford WASHINGTON, D.C.: HAR (202) 337-4914 FLORIDA: Hollywood—Schweber; Melbourne—HAR (305) 727-5430 ILLINOIS: Chicago—Semi-Specs, Schweber; Palos Heights—HAR (312) 597-7510 INDIANA: Indianapolis—Semi-Specs MARYLAND: Rockville—Schweber MASSACHUSETTS: Lexington—R&D; Waltham—Schweber; Wellesley—HAR (617) 237-5430 MICHIGAN: Detroit—Semi-Specs MINNESOTA: Minneapolis—Semi-Specs MISSOURI: Kansas City—Semi-Specs; St. Louis—Semi-Specs NEW MEXICO: Albuquerque—Weatherford NEW YORK: Melville—HAR (516) 249-4500; Syracuse—HAR (315) 463-3373; Rochester—Schweber; Westbury—Schweber OHIO: Beachwood—Schweber; Dayton—Semi-Specs PENNSYLVANIA: Pittsburgh—Semi-Specs; Wayne—HAR (215) 687-6680 TEXAS: Dallas—Weatherford, Semi-Specs, HAR (214) 231-9031 WASHINGTON: Seattle—Liberty, Weatherford.

**LEGEND FOR HARRIS SALES OFFICES & DISTRIBUTORS:** Harris Semiconductor (HAR); Elmar Electronics (Elmar); Harvey/R&D Electronics (R&D); Liberty Electronics (Liberty); Schweber Electronics (Schweber); Semiconductor Specialists, Inc. (Semi-Specs); R. V. Weatherford Co. (Weatherford); Western Radio (Western).

INFORMATION RETRIEVAL NUMBER 142

# An Honest-to-Goodness Breakthrough in Storage Oscilloscopes



The Nicolet 1090 digital storage oscilloscope looks like a storage oscilloscope, acts like a storage oscilloscope, and is operated like a storage oscilloscope — except —

- It has about 20 times the resolution in both time and voltage. It would require hundreds of storage tubes to capture as much information about a single waveform as is recorded in the 1090's memory.
- It is about a hundred times as accurate.
- It has far greater equivalent writing speed than most storage oscilloscopes.

- It is easier, by far, to operate.
- Its stored information doesn't fade away.
- It provides normalized numerical information about any point in the waveform.
- It has sweep speeds as slow as you wish, even days in length.
- It can be told to retain a waveform before, during, or after the signal occurrence, with local or remote control.
- It can provide accurate voltages for operating a pen recorder.

Other than these exceptions, it is like an ordinary storage oscilloscope. If you know how to operate an oscilloscope, you don't even need to look at an operator's manual to make the 1090 serve your needs. Bandwidth 100 KHz ( $2 \times 10^5$  samples/second). Resolution 4096x4096. Price, with model 90-1 single channel plug-in unit: \$4500. (Pen recorder drive and binary output are extra cost options.)

## NICOLET INSTRUMENT CORPORATION




5225 Verona Road, Madison, Wisconsin 53711  
Phone 608/271-3333 TWX: 910-286-2713

Write for complete information or to arrange a demonstration.

INFORMATION RETRIEVAL NUMBER 121

# eX-Yllence now comes under a different name

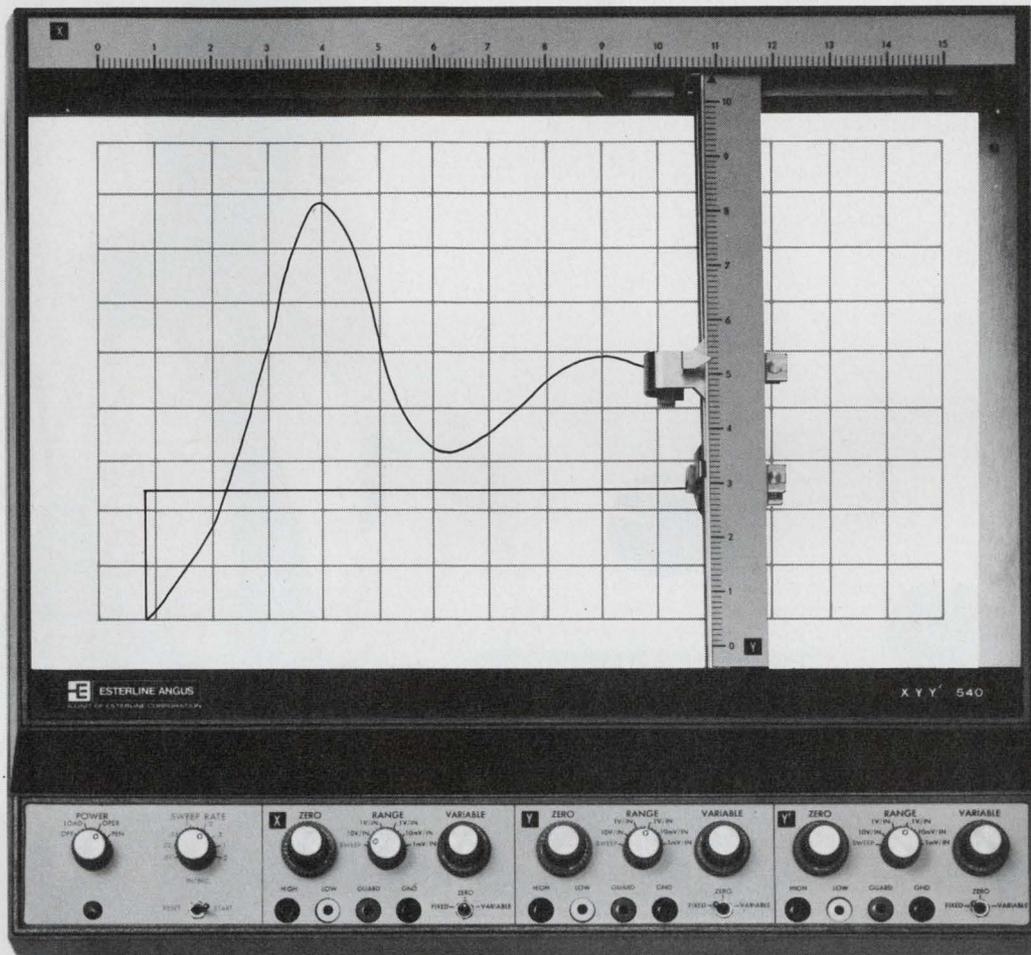

## Honeywell X-Y recorders now made and sold by Esterline Angus

Whatever your needs in X-Y recorders, Esterline Angus is the name to remember.

The complete Honeywell X-Y line — three primary units — now is made and sold by E-A.

Capabilities? Standard sensitivities from 10 microvolts to 50 volts per inch and with slewing speeds to 30 inches per second. With high impedance, differential and guarded input configuration to permit measurement of any parameter from any source without loading the source.

Single- and two-pen (X-Y-Y') units are available with 11" x 17" chart size.

Parts are available — for new and existing units — from the international operations of Esterline Angus. Service will be handled nationwide by Honeywell's Metrology Service.

So, whatever your needs in X-Y recording, drop us a line. We'll tell you the whole story — in our new X-Y catalog. Write Esterline Angus, P.O. Box 24000, Indianapolis, Indiana 46224. Or call 317/244-7611.




**ESTERLINE ANGUS**

A UNIT OF ESTERLINE CORPORATION

INFORMATION RETRIEVAL NUMBER 12

# Ampex memory power. Core modules at stack prices.

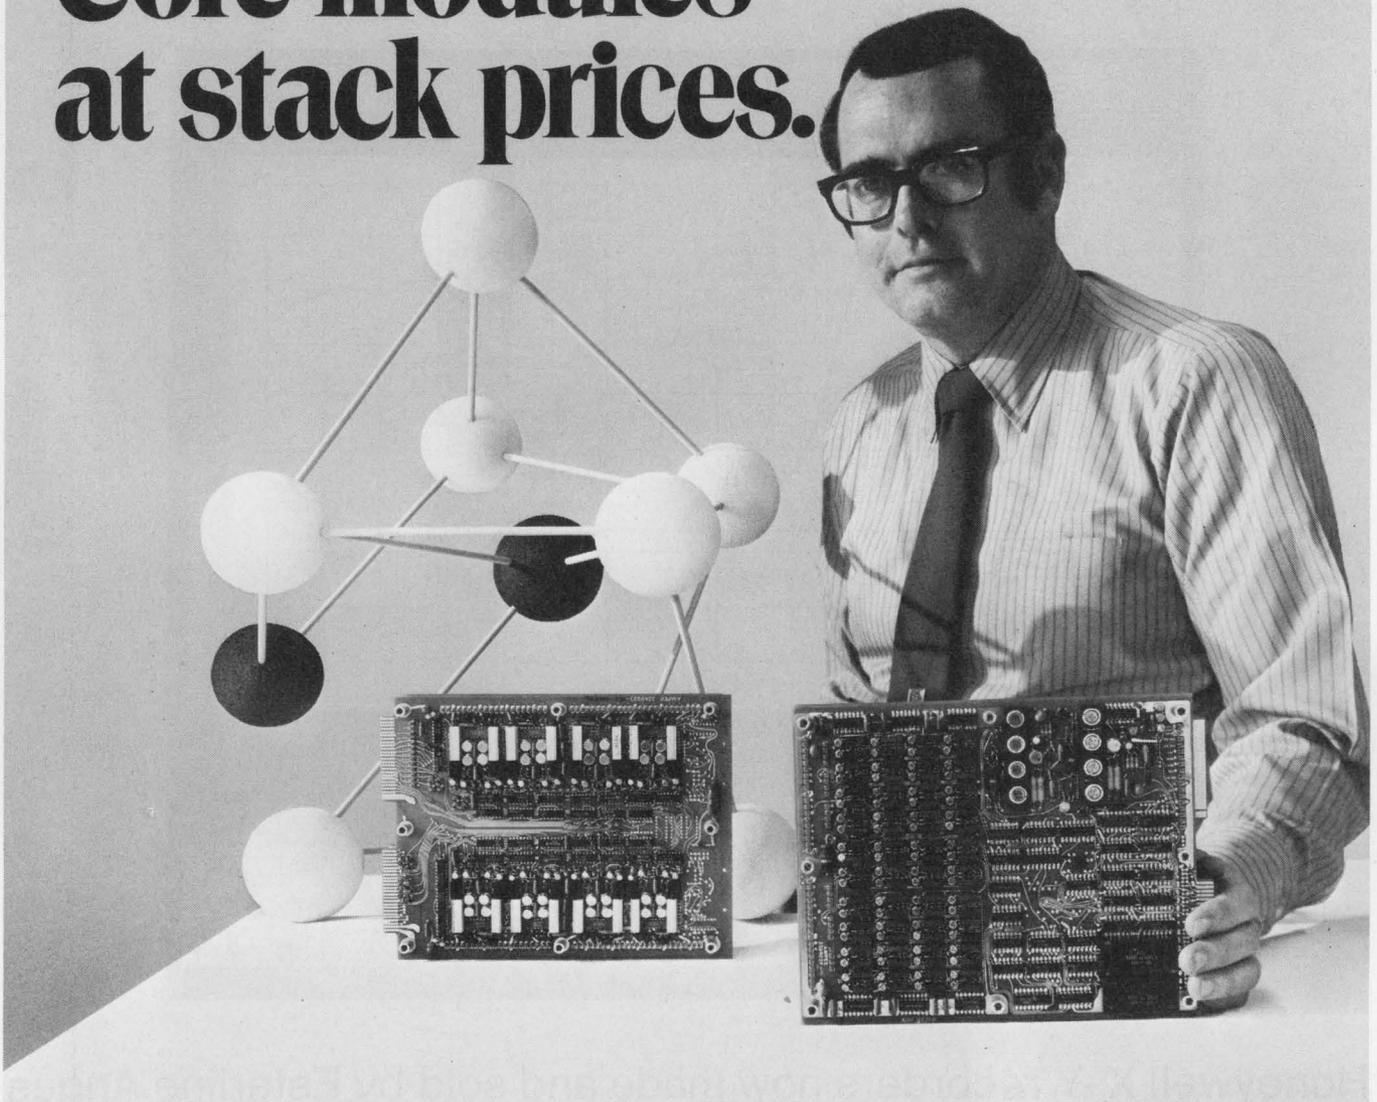

## So why design your own memory?

Ampex 1800 memory modules make real economic sense in both performance and design. No longer any need to design around purchased stacks.

The compact 1800 series modules give you twice the memory in half the space. Up to eight thousand 18 bit words in just 170 cubic inches. Combine any number of modules for the capacity and word length you need. High performance, too: access times of 250 and 340 nano-seconds.

For effortless design, all 1800 modules have decoding circuits, buffered data outputs, require only two voltages, need no temperature compensation or power sequencing. In other words, no external logic required.

Ampex 1800 modules were the first of their kind . . .

and are still the best, and, of course, they come with Ampex worldwide service.

For details on how to get best memory module performance with least design effort, call your Ampex computer expert. He can fill you in on Ampex tape and disk drives, too. Or write.

# AMPEX

**Ampex Computer Products Division**  
13031 West Jefferson Boulevard  
Marina del Rey, CA 90291. (213) 821-8933

SEPTEMBER 2, 1972

## Western Union gets green light on satellite


With an application still pending before the Federal Communications Commission for a construction permit for a domestic communications satellite system, Western Union has placed an order with the Hughes Aircraft Co. for three satellites. The FCC gave Western Union a waiver to proceed, so it might take advantage of a Hughes production line that produced a nearly identical communications satellite for Canada, the Anik I. The latter is scheduled to be flown later this year.

Western Union will pay \$20.7-million for the Hughes satellites and will spend more than \$48-million for seven ground stations. A special incentive clause in the satellite contract can give Hughes considerably more than \$20.7-million. If nine or more of the 12 high-capacity microwave channels in the satellite are operating after 10 years in orbit, Western Union will pay Hughes \$83.67 per channel, per day for the 10-year period—or about \$6-million for 10 channels. If eight are operating, the fee will be \$75 per channel, per day.

One of the few differences between Western Union's satellites and Canada's Anik I is in the feed horn. The U.S. satellite will require a wider beam in the north-south direction, and it will have extra feed horns for spot beams for Hawaii and Alaska.

Western Union will connect its satellite system with its terrestrial line of microwave links. The satellites will be used for long-distance Telex, for the company's voice system and for Mailgram. When a new electronic data switch goes into operation in 1974, it will be used for TWX.

Each of satellite channels will accommodate a color television program or be used for multiplexed voice signals—as many as 1200 signals when used with a single carrier. Each channel will have a

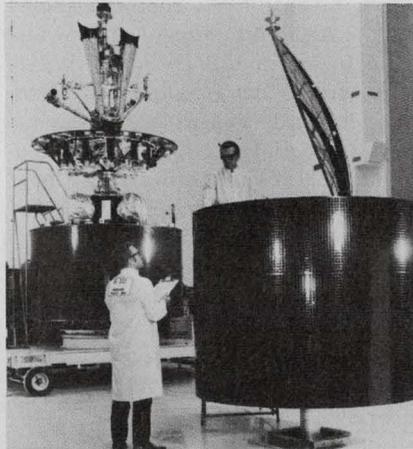

Canada's communications satellite the Anik I, to be launched later this year, is almost identical to three that Western Union has ordered from Hughes Aircraft (right).

bandwidth of 36 MHz and at least 33 dBm of effective radiated power. The spacecraft will weigh slightly more than 1200 pounds when launched.

### Subcontracting time nears for space shuttle

North American Rockwell, happy holder of NASA's \$2.6-billion space shuttle contract, is meeting with the space agency to settle on a final design. Plans originally submitted by losing competitors will be reviewed to see if any features in these should be incorporated in the final version. North American says it expects to give subcontracts to some of the companies that participated with it in the original bidding. These include IBM, which helped design the data-management system; Honeywell, the flight-control system; American Airlines, the ground-maintenance systems, and General Electric, the reusable surface installations.

North American expects to start

proceedings for awarding subcontracts within 90 days, with most items open to competitive bids. It plans to subcontract out 53% of its \$2.6-billion award and has located potential subcontractors in 48 states. Grumman, Lockheed and McDonnell Douglas have already been doing some earnest talking with North American in hopes of getting in on the action.

Long-lead time items, such as electronic systems and major structural components, are expected to be put in the contracting arena first. Some of the big items that North American will call on others to build include the mid-fuselage section, tail, wings, landing gear, some avionics items and portions of the propulsion systems. Hardware will be confined as much as possible to proven, off-the-shelf equipment, the company says.

### Army hopes to salvage part of the Cheyenne

The Army is working to determine what elements of the avionics developed for the abandoned Lockheed Cheyenne helicopter can be adapted for a new, smaller copter it plans to develop.

Major electronic subcontractors affected by the cancellation of the Cheyenne program include Teledyne Systems (the computer central complex), Hughes Aircraft (a night-vision sight for the TOW missile); Bourns/CAI (the pilot's direct sight), Honeywell (the pilot's helmet sight) and Bendix Navigation and Control Div. (the weapons' control panel and the inventory control subsystem).

In canceling the Lockheed program, the Army cited as reasons excessive size, lack of maneuverability and cost. "The avionics contributed to the cost problem," an Army spokesman said.

In recent Congressional testimony Army officials said that the Cheyenne program cost would average about \$4.6-million per helicopter. Avionics are understood to have accounted for almost half the cost of each aircraft.

Approximately \$400-million has already been spent by the Army on the Cheyenne program, and the service has asked Congress to approve \$40-million for developing a

smaller, more maneuverable copter in place of the Cheyenne.

Army sources indicate privately that they feel the new aircraft will have to be developed. Officials of Lockheed, heavily hit by the loss of the Cheyenne contract, say the company will undoubtedly compete for the new helicopter program.

## Solid-state system synthesizes voice

Voice synthesis, which has generally required complex electromechanical systems, is said to be accomplished more simply and reliably with a new solid-state system. Developed by the Master Specialties Co. of Costa Mesa, Calif., the voice-response system uses MOS read-only memories to generate a natural-sounding voice.

The first application is an automatic number announcer in telephone company offices. The system is helping field men to identify pairs of lines by providing an audible voice message with seven digits that make up the telephone number.

According to Stuart B. Brown, vice president of marketing for Master Specialties, the number-announcing system uses one 16-k ROM from Electronic Arrays, Mountain View, Calif., to synthesize the voice for each digit or monosyllabic word. The output of the ROM then goes to a digital-to-analog converter, four bits at a time. Three of the four bits contain amplitude information, while the fourth determines the sign. The output of the digital-to-analog converter is an audio tone—the synthesized voice—which is then fed to a speaker.

While good for this application and such others as warning systems, credit-card verification and inventory status, the present system is not efficient enough for long, complete messages, Brown concedes. Work is now being done, he adds, on a system that will synthesize words from basic sounds, so that an unlimited vocabulary will be available.

Such a system, Brown continues, will require storage of synthesis information for about 200 basic sounds, and it should be available in the next two years.

The applications of a voice synthesizer with an unlimited vocabulary are many. A computer would be able to respond audibly to an inquiry or convert written text into voice for blind people. All that would be needed would be a means to enter the written material into the computer memory. The synthesizer would then convert it into an audible message.

Another possible use, Brown notes, might be the reproduction of music, although much work would have to be done before such a system would be feasible. If bandwidth and fidelity could be increased and the price kept reasonable, electromechanical magnetic tape recorders might one day be replaced by all-solid-state recorders.

## RCA quietly showing a new TV disc player

RCA has demonstrated privately a new television disc player that could compete with the Teledec system being developed in Germany (see ED 16, "Low Cost TV Recorder-Player Systems on the Way—Finally," Aug. 3, 1972, p. 32). In contrast to Teledec's paper-thin disc, which turns at 1500 rpms and can play for five minutes, the RCA disc is thick, like a conventional long-playing record. The RCA platter is played at about 500 rpms, has a viewing time of 12 minutes and can record on both sides.

RCA has refused to confirm or deny publicly that the system is under development. It is expected to sell in the \$140-to-\$400 range.

Leo Hofberg, manager for special products for London Records, Inc., New York City—the U.S. representative for Teledec—asserts

that the RCA unit should pose no real competitive threat. He says the Teledec disc—which is about seven inches in diameter, sized to an international mailing standard—has a potential for mass-media distribution. Because the disc is paper thin, it can be bound into magazines, newspapers and other printed media, as well as incorporated in education texts, according to Hofberg.

## Senate unit backs bill for metric conversion

It won't die overnight, but the English system of measurement, now the standard in the United States, appears to be doomed.

Under legislation approved by the Senate Commerce Committee, the metric system would be phased in over the next 10 years and the old miles, yards, pounds and quart eased out. The bill would not make metric measurement compulsory, but it would set a national goal of switching "predominantly, although not exclusively."

The next step, expected some time after Labor Day, will be a vote on the bill by the full Senate.

To avoid production of equipment with both English and metric measurements, the bill would set up an 11-member National Metric Conversion Board to synchronize each major industry's switch. The board would not have coercive power but would help those who requested it.

An allowance for permitting a fast tax write-off for new equipment for the conversion was proposed, but it was killed by the Administration. Industry itself would pick up the tab under the Senate bill.

## News Briefs

**The Federal Communications Commission is asking for comments** from interested parties on the extent of public demand for "data phone" or an equivalent service between the United States and overseas points. In the meantime it has rejected Western Union International's application for overseas dataphone services.

**The Air Force reports it has completed testing an advanced aircraft navigation system** that has been nine years in development. The system employs electrically suspended gyros to provide inertially derived position, velocity and attitude information for use in weapon delivery, navigation and flight control.

# ISOLATION! 6 NEW COUPLERS FROM GENERAL ELECTRIC

For **SPEED** . . . 4 models **H11A** series SSL-Phototransistor Couplers offer



- Up to 2500V Isolation
- Up to 50% min transfer ratio
- Typical  $\pm 10\%$  variation in transfer ratio — 55 to 100°C
- Typical 2  $\mu$ sec rise/fall time

For **GAIN** . . . **H11B1** and **H11B2** SSL-Photo Darlington Couplers offer




- Up to 2500V Isolation
- Up to 500% min transfer ratio

For the complete story on General Electric Optoelectronics contact your authorized General Electric distributor, General Electric Electronic Component Sales Office, or use Inquiry Card Number 248

**GENERAL**  **ELECTRIC**

Semiconductor Products Department, Syracuse, New York



THIS SYMBOL REAFFIRMS OUR  
NO. 1 GOAL IN 1972: TO MAKE  
GENERAL ELECTRIC YOUR BEST BUY  
IN QUALITY, SERVICE, AND TOTAL VALUE



# Live radio is becoming passe; Enter the automated station

The newscaster sits in front of a wide table arranging his copy as he waits for his cue. Opposite him sits a disc jockey doing a commercial in the voice of one of the many radio characters he creates, while an engineer nearby cues up the next record as he waits to switch in the newscaster's microphone.

The scene is Radio Station WNEW-AM in New York City. Walking through the studios at 565 Fifth Ave., you can see a radio station that is very similar to those operated 10 years ago. True, the equipment has been improved to maintain a high-quality sound, but the basic operation hasn't changed much. The engineer still uses records instead of tapes, the disc jockey still does the intros and

small talk, and except for some pretaped commercials, most everything else is live.

But WNEW is part of a vanishing scene. Automation is taking over in the broadcasting industry slowly but steadily, and in the not-too-distant future most radio stations may be like WNBC-FM.

If you listen to WNBC-FM, you hear music, disc jockeys, commercials and newscasts—all similar to the programming on WNEW or WNBC-AM. But if you go to the studio to watch a WNBC-FM broadcast, all you can see is an array of reel-to-reel tape players, cartridge players, a digital clock and a large assortment of other electronic equipment. You see tape players mysteriously turned on and just as mysteriously turned off in proper sequence. And when it's time for a newscast, the station automatically switches to a net-

work broadcast. After the news, the equipment switches back to the station's regular programming.

If you look hard enough in a rear corner of the studio, you can see one WNBC-FM engineer sitting at a desk, possibly reading a paper, occasionally glancing at a monitoring console before him.

The engineer is there only as a safeguard. The station is programmed to play music, commercials and other features early in the day, and it performs unaided.

## A multitude of new trends

Automated station programming is only one of many trends developing in the radio broadcasting industry. Others include:

- Transmitters monitored by computers for more precise control with fewer people.

- AM stereo for rural and automobile reception, without the fading and multipath distortion generally associated with FM.


- Pulsewidth-modulated AM transmitters for less power consumption and increased efficiency.

- Dolby noise-reduction circuitry for improved signal-to-noise ratio and other advances.

Minicomputers are starting to make strong inroads into broadcasting, reports Lee Facto, executive vice president of International Good Music Corp., Bellingham, Wash., a broadcast-equipment manufacturer. In addition to automating station programming, computers will be able to control transmitters by the end of this year, he says.

The primary goal of such a system is to insure continued operation. To do this, a computer must be programmed to monitor such parameters as power level, modulation and frequency. In addition

Jules H. Gilder  
Associate Editor

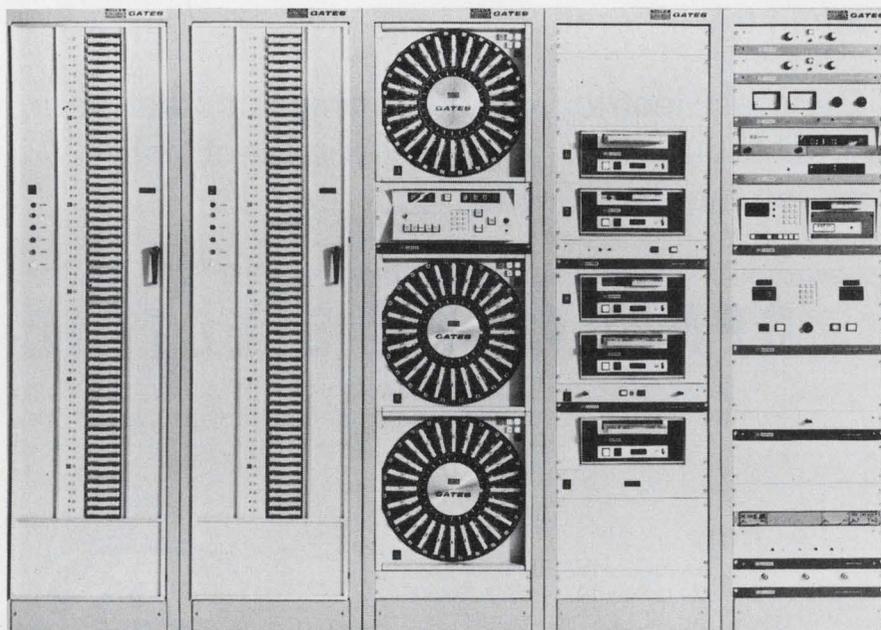

**Automated programming system** by Gates Radio uses cartridges for both music (racks on left) and commercials (carousels in center). A digital clock controls station operation according to a preprogrammed magnetic tape.

Coming soon:

# TI Advanced Technology Seminars on Semiconductor Memories and MOS ICs.

Concentrated courses that meet your need-to-know about two of today's "hottest" technologies.

- **Authoritative**—prepared by five top men in the field, with information gathered from more than 50 scientists and engineers.
- **Practical and up-to-date**—answers to today's problems in systems design.
- **Fast and efficient**—each seminar, in just two days via the videotape medium, offers the equivalent of an 8-day seminar. Learning actually improves since videotape permits scores of "retakes" (impossible with live presentations) until every idea is communicated with maximum clarity.
- **Convenient**—presented in major cities throughout the U.S., with a course author on hand to answer questions.
- **Low-cost**—\$295.00 each, including complete course literature... a fast, inexpensive means to a fundamental understanding of two complex technologies with enormous potential.

## Semiconductor Memories Course

Ten hours of lecture and a 250-page workbook cover:

- Memory Functions and Economics
- Technology Arsenal for Storage Elements
- Sequentially Accessed Storage Design
- High-Speed Random Access Storage Design
- MOS Random Access Storage Design
- Fixed Program Storage Design
- Reliability of Memories

## Fixed Program and Sequentially Accessed Memory Applications RAM Applications

### MOS ICs Course

Nine lecture hours, 200-page workbook and panel discussion cover:

- Characteristics of the MOSFET
- MOS Technology Arsenal
- Achieving Reliability in MOS ICs
- Economics of MOS/LSI
- Inverter and Static Logic Configurations
- Design of MOS Shift Registers
- MOS-bipolar Interface
- Memory Configurations
- Programmable Logic Arrays
- MOS Production

### How to enroll by phone or mail



If you are interested in attending seminars in Washington / Baltimore, Philadelphia, Dallas, Newark or Long Island, call Fred Sawyer, (214)

238-3894. We'll either register you by phone or send you additional detailed information in time for you to respond before the registration deadline.

To register now by mail for all later seminars, complete the coupon, indicating the seminar or seminars you wish to attend.

For more information about all later seminars, check the appropriate box to receive in-depth details (allow 10 days for delivery). Included will be a registration form which must be postmarked no later than the deadlines given above.

CITY	COURSE	PRESENTATION DATES	DEADLINE FOR POSTMARK OF REGISTRATIONS
Washington/Baltimore	Memories MOS	Sept.25-26 Sept.27-28	Sept.11* Sept.13*
Philadelphia	Memories	Oct.2-3	Sept.18*
Dallas	Memories	Oct.5-6	Sept.21*
Newark, N.J.	Memories MOS	Oct.10-11 Oct.12-13	Sept.26* Sept.28*
Long Island, N.Y.	Memories MOS	Oct.17-18 Oct.19-20	Oct.3* Oct.5*
Norwalk, Conn.	Memories MOS	Oct.24-25 Oct.26-27	Oct.10 Oct.12
Boston	Memories MOS	Oct.31-Nov.1 Nov.2-3	Oct.17 Oct.19
Rochester, N.Y.	Memories	Nov.8-9	Oct.25
Dayton	Memories	Nov.13-14	Oct.30
Indianapolis	Memories	Nov.16-17	Nov.2
Chicago	Memories MOS	Nov.27-28 Nov.29-30	Nov.13 Nov.15
Denver	Memories	Dec.5-6	Nov.21
Palo Alto	Memories MOS	Dec.11-12 Dec.13-14	Nov.27 Nov.29
Los Angeles	Memories MOS	Jan.8-9 Jan.10-11	Dec.26 Dec.27
Orange County, Calif.	Memories MOS	Jan.15-16 Jan.17-18	Jan.2 Jan.3
San Diego	Memories	Jan.22-23	Jan.8
Phoenix	Memories	Jan.25-26	Jan.11
Houston	Memories	Feb.1-2	Jan.18
Orlando	Memories MOS	Feb.6-7 Feb.8-9	Jan.23 Jan.25
Ft. Lauderdale	Memories MOS	Feb.13-14 Feb.15-16	Jan.30 Feb.1

**Texas Instruments Learning Center**  
P.O. Box 5012, M/S 84  
Dallas, Texas 75222

  
**LEARNING CENTER**

Please enroll me in  Semiconductor Memories Course  MOS ICs Course. I enclose \$ \_\_\_\_\_ (\$295.00 per seminar, check or money order only).

Bill me  Bill my company. I will attend in the following city \_\_\_\_\_

Please send me more details about the seminars.

Please send me information about acquiring the seminar videotapes for my in-plant training.

NAME \_\_\_\_\_

COMPANY \_\_\_\_\_

STREET \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

**TEXAS INSTRUMENTS**  
INCORPORATED

the machine can be used to calculate transmitter tube efficiency, to minimize noise and distortion, and to provide diagnostic messages, logging and operator signaling.

The computer's function need not be limited to reporting conditions as they exist, Facto notes. It may also be used as an interactive device, by having it perform predetermined corrective adjustments stored in memory. In short, a computer can do practically anything an engineer can.

The cost for computer systems, Facto says, ranges from less than \$10,000 to more than \$120,000, depending on the complexity of the station. International Good Music

will have a system available next month that uses a PDP-8 mini. A typical FM installation would cost about \$20,000, Facto says, while an AM one would sell for about \$30,000.

One obstacle that could prevent the immediate use of computer-controlled transmitters is a lack of approval from the Federal Communications Commission. According to Bruce Longfellow, supervisory engineer for the FCC's Broadcast Bureau, Congress must first amend the Communications Act to allow for computerized radio transmitters. While this could take time, Longfellow admits, he doesn't see any major objections to ultimate approval.

### AM stereo appears imminent

Another area of growing interest is AM stereo radio.

AM stereo is not new. It was first tried about 10 years ago. At that time several companies, including RCA, Philco and Westinghouse, experimented with stereo systems. None, however, was very successful. The reason is that they used either phase and amplitude modulation or phase and frequency modulation to achieve the stereo effect. Those techniques resulted in high negative modulation peaks, which caused interference and noise.

A system that has apparently

overcome these problems has been developed by Kahn Research Laboratories of Freeport, N.Y. According to Leonard Kahn, president of the company, the sum and difference signals—required for stereo reception—are transmitted via the upper and lower sidebands of the AM signal, and thus stereo transmission requires no more bandwidth than conventional AM transmission.

The system has been successfully tested in the laboratory, Kahn reports, and it has made its commercial debut in Tijuana, Mexico. Several stations are reportedly interested in testing the system but must await FCC approval.

In the meantime radio listeners in the San Diego-Los Angeles area can hear AM stereo from XETRA, the Mexican station.


If AM stereo does become popular, a special receiver costing about 30% more than present ones will probably become available. An alternative, Kahn says, is to use two radios to receive AM stereo. Each radio is tuned slightly off center—one on the high side, the other on the low side.

Kahn reports his sideband system is capable of a channel separation of 30 dB and a frequency response of from 50 to 13,000 Hz, with harmonic distortion at 1%.


### Transmitter efficiency improved

Another new development is a pulsewidth-modulated AM transmitter developed by Gates Radio Corp. of Quincy, Ill. The modulator is almost 90% efficient—instead of the usual 50 or 60%—and results in an over-all transmitter efficiency of about 65%. This increase in efficiency means that total power requirements can be cut by as much as 33%.

In operation, the pulsewidth modulator adds the audio signal to be transmitted to a 75-kHz sawtooth signal. The combined signal then goes to a level detector, which determines the point on the sawtooth wave at which a pulse amplifier will conduct. The output of the pulse amplifier is a series of square pulses that vary in duration with the input audio. The square pulses are then passed through a low-pass filter that removes the 75-kHz signal, leaving just the high-power audio signal to

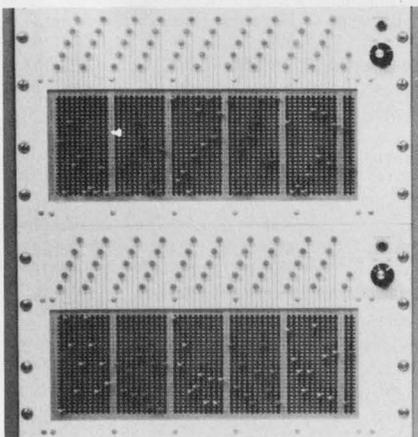

Manual random access memory is generally used to automate carousels which contain commercials, public service announcements, etc.

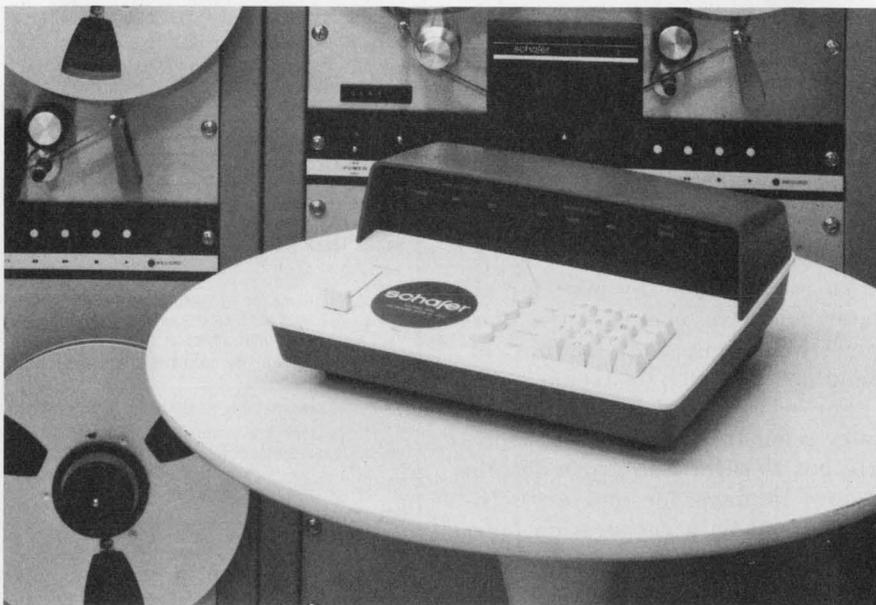

Keyboard memory unit from Schafer Electronics uses an MOS random access memory to store the operating program instead of magnetic tape. The unit holds an entire day's scheduling and can be loaded directly from the keyboard or from a prerecorded cassette.



# NOTORIETY



VOL. 1 No. 1

Santa Clara, California 95051, June, 1972

1 Page

0 Cents

## NATSEM WOWS WINDY CITY CONFAB

### 5 Watt Audio Amp Bows, Car Mfg's say 'Socko'

Raves and kudos continue to be heard about NatSem's new LM383K IC audio amp, the only monolithic 5-watt RMS IC audio amp that's fully short circuit and thermally protected and has a preamp and power amp on the same chip.

Cost effective with discrete designs, the new LM383K also offers adjustable voltage gains from 50 to 500.

### 10-Watt Audio Amp Intros, Hi-Fi Phono Mkt Wowed

National Semiconductor has introduced a 10-watt monolithic power amp designed for use by manufacturers of hi-fi phonographs.

The new LM384 will deliver 10 watts RMS into an 8 ohm load at 28-30V supply voltage. The LM384 is fully short circuit and thermally protected, has both a pre-amp and power amp on the same chip and is cost effective with discrete designs.

### KIDDIE PHONO, PAGING AMP REAL 'LONER'

A new 4-watt IC audio amplifier that requires one external component has been unveiled by National Semiconductor.

Available in a 14-pin DIP package, the new LM380 audio amp was designed specifically for use in kiddie phonographs, paging systems, intercoms and toys which require an amp for their operation.

### CERAMIC PHONO CARTRIDGES FIND FRIEND IN NEW DUAL CHANNEL AUDIO AMP

National Semiconductor has added a dual 2-watt audio amplifier to its expanding line of consumer linear integrated circuits. The new LM377 provides up to two watts of con-

tinuous RMS power into an 8 ohm load on each of its channels with a high impedance equal to 10 megohms, ideal for the ceramic phono cartridges found in most home stereo sets. Gain is 100 dB and distortion is only 0.5 percent at 1 kilohertz, while power bandwidth is 65 kilohertz.

### TV SIGNAL PROCESSOR PACKED WITH POWER

A complete 2-watt TV sound system, utilizing proven circuit techniques, has been incorporated into National's new LM1805. The FM IF portion of the LM1805 uses a three-stage limiting amplifier and a differential peak detector combined with a DC volume control.

Designed for use with a minimum number of external components, the audio power amp section of the new LM1805 may be operated over a wide range of power supply and speaker impedance combinations.

### OPEN LOOP GAIN, HIGH INPUT IMPEDANCE MAKE 4-WATT STEREO AMP 'WINNER'

A new dual 4-watts-per-channel stereo amp, the LM378, has been introduced by National Semiconductor.

An internally-compensated IC stereo amp, the new LM378 features a 100 dB open loop gain, typical 10 megohm input impedance, a dual internal power supply regulator and optimum turn-on, turn-off characteristics to eliminate turn-on delay and speaker pop.

### Possibilities 'Unending' For New NatSem Quad Amp

National's new LM3900 is the first operational amplifier developed to operate from a single +4 to +36V supply and split supplies as well. It consists of four complete amps on a single monolithic silicon chip and is priced at only 75 cents in quantities of 100.

The new LM3900, which is internally frequency compensated for unity gain and completely short circuit proof, has

an open loop gain of 70 dB and a unity gain bandwidth of 2.5 megahertz. Input bias current is only 30 nanoamps.

The combination of four independent amps on a single chip and single power supply operation opens up scores of new applications for op amps in industrial and automotive equipment applications where only one power supply is available.

### Intros IC Preamps, Audio Amps

Chicago—One of the bigger coups pulled off at the Spring Conference on Broadcast and Television Receivers was the unveiling of a new line of integrated circuits that perform preamp and audio amp functions within recording, stereo, hi-fi, phono and other entertainment and broadcast-oriented systems.

The new IC preamps and audio amps are being manufactured in volume by National Semiconductor Corporation, a company who's no stranger to the integrated circuit business.

"What we've done," says a NatSem spokesman, "is to take the functions which normally require a combination of discrete transistors, IC's,

resistors and put everything on a single chip, with little or no external components required."

In addition to their basic advantages of better systems reliability and lower systems costs, each of NatSem's new IC preamps and audio amps has its own distinct advantages. The LM381, for example, is the lowest noise dual preamp in the business, while the new LM382 is a low noise dual preamp which offers full R.I.A.A. and N.A.B. equalization with a minimum of external components.

Each of NatSem's new consumer IC's, available now at all National Semiconductor distributors, is described in more detail elsewhere on this page.

### Kudos for Super Low Noise Preamp

A growing army of former discrete NPN and PNP transistor users are touting the merits of NatSem's new LM381 IC dual preamp. Designed for extremely critical low noise applications, the new LM381 offers a wideband equivalent input noise of 450 nanovolts with 600 ohms source impedance and 10 kilohertz noise bandwidth.


As a result, the new LM381 offers users a single-chip dual amplifier that's as performance effective as a transistor-resistor combo, with much better reliability in the long run.

### R.I.A.A., N.A.B. EQUALIZED PREAMP PREEMS, USERS HAIL SIMPLICITY

A cost-conscious low noise IC preamp aimed at the auto tape, tape player, recorder and phonograph market is now available from National Semiconductor.

The new LM382 not only offers the advantage of low noise operation, but requires just three additional external components for full R.I.A.A. or N.A.B. equalization.

**NATIONAL** National Semiconductor Corp., 2900 Semiconductor Dr., Santa Clara, California 95051/ Telephone (408) 732-5000

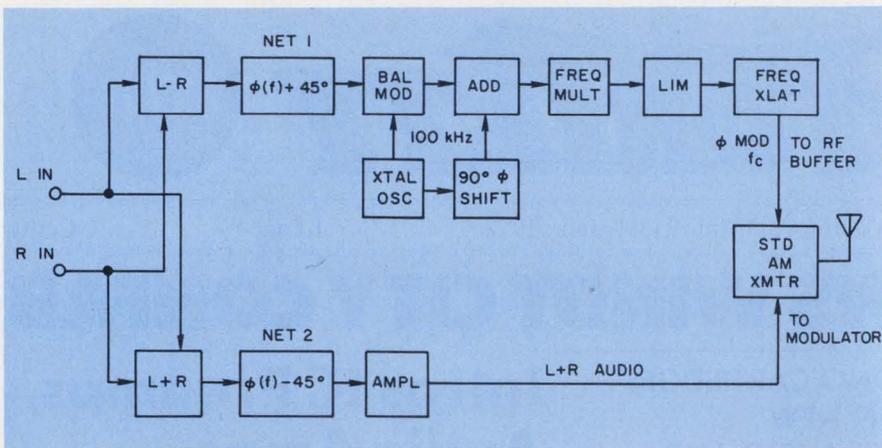

**AM stereo system** developed by Kahn Research uses sum and difference signals to transmit stereo information. Stereo signals are transmitted via upper and lower sidebands of the AM signal.

modulate the power amplifier.

While it is only now becoming available to the broadcast industry, this type of transmitter has been tested and used in Vietnam by the U.S. military for several years.

For the future, industry sources see increased use of Dolby noise-reduction circuitry. Developed in England by Dr. Ray M. Dolby, the circuit reduces noise during the quiet periods of a recording. This is done by using an expansion-com-

pression technique. The system passes high-level signals with unity gain. For low-level signals during soft passages, the Dolby circuit raises (expands) the signal level just before recording. During playback, the circuit attenuates (compresses) the raised signal back to its original level, reducing the noise added during recording.

FM stations are just now beginning to use the Dolby circuit, but it is very expensive, says Facto

of International Good Music. What the industry needs, he continues, is an inexpensive retrofit kit that can be used to modify existing tape recorders and players.

Another current need in the broadcasting industry, Facto notes, is instantaneous random access to program material. One possible approach, he suggests, is adapting the high-speed tape equipment used in the computer industry. However, there is a trend in the broadcasting industry away from electromechanical devices and to solid state, Facto says. If a way could be found, he adds, to memorize audio in a solid-state system and to recreate it with broadcast quality at a reasonable price, it could be the biggest step forward in broadcast audio since the development of the tape recorder itself.

This step may not be far off. A new device developed by Master Specialties Co. of Costa Mesa, Calif., known as an automatic number announcer, uses read-only memories to synthesize the human voice. Although this new voice-response system can store only simple messages, it is not inconceivable that this system can be expanded to store music. ■■

## Improved waveguide built of graphite

A new graphite epoxy composite material is being used to build waveguides, and the result is structures that have less than half the weight and thermal expansion of devices made of invar material.

Moreover there are savings in manufacturing costs, says the Hughes Aircraft Co., maker of the new waveguides. Brian Keller, manager of the company's Materials and Processes Laboratory in Culver City, Calif., notes:

"Our cost analysis indicates that silver-plated graphite composite waveguide devices can be produced at less cost than their invar counterparts. We feel that these devices will be used in such areas as satellites, airborne radar and missiles."

Invar waveguide is used in most applications where thermal stability is important. Invar has a temperature coefficient of  $0.9 \times 10^{-6}$

in/in/F. But it is very heavy. Graphite epoxy composite has a temperature coefficient of  $0.4 \times 10^{-6}$  in/in/F, and it weighs about 70% less than invar.

The graphite material is similar in structure to fiberglass. It contains long strands of graphite fibers, bonded together with a proprietary epoxy. It comes in sheets with thicknesses down to about 7 mils. To construct a waveguide with good structural rigidity, four plies are used to give a wall thickness approaching 30 mils.


Waveguide made of the composite material, according to Keller, works fine over a temperature range of at least  $-250$  to  $+250$  F. Hughes compared a four-cavity graphite composite filter with an identical invar filter over a temperature range of 0 to 140 F. Both filters were plated with silver, and

both were tested at a center frequency of 4.16 GHz. The insertion loss of the graphite filter was a nominal 0.29 dB against 0.30 dB for the invar filter, according to Keller. The frequency shift, measured over the entire temperature range, was 0.40 MHz for the graphite filter against 1.15 MHz for the invar filter.

Keller notes that the breakthrough in making graphite composite a practical material came in the area of plating. "It took a while," he says, "but we finally found a process that allows us to put down a uniform coat of high-conductivity silver plating."

Keller, who uses a plating thickness of about 1 mil on his waveguides, says they will work fine up to the low-millimeter frequency range. Above that dimensional changes may occur. ■■

THE  
SLIDE  
WITH  
THE  
VELVET  
TOUCH.

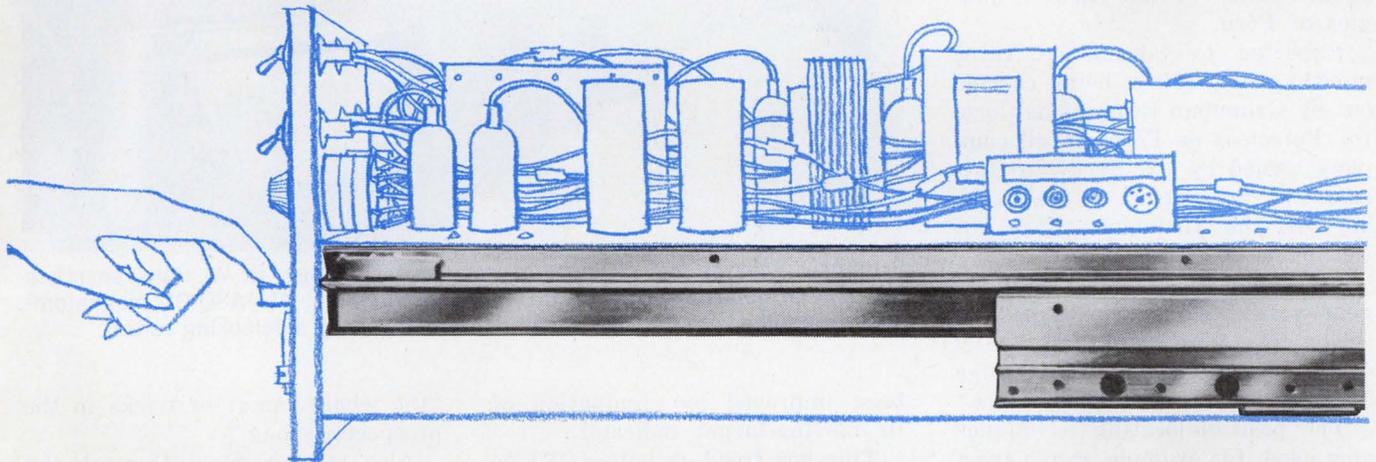

## THE 525.

Grant's spectacular new progressive  
action slide features incomparably  
smooth operation • up to 150 lb.  
load capacity • simple installation  
• "quick-disconnect" mechanism •  
wide range of sizes

*It's ready for action!*

**GRANT®**  
WE KEEP THINGS MOVING

GRANT PULLEY & HARDWARE CO.  
A Division of Instrument Systems Corporation  
155 High Street, West Nyack, New York 10994

INFORMATION RETRIEVAL NUMBER 15

# War electronics proving useful in search for oil in jungles

Early this month a variety of modified military electronic equipment, some of it of World War II vintage, began the peaceful but formidable job of exploring for petroleum and mapping 130,000 square miles of the Amazon jungles of Peru.


Expected to take about three months, the work is being carried out by Grumman Ecosystems Corp. for Petroleos de Peru, an oil company owned by the Peruvian Government. Ecosystems is a subsidiary of the Grumman Corp. of Bethpage, N.Y.

"Although the pacified military gear works well, newer systems for ecological jobs will eventually evolve," says Thomas W. Attridge Jr., vice president of Ecosystems.

The position-locating techniques now used, for example, range from Shoran, a highly accurate, transportable bombing system used during World War II, to Transit, the navigation satellite.

"We set up Shoran transmitting towers on hills throughout the area being mapped, and these give the aircraft its distance from each tower," explained R. W. Pate, Ecosystems' manager of systems technology. "We determine the position of the hills themselves by taking 35 position fixes on each one with the Transit navigation satellite." Averaging out the results determines the tower's position within 10 meters. "Eventually," Pate says, "we want a navigation and locating system that does not depend on setting up sites on hills."

Map-making is being done now by Motorola's sidelooking radar, the AN/APS-94. The latter is the prototype of the APS-94D, which has been highly successful in Vietnam in the Army's Mohawk OV-1D surveillance planes. The radar's mapping capability has

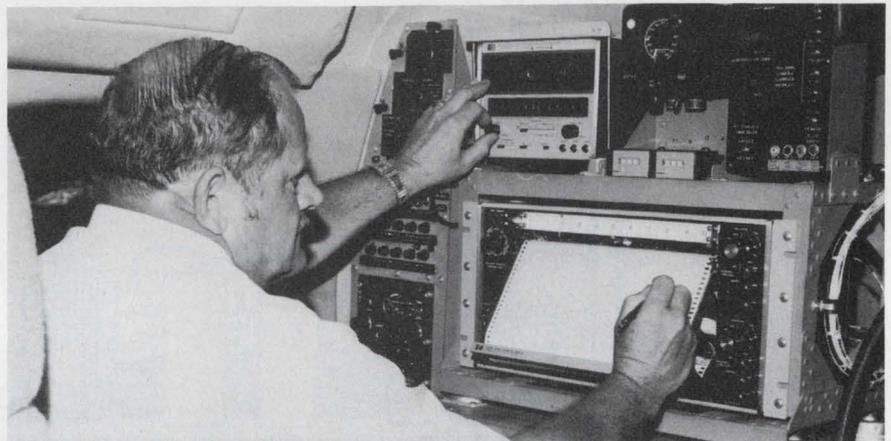

**Grumman Ecosystems' manager of systems technology, R. W. Pate, searches for mineral deposits in Peru with Texas Instruments' AN/ASQ-81 magnetometer. In another aircraft the same area is mapped by sidelooking radar.**

been improved by elimination of its moving-target indicator.

This has freed an entire CRT to present the fixed target seen from the righthand side of the plane, and an entire CRT for the lefthand side. On the military version half of each CRT is dedicated to fixed targets and the other half to moving targets.

The sidelooking radar in Peru is being flown in a modified World War II Douglas A-26.

## Sub chaser looks for oil

The search for oil and gas is being made by a Texas Instruments' AN/ASQ-81 magnetometer, the type usually used by U.S. Navy patrol planes to detect intruder submarines. Ecosystems' sensor protrudes from the tail of Grumman's Gulfstream I, a turboprop corporate craft.


In the future, Pate said Ecosystems plans to augment its magnetic findings by sending out a ground team to make a variety of measurements—seismic, gravity, geochemical and electromagnetic,

"the whole gamut of tricks in the prospector's bag."

Also looking down through the floor of the Gulfstream I is an IRSA 8 infrared line scanner made by Daedalus. The scanner operates at 0.5 to 5.5  $\mu$  or 8 to 14  $\mu$ . The data output is continuous 70-mm film converted from magnetic tape.

The plane's Doppler navigation system, a GPK-1000, built by General Precision, has been modified to give more precise readings than are normally needed. It reads out at 1/50th mile increments instead of the conventional 1/5th mile. The system has been tied in with the flight director.

All the sensors and navigation equipment feed into a digital data-acquisition system that records on magnetic tape. One modification under way, Pate says, is the addition of a verifier and printer for the tape recorder. "Now, we have no read capability," he points out. "We know the tape recorder is recording, but we don't know if it's valid or recording correctly. With a read-and-write capability we'll know." ■■

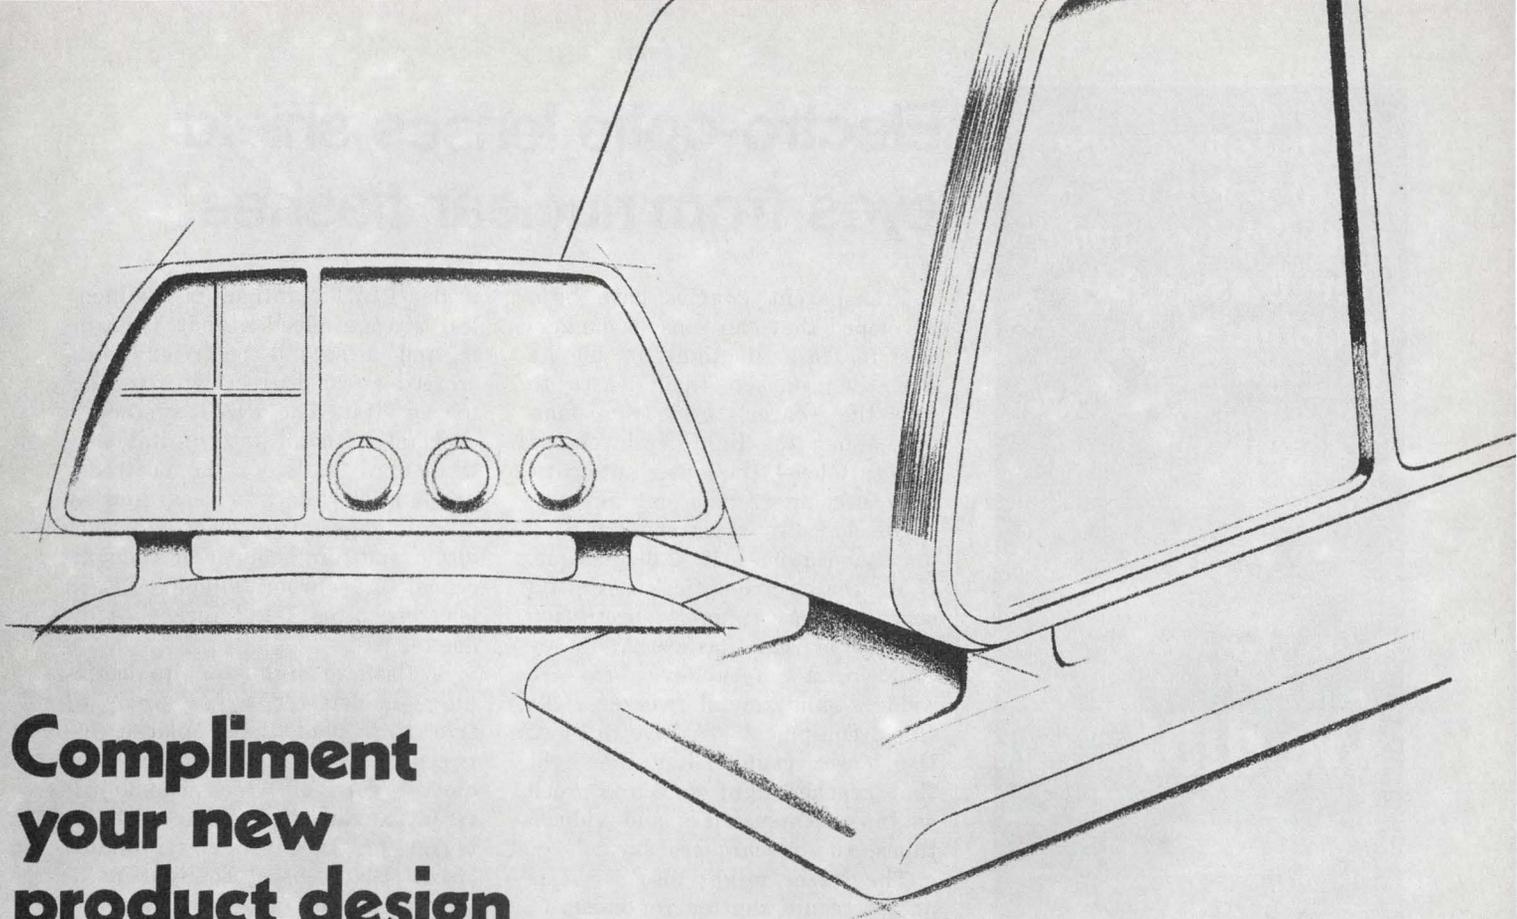

**Compliment  
your new  
product design  
with an exciting  
new control  
knob.**




**Rogan's new  
Alpha-knobs.**

**Rogan**

8015 N. Monticello Ave. • Skokie, Ill. 60076  
(312) 675-1234  
TWX: 910-223-4547

A customer asked us to solve his nut, washer and sleeve assembly problem.

**We did!**

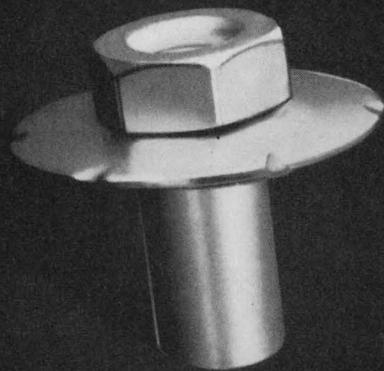

### The Sleeve KEPS®

A Keps which combines a sleeve, washer and nut into one easy to handle, pre-assembled part. Because Keps eliminate the need for handling loose parts on the assembly line, reduced fastening costs result. Quality is assured because the right parts are in place—everytime!

**THEY'RE AVAILABLE RIGHT NOW!**

The Sleeve Keps®

Send for catalog and samples.

**it** **SHAKEPROOF**  
DIVISION ILLINOIS TOOL WORKS INC.  
ST. CHARLES ROAD • ELGIN, ILLINOIS 60120

Copyright 1972 Illinois Tool Works Inc.

## Electro-optic lenses shield eyes from nuclear flashes

Transparent goggles have been developed that can sense a dangerous increase in light in 50  $\mu$ s and then darken their lenses to save the wearer's eyes from damage. When the light level returns to a safe level, the lenses automatically become transparent again.

Developed by researchers at Sandia Laboratories in Albuquerque, N.M., the electro-optic lenses could serve as a valuable protection against nuclear flashes. And they could be a safety device for arc welders and metal workers. To shield equipment sensitive to light, the lenses could filter the light that reaches light detectors, such as image intensifiers and vidicon tubes, the researchers say.

The lenses might also serve as an electronic shutter for cameras, an optical switch or light gate or a variable-density transmission window that could provide a gray scale over four orders of magnitude.

Photochromic glass, produced by Corning Glass and used by several optical companies to make clear glasses that become sunglasses on exposure to strong light, takes several seconds to react—not fast enough to guard against nuclear flashes.

The Sandia device is a sandwich consisting of a polarizer, an elec-

troded PLZT (lanthanum-modified lead zirconate-lead titanate) ceramic and a second polarizer criss-crossed at 90 degrees with respect to the first. The PLZT surface is overlaid with an interdigital electrode array in which the electrodes are 2 mils wide and separated by 40-mil gaps. The electrodes are either sputtered copper or vacuum-deposited chromium-gold. Each lens measures 1-1/2 inches in diameter.

A flash of light—or its beginning—is detected by an array of five tiny photodiodes placed between the two goggle lenses. The diodes—each of which has a different angle of visibility—are integral parts of a discriminator circuit that senses the light-intensity threshold and switches the goggles to their opaque state. This is done by applying voltage to the ceramic that alters the alignment of the ferro electric domains within the material so the alignment prevents light from passing through. The level at which this occurs may be adjusted by changing the values of resistors in the circuit.

The power supply consists of a 5.4-V battery, a dc-dc converter and electronics. It displaces 12 cubic inches and weighs 10 ounces. And, Sandia says, it can be miniaturized still further.

Operating the goggles requires only a few picoamperes of current, although the converter has a potential of 950 V. The battery will power the goggles for about 200 hours. The units Sandia has already developed have been triggered several thousand times without measurable degradation.

Light transmission through the goggles when they are turned on is about 21%, and they are almost colorless. U.S. Air Force sunglasses transmit 15%. When desired, the transmission may be set to any level between 21% and "opaque"—0.003%—by means of a simple rheostat control. "Near opaque," to which the lenses automatically adjust when a bright flash starts, is 0.01% transmission. ■■



Sandia inventors J.T. Cutchen (left) and J.O. Harris examine electro-optic flashblindness goggles.

# Beckman offers a high performance line of test instruments.

They're designed to deliver reliable, high-quality operation in your laboratory, industrial application or test system. All instruments feature plug-in IC's for easy, low-cost field maintenance. A few of these stellar performers are:

Model 3020 Line Noise Generator. Serves the dual purpose of generating and measuring line noise.

Model 6421B Frequency Meter — 500 MHz. Direct-read frequencies to one Hz in one second. No prescaling input. Complete hands-off operation.

Model 6401 Counter/Timer — 136 MHz. Extremely versatile, completely programmable counter. Trigger level indicators simplify operation.

Model 1454 Digital Printer. Standard 7-column BCD printout is expandable to 21 columns. Flexibility provides integrated printout from multiple data sources.

Model 1248 Counter Data Terminal. 136 MHz counter provides direct interface to a computer at a very low cost.

For information on our full line, call your local Beckman representative, or call us direct at (312) 671-3300.

**Beckman**® INSTRUMENTS, INC.

ELECTRONIC INSTRUMENTS DIVISION  
3900 N. River Rd., Schiller Park, Ill. 60176




# Celco for CRT DISPLAYS

DEFLECTION YOKES FOCUS COILS



In building flying spot scanners, film and hard copy printers and recorders, film readers, optical character readers, and other

DEFLECTION DRIVERS • CIRCUIT CARDS





applications where high-resolution light sources are required, the Systems Display Designer is freed from

RAMP GENERATORS




the long, laborious and expensive procedure of buying, evaluating, and assembling deflection yokes, focus and

POSITIONERS CRT SPOT ANALYZER



centering coils, amplifiers, correction circuits, positioners, power supplies, CRT's, associated shielding

COMPLETE DISPLAY SYSTEMS




.0006" SPOT

and packaging.

**Celco**

CONSTANTINE ENGINEERING LABORATORIES COMPANY  
UPLAND, CAL. 91786 MAHWAH, N. J. 07430

# AMPERITE



## Thermostatic DELAY RELAYS

*Glass enclosed*

For TRUE HERMETIC SEALING

**Delays: 2 to 180 seconds\***

Actuated by a heater, they operate on A.C., D.C., or Pulsating Current... Being hermetically sealed, they are not affected by altitude, moisture, or climate changes... SPST only — normally open or normally closed... Compensated for ambient temperature changes from  $-55^{\circ}$  to  $+80^{\circ}\text{C}$ ... Heaters consume approximately 2 W. and may be operated continuously. The units are rugged, explosion-proof, long-lived, and inexpensive!

**TYPES:** Standard Radio Octal and 9-Pin Miniature.  
List Price, \$4.00

\*Miniatures Delays: 2 to 120 seconds.

All Amperite Delay Relays are recognized under component program of Underwriters' Laboratories, Inc. for all voltages up to and including 115V.


**PROBLEM?** Send for Bulletin No. TR-81.

## AMPERITE BALLAST REGULATORS

Hermetically sealed, they are not affected by changes in altitude, ambient temperature ( $-50^{\circ}$  to  $+70^{\circ}\text{C}$ ), or humidity... Rugged, light, compact, most inexpensive.

List Price, \$3.00

Write for 4-p. Bulletin No. AB-51.



# AMPERITE

600 PALISADE AVE., UNION CITY, N.J. 07087

Telephone: 201 UNion 4-9503

In Canada: Atlas Radio Corp., Ltd.,  
50 Wingold Ave., Toronto 10

## technology abroad

Low-loss fiber-optic waveguide experiments are being conducted at Southampton University in Britain. So far they have produced an unusually low transmission loss, on the order 10 dB/km, with liquid-core fibers. The liquid core internal diameter was  $50\ \mu\text{m}$ . (Bell Telephone Laboratories in the United States recently claimed a loss of 13.5 dB/km). The low-loss transmission region of the new fiber extends to longer optical wavelengths—for example, the wavelength range for a 20 dB/km loss was found to be 0.8 to  $1.1\ \mu\text{m}$ . The experiments are expected to increase interest in multi-mode fiber-optic transmission systems, previously neglected because of high attenuation and narrow bandwidth limitations. A research team at Southampton University has been investigating various materials for use in viable optical communication systems since 1967.

CIRCLE NO. 441

The sound-attenuation properties of glass windows can be measured in the laboratory with a black box developed by Pilkington Brothers, a glass manufacturer in Britain. Pilkington's Spectrum Shaper reproduces electronically the sound-insulation "performance" of any window. Signals representing raw traffic noises or the sound of a 747 jet taking off are fed into the equipment. The Spectrum Shaper adjusts its volume and frequency to give the true level of noise attenuated by glass windows made with different materials in different configurations. A simulation of the degree of insulation, which varies from 12-mm-thick glass to dual windows with wide air-spaces, is selected by a patch-board.

CIRCLE NO. 442

A novel constant-voltage-supply transformer has been developed by Brandenburg, Ltd., an English

high-voltage power supply manufacturer. The transformer was designed for photomultiplier supplies in which voltage stability was the prime requirement. The output voltage of the transformer remains constant despite large changes in input voltage or the load. The transformer has a high leakage reactance with at least two secondary windings. The combined output of the two secondary windings is related—if the output of one increases, the output of the other decreases. Thus the output to the load can be controlled by varying the load on either secondary winding. In use, the transformer is supplied with a fraction of the primary line voltage. This fraction is compared with a reference voltage. When a differential voltage appears, it is applied to the control winding, which in turn induces a correction in the main output winding. The same design technique can be applied to constant current supplies.

CIRCLE NO. 443

A technique that increases the radiation resistance of silicon planar devices has been developed by the Siemens AG Research Laboratories in Germany. Improvements of radiation resistance by factors of 10 to 100 are reported to have been achieved with only relatively simple post-fabrication radiation and temperature treatment. This treatment is in contrast to the usual method that involves the replacement of silicon dioxide by other passivation layers. Arising from a Government-sponsored program to investigate damage to electric components caused by high-energy radiation in and around the Van Allen radiation belts, the new radiation-hardening technique can be applied to other components without additional development costs, Siemens says.

CIRCLE NO. 444

# One Time, Introductory Offer



# nimo 64

DISPLAY AND SOCKET

# \$29<sup>95</sup>

The ultimate readout—  
The **nimo™ 64** by **IEE**

a 50% Savings

FOR A LIMITED TIME ONLY!

...64 different messages displayed in 1.5" of panel space!

**nimo 64 position CRT and socket . . . \$29.95**  
... that's a 50% saving!

That's right . . . for a limited time we are offering the ultimate display — *nimo 64* — for a cool \$29.95. Or, how about the complete display kit which includes: the *nimo 64*-position tube, socket, filament transformer and power supply. Everything you always wanted to have to display the ultimate image. Price of the kit: \$49.95.

What's so great about *nimo*? Consider the following: *nimo 64* displays the full typewriter keyboard (ASCII/EBCDIC), symbols, image combinations, 5-line messages, etc. — all this requiring but 1.5" of panel space. The display is sharp, distinct, and true to form, and no translation is required from coded mes-

sages as in competitive devices. Name the parameter: cost, value, aesthetics, human factors . . . *nimo 64* is the answer to today's display applications. And, it's uses are endless:

Key-to-tape/disc terminals for character entry verification, digital instrumentation, annunciator systems, computer prompters, optical data scanning systems, teaching machines.

You name it, *nimo 64* fits it.

This offer is good through December 1, 1972, so **act now**.

Fill out the order form on the reverse side, check the appropriate squares and attach your purchase order, check, money order or hot cash and mail it in. **We'll act . . . like now!**

SP H & Q - Y 0 8  
A I J R / Z 1 9  
B C K ! S 2 :  
C . L \$ T , 3 #  
D < M \* U % 4 ©  
E ( N ) V \_ 5 '  
F + O ; W > 6 =  
G | P ~ X ? 7 "

EBCDIC

© P SP 0 H X ( 8  
A Q ! 1 1 Y ) 9  
B R " 2 J Z \* :  
C S # 3 K E + ;  
D T \$ 4 L \ , <  
E U % 5 M J - =  
F V & 6 N ^ . >  
G W ' 7 O \_ / ?

ASCII

? = > < CRT 64 1 1/2  
IEE 64 POSITION 1 1/2" DIA. 30V 500mA  
A Z O 9  
NUMBER OF BUNDLES . L T  
RESERVE TON Q 4  
SHALL WE SEND ALPHA ASCII YES/NO ADRS SELF W/RETR-300M  
F E SEND EORING CLEAR O + &  
FLIGHT NUMBER \$ C P % X #

UNIVERSAL


DATE OF RESERVATION

ACTUAL SIZE



### MECHANICAL CHARACTERISTICS

Operating position ..... Any  
 Envelope ..... T12ZD1  
 Base ..... 26 pin  
 Anode connection..... Through base  
 Socket ..... IEE p/n 21049  
 Outside diameter ..... 1.50"  
 Max. overall length..... 4.750"  
 Seated height ..... 4.250" ± .05

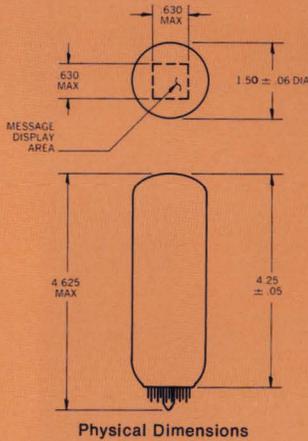


### ELECTRICAL CHARACTERISTICS

Filament voltage,  
 AC or DC ..... 1.75 ± .15V  
 Filament current..... 0.8 amps max.  
 Anode voltage (normal) ... 2.0 KVDC  
 Anode current (max.) ..... 80 μA  
 Normal brightness..... 70 ft.-L  
 Blanking grid voltage "off" .. -10 VDC  
 Blanking grid voltage "on" .. +2.5 VDC  
 Aperture grid voltage "off" .. -10 VDC  
 Aperture grid voltage "on" .. +2.5 VDC  
 Phosphor (standard) ..... Color code 2  
 Fluorescence ..... Green (optional red  
 and blue phosphors available on special  
 order)  
 Persistence ..... Medium

### DISPLAY CHARACTERISTICS

Display area ..... .63 x .63 max.  
 Character height ..... 0.562" max.;  
 0.125" min.  
 Message capability..... Up to 5 lines,  
 8 letters per line  
 Character style..... Modified alternate  
 gothic #3, or custom design

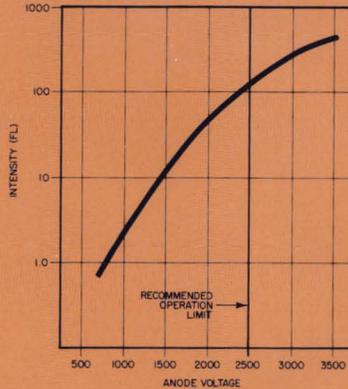

Anode Voltage Curve

### ENVIRONMENTAL CHARACTERISTICS

Vibration ..... 10-50-10 cps at .06  
 double amplitude on all axes  
 Shock ..... 35g's, 11 milliseconds  
 RFI ..... Meets MIL-I-26600  
 Phosphor Life .. 15,000 hours at nominal  
 brightness without catastrophic failures

### POWER SUPPLY

This 15 VDC-in/3 KVDC-out anode  
 power supply was specially designed for  
 the nimo 64 and is capable of driving up  
 to 8 tubes simultaneously. Dimensions:  
 1 1/8" x 1 1/8" x 3/4" solder connections.

### FILAMENT TRANSFORMER

1 1/2" x 1 5/8" x 1-15/16". 2 3/8" mounting  
 centers. Input 117V, 50/60 Hz, or 220V,  
 50 Hz. Commercial quality.

### DRIVER/DECODER


nimo®64 grid structure is arranged  
 such that 8 parallel aperture grid bars are  
 oriented at right angles to 8 blanking  
 grids with cathodes spaced inbetween.  
 Each one of the 64 so formed grid in-  
 tersections constitutes an electron gun.  
 A gun is activated when both the inter-  
 secting grids are biased sufficiently posi-  
 tive. The gun will remain in OFF position  
 if one grid member is negative. There  
 are 16 lines required to address this 8 x 8  
 matrix.

The driver/decoder reduces the neces-  
 sary number of control lines to six. By  
 using five integrated circuits, 8 blanking  
 grid control lines can be decoded from  
 3 binary weighted lines, while 3 addi-  
 tional binary lines can be decoded into 8  
 aperture grid control lines. Such an 8 by  
 7 matrix may be treated as an ordered  
 pair of numbers (a pair of 3 character  
 binary numbers), hence, a message may  
 be addressed i.e., one, eight (001, 100 in  
 binary) to display the message in the  
 upper right corner of the mask.

The above decoder/driver function re-  
 quires the following:

2 SN 7442N — Decoders; 3 MC1820P  
 — Hex Inverters.

(Complete driver/decoders, memory/  
 non-memory are available for remote  
 mounting from IEE).

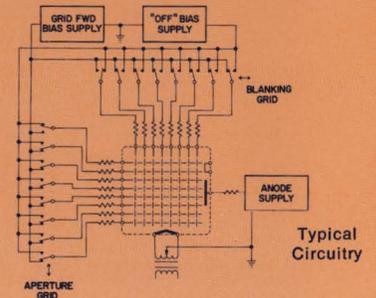

### nimo 64 Super Special Sample Order Form

O.K. IEE, send me the following:

- nimo 64 display and socket ..... \$29.95 \*  
 nimo 64 display, socket, transformer, power supply ..... \$49.95 \*

Filament transformer required (check one)

- 117V, 50/60 Hz     220V, 50 Hz

Mask selected is (check one).

- ASCII     EBCDIC     UNIVERSAL

Return Form To:

Industrial Electronic Engineers, Inc.  
 7740 Lemona Avenue  
 Van Nuys, CA 91405

\*Prices shown do not include local taxes and/or import duties and  
 transportation costs if purchased outside continental United States.

Name \_\_\_\_\_

Title \_\_\_\_\_

Firm \_\_\_\_\_

Dept. \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Telephone \_\_\_\_\_

Amount enclosed \$ \_\_\_\_\_

Purchase order # \_\_\_\_\_

- Have your local Representative  
 call me for a demonstration.

# washington report

## **The McGovern defense program: Some clues**

Where would Senator George McGovern slash the defense budget to save the \$30-billion he says he would over two years? Robert Sherman, a member of the Presidential candidate's staff on defense strategy, has given ELECTRONIC DESIGN the following clues:

Conversion of Minuteman missiles to more powerful warheads would be held to 250 missiles, about half the number the Pentagon wants. Twenty Polaris submarines would be converted to the Poseidon configuration instead of 30. Deployment of the Safeguard system would be halted and the ABM work would be confined to research and development. Prototype development of the B-1 bomber would be stopped; any future research and development and procurement decisions would be aimed at increasing the potency of existing bombers. While older B-52 bombers would be phased out, McGovern recommends buying SRAM and SCAD missiles for the B-52 and the FB-111 force. He would continue research on the super submarine, Trident, but hold off freezing design "until the nature of the Soviet threat that it is designed to face is proven to his satisfaction," Sherman said.

Senator McGovern would cancel the F-14 program, turning instead to a lightweight fighter now being studied by several companies or to an improved F-4. He recommends six aircraft carriers instead of 12, and no further funds for escort ships. He would, however, plan for a nuclear attack submarine fleet of 84 subs.

Such a budget, Sherman says, would provide the "necessary elements of national interest, including nuclear deterrents, protection of NATO, protection of Israel, and would give the U.S. some ability to operate in waters off Asia and Latin America, if necessary."

While many jobs in the defense industry would conceivably be threatened by such a budget, Sherman says, "that McGovern has detailed plans, for transfer of such talent to greatly expanded Government programs on environmental problems, mass transit, emergency medical care and traffic control."

## **Military programs facing tests in Congress**

New threats to military hardware projects are looming as Congress returns from recess to consider Defense Dept. money bills. Among the major targets will be Grumman Corp.'s F-14 aircraft and the Litton DD-963 destroyer. Both programs are now projected at substantially over their initial estimates.

The Senate and the House already have slashed the DD-963 program for this year from \$610-million to \$247-million, but both bodies of Con-

gress reluctantly approved \$773-million requested for the F-14. The E-3A fighter aircraft's airborne warning and control system was slashed by \$309.9-million in procurement funds, but \$83-million was added for research and development. In other items the House approved the President's request for ABM protection of Washington, D.C., but the Senate voted it down. While the House voted to provide six Advanced Airborne National Command Post aircraft, the Senate approved only four.

These differences are being settled in a conference of House and Senate members on the Military Authorization Bill. The next round begins when the House Appropriations Committee reports on the Defense Appropriations Bill, which provides the actual amount the Defense Dept. can spend this year within the ceiling of the Authorization Bill.

## **U. S. may ease exports to Soviet bloc**

Congress is considering legislation that could greatly increase the export of high technology items to the Soviet Union and other Communist countries. A proposed bill would require the Secretary of Commerce to restudy the list of prohibited export goods and remove those that already are freely available from foreign sources. The Commerce Dept. would also be required to justify any unilateral controls imposed on items and to set up industry-government committees to review specific items. The bill, S.3727, has been passed by the Senate and is being considered by the House.

## **FCC decision due on TV uhf tuners**

The Federal Communications Commission is expected to decide the end of August on a request by the electronics industry to modify the government's requirements for future television uhf tuning equipment.

The Electronic Industry Association urged the FCC late in July to reconsider a requirement that all TV receivers sold after July 1, 1974, have 70-position channel mechanisms, with afc, and a reset accuracy within the pull-in range of afc circuitry in use today.

EIA told the Commission that the afc circuitry would price black-and-white TV sets and low-cost color sets out of the market. The association also has asked that the Commission relax the deadline date, since such tuners are not now available for sets already under construction for marketing in that time frame. In addition the EIA has asked the FCC to limit the uhf TV channels that must be received to channels 14 through 69, effective July 1, 1974.

**Capital Capsules:** The Naval Electronics Laboratory in San Diego will have the last word on the design of many of the Navy's most important electronic systems due to a revision in the Naval Electronics Systems Command's charter. The Command's responsibilities now include command, control and communications. . . . The Bureau of Labor Statistics says that while average salaries for white-collar workers in private industry rose 4.4% over the nine months from June, 1971, to March, 1972, **engineers salaries rose 3.9%**. . . . The Electronic Industries Association is calling for papers for its **23rd Electronic Components Conference**, to be held next May 14-16 in Washington, D.C. . . . **Power-tube sales were up 19.8% in the first quarter of this year**, reaching \$7-million, according to the EIA. . . . The Pentagon has decided to go forward on development of a **more accurate and destructive re-entry vehicle for its Minuteman force**. The vehicle is called the Mk-19.



# TEKTRONIX®

# 7900 FAMILY

## 1 GHz Direct-Access Oscilloscope



OR...

## 500 MHz real-time Oscilloscope System


- 8 x 10 cm display CRT READOUT
- 8 cm/ns writing speed
- 7A19 Amplifier 500 MHz @ 10 mV/div
- 7D14 Digital Counter 525 MHz direct counting
- 7B92 Dual Time Base 500 ps/div

OR...

choose from 24 compatible 7000-Series plug-ins for virtually any measurement

7904 Oscilloscope .....	\$2900
7904 Oscilloscope, without readout .....	\$2500
7A19 Amplifier .....	\$500
7A19 Amplifier, with variable delay .....	\$700
7D14 Digital Counter .....	\$1400
7B92 Dual Time Base .....	\$1400
7A21N Direct Access .....	\$350

U.S. Sales Prices FOB Beaverton, Oregon

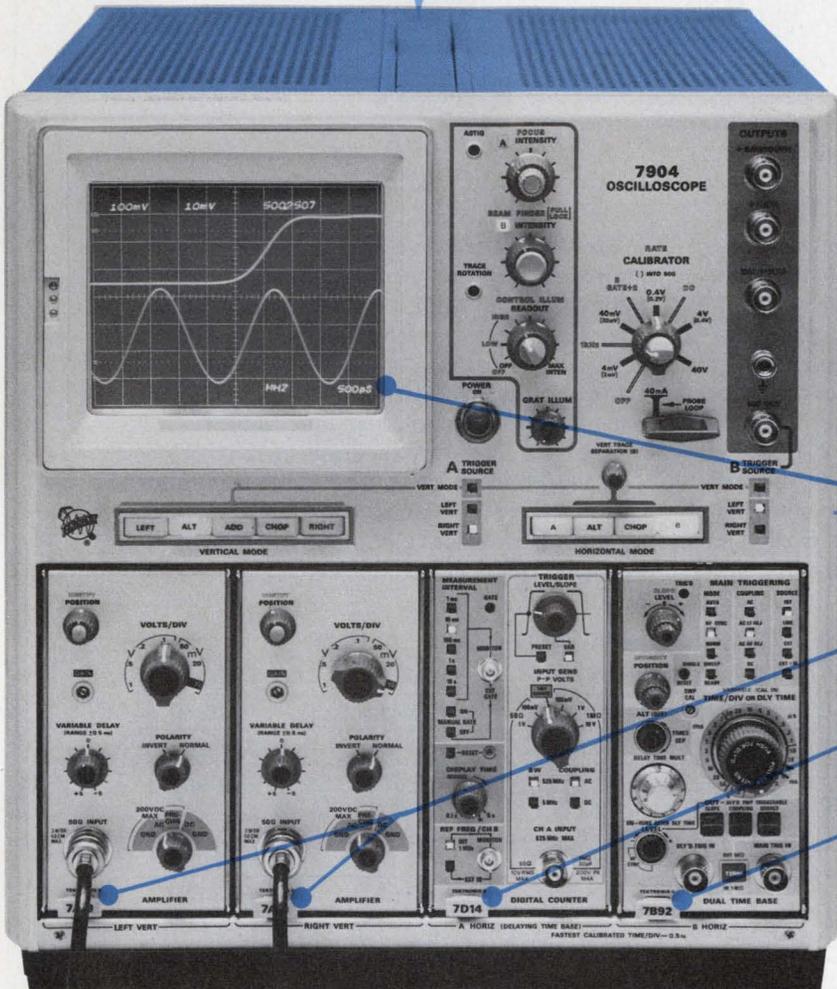

## TEKTRONIX 7904

featuring extended performance or general purpose use, from one mainframe and a family of plug-ins.

### Extended Performance — 20 kHz to 1 GHz

Plug in the 7A21N and install a simple vertical amplifier bypass to directly access the CRT. The bandwidth — 1 GHz, and risetime — 350 ps. Less than 4 V/div driving signal required — single ended or differential. Sorry — no CRT READOUT — vertical amplifier bypassed.


### General Purpose — DC to 500 MHz

Plug in the 7A19 — 500 MHz bandwidth at 10 mV/div, 7B92 — delaying sweep rates to 500 ps/div, 7D14 — direct counting to 525 MHz. As your applications and measurement requirements change, choose from 24 plug-ins for: • sampling • TDR • spectrum analysis • curve tracing • digital multimeter • etc., etc. TEKTRONIX 7904 . . . A product of technical excellence.

For further information or a demonstration call your nearby TEKTRONIX Field Engineer or write: Tektronix, Inc., P.O. Box 500, Beaverton, Oregon 97005.

INFORMATION RETRIEVAL NUMBER 21

# to build a better VHF/UHF FET mixer:

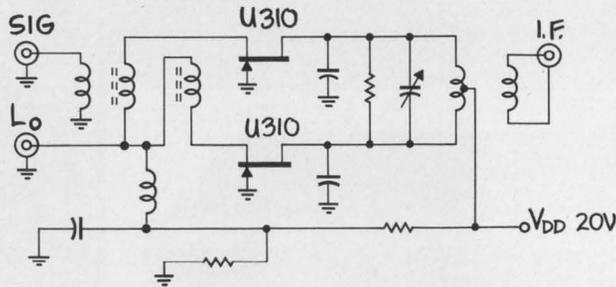

Try our U310 junction FET in this balanced mixer and make your own performance comparison. Our results are below. The inherent square-law transfer characteristic of the FET ensures high intermodulation intercept and signal desensitization. The grounded-gate connection is most stable, while source injection of both the signal and local oscillator make easy impedance matching into the FETs. Also, the balanced configuration reduces l.o. radiation from the signal port and suppresses the generation of even harmonics (which helps reduce intermodulation).

How do you select an optimum JFET for a mixer? Low gate capacitance is needed for wide bandwidth — the Siliconix U310 typically has  $C_{gs} = 4.5$  pF and  $C_{gd} = 1.9$  pF. Useful conversion gain comes from high transconductance. Our U310 has typical  $g_{fs} = 14,000$   $\mu$ mhos. Dynamic range is bracketed by the lowest drain current for an acceptable noise figure and the maximum drain current — typically  $I_{DSS} = 40$  mA for the U310. For an optimum balance, matched pairs are available.

## 50-250 MHz Mixer Performance Comparison

Characteristic	JFET	Schottky	Bipolar
Intermodulation Intercept Point	+ 32 dBm	+ 28 dBm	+ 12 dBm†
Dynamic Range	100 dB	100 dB	80 dB†
Desensitization Level (the level for an unwanted signal when the desired signal first experiences compression)	+ 8.5 dBm	+ 3 dBm	+ 1 dBm†
Conversion Gain	+ 3 dB*	- 6 dB	+ 18 dB
Single-sideband Noise Figure	6.5 dB	6.5 dB	6.0 dB

† Estimated \* Conservative minimum

There's a lot more to this, so  
**write for data**

and get the complete story on VHF/UHF mixing and the Siliconix U310.  
Applications Engineering: (408) 246-8905



**Siliconix incorporated**

2201 Laurelwood Road, Santa Clara, California 95054

## Why 'waste' money on space?

With the successful launching of the ERTS (Earth Resources Technology Satellite), the eyes of the public have finally been focused on some of the benefits of the space program to the quality of life here on earth. ERTS will provide data that will help solve problems in agriculture, forestry, geology, land-use management, hydrology, pollution control, oceanography, meteorology and ecology.

While the space program has the public's eye, you can ease the path of NASA's budget through Congress by making your legislators and your neighbors aware of the good that space research does on earth. Here are but a few of the items to mention:

Did you know that NASA paid for the development of the principle of freeze-drying foods? Today you buy freeze-dried coffee and freeze-dried foods to be used when camping. Did you know that Teflon (a duPont trademark) coating was developed primarily for NASA? How many people have Teflon-coated pots and pans? Did you know that the intensive-care units that monitor heart-attack victims were originally developed to monitor astronauts? Some other recent applications of NASA-developed technology include digital clocks; super-fireproof suits and thermal underwear for firemen; antifogging compounds for helmet visors, windshields and eyeglasses; a caulking compound for bathroom tile; sight switches for paraplegics, so that the blink of an eye can turn a page in a book or call a nurse; the telemetry of EKG readings from a patient or ambulance, and a lightweight torch that can cut through steel plate at the rate of a foot a minute to release people trapped in cars after an accident.

Let's not forget communications satellites for watching Presidents on distant trips or weather satellites to help us plan next weekend's picnic. The same type of navigation system that took the Apollo astronauts to the moon now guides our commercial jets from coast to coast. NASA is even working on nonpolluting automobile engines.

Think twice when someone asks, "What good does it do here on earth to land a man on the moon?" Yes, it's true. Problems here on earth are solved by more technology, not less.



*David N. Kaye*

DAVID N. KAYE  
Senior Western Editor

# FOCUS

## on Cassette and cartridge recorders

Digital cassette and cartridge recorder users are all looking for the same product.


Ideally, it should store as much data as a disc, start and stop instantaneously, run at high speeds, use a medium that is interchangeable from drive to drive, operate forever, require no power and cost nothing.

Cassette and cartridge manufacturers start out on equal ground in trying to satisfy these desires. That is, they both use magnetic tape as the recording medium. From that point on, the similarity ends. Although cassettes and cartridges are technically the same animal, the digital-recorder industry has chosen to call the Philips-type cassette a cassette and any other type of cassette, a cartridge. **ELECTRONIC DESIGN** will adhere to the same basic definitions. In the industry a further distinction has arisen. While cassettes have 0.150-inch tape width, most cartridges use 1/4-inch wide tape.

Since cassettes were originally intended for audio use rather than digital use, they are not designed optimally for the digital world. Cartridges, on the other hand, are designed for digital applications from the start. Cartridges can, therefore, be more readily designed with high performance in mind.

Many unusual driving and tape-guiding schemes have been incorporated in cassette systems to increase system performance. The complexity of these designs has made the purchase of cassette recorders more difficult. This condition has also led to much specsmanship in such areas as capacity, speed, reliability and cassette interchangeability from one drive to another.

Cartridge drive manufacturers, also, are prone to play many of the same specsmanship games as the cassette industry. With cartridges, one of the problems is that every cartridge is different. At

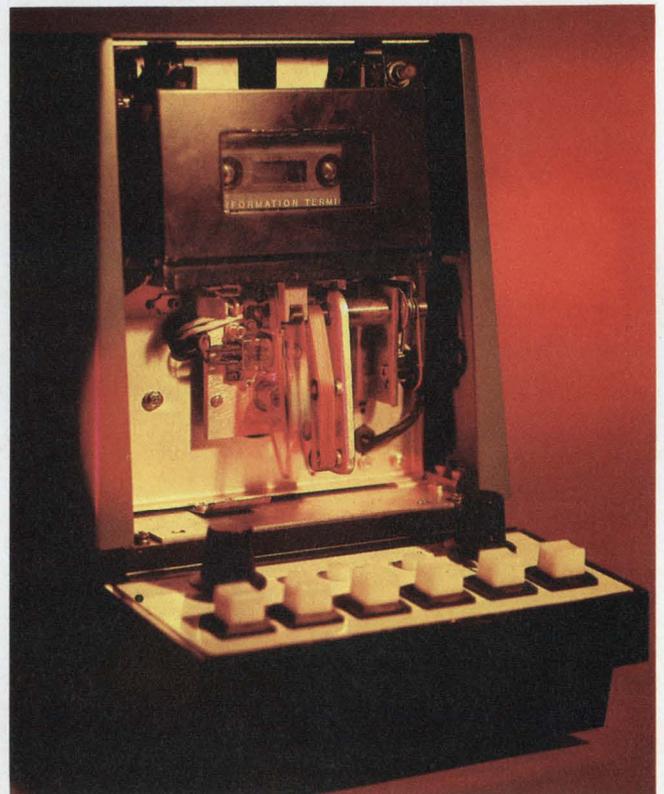

**Bell & Howell's model 410** digital cassette decoder pulls tape out of the cassette in order to wrap it around a large capstan. This allows much more precise tape control than is possible with the small capstans that many other manufacturers use.

least, all cassettes are very similar.

In fact, ANSI (American National Standards Institute) and ECMA (European Computer Manufacturers Association) have recently agreed upon an international standard governing cassettes and the data-recording method for them.

This, at first glance, is certainly a step in the

**David N. Kaye**  
Senior Western Editor




**Data General has packaged three transports** in a single package for use as a peripheral with its Nova minicomputers. The transports are of a reel-to-reel type with constant reel speed but variable tape velocity. Read-after-write recording heads are standard on this drive. An unusual encoding scheme avoids an extra clock track.

as paper-tape replacement, CRT terminal loading or a large number of inexpensive business applications. These markets call for a recording scheme that is incremental by character. This type of recording makes extremely inefficient use of tape if done in accordance with the ANSI-ECMA standard. The aim of the new standard is to allow a cassette recorded on any machine to be played back on any other machine. At present, ANSI, recognizing the problem, has set to work on developing an incremental-by-character standard to complement the existing standard. Until this standard is completed, many of the cassette recorder manufacturers—those making incremental recorders—will not sell ANSI-compatible machines.

### When to use cassettes or cartridges?

Most cartridge recorders have been designed

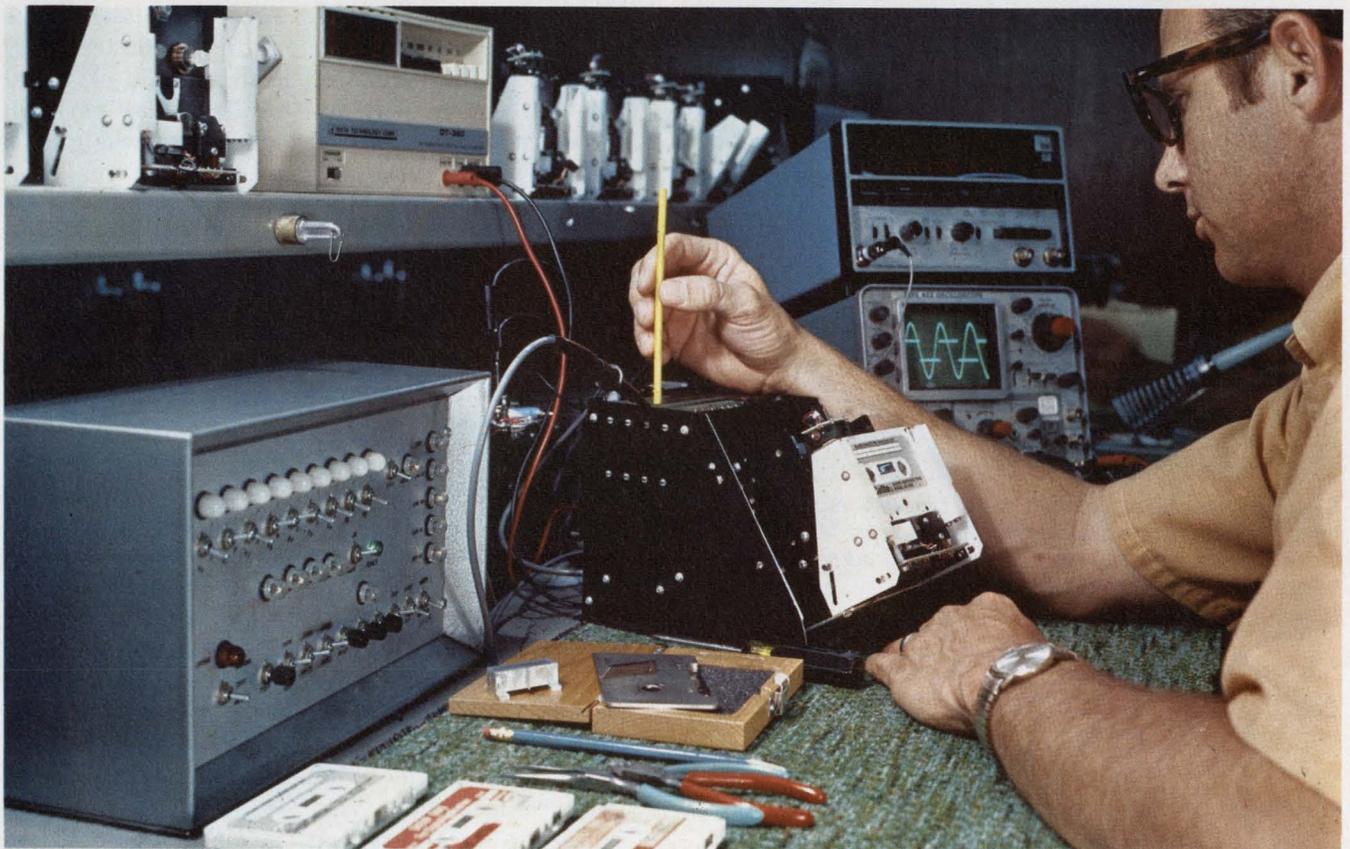

**Threshold voltage adjustments** are made in the electronic circuitry of an International Computer Products Digideck. The technician uses a specially constructed test console

of a type that most manufacturers have constructed for use in testing their own tape decks. The Digideck drive is primarily aimed at the paper-tape replacement market.


right direction. It turns out, however, that it is a step in the right direction only for those manufacturers making file-oriented recorders aimed at on-line computer peripheral applications.

More than 75 percent of the digital cassette recorders sold to date are asynchronous, byte or character oriented and aimed at such markets


to be on-line minicomputer peripherals. Some cassette recorders have also been designed for the same application. If this is your application, you will find good recorders of both types. If, on the other hand, your application is of the type calling for incremental-by-character recording, the choice is clearly a cassette system. Available



One of the few cassette drives to meet the new ANSI specifications for cassette recording is the Electronic Associates, EAI CT 1000. It uses a capstan, pinch roller drive with a proprietary tension-adjust servo.

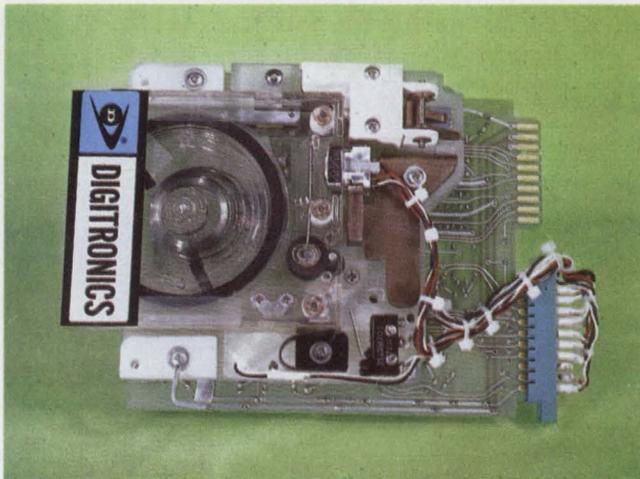

Cartridge recorders compete with cassette recorders for high performance applications. Digitronics MCT-7 mini cartridge transport uses a special spring-loaded cartridge and only a single dc drive motor. It has a 7 ips read/write speed and an 18 ips file search.

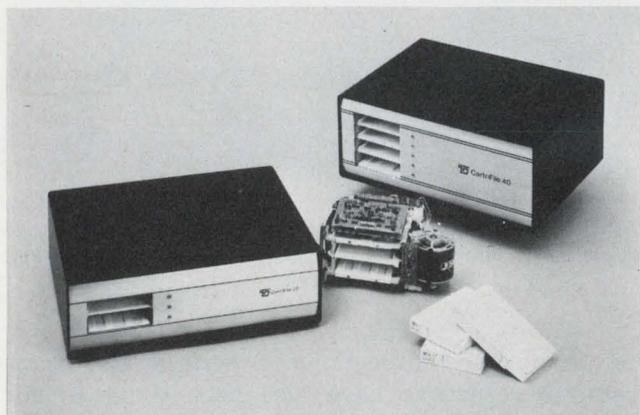

Tri-Data produces several digital cartridge recorders. The drives handle either two or four cartridges at a time. The 1/4-inch tape is contained within the cartridge as an endless loop. Tri-Data's drives all output data in parallel format of either 8, 12 or 16 bits.

recorders in the latter category have been getting better and better recently.

In the past, the marketplace was cluttered with companies that had merely modified an audio cassette recorder for the digital job. These recorders were notorious for their unreliability and they almost killed the cassette recorder industry before it had a chance to begin to mature.

One indication of the increasing maturity of the cassette industry is that the larger mainframe minicomputer houses, such as Digital Equipment Corp. and Data General, have finally become convinced of the reliability of cassette recorders and have begun to market their own.

### Cassette recorders have physical problems

Since even the best designed cassettes do not provide accurate tape alignment across the surface of the magnetic recording head, the tape transport must do this job. Among the techniques used are: little metal finger guides connected to one side of the recording head; a pair of metal rails across the surface of the head through which the tape is passed; small grooved guides that are placed a small distance from the head either on one side or the other (sometimes these are placed on both sides of the head); and spring loaded guides placed on both sides of the head a short distance away.

Each of these schemes has problems. However, some additional guiding definitely is necessary, and, therefore, one or a combination of these schemes is used on most every recorder. The main problem caused by these guides is that as the tape skews to one side or the other, the guides can cause edge damage to the tape. Some companies get around the problem by pulling the tape out of the cassette for a few inches and then more carefully guiding it around a large capstan and past the recording head. This scheme is used by such companies as Dicom, Bell & Howell and Electronic Processors. These techniques have the advantage of more accurate guidance, but the disadvantage of more moving parts and, therefore, less reliability.

Cassette recorders can be classified into two basic categories, determined by the method of driving the tape. The basic methods are: capstan drive and reel-to-reel drive.

In a capstan drive system, the tape is forced against a capstan (a rotating cylinder) which is turned by a dc motor. The motor may either be continuously rotating or may be servo controlled. If it is continuously rotating, the tape is forced against it only when tape motion is desired. If it is servo controlled, the tape is against the capstan at all times and is completely controlled by it.

In the continuously rotating capstan drives, when contact with the tape is desired, a pinch roller clamps the tape to the capstan and holds it there, hopefully without slippage. The pinch roller is driven by a solenoid in most cases and is the cause of most of the problems that occur with this type of drive. Pinch rollers can grind dirt into the tape and can damage the tape when they clamp down on it repeatedly. Sometimes the tape has even been known to get stuck on the capstan and wrapped around it.

All is not bad with capstans, however. They do have the advantage of careful tape-speed control in the vicinity of the recording head. Capstan drives that keep the capstan in contact with the tape at all times eliminate the need for solenoids that can fail. Also they eliminate the action of the pinch roller banging into the tape. But the capstan motor must have better performance than is needed for other systems, and it must have speed-control circuitry associated with it. Some machines use a capstan on either side of the head. This provides a certain amount of redundancy and allows for more accurate tape control. Of course, it takes an extra motor and costs more.


Reel-to-reel drives use servo-controlled reel motors on the two hubs of the cassette. They often have a servo-controlled tension adjust system as well as a servo-controlled speed adjust system. They derive their servo information either from the back emf of the motors, from tachometers or from a prerecorded clock track on the tape. These drives are much easier on the tape and have less objectionable failure modes. However, they have trouble maintaining tape speed and tension within the tolerances that a capstan machine meets routinely.

Cartridge drives are primarily of a capstan variety. However, they usually have a method of tension adjustment that eliminates the need for pinch rollers. Guiding of the tape in the vicinity of the head is done within the cartridge, and, therefore, cartridges can usually be interchanged from one drive to another as long as they are all made by the same manufacturer.


### Specs are often confusing

Reliability is the most important and least understood spec of all. In fact, it doesn't even appear on most spec sheets. Reliability encompasses error rate, MTBF (mean time between failures) and MTTR (mean time to repair a failure once it occurs).

Error rate breaks down into two categories: hard error rate and soft error rate. Hard errors are errors that will not be corrected no matter how many times you try to reread the tape. Soft

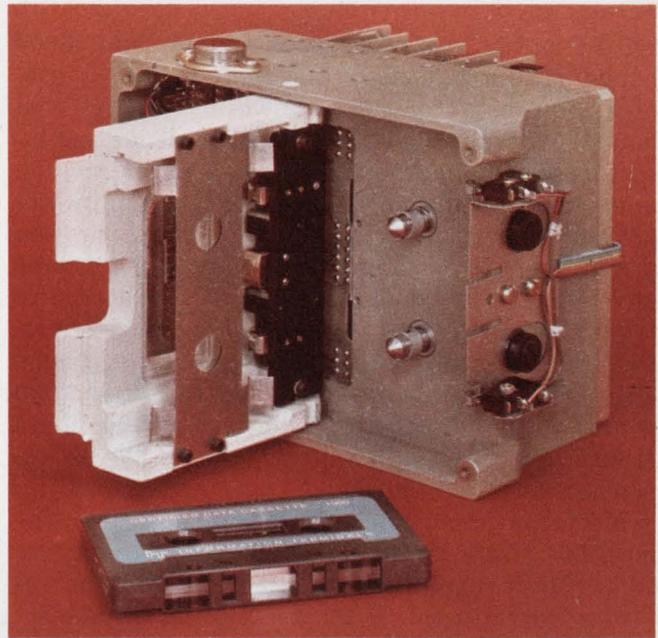

**High speed and high density** are characteristics of the Peripheral Dynamics 4200 Digital Cassette Tape Recorder. It is a reel-to-reel drive with servo-controlled tape speed and tension. It records on 4 tracks in order to store up to 8 million bits on a standard cassette.

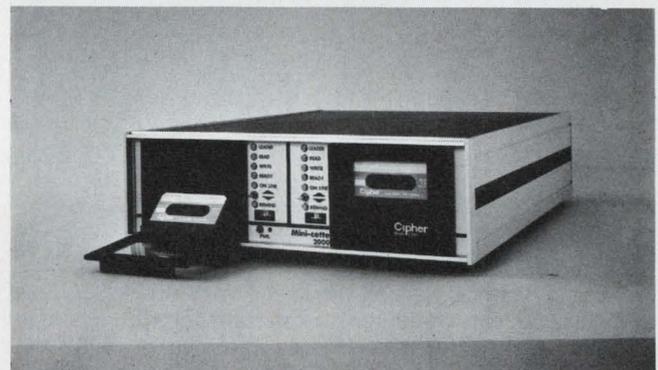

**Cipher Data's Mini-cette 2000** is a high performance read-after-write cassette system. It is one of the few cassette recorders that is compatible with the ANSI specifications. It is also one of few recorders that allow recording on both sides of the cassette. One track of data is recorded on each side.

errors are errors that can be corrected upon one or more rereadings of the tape. Typical hard error rate is 1 in  $10^8$ . Typical soft error rate is 1 in  $10^7$ . Sometimes these numbers are measured after a given number of passes of a cassette over the head. Some manufacturers provide controllers that will detect a bit error and automatically go back and reread the tape location of the error a fixed number of times or until the error is corrected. Error detection is usually either by parity bit or cyclic redundancy code. Some drives have a dual-gap read-after-write recording head to facilitate error detection.

MTBF is quoted, for cassette and cartridge

recorders, at between 2000 hours and 5000 hours. MTTR is usually quoted at about 30 minutes. Few manufacturers, however, will tell you how they arrived at these figures. Some manufacturers just guess. Others quote experience on units in the field. Unfortunately, those units are not necessarily the same model as the one you are buying. Some companies calculate the figures and others do some form of accelerated life testing. These figures also depend upon the manufacturer's definition of a failure. For example, although a motor might normally fail after 2000 hours, a manufacturer might quote 5000 hours MTBF on the condition that the motor is replaced every 2000 hours.


MTTR is important only if you can repair the machine yourself or get a service man out to do it. Many manufacturers require that the recorder be returned to the factory for service.



Remex RCP drives can be packaged with up to 3 drives to a case or can be bought as a transport for a single cassette. Remex stresses cassette interchangeability between systems and between decks in the same system. The drive is of the dual capstan variety.

Capacity is not an extremely important spec, neither is access time. In fact access time is so long that it is never quoted. Capacity can range from 0.2 Mb to over 11 Mb for cassettes and cartridges. Sometimes it is also quoted in bytes or characters.

Most manufacturers quote a capacity that is derived by taking the bit density on the tape and multiplying it by the length of tape, and then again by the number of tracks. But this is not realistic. Most data are recorded either in the form of 8 or 11 bit characters separated by inter-character gaps, or in the form of multibit records separated by multi-bit inter-record gaps. The gaps are not usable capacity. Neither are the preambles or postambles associated with each data record. These gaps and other nondata bits must be subtracted out to get usable data capacity. Inter-record gaps depend on the start and stop

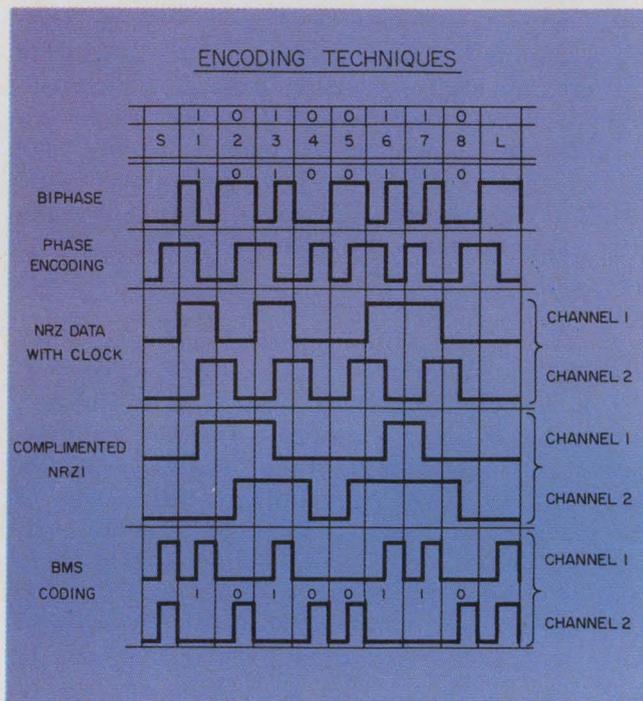


Five of the more popular data encoding techniques are illustrated in the table. Phase encoding is the method accepted by the new ANSI-ECMA standard.

times of the drive being used. These times are usually tens of milliseconds and they vary according to the read/write speed of the particular drive being used. Start and stop times are often given on data sheets, but it is often not clear which running speed is associated with them.

Spec sheets will often call out the method of recording. It may be phase-encoded, biphasic, NRZ, NRZI, BMS, or some other technique. Phase encoding is the method called out by the ANSI standard. The accompanying table illustrates the differences between some of the more common recording techniques.

Speed is often an unclear spec. Often more than one speed is called out. For example, the data sheet might say: Speed—2, 20, 80. This usually means that 2 and 20 inches per second (ips) are a pair of read/write speeds. Rewind or file search is most likely done at 80 ips. Most capstan drive cassette machines do not read/write at a higher speed than 15 ips. Reel-to-reel cassette drives can occasionally read/write up to 30 or 40 ips. Some cartridges can go even faster.

Environment is an often neglected factor in specifying a cassette or cartridge drive. Is the system going to operate on a factory floor, in an office, a gas station or maybe a computer room? If the answer is not a computer room, the environment may be crucial. Tape is not happy at temperatures above 120 F and at humidities of 95 percent or higher. Tape can get soft and

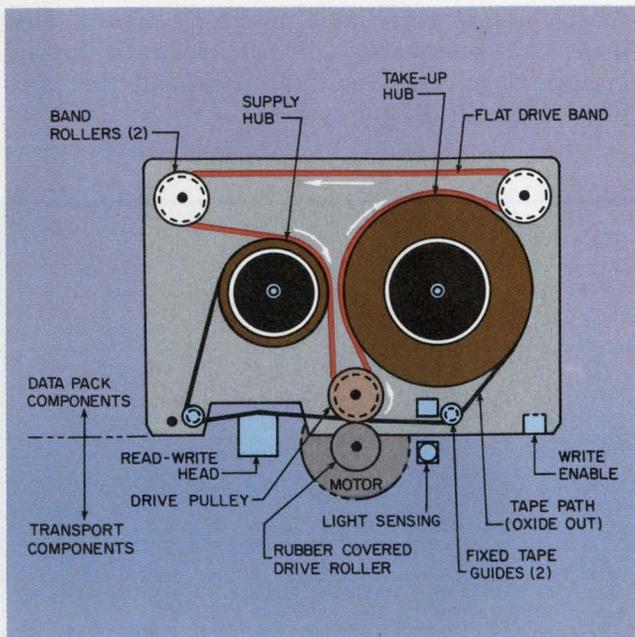

**Data cartridge from 3M Co.** uses 1/4-in tape wound on two coplanar reels. This cartridge accepts four tracks of data recorded at a density of 1600 bpi. A unique plastic drive band maintains tape tension within the cartridge and allows single-point driving at speeds of up to 90 ips.

stretch. Or tape can stick to itself in the reel and cause uneven tension as it pulls apart.

Price is the stickiest subject of all. What does the price include? Does it include: a controller, power supply, mounting hardware, case, read/write electronics, more than one speed of operation, bidirectional operation, motor controls, read/write or read-after-write recording head? If it contains a controller, does the controller have: serial/parallel conversion, error detection, error correction strategy, level shifting or special interface to your digital system. Often, for OEM customers, the price includes only the mechanical transport with no electronics of any kind. To make a fair comparison, you must specify all the desired options and get a written quote from a variety of manufacturers.

Above all, it is necessary to run benchmark tests. Never buy a cassette or cartridge recorder without first trying it in your system. When checking the quoted specs, make sure you test in accordance with the manufacturer's test procedure, not your own. The manufacturers all make the measurements differently.

### Cassettes galore but few cartridges

A whole array of companies have recently joined the cassette recorder scene. They include Ross Controls, Memodyne, Interdyne, EAI, Peripheral Dynamics and several others. Long-

standing companies in the business include Cipher Data, Sykes, Sycor, International Computer Products and Dicom. Many others fit into an in-between category in terms of longevity and penetration in the cassette business. Of the cartridge drive companies, Tri-Data and Digitronics are the best known. Most talked about of the 1/4-inch cartridges is a one-year-old entry from 3M Co.

Single-point motor drive, internal tension control and a dual-hub coplanar package are some of the features of the 3M cartridge. It operates at speeds to 90 ips reliably and can stand tape acceleration and deceleration of 2000 in/s<sup>2</sup>. Recording densities of 1600 bpi are recommended on four tracks. This gives the 3M cartridge a 400-percent capacity advantage over ANSI standard cassettes. ANSI standard recording density is 800 bpi on only 2 tracks. Soon to introduce a drive for the cartridge is 3M itself. Others stating intentions in that direction include Hewlett-Packard, Kennedy and Mohawk Data Sciences.

Tri-Data calls its cartridge systems Cartri-files. The cartridges are of an endless-loop design and the read/write speed is 10 ips.

Digitronics makes the MCT-7 cartridge drive. This has a read/write speed of 7 ips and a file search speed of 18 ips. The cartridge is spring loaded to maintain constant tape tension.

Few current cassette drives on the market meet the new ANSI standard. Manufacturers that do have drives meeting the standard include: Dicom, Computer Access Systems, Peripheral Systems, Raymond, Sycor, EAI, Interdyne, Sykes, Ampex and Cipher Data. Some of these drives are reel-to-reel and some are capstan types. All of these drives are capable of being on-line mini-computer peripherals.

Among the drives aimed at the paper-tape-replacement market are units from: Kybe, Memodyne, Telex, Bell & Howell, Chalco, Remex, International Computer Products and others. Many of the companies that make ANSI standard drives also make paper-tape-replacement types. Most of these drives are either incremental-by-character in format or have a built-in buffer memory for outputting data in the proper format. The major advantage that these drives have over paper-tape systems is ease of editing data on the tape. With a cassette system you just rewrite over the record to be corrected. For applications which merely involve program loading or data loading, most of these drives come in a unidirectional configuration. That is, they can drive the tape in one direction only and can not back up and rewrite a record.

Unidirectional drives also find a home in inexpensive computer terminals where they serve as

buffer memory for a CRT. Better terminals use bidirectional drives to allow more flexibility in data manipulation.

Cassettes and cartridges are getting more

flexible and more reliable month by month. They provide a reasonably inexpensive data storage medium that can considerably expand the capability of small digital systems. ■■

## Need more information?

The products cited in this report have, of necessity, received only cursory coverage. And they don't represent the vendors' full lines. Readers may wish to consult the manufacturers listed here for more details. For quick response, circle on the retrieval card the boldface numbers that are shown below:

Ampex Corp., 13031 W. Jefferson Blvd., Marina del Rey, Calif. 90291. (213) 870-2121. (Jim Casey, Marketing Support Manager) **Circle 380**

Anderson-Jacobson, Inc., 1065 Morse Ave., Sunnyvale, Calif. 94086. (408) 734-4030. (Richard Indermill, Director, Corporate Development) **Circle 381**

Applicon, 22 Third Ave., Burlington, Mass. 08103. (612) 272-7070. (Paul Schmitz, Vice President, Marketing) **Circle 382**

Bell & Howell, 360 Sierra Madre Villa, Pasadena, Calif. 91109. (213) 796-9381. (Roy Gregory, Advertising Manager) **Circle 383**

Braemare Computer Devices, 505 W. 79th St., Minneapolis, Minn. 55420. (612) 884-8155. (Dick Morris, Executive Vice President) **Circle 384**

Burroughs Corp., 5411 N. Lindero Canyon Rd., Westlake Village, Calif. 91360. (213) 889-1010. (L. Coon, Product Evaluation) **Circle 385**

Canberra Industries, Inc., 45 Gracey Ave., Meriden, Conn. 06450. (203) 238-2351. (Stephen Johnson, Marketing Manager) **Circle 386**

Chalco Engineering, 15126 S. Broadway, Gardena, Calif. 90248. (213) 321-0121. (Jim Fox, Director, Marketing) **Circle 387**

Cipher Data Products, 7655 Convoys St., San Diego, Calif. 92111. (714) 277-8070. (Peter A. Gilbody, Sales Manager) **Circle 388**

Computer Access Systems, 2645 E. Buckeye Rd., Phoenix, Ariz. 85034. (602) 267-1444. (Brent Welling, Vice President) **Circle 389**

Computer Terminal Corp., 9725 Datapoint Dr., San Antonio, Tex. 78229. (512) 696-4520. (Lloyd Shiller, Marketing Manager) **Circle 390**

Conrac (Formerly Auricord), Mill Rock Rd., Old Saybrook, Conn. 06475. (203) 388-3574. (John Moore, Marketing Manager) **Circle 391**

Datacord, Inc., 795 Kifer Rd., Sunnyvale, Calif. 94086. (408) 732-7540. (Larry Lehman, Applications Engineer) **Circle 392**

Data General Corp., Route 9, Southboro, Mass. 01772. (617) 485-9100. (Gus Ashton, Sales Manager) **Circle 393**

Delta Data Systems, Woodhaven Industrial Park, Cornwells Heights, Pa. 19020. (215) 639-9400. (Howard Podguerski, Marketing Manager) **Circle 394**

Dicom Industries, Inc., 715 N. Pastoria, Sunnyvale, Calif. 94086. (408) 732-1060. (Robert Conger, Marketing Manager) **Circle 395**

Digital Equipment Corp., 146 Main St., Maynard, Mass. 01754. (617) 897-5111. (David Chertkow, Marketing Manager) **Circle 396**

Digitronics Corp., Route 9, Southboro, Mass. 01772. (617) 481-2500. (Sy Glasser, Marketing Engineer) **Circle 397**

Dynamic Peripherals, P.O. Box 56, Nabnasset, Mass. 01861. (617) 692-4421. (Joseph Antognoni, President) **Circle 398**

Dytro Corp., 63 Tec St., Hicksville, N.Y. 11801. (516) 822-2130. (Martin Raphael, President) **Circle 399**

Electronic Associates, Inc., 185 Monmouth Pk., West Long Branch, N.J. 07764. (201) 229-1100. (Todd Martin, Manager, Cassette Sports) **Circle 400**

Electronic Labs, 3726 Dacoma St., Houston, Tex. 77018. (713) 686-8656. (John Humphreys, President) **Circle 401**

Electronic Processors, 5050 Federal Blvd., Englewood, Colo. 80110. (303) 798-9305. (John Geraghty, Assistant Product Manager) **Circle 402**

Genisco Technology, 18435 Susana Rd., Compton, Calif. 90221. (213) 537-4750. (Pete Godinez, Sales Manager) **Circle 403**

Hazeltine/Electronics Div., Cuba Hill Rd., Greenlawn, N.Y. 11740. (516) 261-7000. (Sal Nuzzo, Vice President) **Circle 404**

Hewlett-Packard Calculator Div., 815 14th St., S.W., Loveland, Colo. 80537. (303) 667-5000. (Dean Millett, Marketing Manager) **Circle 405**

Incre-Data Corp., 6405 Acoma Road S.E., Albuquerque, N.M. 87108. (505) 265-9575. (Roland Fischer, Marketing Manager) **Circle 406**

Interdata, 2 Crescent Pl., Oceanport, N.J. 07757. (201) 229-4040. (Joseph Popolo, Marketing Manager) **Circle 407**

Interdyne, 14761 Califa St., Van Nuys, Calif. 91401. (213) 787-6800. (Frank Bumb, Vice President) **Circle 408**

International Computer Products, 601 Dooley Rd., Dallas, Tex. 75234. (214) 239-5381. (David Griffin, Marketing Manager) **Circle 409**

Kybe Corp., 132 Calvary St., Waltham, Mass. 02154. (617) 899-0012. (Robert Borshay, Marketing Manager) **Circle 410**

Leach Controls, 717 N. Coney Ave., Azusa, Calif. 91702. (213) 334-8211. (Jim Shenk, Sales Manager) **Circle 411**

Lockheed Electronics Co. I. T., Route 22, Plainfield, N.J. 07061. (201) 757-1600. (Earl Nadeau, Director of Engineering) **Circle 412**

MCA Technology, 13035 Staticoy St., N. Hollywood, Calif. 91605. (213) 875-1900. (Bart Bingaman, Sales Manager, Udac Div.) **Circle 413**

3M Mincom, 300 S. Lewis Rd., Camarillo, Calif. 93010. (805) 482-1911. (Ed Crosby, Marketing Manager) **Circle 414**

Memodyne, 369 Elliott St., Newton Upper Falls, Mass. 02164. (617) 527-6600. (James Pastoriza, President) **Circle 415**

Memorex, San Tomas, Central Expwy., Santa Clara, Calif. 95052. (408) 987-1000. (Larry Lindsey, Product Manager) **Circle 416**

Mobark Instruments, Inc., 1080-D Duane Ave., Sunnyvale, Calif. 94086. (408) 736-8540. (Dick Barton, Marketing Manager) **Circle 417**

MSI Data Corp., 340 Fischer St. Costa Mesa, Calif. 92627. (714) 540-6600. (Gary Liebl, National Sales Manager) **Circle 418**

NCR, Main & K Sts., Dayton, Ohio 45409. (513) 449-2000. (H. V. Schiffer, Vice President, EDP Products) **Circle 419**

North American Philips, 100 E. 42nd St., New York, N.Y. 10017. (212) 697-3600. (Patrick Greaney, Marketing Manager) **Circle 420**

Novar GTE, 2370 Charleston Rd., Mountain View, Calif. 94040. (415) 966-2773. (Ted Tickett, Advertising Manager) **Circle 421**

Peripheral Dynamics, 1809 National St., Anaheim, Calif. 92801. (714) 871-2200. (Jim Bybe, President) **Circle 422**

Peripheral Systems, 215 Little Falls Rd., Fairfield, N.J. 07006. (201) 256-6171. (Lee Milligan, Marketing Manager) **Circle 423**

Raymond Engineering, 217 Smith St., Middletown, Conn. 06457. (203) 347-5611. (Robert Duffy, Product Manager) **Circle 424**

Redactron, 100 Parkway Dr. S., Dept. 420, Hauppauge, N.Y. 11787. (516) 543-8700. (Robert Schadt, Marketing Services Director) **Circle 425**

Remex, Div. of Ex-Cell-O Corp., 1733 Alton St., Santa Ana, Calif. 92705. (714) 557-6860. (Bill Walker, Sales Manager) **Circle 426**

Ross Controls Corp., 381 Elliott St., Newton, Mass. 02164. (617) 969-9240. (Edward A. Ross, President) **Circle 427**

Sycor, 100 Phoenix Dr., Ann Arbor, Michigan 48104. (313) 971-0900. (Richard Connor, Product Manager) **Circle 428**

Sykes Datatronics, 375 Orchard St., Rochester, N.Y. 14606. (716) 458-8000. (Tom Schaaf, Marketing Manager) **Circle 429**

TEAC Corp. of America, 7733 Telegraph Rd., Montebello, Calif. 90640. (213) 726-0303. (Ken Williamson, Director of Technical Products) **Circle 430**

Techtran Industries, Inc., 580 Jefferson Rd., Rochester, N.Y. 14623. (716) 271-7953. (David Decker, President) **Circle 431**

Telex, 9600 S. Aldrich, Minneapolis, Minn. 55420. (612) 884-4051. (Pat Riley, Marketing Manager) **Circle 432**

Tri-Data Corp., 800 Maude Ave., Mountain View, Calif. 94040. (415) 969-3700. (Lee McGrew, Marketing Manager) **Circle 433**

Tycome Systems Corp., 75 Hamburg Turnpike, Pompton Lakes, N.J. 07442. (201) 839-3000. (Dr. Eugene Starr, President) **Circle 434**

Univac, Div. of Sperry Rand, 322 N. 21st St. W., Salt Lake City, Utah 84116. (801) 328-8066. (Dewaine L. Osman, Vice President) **Circle 435**

Vari-Systems, 80 Skyline Dr., Plainview, N.Y. 11803. (516) 293-0141. (Joe Casey, Manager of Marketing Services) **Circle 436**

Victor Comptometer Corp., 3900 N. Rockwell St., Chicago, Ill. 60618. (312) 539-8210. (George Reich, Director of Advertising) **Circle 437**

Wang Laboratories, Inc., 836 North St., Tewksbury, Mass. 08176. (617) 851-7311. (Roland Boisvert, Marketing Manager) **Circle 438**

Xebec Systems, Inc., 366 San Xavier Ave., Sunnyvale, Calif. 94086. (408) 732-9444. (Andrew Nester, Marketing Director) **Circle 439**

# Introducing an ECMA-compatible cassette recorder for \$525.\*

It's from Sycor. And it's compatible with not only the ECMA standard, but also the new ISO and ANSI standards.

Which is good news for marketing. Because by meeting these worldwide standards, Sycor's new recorder is capable of worldwide interchangeability. And this vastly increases its application potential. Especially when you consider how easily Sycor's Model 135 can fit within your price requirements. Because it sells for the lowest prices in the industry.

But there's also good news for engineering. Because the Model 135's price includes control and phase encoded electronics, a read-after-write head, and a 12.5 ips. read/write speed


with a transfer rate of 10,000 bits per second. And there are no interchangeability problems.

There's also good news for purchasing. Because with Sycor you get fast delivery and complete documentation from a proven supplier. (There are over 7,000 Sycor cassette recorders currently operating in 33 countries throughout the world.)

Sycor's remarkable new Model 135 digital cassette recorder. Good news for the entire OEM industry.

To find out more about it, contact Mr. R. M. Connor at Sycor Inc., 100 Phoenix Drive, Ann Arbor, Michigan 48104. Phone (313) 971-0900. TWX: (810) 223-6011.

\*OEM price for 100 units

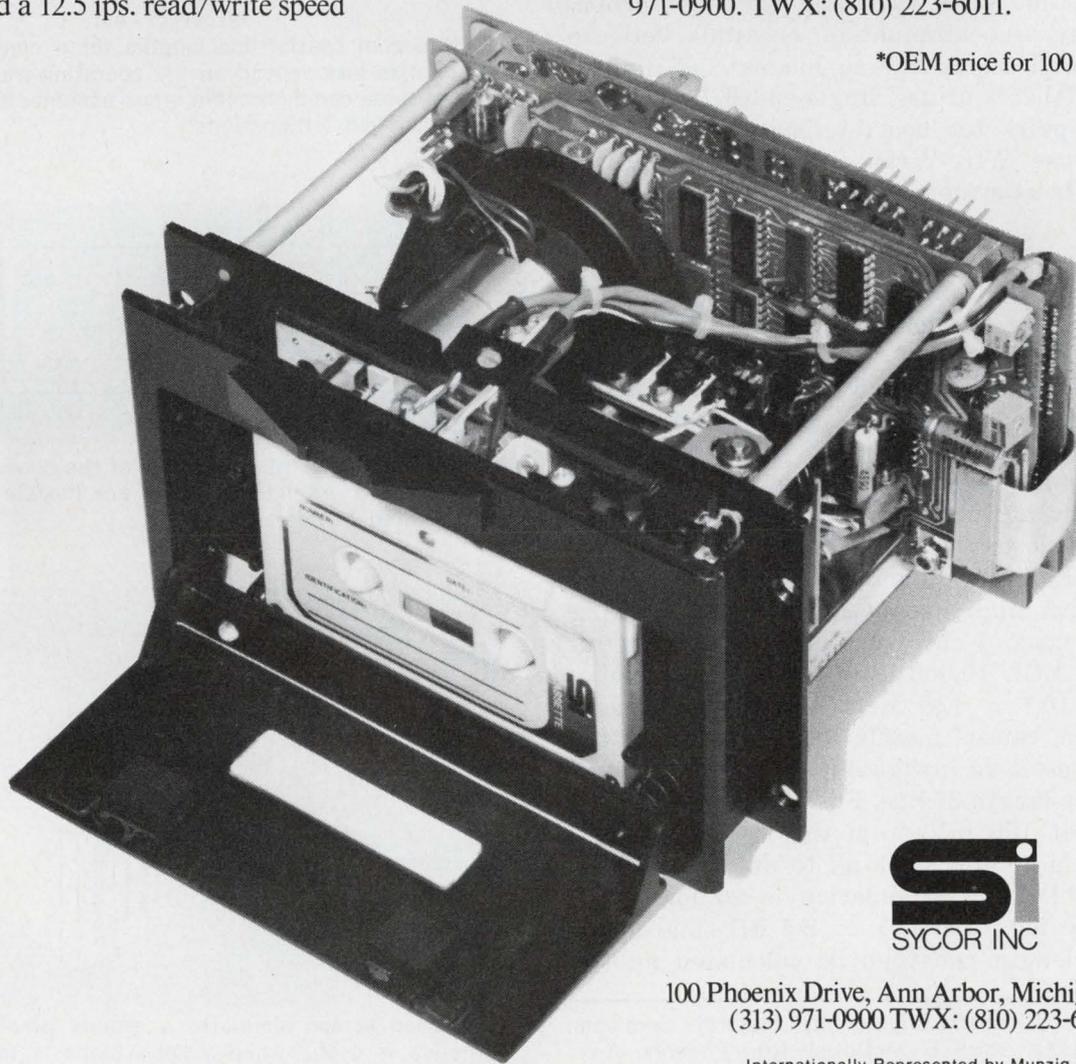

**SI**  
SYCOR INC

100 Phoenix Drive, Ann Arbor, Michigan 48104.  
(313) 971-0900 TWX: (810) 223-6011

Internationally Represented by Munzig International  
Offices in Stockholm, London, Paris, Munich, Geneva

INFORMATION RETRIEVAL NUMBER 23

# Avoid ECL-10,000 wiring problems with board-to-board interconnects and Wire-Wrap techniques that preserve the performance of PC-board layouts.

## Second of two articles

An important part of ECL-10,000 design begins with the PC-board layout. The high-speed advantages of this logic family cannot be maintained without careful attention to board interconnects. But there's more to the design than that: The complete design also calls for board-to-board interconnects with the possible use of Wire-Wrap techniques, and each of these can adversely affect performance if recommended guidelines are not followed.


In the design of system interconnections, four parameters must be accounted for: line propagation-delay, line attenuation, crosstalk between lines and reflections due to mismatched impedances. Whether you use single-ended lines or go to twisted-pairs for board-to-board interconnections—or use Wire-Wrap techniques—each parameter affects system performance.

### Single-ended lines as interconnects


The types of single-ended lines that may be used are as follows:

1. *Coaxial Cable.* The well-defined characteristic impedance of this cable permits easy matching of the line, and the ground shield internal to the cable minimizes crosstalk between lines. In addition low attenuation at high frequencies allows the cable to transmit the rise times associated with ECL-10,000 signals.


Bandwidth and attenuation are the limiting factors in coaxial cable use. The bandwidth required for ECL 10,000 is  $f \approx 0.37/\text{rise time} = 0.37/3 \times 10^{-9} = 125 \text{ MHz}$  (for a 50- $\Omega$  load). Attenuation, caused mainly by skin effect in the cable and resulting in signal loss, limits the maximum usable length of line. For a maximum signal reduction of 100 mV from the logic ONE and ZERO levels (800 mV pk-pk to 600 mV pk-pk) the allowable total attenuation is  $20 \log (V_{in}/V_{out}) = 20 \log (0.8/0.6) = 2.5 \text{ dB}$ . The maximum line length can then be calculated as 100

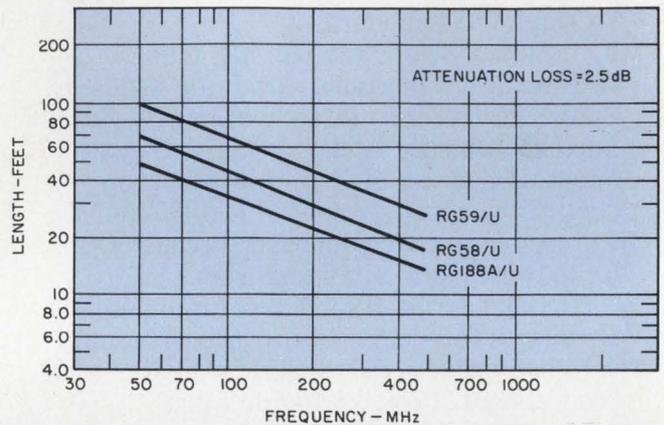

1. Maximum coaxial line lengths for a constant 2.5-dB attenuation loss depend on the operating frequency. This plot of three common cable types assumes that the lines have matched terminations.

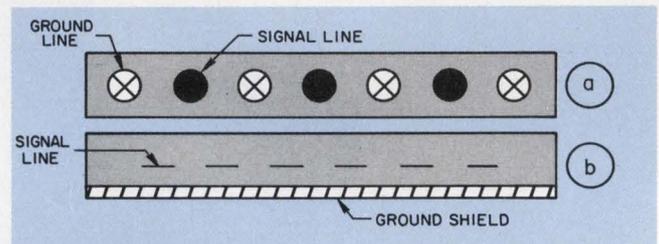


2. Multiconductor ribbon cables of the conventional type (a) or with a ground shield (b) are flexible and can be easily wired to connectors.

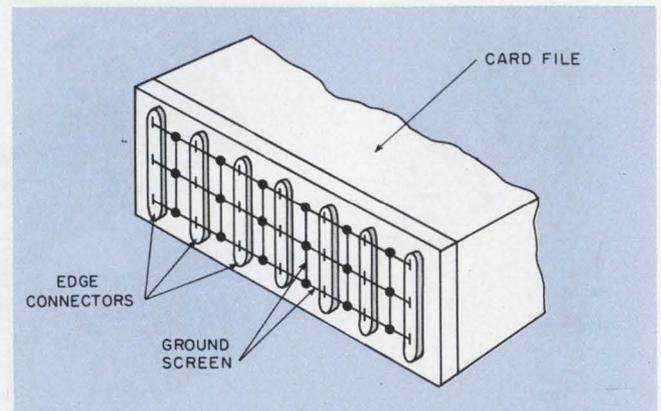

3. Ground screen simulates a ground plane. This construction is useful when a solid plane is not practical, as can be the case in point-to-point wiring.

**Tom Balph**, Applications Engineering, Motorola Semiconductor Products, 5005 E. McDowell Rd., Phoenix, Ariz. 85008

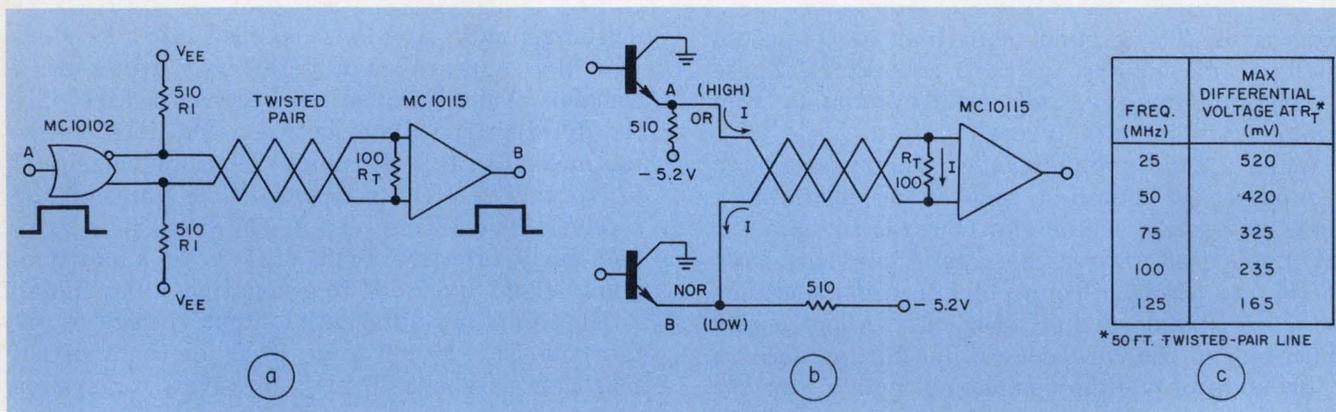

4. Twisted pair lines provide maximum noise immunity. Crosstalk noise for a typical line driver/receiver configuration (a) can be tolerated up to 1 V or 2.5 V, depending on the direction of the common-mode signal.

From the dc equivalent circuit (b), the voltage across  $R_T$  can be calculated. However as frequency increases, this voltage decreases because of line attenuation (c). Maximum line length depends on frequency.

$\text{ft} \times 2.5 \text{ dB}/\alpha$ , where  $\alpha$  is the cable attenuation in decibels per 100 feet at the operating frequency.

Curves of maximum line lengths vs operating frequency for a 2.5-dB loss and for three cable types are shown in Fig. 1. Generally a high-bandwidth cable is sought to preserve fast signal edges, regardless of the system bit rate.

The curves are plotted for the case of a coax line terminated with a resistive load that is equal to the characteristic impedance of the line. Standard carbon 1/8 or 1/4-W resistors work well as line terminators. However, when using precision wire-wound or film resistors, determine the high-frequency properties of these devices. It's possible that they may become highly inductive at high frequencies, and thus be unusable.

Coaxial cable are well suited for sending single-ended signals over long lines. The constant impedance and low attenuation of the cable allows transmission with minimum distortion.

2. *Parallel-wire cable.* Multiple-conductor cable, as purchased or as constructed by lacing interconnecting wires together, is not normally recommended with ECL-10,000 or other high-speed logic families because of crosstalk. The crosstalk results from capacitive and inductive coupling of signals between parallel lines. This type of line is also susceptible to coupling of external signals.

Accordingly multiple-conductor, single-ended cable is recommended only when shields are used on each wire.


3. *Ribbon cable.* For systems requiring many board-to-board interconnections, multiconductor ribbon cable is often useful. In conventional ribbon cable (Fig. 2a), the side-by-side arrangement of signal lines, with alternate ground wires, defines a constant characteristic impedance.

For ribbon cable with a ground shield (Fig. 2b), the characteristic impedance is determined by the shield. Every other conductor can still be grounded for improved immunity to crosstalk.

As with coaxial cable, the maximum allowable attenuation for a total signal loss of 100 mV is 2.5 dB. Attenuation per foot is generally higher for ribbon cable than for coaxial. Consequently the maximum line lengths for ribbon are normally limited to 10 or 15 feet.

4. *Point-to-point wiring.* A system consisting of several logic cards can be assembled with edge connectors to form a card file. Point-to-point wiring via the board connectors is then useful for system interconnections.

A ground plane is often formed by a large printed-circuit board, to which the connectors are mounted. Metal can be left on one side of the PC board to form the system ground, or on both sides of the board to supply power to the system

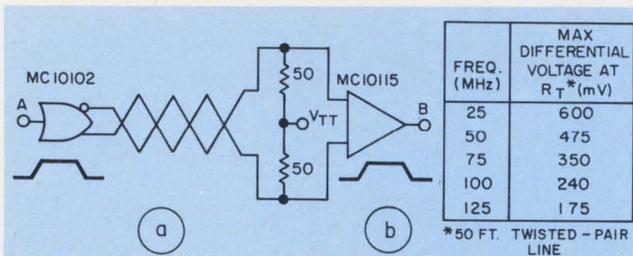

5. Pull-down resistors can also terminate a twisted-pair line (a), providing full output levels to the receiver. Attenuation data for 50 feet of twisted-pair line and 50  $\Omega$  pull downs (b) show higher differential voltages.

logic cards. The ground plane may be connected to the frame holding the card connectors. These card-file systems are commercially available from a number of manufacturers.

When a solid ground plane is not practical, a ground screen should be constructed on the back plane. A ground screen can be made by connecting bus wires (wire size compatible with connector) to the edge connectors in a grid pattern prior to signal wiring (Fig. 3). About every sixth pin on the card edge connectors is used as a ground, providing connection points for the ground grid. This interconnection of ground points forms a grid network of approximately 1-inch squares over which the signal lines are wired. A characteristic impedance of around 140  $\Omega$  can be expected for a wire over ground screen.


To provide maximum signal purity a motherboard, composed of multilayer or two-layer board, can be used to mount the card connectors. Striplines or microstrip lines are designed on the circuit board, along with ground and voltage planes. Connectors are available to interface between cards and the motherboard with little line discontinuity. The motherboard technique is normally used when the system design is advanced to the point where few changes in the back-plane wiring are expected.

For point-to-point wiring with a ground plane or screen, soldered connections or Wire-Wrap techniques are feasible. In general, a good technique is to parallel-terminate with approximately 100 to 140  $\Omega$  to -2 V. The load resistor, with a value near that of the characteristic impedance of the line, minimizes ringing.

Series damping or termination can be used to further reduce ringing. An unterminated line with a fanout of 4 can be up to 15 inches long when a ferrite bead is placed on the line.

For high-speed lines, such as those for clock distribution, coaxial cable and twisted-pair lines should be used between cards. Maximum integrity of clock signals should be maintained for best system performance.

Twisted-pair lines, differentially driven into a line receiver, as in Fig. 4a, provide maximum

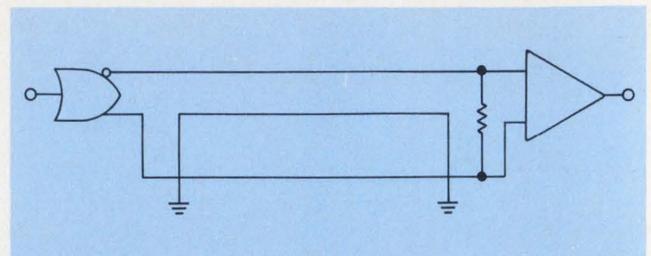

6. When using conventional ribbon cable as twisted-pair line, every other wire should be grounded to provide a constant impedance. This connection may be avoided with ribbon that comes with ground shields.

noise immunity. Any noise coupled into a twisted-pair line appears equally on both wires as a common mode. Because the receiver senses only the differential voltage between the lines, cross-talk noise has no detrimental effect on the signal up to the common-mode rejection limit of the receiver. The line receivers shown have a common-mode rejection limit of 1 V to a positive-going signal and 2.5 V to a negative-going signal.

The minimum differential input voltage to obtain the ECL-10,000 logic level on the twisted-pair lines is about 70 mV. However, for system design, several factors call for use of a higher value. These include noise, amplifier offset voltage and voltage gain vs frequency characteristics. In general, a minimum voltage of 150 mV is recommended.

Except at slow bit rates, attenuation is the limiting factor for twisted-pair line length. From the dc equivalent circuit of the twisted-pair line in Fig. 4b, the voltage across the terminating resistor is (with the small dc line resistance neglected)

$$V_R = \frac{(5.2 \text{ V} - 0.9 \text{ V}) 100 \Omega}{510 \Omega + 100 \Omega} = 0.705 \text{ V}$$


If  $V_R$  exceeds 800 mV, the logic ZERO level of -1.7 V is reached, and the NOR output then clamps the voltage at node B.

The voltage across the terminating resistor decreases as frequency increases because of attenuation in the line. A tabulation of the maximum available differential voltage across the termination resistor vs frequency for a 50-foot line is shown in Fig. 4c. Maximum line length is determined by operating frequency.

Another method for terminating twisted-pair lines uses pull-down resistors as terminations (Fig. 5a). As a result, full output levels are presented to the receiver. Attenuation data for this line are shown in Fig. 5b.


Regardless of the type of termination, two types of cable can be used with differential twisted-pair lines:

1. *Bundle twisted-pair cable.* When running ECL-10,000 signals in parallel with higher voltage analog or logic signals, use shielded twisted-

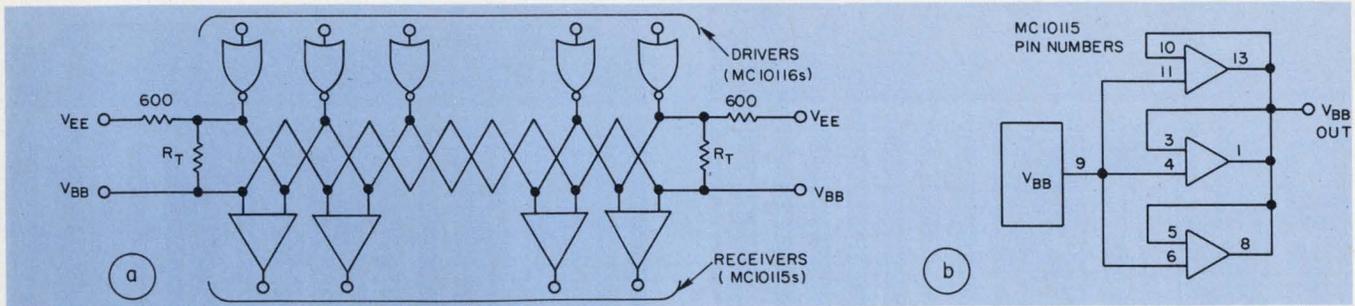

7. Twisted-pair lines offer this party-line technique (a). The driving-gates are emitter-dotted. Bias voltage,  $V_{BB}$ ,

available from the drivers and receivers, can be buffered to handle the termination current (b).

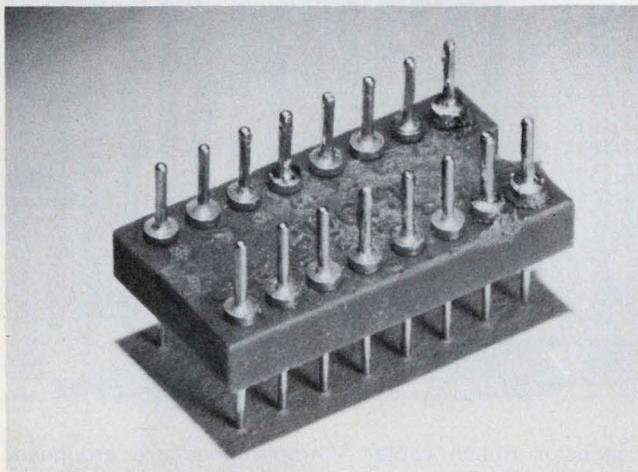

8. A dual-in-line adaptor plug for discrete components extends the versatility of Wire-Wrap techniques.

pair lines. Such lines have a foil shield on each twisted pair that can be tied to the system ground. Cables with several bundled twisted pairs are available commercially.

2. *Ribbon cable.* Ribbon composed of several twisted pairs is one type of ribbon cable available. Conventional side-by-side cable may also be used with differentially driven signal lines (Fig. 6). With every other wire grounded, the signal lines then have a constant characteristic impedance.

Under adverse conditions, differential twisted-pair lines offer several advantages over single-ended lines. These include power-supply and temperature variations between panels or cabinets of a system and corresponding shifts in logic levels within the system, all of which lessen noise margins.

Differential lines are unaffected by variation in logic levels, since the receiver detects only the differential voltage between the driver outputs rather than absolute logic levels. With single-ended lines, noise generated on the signal line by crosstalk and inductive coupling directly reduces noise immunity. Noise is coupled equally to both wires of a twisted pair line, so the differential voltage is unaffected. As a result the receiver does not detect noise as long as it is within

the common-mode range of the receiver.

Data bussing, another interconnection technique, usually requires large fanout, long lines and several driving points. An ECL-10,000 bus, or "party line," can be made by emitter-dotting gates together, provided only one driver is allowed to go high at one time.

Data bus lines on PC boards can be extended for board-to-board use. The characteristic impedance of board-to-board interconnections will generally be from 100 to 150  $\Omega$ , so the termination resistors must be adjusted accordingly.

Another scheme for bussing is the twisted-pair party line of Fig. 7. The driving gates are emitter-dotted, with all outputs held low when they are not sending data.


In both bussing schemes the driving lines are operating single-ended. However, the twisted-pair bus retains the advantage of the common-mode rejection of the line receivers.

### Wire-Wrap techniques

Wire-Wrap is a popular technique for breadboarding large system prototypes and for interconnecting system logic boards. Because it permits changes in interconnections to be made easily, it is extremely useful for breadboarding new system designs. ECL-10,000 systems may be Wire-Wrapped with high-density, dual-in-line packaging boards. In addition Wire-Wrap can be used for board-to-board interconnections when the logic boards are mounted in a card file in edge connectors.

Several types of Wire-Wrap boards for dual-in-line packages are commercially available. For ECL-10,000 systems, use a board that has voltage planes on both sides and low-profile device mounting. Device mounting via pins set in the board is also recommended.

The  $V_{CC}$  pins of the mounted device should be soldered to the  $V_{CC}$  voltage plane (the voltage plane on the device side of the board). When the  $V_{CC}$  pins are Wire-Wrapped to the  $V_{CC}$  voltage source, a ferrite bead on a wire between the  $V_{CC1}$  and the  $V_{CC2}$  pins of the same package help avoid high-frequency noise and prevent oscilla-

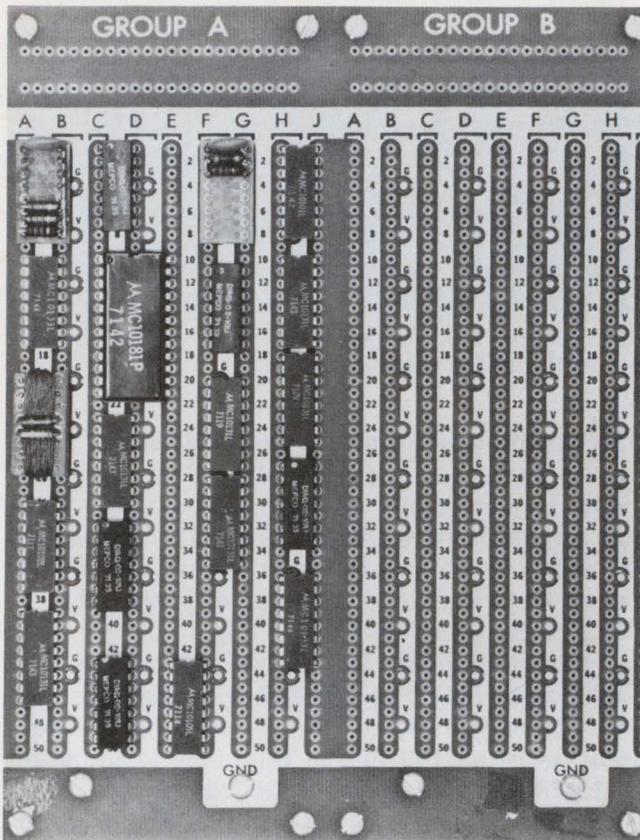


9. This 4 × 4-bit multiplier prototype shows Wire-Wrap with MECL 10,000 logic. Signals are taken on and off the board with commercially available conventional multi-

conductor ribbon cable. Alternate lines are grounded. With Wire-Wrap, maximum clock rates of 100 MHz can be obtained when using twisted pairs.

tion. Long leads from the ground plane to the  $V_{CC}$  pins help induce oscillation, and may pick up noise caused by the added inductance.  $V_{EE}$  pins may be Wire-Wrapped to the  $V_{EE}$  voltage plane with no detrimental effects. Bypassing on the board should be provided in a manner similar to that for two-sided PC boards with a ground plane.

Wiring rules for Wire-Wrapped interconnections are similar to those for a wire over ground. If a voltage plane is present, the characteristic impedance of a Wire-Wrap interconnection is 100 to 150  $\Omega$ . Parallel termination, series damping and unterminated lines can all be used.

With Wire-Wrap, the pull-down resistors can be provided by commercial resistor networks in a single or dual-in-line package or by adaptor plugs. Many manufacturers are marketing resistor networks in a variety of values suitable for ECL-10,000 terminations. Resistor networks with good high-frequency characteristics should be used. Networks composed of discrete resistor chips mounted in a package, or thick-film cermet resistors with a minimum of interconnect metal within the package, provide the best high-frequency characteristics. Wire-Wrap equipment manufacturers have dual-in-line adaptor plugs available to allow discrete components to be mounted for use on the Wire-Wrap board.

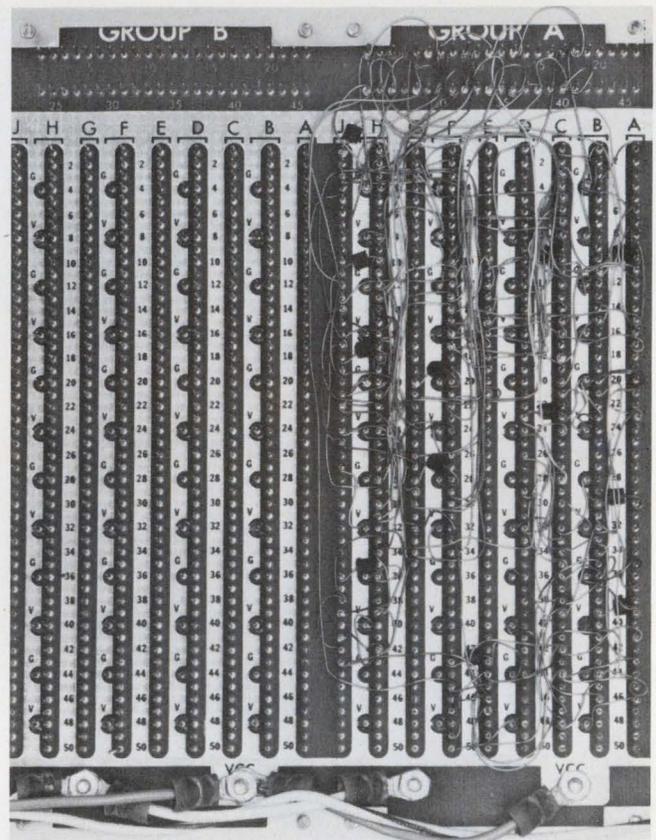

conductor ribbon cable. Alternate lines are grounded. With Wire-Wrap, maximum clock rates of 100 MHz can be obtained when using twisted pairs.

An example of a Wire-Wrap system is a 4 × 4-bit multiplier that uses ECL 10,000 (Fig. 9). The delay-line oscillator has a frequency of 30 MHz, and the total system multiplication cycle time is about 175 ns. The multiplier uses an add-shift algorithm.

The clock distribution for this system uses a parallel-terminated Wire-Wrap line (Thevenin equivalent). Twisted-pair lines may also be used for clock distribution and are helpful for higher clock rates. With Wire-Wrap, the maximum clock rates are about 100 MHz.

To get signals on and off the board, commercially available multiconductor ribbon cable is used. Commercial cable adaptors, which plug into the Wire-Wrap board, are also available. Alternate lines are grounded to minimize cross-talk and to generate a characteristic impedance for the signal lines. ■■


#### Bibliography:

Balgh, T., *Interconnection Techniques for Motorola's MECL 10,000 Series Emitter-Coupled Logic*, Application Note 556, Motorola, Inc., 1972

*This concludes a two-part series on ECL-10,000 interconnection techniques. The first article, which ran in the Aug. 17 issue, dealt with PC-board interconnects.*

# are you a designer who demands ultimate reliability at lowest possible cost?

then consider Telex TERMI SERIES  
digital cassette recorders!

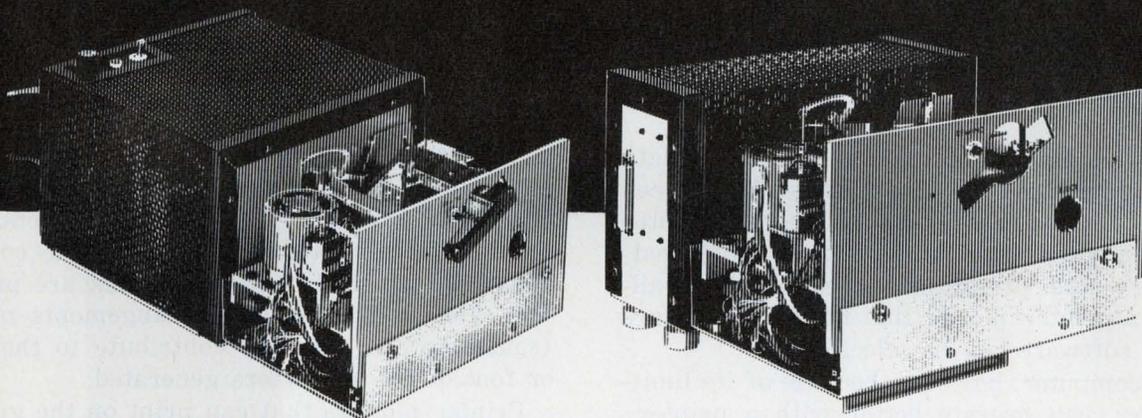


Telex — world's leading manufacturer of recording equipment — offers industry's most comprehensive series of high-reliability, low-cost digital cassette recorders and memories; pre-engineered, field-proven units for virtually every modern application.

TERMI SERIES includes models ranging from basic cassette transports to complete systems designed for buffered terminals, data capture, point-of-sale equipment, peripheral storage, numerical control and other digital data handling missions.

Perhaps most important, Telex provides decks with unique mechanical enhancements; subsystems with Read/Write electronics, Power Supply and a range of data interfaces from phase encoded, NRZ, parallel to communications RS-232; and complete high-performance computer peripheral memory systems for low-speed paper tape replacement (10, 15, 30 CPS) or high-speed paper tape replacement to 300 CPS.

Telex has combined more than thirty-five years of recording expertise to create TERMI SERIES — the *only* complete line of digital cassette recorders and memories expressly designed for high-volume OEM applications where low cost and high reliability are critical specifications.



**new-breed™**  
digital recorders

Contact Telex today for detailed technical literature and application data.

**TELEX®**  
COMMUNICATIONS DIVISION

9600 Aldrich Avenue South  
Minneapolis, Minnesota 55420  
Tel: (612) 884-4051

INFORMATION RETRIEVAL NUMBER 24

# Need a hard-copy peripheral? Before you select a printer/plotter, know how they work. Here is a quick review of the techniques used.

The wide variety of techniques used in printer/plotters makes selection difficult. The tradeoffs are many. Some units print better than they plot. Some plot better. And some do both equally well. Many are difficult to interface. A few need frequent adjustments. And still others can be nuisances—they're noisy, they spray ink or wax, and they give off burning odors.

In selecting a printer/plotter, an engineer must consider the problems of interfacing the unit to his data source, the kind of type styles he would like, the form and type of paper he wants and the way the printed copy looks. He must also consider the systems' accuracy, resolution and speed.

## The interface tradeoffs

Unless a printer/plotter is designed to work with the voltage levels, timing, word format and architecture of a particular data source, some minimum of hardware will be required to match them.

Above this minimum the nature of the data source determines the best tradeoff between hardware and software. In a large computer installation, advantage can be taken of the greater memory and programming capability available, and a printer/plotter that has less hardware but more software can be selected.

A minicomputer, however, because of its limited memory, can operate better with a printer/plotter that needs a minimum of software and uses hardware to create the graphics and characters. In addition hardware can control the details of the printer/plotter's sequence of functions, which is dictated broadly by the computer. For instance, a printer/plotter, in receiving a turn-on command, may require a sequence of detailed commands (start paper drive, heater on, activate power supply, etc.) that a hardware-microprogrammer (ROM) can furnish.

Hardware/software tradeoffs must also be

made for applications-oriented requirements. These could include such items as the storage of data for special, selectable headers; the availability of a variety of standard forms (preprinted, or computer or hardware composed); the selection of type styles; or even printing in different colors. Information for each item can be stored, and the sequencing directed by either hardware or software.

## Fonts, printing media and cosmetics


The printer/plotter technique used determines the style and the way characters are generated, the printing media that can be used, and the resulting cosmetic qualities of the printed copy.

Either hardware alone or a combination of hardware and software can determine the font, or particular style of the characters and symbols. Many impact printers create a character in one stroke with hardware alone. Like a typewriter, impact printers offer a large variety of fonts that often can be easily changed in the field.


Other types of printers—both impact and non-impact—use a dot matrix to form a character, typically a  $5 \times 7$  or  $7 \times 11$  array of dots. Software or circuit hardware provides the codes to determine which dots in the matrix are printed. The relative spacing and arrangements of dots (squared-off or slanted) contribute to the style, or font of the characters generated.

Printer/plotters that can print on the greatest variety of paper forms and types (called printing media), and have the least restrictions in the selection of font styles, can produce the best looking printed copy, all else being equal. The forms of printing media are categorized by physical characteristics such as width, length and style (sheets, roll or fanfold), transparency (opaque or translucent). Paper types refer to the need for special paper that may require chemicals or special handling.

While good printing media and well-designed fonts provide the potential for good cosmetics via the subjective reactions of "looks" and "feel," there are measurable cosmetic qualities such as intensity, contrast, definition and distortion. These measurable qualities are determined direct-

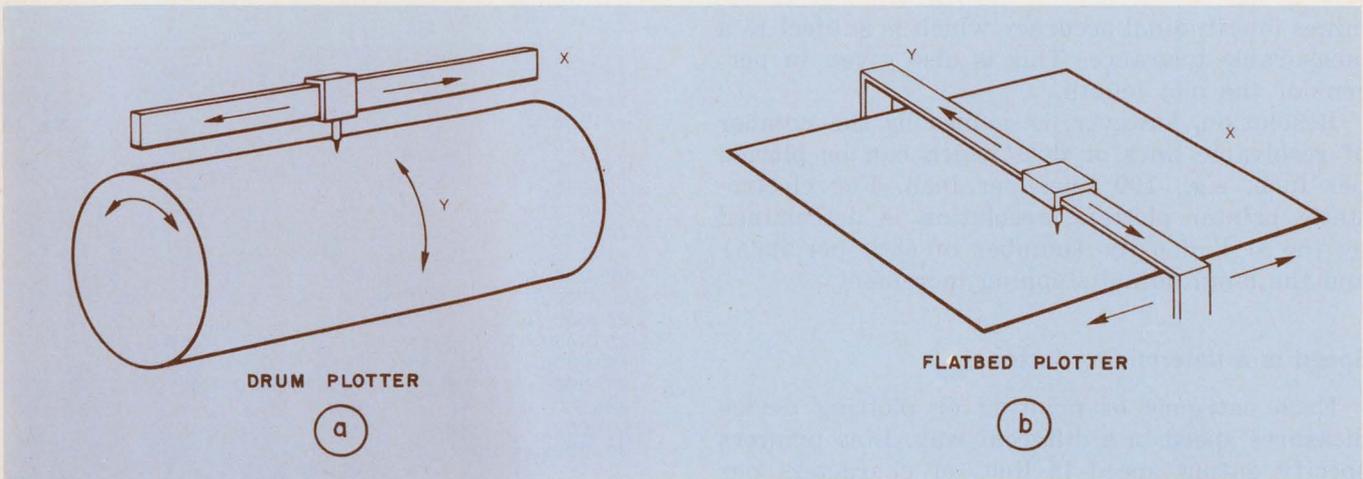

1. Pen plotters are slow but find many uses, usually in noncomputer applications.

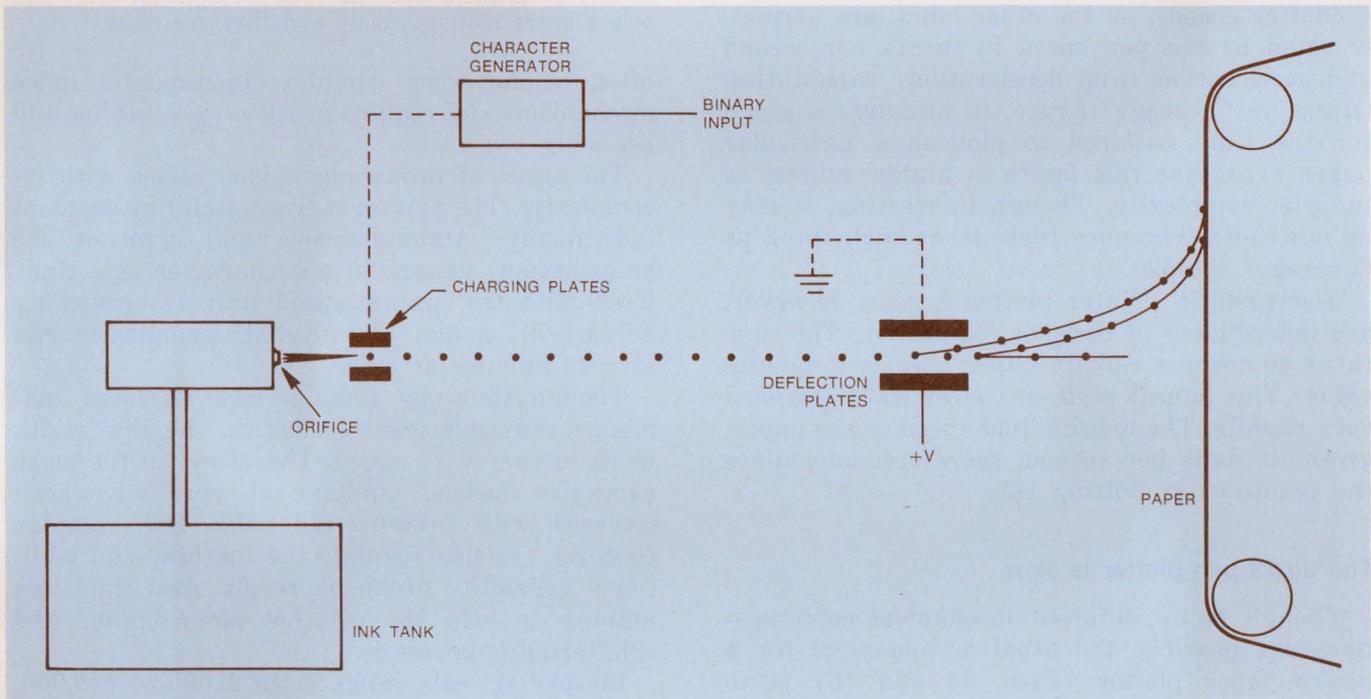

2. Jet-squirt printers claim speed of 200 characters per second, but fog-up the environment with ink mist.

ly by the printer/plotter technique used.

In addition, an undesirable quality like wet (or damp) printed copy can result in wrinkling, stretching or shrinkage. In general, a sharp, black image on crisp-white paper is considered good cosmetics.

#### Accuracy and resolution untangled

Accuracy and resolution are two terms which are often confused. Each has a distinct meaning and each separately contributes to "good" printed copy. In printer/plotters accuracy is determined by how close a line, dot or character can be placed to any given point on the paper on a

repeatable basis.

For a pen plotter, accuracy is mostly determined by mechanical limitations such as backlash. It is usually measured in percent of the length or width of the plot. Typical values would be 5 mils or 0.5%.

In an electrostatic printer/plotter, on the other hand, accuracy can be virtually "perfect" in the lateral direction. Since lateral-image position is determined by electrically switching the signals to styli in fixed positions across the paper, the lateral accuracy is fixed at the time of manufacture and will not change over the life of the device. The stepping accuracy of the paper-drive mechanism in the longitudinal direction deter-

mines longitudinal accuracy which is subject to a measurable tolerance. This is also given in percent of the plot length.

Resolution, however, is defined by the number of resolvable lines or dots which can be plotted per inch, e.g., 100 lines per inch. For electrostatic printer/plotters, resolution is determined by the styli density (number of styli per inch) and the longitudinal stepping increment.

### Speed is a determining factor

Each category of printing or plotting device measures speed in a different way. Line printers specify output speed in lines of characters per minute. Up to about 200 lines per minute is considered slow, 800 to 1400, medium, and above this to about 5000 lines per minute, is fast.

Plotter speeds, on the other hand, are normally rated by the pen speed in inches per second and acceleration (and deceleration) capabilities. Often, an "average" figure, in minutes, is given for the time required to plot on a particular paper area. But this figure is highly subject to the plot complexity. Though interesting, it may be misleading, because there is no such thing as "average" complexity.


Electrostatic printer/plotter speeds, however, are independent of the plot complexity. The time taken to cover a certain paper area is a definite value. The lateral styli are electrically scanned very rapidly. The longitudinal speed of the paper, given in steps per second, therefore determines the printing or plotting rate.

### The direct-pen plotter is slow

Though many different mechanical configurations are possible, the usual arrangement for a pen-on-paper plotter (Figs. 1a and 1b) is to move a carriage-mounted pen along a bar. This bar bridges across the paper to produce the X-axis. The Y-axis motion can be produced by either rotating the paper fastened to a drum (Fig. 1a), or more commonly, by moving the bridge-bar itself (Fig. 1b) across a flat sheet of paper, in the flatbed version.

In these plotters, the pen must be manually located at the zero or other starting position, making sure to take out the backlash. This procedure must be followed at the beginning of every new plot to avoid "zero point" errors. Also, for no-write positioning, a mechanism for raising the pen off the paper must be provided.

Cheaper pen drives use analog dc-servo motors. The position accuracy can be quite poor, with the least expensive models off by 2% or more. High-accuracy units approach 0.1%. They

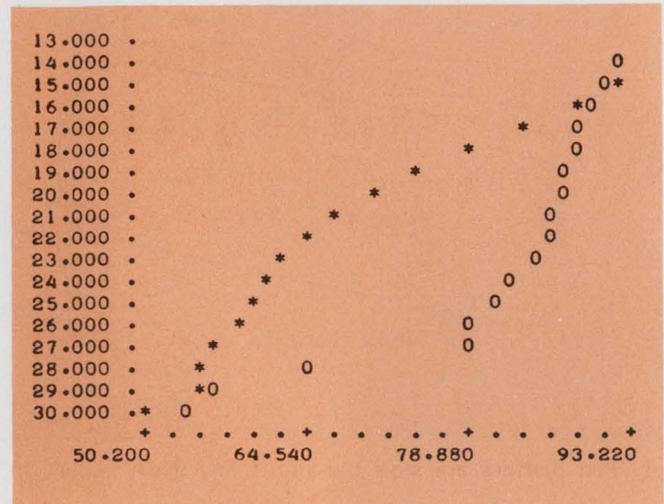

3. Impact printers are fast and economical but have only a crude plotting ability and they are noisy.

often employ very complex, incremental drive mechanisms and require precision machining and assembly work.

The speed of producing a plot varies with its complexity. The pen must trace each line segment individually. Alphanumerics and symbols are painstakingly generated one character at a time. Even with the highest-speed unit (approaching 50 inch/s), a plot of "normal" complexity can take 20 minutes or more.

Though the copy from a well adjusted ink-plotter can have good cosmetics, the line width tends to vary with speed. Therefore, in the more expensive models, capillary-ink pens have been replaced with pressure-fed pens. But complex feedback systems regulate the ink flow and additional reliability problems result. And this does nothing to help the original pen-clogging and splattering annoyances.

Ink-plotter costs range from \$1000 to \$10,000, for either the drum or small-flatbed plotter. Paper costs are relatively inexpensive (0.3 cents per square foot), but most applications require preprinted paper. This saves time in plotting recurring data, but it can raise paper cost to 10 cents per square foot.

### The jet printer squirts ink

While direct-pen units are primarily plotters, ink-jet or "s squirt"-type units are printer/plotters (Fig. 2). They shoot a stream of electrically charged ink from a small jet. The stream is acoustically treated to break the ink into a spray which then passes through a set of electrostatic deflection plates to form an image on the paper.

Because the deflection range is limited to a fraction of an inch, the jet mechanism must be

moved across the paper by a carriage for each new character. Single-jet devices normally print about 10 char/s (and cost about \$7000) but some have achieved speeds of 100 char/s.

For higher printing speeds (to 200 char/s) multiple jets are used instead of a mechanical carriage. However this presents an inherent reliability problem (besides costing about \$10,000), since one clogged jet can ruin the entire output record.

Many other problems also plague jet systems. Air currents and humidity can shift dots and blur and distort printing. Also, all the aberrations familiar to users of CRT devices exist in the deflection system, too. In addition, a fine ink mist may develop near the printer.

#### Impact-on-inked ribbon are widely used

Many of the problems with liquid-ink methods are eliminated in inked-ribbon systems. But an inked ribbon requires an impact mechanism, so it's noisy. The complex electromechanical systems need frequent, often tedious adjustments. Critical alignments, when upset, cause both vertical and horizontal printing distortions.

Impact printers produce reasonably good copy. They use inexpensive paper, work at high speeds, and even have a very elementary plotting capability (Fig. 3) though with poor resolution. They are very popular for high-speed printing of computer outputs.

The price of an impact printer is directly related to its speed. For example, 2000 lines/min costs over \$45,000, 1100 lines/min about \$20,000 and 8 lines/min about \$1800. Slow-to-medium speed (500-600 lines/min) printers, with 80 and 132 columns of characters, are available for \$5000 to \$15,000.

Most impact printers have a fixed, though in many cases field-changeable, font. Characters are often arranged on a rotating drum which directly strikes the ribbon, or they can be on a moving-

flexible chain, which is struck by a hammer against the ribbon. There are many other mechanical arrangements used to hold the font set and strike the ribbon.

Less common is the matrix-hammer type. This uses individual spikes that are preset by coded-input data. Direct impact against the inked tape produces the variable dot-matrix character.

#### Electrolytics solve some problems


In electrolytic printing, a mark is created where an electric current passes through chemically treated paper. Though acceptable for inexpensive, nonarchival (short-lived) printing, the method has many disadvantages. Its slow speed and poor cosmetics result in limited use. The paper is brownish and produces a light pink record of low contrast. Further, the record fades completely in a matter of days.

In its favor is the moderately priced paper at two cents per square foot. The device itself is priced between \$4000 and \$10,000.

In operation, chemically-treated wet paper is moved between two iron electrodes (Fig. 4a). As a modulated current passes between the electrodes, iron is depleted from the positive electrode onto the paper proportionately to the current. In a practical mechanism (Fig. 4b) the paper is placed over a roller containing a raised helical iron strip. A stationary sharp blade, which bridges and passes current through the paper, forms the second electrode. The helical electrode must be changed periodically, since it is depleted with use.


As the helix turns, the "point" region of contact (through the paper) between the helix and the bridging blade scans across the paper and marks it whenever current passes. Alphanumerics are produced in 7 to 10 scans (or revolutions) of the roller at speeds up to 100 lines of characters per minute. Plots are similarly produced.

With Z-axis modulation of the current, con-

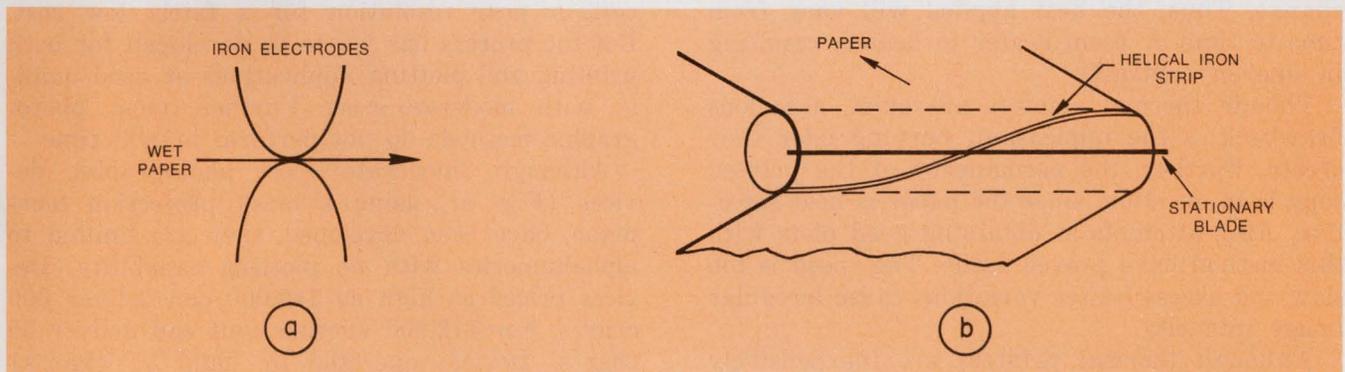

4. Electrolytic printer/plotters are inexpensive, but the poor cosmetics and short life of the copy limit appli-

cations. Further, the helix must be changed periodically, since it is depleted with use.

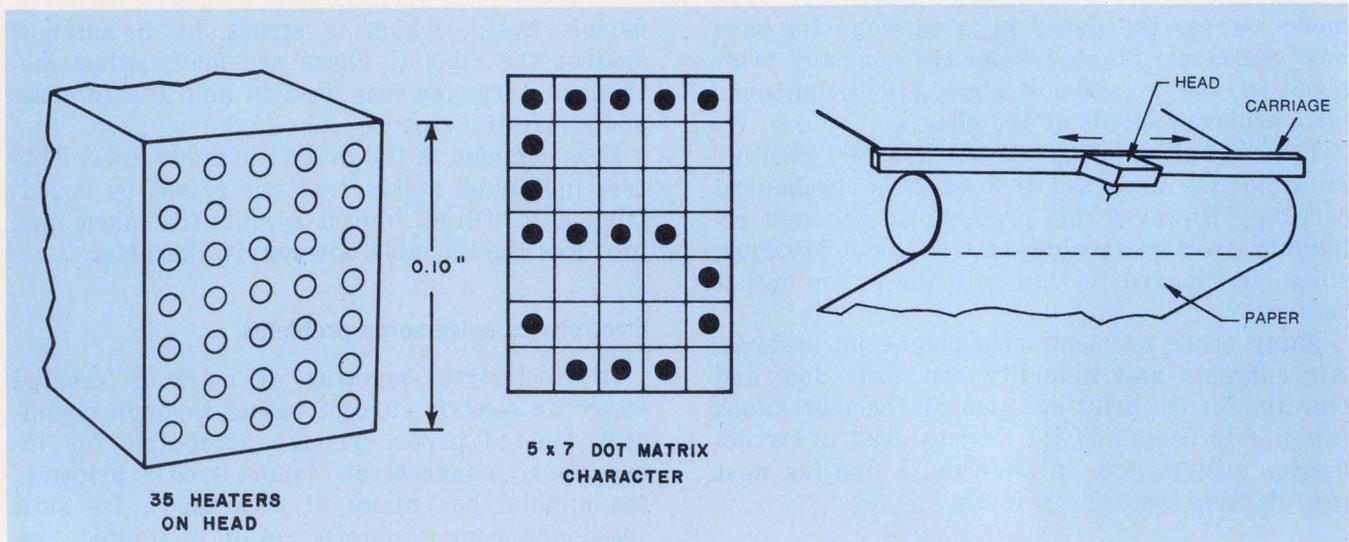

5. Thermal printers are quiet, but they need special paper, are slow and create unpleasant odors.

tinuous-tone copies can be produced, but this is usually of more interest in facsimile work than computers.

#### Thermics provide another approach

Thermic printers use special paper, too. Some merely heat the paper (thermal types) and others use an arc to evaporate wax from the paper. In thermal systems the surface of the paper undergoes a chemical change, resulting in a visible image. The chemically treated paper is "off-color," usually pink or yellowish, and the image comes out blue. Contrast is low.

In one form of thermal printer (Fig. 5), heat is applied to the paper with a single heating head containing a 35-dot heater in the form of a  $5 \times 7$ -dot matrix. To print a character, the head contacts the paper while the data source activates the appropriate dot pattern. To print a line, the heater head is moved across the width of the paper on a carriage.

Because the heater time constant is relatively long, this printing method is limited to about 30 char/s. In addition, the time constant tends to change. Thus, the heat applied will vary from time to time or from heater to heater, resulting in uneven contrast.

Though thermal printers are quiet, a serious drawback is the unpleasant, burning odor they create. Further, the permanency of the printed copy is in question, since the paper is heat sensitive. Also, attempts at obtaining good plots with this method have proved futile. The speed is too slow and excess heater variations cause irregular image intensity.

Although thermal printers are inexpensively priced (\$2000 to \$3000) and the paper costs moderate (three cents per square foot), the slow

speed, poor record quality and lack of plotting capability, limit their use.

Arc burn-off printers employ a dark paper with a light wax coating which evaporates when exposed to a high current, revealing the dark paper beneath. The voltage must be high enough to form an arc. The rotating-helix configuration (as in Fig. 4b) is often used as a scanning mechanism.

While small helix printers can cost as little as \$200 and the paper expense is only about three cents per square foot, the printing speed is very slow, the records produced have poor cosmetics and the evaporation of the wax creates an unpleasant odor. Also, the "burned-off" wax contaminates the area. Thus, the equipment needs periodic cleaning. Burn-off printers are not generally considered as computer-output devices.

#### Photographics go to extremes


Of the methods employing special paper, the photographic approach provides the greatest range of quality and costs. The photographic process can provide fine resolution at very high cost or poor resolution for a fairly low cost. But the process has yet to be developed for both printing and plotting applications at good quality with moderate cost. Further, most photographic methods do not perform in real time.

Although "moderate" cost photographic devices (Fig. 6), using a mask projection technique, have been developed, they are limited to alphanumeric with no plotting capability. Devices priced as high as \$40,000 can deliver 300 char/s. For \$12,000 another unit can deliver 50 char/s. Devices operated by hand (1 char/s) come as low as \$6000.


Most troublesome of all is the high cost of

# Figures of merit for printers, plotters and printer/plotters

Printers										
	Speed	Font	Record quality	Multi-copy	Reliability	Environmental	Operating cost	Purchase cost	Figure of merit	
Line printer (impact)	4	4	3	5	4	3	5	2	30	
Teletypewriter (impact)	1	2*	2	1	2	3	5	5	21	
Thermal	2	2	2	1	3	1	2	4	17	
Electrolytic	2	3	2	1	3	4	3	3	21	
Photographic	2	3	4	1	3	3	2	2	20	
Ink-jet	2	2	3	1	2	2	5	3	20	
Electrostatic	5	2	3	1	5	4	3	3	26	
*Impact, but comparable to dot-matrix in quality										
Plotters										
	Speed	Accuracy	Resolution	Record quality	Reliability	Environmental	Operating cost	Purchase cost	Figure of merit	
Direct pen	2	5	5	5	3	3	2	2	27	
Photographic	1	5	5	4	3	3	2	1	24	
Line printer (impact)	3	1	1	2	2	2	5	2	18	
Thermal	3	2	1	2	2	2	2	4	18	
Electrolytic	3	2	4	2	2	3	3	3	22	
Electrostatic	5	4	4	4	4	4	3	3	31	
Printer Plotters										
	Speed	Accuracy	Resolution	Font	Record quality	Reliability	Environmental	Operating cost	Purchase cost	Figure of merit
Line printer (impact)	3	1	1	4	2	3	3	5	2	24
Thermal	3	2	2	2	2	3	2	2	4	22
Electrolytic	3	2	2	3	2	3	3	3	3	24
Photographic	1	5	5	3	4	3	3	2	1	27
Ink-jet	2	3	3	2	3	2	2	5	3	25
Direct pen	2	5	5	1	5	3	3	2	2	28
Electrostatic	5	4	4	2	4	4	4	3	3	33
Printer speed (lines per minute)	Font quality	Multiple-copy capability			Purchase cost (dollars)		Operating cost (per copy)			
1. 0-15	1. Helical scan	1. Single			1. 50-200k		1. 10¢ and up			
2. 15-300	2. Dot-matrix	5. Multiple			2. 15-50k		2. 2-10¢			
3. 300-800	3. Vector				3. 5-15 k		3. 0.5-2¢			
4. 800-2000	4. Impact				4. 1-5 k		4. 0.1-0.5¢			
5. 2000 and up	5. Projection Mask				5. up to 1 k		5. up to 0.1¢			
Plotter speed (time to produce a typical plot)	Resolution (lines per inch)			Accuracy						
1. Over 10 minutes	1. 5-10			1. ±10%						
2. 2-10 minutes	2. 10-25			2. ±5%						
3. 30-120 seconds	3. 25-50			3. ±1%						
4. 10-30 seconds	4. 50-100			4. ±0.5%						
5. up to 10 seconds	5. Over 100			5. ±0.1%						
<p><b>A first approach to selection</b> can be helped by these figures of merit. But one must be aware that such figures are often arrived at subjectively, depending on the bias of the author. Figures are</p>					<p>given from 1 (poorest) to 5 (best). The sum of the figures for all the features appears in the right-hand column as an over-all Figure of Merit. Frequency of use, however, doesn't follow the ratings.</p>					

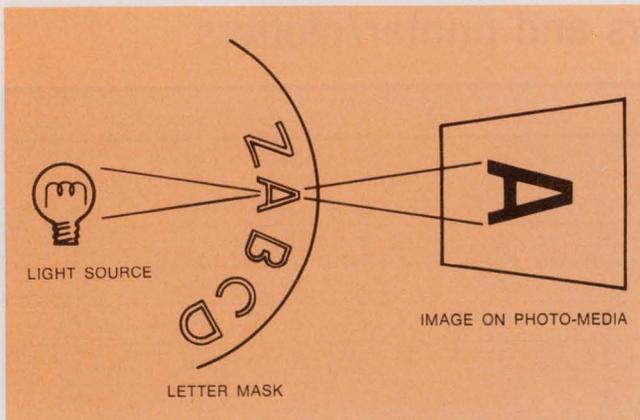

6. Photographic methods tend to extremes in cost and abilities. Cheap ones have poor qualities and good ones are very expensive.

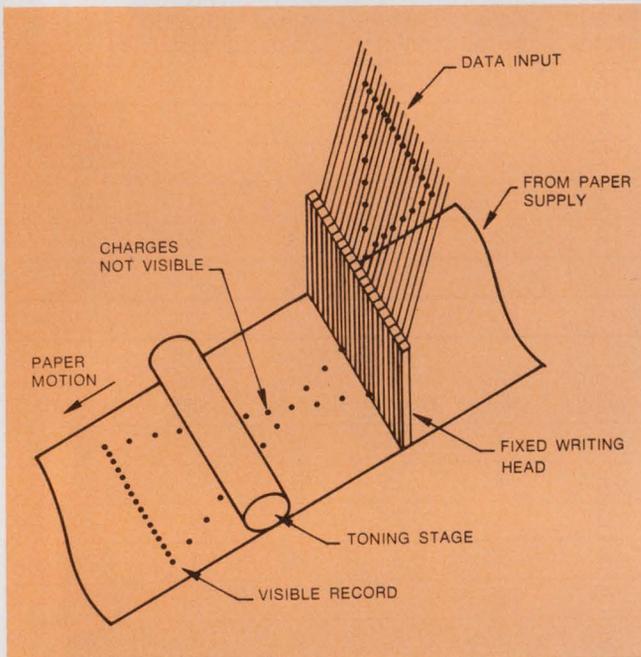

7. Electrostatic methods, when properly implemented, provide a good approach to building a combined printer/plotter. Speed is independent of image complexity.

silver halide paper (10 cents per square foot). This plus the long wet-developing time (minutes to hours), limit the wide use of this technique.

A dry-silver method, though lower in price (exposing device costs \$3000), and not as messy, as the wet process, delivers less resolution and accuracy, and poorer contrast. Further, the record does not remain stable over long periods of time, especially when exposed to wide swings in temperature and humidity.

A still cheaper zinc-oxide paper, used in low-cost copiers (\$1000), requires a liquid toning system. In addition, it has poor sensitivity, low resolution and poor contrast. Besides, its sur-

face has a slick coating that inhibits writing. The coating also makes paper separation difficult.

And at the highest end of the cost spectrum, the best resolution obtainable is with a silver-halide, wet process medium (paper or Mylar backed) using a high-resolution cathode ray tube as scanner and exposing device. Resolutions up to 0.001 inch have been faithfully reproduced by this method. Such a complete photographic-printing/plotting peripheral as used in computer output to microfilm (COM) systems can cost as much as \$200,000, with prices starting at \$30,000 for only the alphanumeric capability.


### Electrostatics may have the answer

Eliminating the need for expensively treated paper, complex or noisy mechanical systems and clogging-liquid inks, electrostatic printer/plotters (Fig. 7) employ a low-cost dielectric-coated paper. The recording paper is electrostatically pre-charged in a dot pattern representing the desired image, and then passed through a liquid-toner suspension of charged particles. The toner particles adhere to the paper whenever a charge exists, resulting in a permanent, high-contrast image on the paper. A wide variety of electrostatic printing media are available, with the basic paper types ranging from one to three cents per square foot. Other recording media such as gummed and translucent papers are also used.

This system is mechanically simple. Only the paper transport requires moving parts. Mechanical adjustments are seldom necessary and the entire system is very quiet.

A fixed writing head, containing multiple conducting styli, places electrostatic dot charges across the paper. The styli, fixed in a linear array, are individually activated by binary signals and form the X-axis of the printer/plotter. Resolutions of 80 to 100 styli/inch are common. Usually, a step motion is used in advancing the paper longitudinally forming the Y-axis. Thus the X-axis scanning and Y-axis stepping covers every spot on the paper.

Printing, plotting or combinations of both are done at a speed completely independent of the image complexity. A solid black page takes as little time as a nearly blank page. The speeds of these devices are limited primarily by the capability of the paper drive. Printer/plotters that can deliver up to 5000 lines of characters or sixty plots, each 8-1/2 x 11 inches, in one minute, or a combination of both, can be obtained for less than \$13,000. Slower devices with a capability of 1000 lines per minute or a plotting rate of 12 such plots per minute are available for less than \$8000. ■■

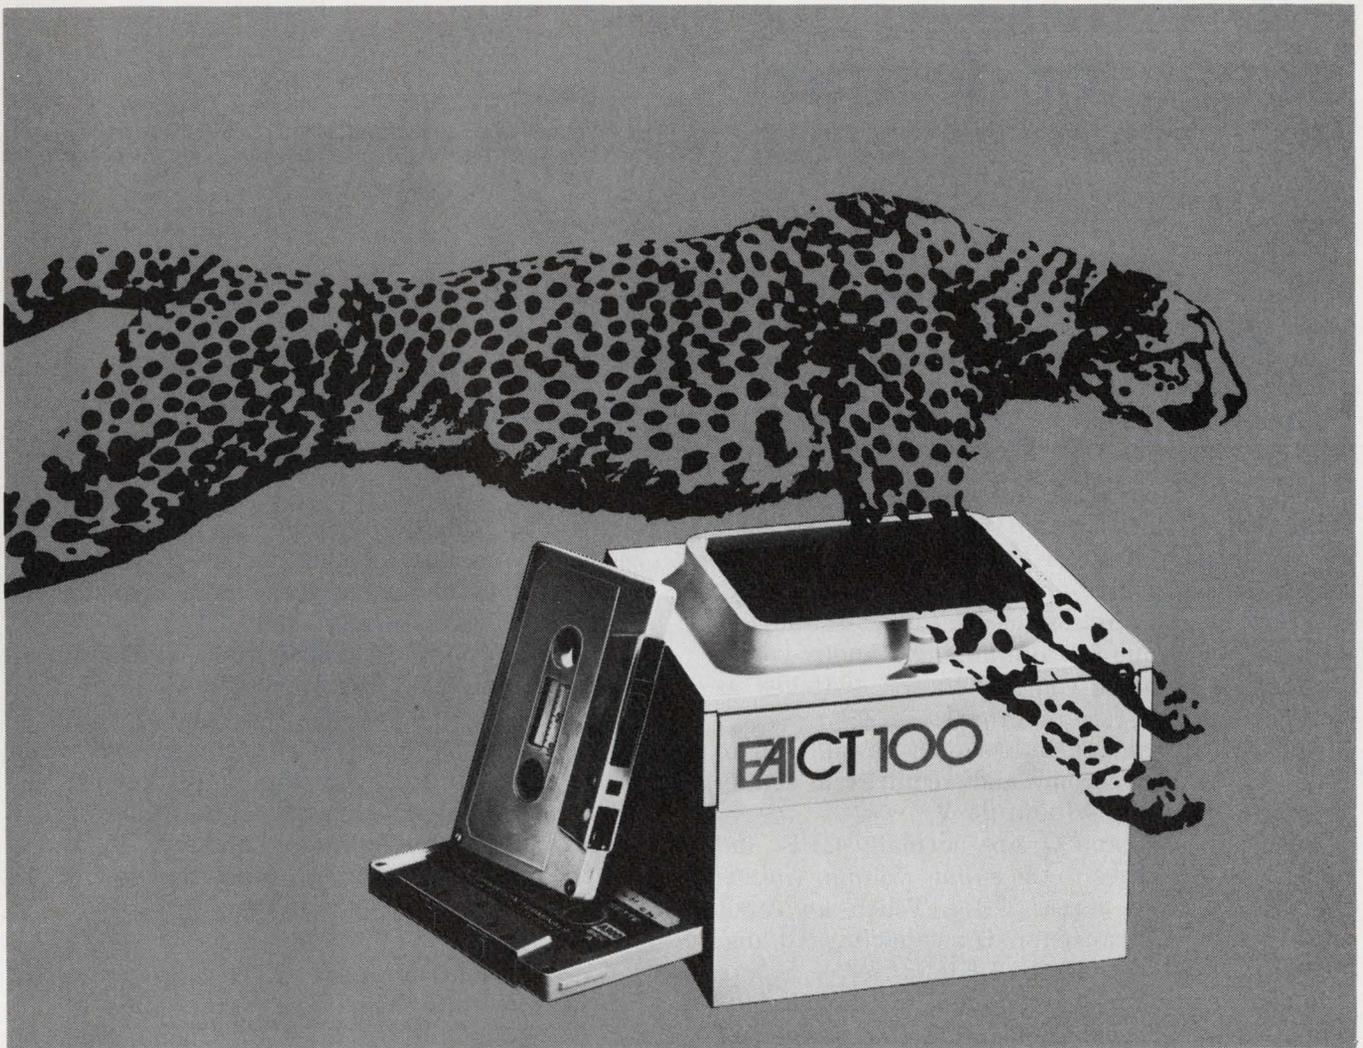

# A Great Stride Forward. The EAI Cassette Tape Transport.

**It's built for rugged action.** To open a wide and wild new range of design possibilities for the OEM engineer. The new EAI CT 100 is like no other tape transport you've ever seen before. Because we made it simple.

Designed to ANSI and ECMA specifications, this transport second-guesses its predecessors and competitors, outperforms them, because it has fewer moving parts and features like modular construction and direct drive.

It's deadly accurate at any speed. It's all muscle, clean and trim. Without an ounce of excess to raise prices. Or take away from peak performance.


A single unit with all the control electronics you'll probably want comes in at well under \$700. Price discounts start at four units. And the price goes down, down, down from there.

So you can trim design costs to the bone. While you get super reliability in data collection and readout.

Because we cut out all the problem-making non-essentials. So there's literally much less to bend, break, twist or wear out. And we concentrated on basics. Such as building everything into a solid, cast-aluminum chassis that won't flex. So there's no misalignment during operation.

And we added direct drive with a brushless, noiseless DC capstan motor that is electrically controlled. For an operating life that runs to more than 10,000 hours. For start/stop times faster than 20 milliseconds. With standard speed selections from 4 to 24 ips.

Also, a unique NEOT (near-end-of-tape) sensor tells you how many inches of tape remain for use. A special head mounting makes field adjustment unnecessary. And you'll find many other useful features. Plus single- and double-capstan models. Modular wiring to fit your needs. So you can make great strides forward in design. All it takes is one little step: Write or phone for details today.



Electronic Associates, Inc.  
195 Monmouth Parkway  
West Long Branch, New Jersey 07764  
(201) 229-1100

INFORMATION RETRIEVAL NUMBER 25

## Optical-trigger-link scheme minimizes standby power

When optical trigger links are used for high-voltage level shifting and the elimination of the ground loops, the use of line-operated power supplies may be troublesome. If batteries are used, the power consumption needs to be minimized. A useful technique for minimizing standby power dissipation employs complementary switches as pulse generators (see diagram).

The optical trigger link shown handles up to 1000 pulses per second and requires a supply voltage of between 10 and 24 V.

Transistors  $Q_1$  and  $Q_2$  are normally OFF, and capacitor  $C_1$  charges to the supply voltage (minus the voltage drop across  $CR_1$ ). When an input pulse turns on transistor  $Q_2$ , capacitor  $C_1$  discharges via  $Q_1$ ,  $Q_2$  and the LED.


When transistor  $Q_2$  conducts, diode  $CR_1$  becomes reverse-biased. Hold on is thus prevented

because  $C_1$  is no longer charged. As soon as  $C_1$  discharges, both  $Q_1$ ,  $Q_2$  and the LED turn off. Diode  $CR_1$  becomes conducting and capacitor  $C_1$  again charges to the supply voltage. Resistor  $R_2$  limits the current through the LED.

The light pulse is transmitted by the fiber-bundle to arrive at the remote detector, where it triggers the photodiode. The output pulse is generated by the discharge of  $C_3$  through transistor  $Q_3$  and  $Q_4$  in a way similar to that for the transmitter. Supply current at both the transmitter and detector is approximately  $fCV$ , where  $f$  is the pulse rate,  $C$  is the capacitance of  $C_1$  or  $C_3$ , and  $V$  is the supply voltage.

*C. A. J. Van der Geer, FOM Instituut voor Plasmafysika, Jutphaas, The Netherlands.*

CIRCLE No. 311

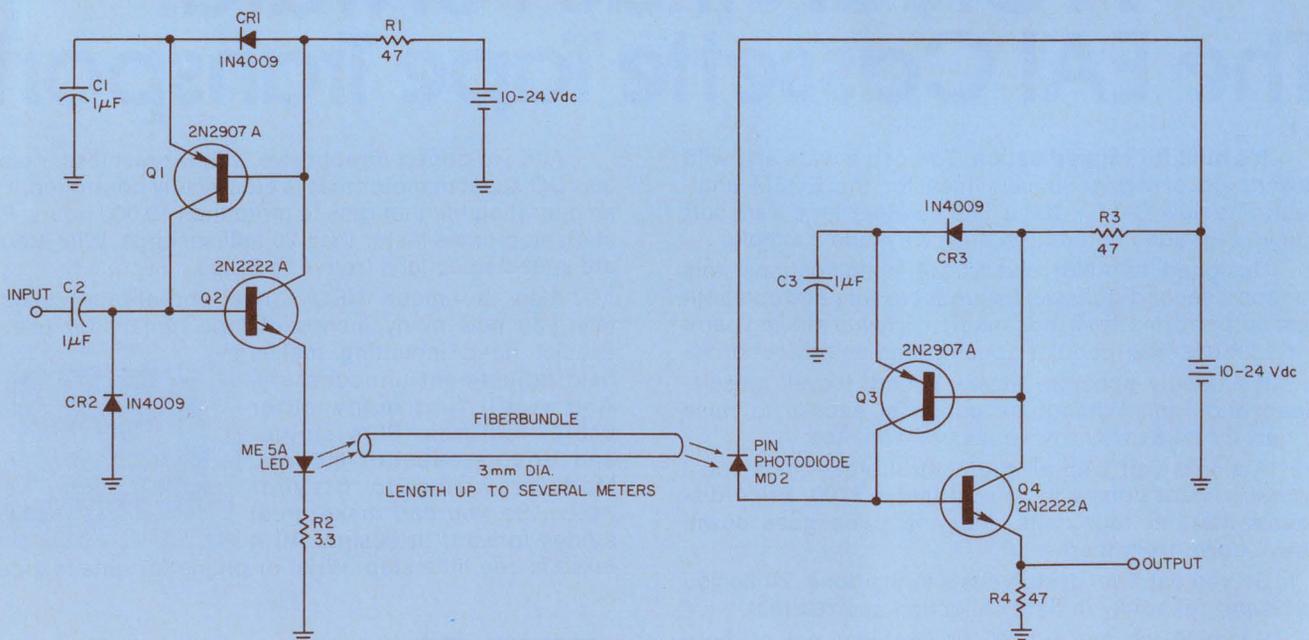

Transmitter and detector operate without standby power. Complementary switches  $Q_1 + Q_2$  and  $Q_3 +$


$Q_4$  act as pulse generators. Diode  $CR_1$  acts to achieve hold-on prevention.

We have documented proof you can **replace your oscilloscope for \$79.95**



Kurz-Kasch logic probes replace oscilloscopes for digital logic testing.

The Kurz-Kasch logic probe is the most amazing new concept today in electronic testing. All digital logic circuitry can be tested for every condition you need to know. It actually replaces wide band pass type oscilloscopes costing \$2,000 and \$3,000. Write or call now for your free copy of that proof to: Tom Barth, Marketing Manager, Department ED



Free test data



**Kurz-Kasch, Inc.**

Electronics Division  
1421 S. Broadway  
Dayton, Ohio 45401  
Telephone (513) 223-8161

INFORMATION RETRIEVAL NUMBER 26



# FREE

The World's Largest Consumer Electronics Catalog



• Stereo/Hi-Fi Components • Musical Instruments and Amplifiers • CB & Ham Equipment • Tools and Test Equipment • Police and Fire Monitor Receivers • Public Address Systems • Photography Equipment • Semiconductors, Books, Parts • Plus Much More!

Send For Your Free Lafayette Catalog Today!

Lafayette Radio Electronics, Dept. 45082  
P.O. Box 10, Syosset, L.I., N.Y. 11791

Send Me the Free Lafayette Catalog

Name .....

Address .....

City .....

State ..... Zip .....

(Please include your zip code)

45092

INFORMATION RETRIEVAL NUMBER 27

ELECTRONIC DESIGN 18, September 2, 1972

looking for a....

## LOW COST HIGH QUALITY POPULAR SIZE

....ceramic capacitor?



Well, look toward USCC/Centralab.

Our Mono-Kap™, a radial lead, epoxy coated monolithic ceramic capacitor could be the answer. They're available in six sizes from .100 x .100 to .500 x .500 in NPO, W5R, Z5U and Y5V dielectrics. Capacitance values range from 4.7pF to 10Mfd in 50, 100 and 200 VDC ratings.

USCC/Centralab has developed highly automated assembly techniques for Mono-Kap and our other ceramic capacitor products— from raw materials to chip capacitors to leaded capacitors with no sacrifice to quality. All this makes possible the fastest delivery in the industry on the wide variety of USCC components. Ask us, we'll give you our best.



For FREE Mono-Kap evaluation samples, write on company letterhead to USCC/Centralab, 2151 N. Lincoln Street, Burbank, California 91504. For complete technical data on Mono-Kap, and a FREE copy of our Ceramic Capacitor Catalog, circle the information retrieval number below.



U. S. CAPACITOR CORPORATION



CENTRALAB  
Electronics Division • GLOBE-UNION INC.

INFORMATION RETRIEVAL NUMBER 28

# Synchronous gating controls complementary clock signals

The synchronous clock gate in Fig. 1 controls clock signals without introducing false edges, lost synchronism, or pulse shrinkage.

The gate is a cross-coupled latching circuit whose operation is synchronously controlled by the MODE input. Synchronous gating proves better than simple clock ANDing because it allows gating signals to occur at any time during the clock cycle without modification of the output transitions determined by the CLOCK input.

The MODE input controls the gate. The level of the MODE control at the positive edge of the CLOCK determines whether the pulse is transmitted to the  $Q_1$  or  $Q_2$  outputs. With the MODE control LOW, output  $Q_1$  follows the CLOCK input and  $Q_2$  is LOW. When the MODE control is HIGH,  $Q_2$  follows the CLOCK, and  $Q_1$  is LOW. The output pulse width always equals the input CLOCK pulse width, and the MODE control has no effect except at the rising edge of the CLOCK.

The waveforms in Fig. 2 demonstrate the operation of the synchronous clock gate. It can be seen that the MODE transitions that occur while



the CLOCK is either HIGH or LOW have no effect on the output. Only the MODE-control state at the positive CLOCK transition is recognized for each clock cycle.

For applications requiring a gated clock, either  $Q_1$  or  $Q_2$  may be used as the clock output. Output  $Q_1$  is gated OFF with MODE-ONE, and  $Q_2$  is gated OFF with MODE-ZERO. The inverting outputs provide a gated  $\overline{\text{CLOCK}}$  when required.


The two sets of inverting and noninverting outputs provide versatility for many applications other than clock gating. If the MODE control is alternately HIGH and LOW for each successive CLOCK pulse, the synchronous clock gate will translate a single clock signal into a two-phase clock. The MODE control signal may be derived from the clock input by using a J-K flip-flop in the toggle mode.

*John R. Reinert, Motorola Inc., Semiconductor Products Div., 5005 E. McDowell Rd., Phoenix, Ariz. 85008*

CIRCLE NO. 312

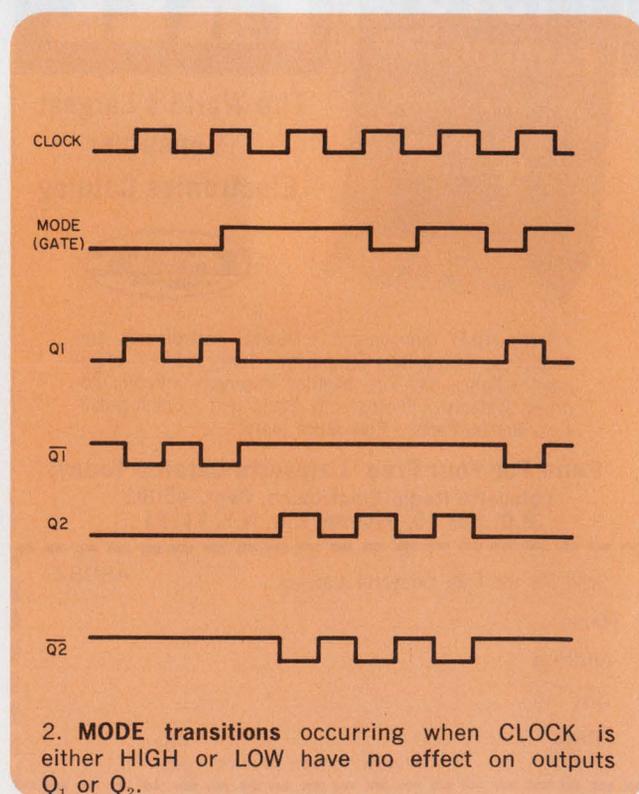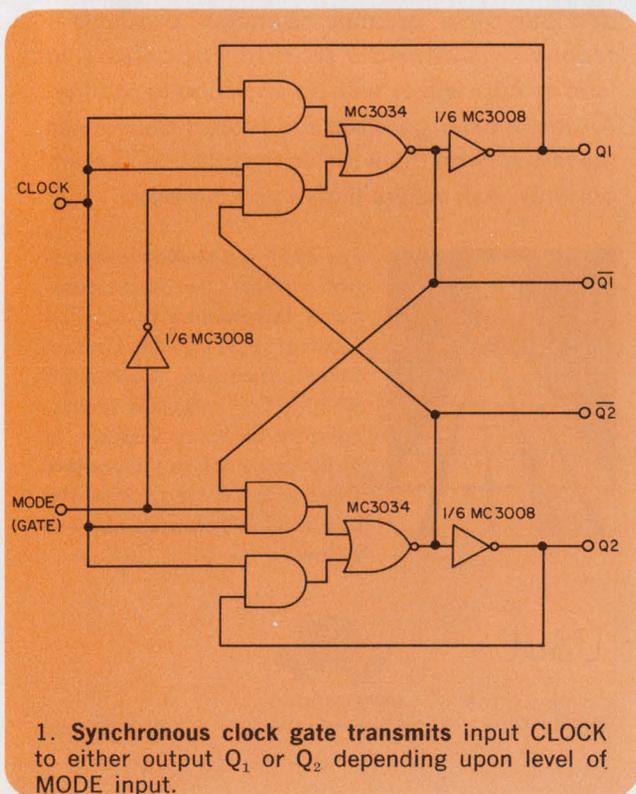

# compact terminal blocks by curtis

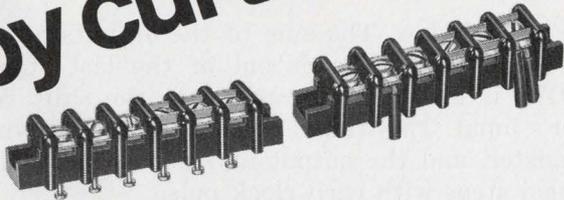

E Series surface connection or feed through, compact, barrier-type terminal blocks for use with wires up to #16 AWG.

Model E—Surface connection, positive clamp which eliminates need for lugs, looping or hooking of wires. (EC variation has both internal and surface clamps for greater wire capacity.)

Model EFT—Screw terminals externally, solder terminals internally (EFTC variation has surface clamps and EFTM has movable insert to provide clamping.)

All models above—Available with 1 to 22 terminals, factory assembled to your specifications, terminals on 3/8" centers. Rated at 10 amperes, 300 volts. Molded parts are black, thermo-set phenolic. Mounting holes are integral, .160 diameter for use with #5 mounting screw.

Contact factory for your nearest local Curtis representative, distributor, or for additional information.

**CURTIS DEVELOPMENT & MFG. CO., INC.**  
3236 N. 33rd St. • Milwaukee, Wis. 53216



INFORMATION RETRIEVAL NUMBER 29

8641

# PRECISION DESIGN GRIDS

**Extremely accurate and stable**

- .007" polyester drafting film
- 1/4" frosted table top glass

O. S. I. PRECISION DESIGN GRIDS are manufactured under strict environmental control to a tolerance of  $\pm .002$ " over 48 inches. Available in black or non-reproducible blue, the crisp, clear lines of these stable grids are unaffected by erasures or removal of tape.

Grids can be supplied in many sizes, with increments in either inches or millimeters, and a wide variety of line styles (accented, solid or broken lines) are available.

Write or call for details and prices. Dealer inquiries are invited.



**OPTIGRAPH SYSTEMS, INC.**

A Subsidiary of Capitol Reproductions Inc.

213 East 12 Mile Road • Madison Heights, Michigan 48071 • Phone (313) 398-2424

INFORMATION RETRIEVAL NUMBER 30

ELECTRONIC DESIGN 18, September 2, 1972

## 146 MONO-KAP™ Monolithic capacitor values

# NOW IMMEDIATELY AVAILABLE FROM YOUR CENTRALAB DISTRIBUTOR


The superior reliability of Centralab MONO-KAP capacitors has already been tested and proven. Now they're available, for the first time, from Centralab Distributors. That means the same tested and proven local service you've come to expect on other Centralab components.

Let your distributor prove his reliability for immediate delivery of the most complete range of radial lead, epoxy-coated monolithic capacitor values in the industry. You can rely upon his complete stock for the prototype or small production quantities you need. Let your distributor prove how fast and how well he can handle your requirements.

Remember, he also stocks a complete line of Centralab ceramic disc capacitors as well as other highly reliable special purpose ceramic capacitors. You can depend on him for feed-thru, variable trimmer and transmitting types plus a wide range of polystyrenes and miniature electrolytics. Check your requirements, then call your Centralab Distributor. He has just the right capacitors you need. Immediately!

Need complete Mono-Kap technical data and the name of your closest distributor? Write Centralab Distributor Products, Dept. MK-1.

DISTRIBUTOR PRODUCTS



**CENTRALAB**

Electronics Division  
GLOBE-UNION INC.


5757 NORTH GREEN BAY AVENUE  
MILWAUKEE, WISCONSIN 53201

INFORMATION RETRIEVAL NUMBER 31


# Digital sweep generator maintains constant output voltage at specified time

A triggered triangle sweep generator holds its output voltage constant when a pulse is applied at the HOLD input. The circuit provides versatility not commonly found in digital sweep generators.

A pulse applied at the "trig" input clears the shift register (Fig. 1) when the HOLD input

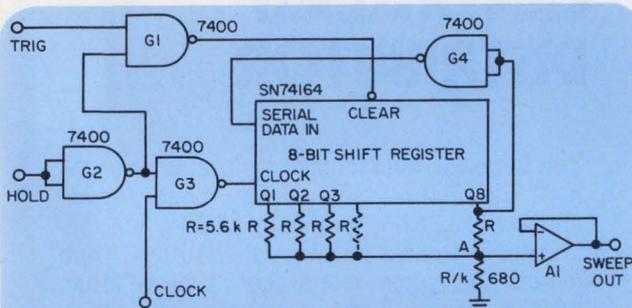

1. Sweep generator output level at point A is held constant when a high pulse is applied at the HOLD input.

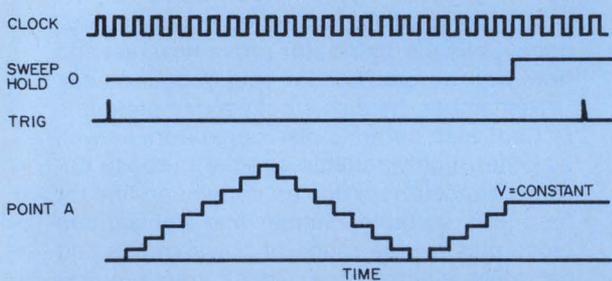

2. Timing sequence for an eight-bit register is illustrated by the waveform for the output at point A.

(Fig. 2) is low. The sum of the outputs at point A equals zero. The output of the last stage, a LOW, is inverted and applied to the shift register's input. This HIGH input is clocked down the register, and the output at point A increases in equal steps with each clock pulse.

After  $k$  clock pulses (where  $k$  is the number of bits of the shift register), the last stage becomes HIGH. The resultant LOW is clocked down the register, causing a step voltage decrease at point A, equal to the earlier increase, until the cycle repeats. Upon application of a HIGH at the HOLD input, the "trig" and clock are disabled, and the output remains constant. Voltage follower A<sub>1</sub> provides isolation.

The smoothness of the sweep variation (step size) depends on the length of the shift register,  $k$ . A capacitor from point A to ground can also help to smooth the output.

If the "trig" circuitry is disconnected, the generator becomes asynchronous. A sawtooth may be obtained by connecting the inverted output of the last stage to the register's "clear" input and placing a HIGH at the register's input.

A divide-by-N counter may be inserted in the clock line if the HOLD input is a function of the circuit's output and clock time—such as for coarse VCO control in code synchronization. A logarithmic or square-law sweep may be obtained by selecting appropriate values of  $R$  for each output.

*Peter Himmelheber, Senior Project Engineer, and Stanley Thomas, Project Engineer, Naval Electronic Systems Test and Evaluation Facility, St. Inigoes, Md. 20684.*

CIRCLE NO. 313


## IFD Winner of April 27, 1972

**Bernie Schmidt**, CMOS Design Engineering Manager, Motorola Semiconductor Products, Inc., 5055 E. McDowell Rd., Phoenix, Ariz. 85008. His idea, "Schmitt trigger design uses CMOS logic," has been voted the Most Valuable of Issue award.

**Vote for the Best Idea in this issue.**

**SEND US YOUR IDEAS FOR DESIGN.** You may win a grand total of \$1050 (cash)! Here's how. Submit your IFD describing a new or important circuit or design technique, the clever use of a new component or test equipment, packaging tips, cost-saving ideas to our Ideas for Design editor. Ideas can only be considered for publication if they are submitted exclusively to ELECTRONIC DESIGN. You will receive \$20 for each published idea, \$30 more if it is voted best of issue by our readers. The best-of-issue winners become eligible for the Idea of the Year award of \$1000.

ELECTRONIC DESIGN cannot assume responsibility for circuits shown nor represent freedom from patent infringement.

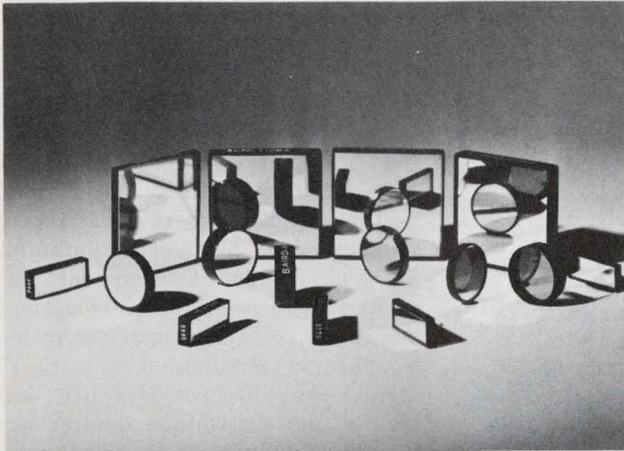

## Free Standard Optical Filters Catalog

Over 1,000 Standard Optical Filters listed with specifications and prices.

All Standard Filters are of highest quality. These filters have been carefully selected to satisfy 80% of the needs of customers who are building prototype instruments.

65% of all filters are in stock ready for immediate shipment.

Send for your copy of Catalog C-6.




System Components Division

125 Middlesex Turnpike, Bedford, MA 01730  
(617) 276-6420 Telex: 92-3491

INFORMATION RETRIEVAL NUMBER 32

## AJ700

### The OEM Digital Cassette Deck

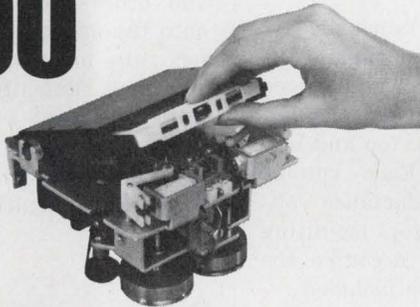

...because it makes *no* compromise in performance or quality at low cost.

The secret is an exceedingly straight-forward design for the ultimate in reliability and long life, with minimum maintenance. The result is a cassette deck that is small, lightweight, and quiet. Two reel motors with two capstans give bi-directional recording, and electronic clutching and braking reduces wear. Our unique tape guiding system helps eliminate problems of cassette variables. All serviceable elements are accessible for quick, easy maintenance... in the field. And the AJ700 operates in ANY position.

There's more to the AJ700. Write or call us:

*We promise what we say, and we service what we sell!*



1065 Morse Ave. ■ Sunnyvale, California 94086 ■ (408) 734-4030  
Sales offices in principal cities throughout the U.S.A.

INFORMATION RETRIEVAL NUMBER 34

ELECTRONIC DESIGN 18, September 2, 1972

## FIXED CAPACITORS... Hermetically Sealed ...in Glass!


### FOR MAXIMUM RELIABILITY AND LONGER LIFE!

Now you can design circuit capabilities never before possible! "Glass-To-Metal" hermetic seal guarantees long-term reliability and greater strength! All potential problems are ruled out because they are sealed out... with glass! High to low temperature excursions (-100°C to +500°C or vice versa) will not affect the thermally matched components! Contact surfaces are non-oxidizing even under the most extreme conditions! Available in 4 sizes from .160 x .065 to .400 x .155 with capacitance ranges of 1 pf to .22 mfd. Write for catalog sheet.

**Monolithic Dielectrics Inc.**

P.O. Box 647 • Burbank, Ca. 91503  
Phone (213) 848-4465

Subsidiary of



INFORMATION RETRIEVAL NUMBER 33



## CHOOSE FROM OVER 4,000! UNUSUAL BARGAINS!

OPTICS • SCIENCE  
ELECTRONICS

## FREE CATALOG!



### 1,000's OF HARD-TO-FIND BUYS FOR INDUSTRY

Brand new 164-page easy-to-read edition packed with new products, charts, diagrams, illustrations. On-the-job helps; quality control aids, unique, exclusive items to speed your work, improve quality, cut development and production costs! Loaded with optical, scientific and electronic equipment available from stock for industry, research labs, design engineers, experimenters, hobbyists.

#### ONE SOURCE FOR ALL YOUR NEEDS


Tremendous variety. Terrific savings. Countless hard-to-get surplus bargains. Many "one-of-a-kinds" nowhere else. Ingenious scientific tools. Thousands of components: lenses, prisms, wedges, mirrors, mounts, all types of accessories. Hundreds of instruments: pollution testing equipment, lasers, comparators, magnifiers, microscopes, projectors, telescopes, binoculars, photo attachments, ecological items, black light equipment and America's largest collection of unique lighting products.

#### BUY DIRECT WITH MONEY-BACK GUARANTEE

Edmund ships over 5,000 orders monthly to America's largest industrials — every item guaranteed! You must be satisfied, or return your purchase in 30 days for your money back. Shop the catalog of America's largest Science-Optics-Electronics Mart with confidence! Get your FREE copy without obligation. No salesman will call. Write now for free catalog "DA"




**EDMUND SCIENTIFIC CO.**  
300 EDSCORP BUILDING  
BARRINGTON, NEW JERSEY 08007  
TELEPHONE: 609-547-3488



INFORMATION RETRIEVAL NUMBER 35

## Solderless-wrap board handles ECL 10,000 logic

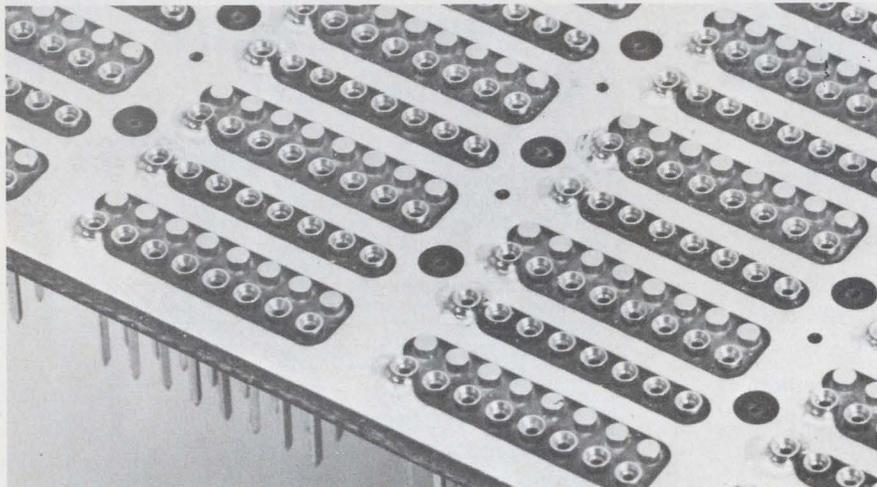

Augat, Inc., 33 Perry Ave., Attleboro, Mass. 02703. (617) 222-2202. P&A: See text; 4 wks.

Until now, packaging techniques for ECL 10,000 logic have been limited to two-sided PC (microstrip) and expensive multilayer (strip line) boards. Wrapped-wire terminations—offering lower hardware and layout costs and design flexibility for field changes and repairs—were not widely used with high-speed logic because of problems stemming from the 2-ns rise time of ECL 10,000.

But Augat has announced a new board that accommodates DIP packages and wrapped-wire terminations. The major difference between this and earlier logic boards is that it has a third voltage plane in addition to the usual ground and  $V_{CC}$  planes. The added plane, for  $V_{TT}$  ( $-2$  V), allows the boards to meet the following requirements for ECL 10,000:

- Characteristic impedance ( $Z_0$ ) of long circuit lines. This should be controlled.
- A resistive load  $R_L$ , equal to the characteristic impedance of the line. The load should terminate long circuit lines.
- Maximum circuit efficiency. This results when  $R_L$  is terminated

by a source of  $-2$  V.

- Voltage bussing for  $V_{CC}$ ,  $V_{EE}$  and  $V_{TT}$ . The busses should have low series inductance with sufficient decoupling.

Augat's panel is fabricated in three layers, with the third,  $V_{TT}$ , voltage plane sandwiched between two insulating layers and the  $V_{CC}$  and  $V_{EE}$  planes on the top and bottom of the panel. Each voltage plane forms a low-inductance voltage source. Areas for mounting bypass capacitors to decouple the voltage planes are also included.

Each DIP location has four auxiliary solderless-wrap pins connected to the  $V_{TT}$  supply. These are used for terminating a resistive load. The load resistor ( $R_L$ ) serves as a pull-down resistor and also terminates the line at the gate input.

The characteristic impedance of a solderless-wrapped line on the Augat panel is normally 140  $\Omega$ . Termination of a line is generally effected by a 150- $\Omega$ , 1/8-W resistor.

The new panel series is initially available in multiples of 30 DIP patterns, up to a maximum of 180, for standard boards in Augat's PG panel style. Prices for a 30-pattern panel range from \$40 to \$80 each, depending on style and quantity.

CIRCLE NO. 250

## Tantalum powder boasts highest capacitance

Norton Co., 1 New Bond St., Worcester, Mass. 01606. (617) 853-1000. \$27.50 to \$32.50/lb.

A tantalum powder claimed to be the world's highest capacitance commercially available tantalum powder enables development of smaller devices, easier fabrication and lower costs for capacitor manufacturers. Designated the SGV series, the new powders are designed for low voltage devices up to and including 35 V. They provide 8000  $\mu$ F V/g compared to the next best comparable powder of 6200  $\mu$ F V/g. The higher capacitance enables a cost saving of from 30 to 50% over previously available Norton powders.

CIRCLE NO. 251

## Substrate terminations can be DIP soldered

Berg Electronics, Inc., York Expwy., New Cumberland, Pa. 17070. (717) 938-6711.

A line of ceramic substrate terminations, some of which are designed to mount onto DIP packs and others for edge mounts, clip onto the substrate rather than fasten into holes drilled through it. They mechanically hold their position until wave soldered for a permanent connection. Since there is no need to drill the substrate there is no resulting breakage.

CIRCLE NO. 252


## Potting epoxies reduce thermal expansion

Transene Co., Inc., Route One, Rowley, Mass. 01969. (617) 948-2501. \$3.25/lb.; stock.

A one-part epoxy for potting and encapsulation of electronic assemblies and components is self-catalyzed to reduce waste and simplify the process by eliminating the need to weigh out and add hardener. Transepoxy 310 is a silica filled epoxy system for general purpose potting and encapsulation. Transepoxy 320 is an alumina filled epoxy system with high thermal conductivity. Transepoxy 330 is an optically clear unfilled epoxy system.

CIRCLE NO. 253

## DIP breadboard handles plug-in or hardwired ICs

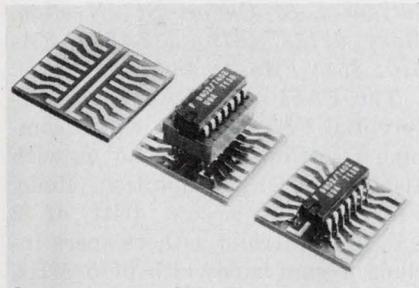


Christiansen Radio Co. 3034 Nestall, Laguna Beach, Calif. 92651. (714) 497-1506.

The Model 14/16 DIP Mini-Mount breadboarding system has a pressure-sensitive adhesive to hold it in place while interconnecting wires are installed. Either 14-pin or 16-pin dual in-line packages may be accommodated. The pressure-sensitive backing allows the Mini-Mount to be moved or exchanged as the circuit develops, yet holds it firmly in place in the finished assembly.

CIRCLE NO. 254

## LSI flat pack offers alumina loaded body

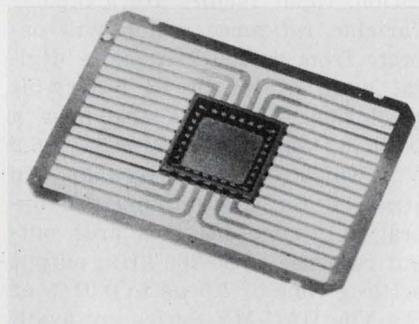


National Beryllia Corp., Sealox Product Div., Greenwood Ave., Haskell, N.J. 07420. (201) 839-1600.

A 30-lead flat pack for MOS/LSI applications, the 051-2268, is 3/8 x 3/8 inch in size, with an alumina loaded glass body, Kovar bottom and Kovar seal ring plated with gold. Metallized lids and preforms are available. Hermetic to 10<sup>-8</sup>, rugged and dependable, and capable of volume production and high yields, 051-2268 has a 200-mil square die bond area, with overall lead frame dimensions of 1.240-in. x 0.700-in.

CIRCLE NO. 255

## Press-fit edge connector offers modular approach

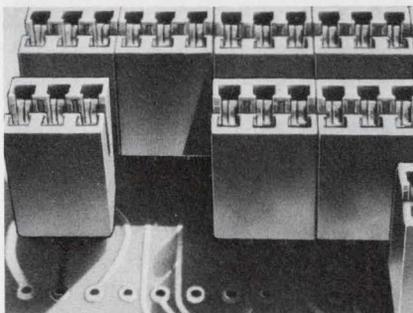

Elco Corp., Maryland Rd. & Computer Ave., Willow Grove, Pa. 19090 (215) 659-7000.

A modular card edge connector provides a means to update connection systems without the need to redesign existing PC cards with their 150 or 156-mil center contact traces. The card edge connector comes in modules of four and six contacts. The modules can be ganged together to custom design connectors to fit the existing PC card, without soldering.

CIRCLE NO. 305

# A Public Service Announcement:

This comparison is brought to you with ulterior motives by Cipher Data Products.

All the "yes" answers and the low price make the Cipher Mini-Cette 2000 ideal for test instrumentation, data acquisition, program loading and overlays, sort/merge operations—in fact, for any application where you need to get the maximum throughput and highest reliability from your minicomputer.

Since the information for the other manufacturers is based on the best information available to us, don't hesitate to call them.

Then call us collect for more details or a demo.

### COMPARISON OF MINI-MAG TAPE SYSTEMS

FEATURE	CIPHER CASSETTE	TRI-DATA CARTRIDGE	SYKES CASSETTE	DICOM CASSETTE
Read-after-write?	Yes	No	No	No
Backspace record?	Yes	No	No	No
Backspace file?	Yes	No	No	No
Recognize inter-record gap?	Yes	No	No	No
Search for file mark?	Yes	No	No	No
ECMA/ANSI-compatible?	Yes	No	No	No
High-speed search for data or location	Both	Location only	Location only	Location only
Drive mechanism	Direct	Solenoid	Solenoid	Solenoid
Max read speed	2400 cps	667 cps	1200 cps	500 cps
Max write speed	600 cps	667 cps	1200 cps	500 cps
Price with coupler (1 drive)	\$3625	\$3100	\$3440	\$4350
Telephone	714/277-8070	415/969-3700	716/458-8000	408/732-1060



**Cipher**  
Data Products  
(714) 277-8070

# NEW Low Cost, 12-Bit D/A Converter



- Bipolar — 2's Complement Coding
- Pretrimmed — Ready to Use
- Full Range — 10V Output
- TTL, DTL Compatible
- All Hermetic Components
- 2" x 2" x 0.4"

**\$45**  
in hundreds

Now at a remarkably low OEM price . . . The DAC372-12 is a fine performance, general purpose 12-bit D/A converter featuring 30PPM/°C temperature coefficient, 0-70°C operation, and 5µSec settling. The unit incorporates thin film precision resistors and is complete and ready to use. Price for 1-9 — \$75.

Need ultra fast settling? The DAC372-WB-12, using an extremely fast internal amplifier, settles in under 950nSec for a full 10V output range . . . a remarkable unit at only \$120 (1-9). Contact us for full details.



## HYBRID SYSTEMS CORPORATION

87 Second Ave., Northwest Industrial Park, Burlington, Mass. 01803  
Telephone: 617-272-1522 TWX: 710-332-7584

INFORMATION RETRIEVAL NUMBER 37

## MODULES & SUBASSEMBLIES

### FET op amps combine 1.5 µs settling, 10<sup>5</sup> CMR

*Intronics, 57 Chapel St., Newton, Mass. 02158. (617) 332-7350. FA-540: \$55; FA541: \$68.*

The FA540 and FA541 are differential FET op amps which combine a settling time of 1.5 µs with 100,000 CMRR. In addition, Model FA541 offers a low drift of 2 µV/°C, minimum. Others specs include a gain-bandwidth of 5 MHz, 10 pA input current, and 10<sup>11</sup> Ω input impedance. Both amplifiers are packaged in a miniature 1.25-inch square by 0.4-inch high epoxy case. Mil spec versions of both units are available for operation from -55 to +125 C.

CIRCLE NO. 256

### Multiplying d/a settles to 0.01% in 1.5 µs

*Datel Systems, Inc., 1020 Turnpike St., Canton, Mass. 02021. (617) 828-6395. 8-bits, \$99 ea.; 12-bits, \$139 ea.; stock.*

The DAC-MV series d/a converters are plug-in modules capable of full four-quadrant multiplication. Input factors are a bipolar variable reference which will operate from dc-200 kHz and a digital word of up to 12 binary-bit resolution. The units also have a built-in voltage reference (+6.2 V), which can be externally pin strapped for conventional d/a operation. Prime features are: output response of dc-200 kHz; output settling time of 1.5 µs to 0.01% of FS. The DAC-MV Series are available in word lengths of 8, 10, 12 binary bits and two or three-digit BCD. Input coding can be straight binary, binary coded decimal, offset binary or two's complement. The analog input reference range is ±5 V and requires a source current of 1 mA. Full scale analog output can be either unipolar (0 to +10 V @ 5 mA) or bipolar (±5 V @ 5 mA). Accuracy specifications include ±1/2 LSB linearity, ±30 ppm/°C tempco and ±0.01% FS accuracy. All models feature a fast output settling time of 1.5 µs for either a FS digital input change or for a FS reference voltage change.

CIRCLE NO. 257



## MULTICHOICE IN MULTITHROW COAXIAL SWITCHES




Type-M choices include 2 sizes, 3 connector types, single pole-3, 4, 6 throw...Latching or Selective actuator, indicating circuitry, 2 mountings, 28 Vdc or 115 Vac.

Transco Products, Inc., 4241 Glencoe Ave., Venice, Calif. 90291

INFORMATION RETRIEVAL NUMBER 38


# Serial-output a/d converters make data-shuffling easier

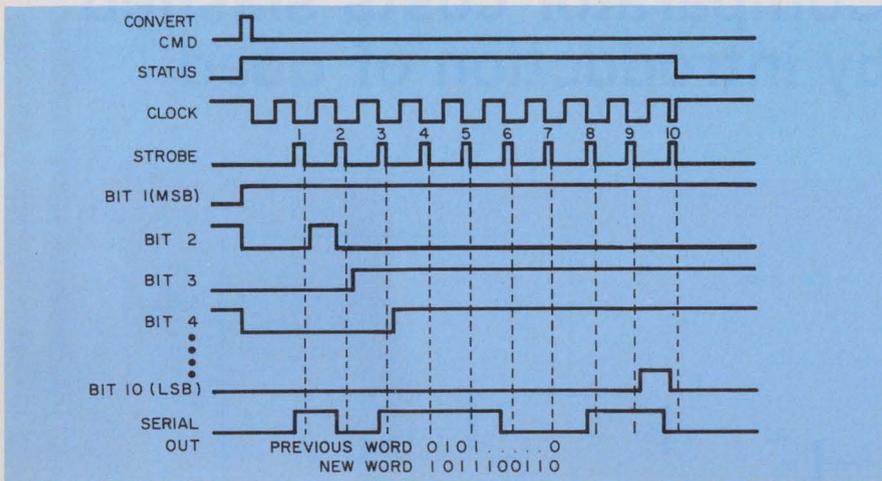

Analog Devices, Route 1 Industrial Park, P.O. Box 280, Norwood, Mass. 02062. (617) 329-4700. ADC-10Z: \$99 (1-9); ADC-12QZ: \$129 (1-9).

By designing-in the circuitry to control the timing of serial-output data from two new a/d converters, Analog Devices has saved the designer time and money.

Both parallel and serial outputs are provided. But unlike competing units—which also offer both parallel and serial outputs—the Analog Devices units provide an additional output: a 200-ns strobe pulse whose ONE-to-ZERO transition indicates a completed, or valid, serial bit. Thus the strobe pulse can be

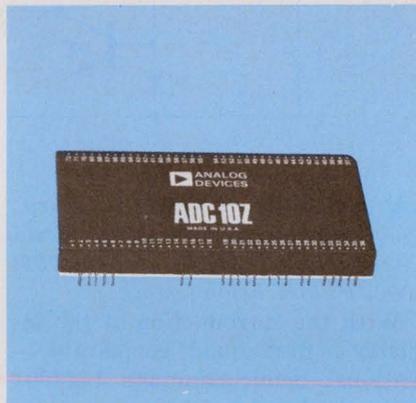

used to clock the serial data into a receiving shift register. No external delay or synchronization logic are necessary.


The \$99 and \$129 costs of the ADC-10Z and the ADC-12QZ, respectively, make them more expensive than at least three competing converters of similar relative accuracy ( $\pm 1/2$  LSB). However, the ADC-10Z converts in  $20 \mu\text{s}$ —2-1/2 to five times faster than its 10-bit competition. And it exhibits slightly less gain temperature drift:  $\pm 40 \text{ ppm}/^\circ\text{C}$  vs  $50 \text{ ppm}/^\circ\text{C}$ . The 12-bit ADC-12QZ is also faster— $40 \mu\text{s}$  against 100 to  $200 \mu\text{s}$  for competing units—but its gain TC of  $30 \text{ ppm}/^\circ\text{C}$  is about par with similar units.

Perhaps more important, both units are guaranteed to be monotonic (have no missing codes) missing codes (monotonicity) over their operating temperature ranges, which are 0 to  $70^\circ\text{C}$  for the ADC-10Z and 0 to  $50^\circ\text{C}$  for the ADC-12QZ.

In addition to the built-in timing control, two other features make the 10-bit ADC-10Z and the 12-bit ADC-12QZ easy to use: They both contain built-in, temperature-compensated voltage references and, by use of jumpers, allow the selection of any of four input ranges: 0 to  $+10 \text{ V}$ ,  $\pm 10 \text{ V}$ , 0 to  $+5 \text{ V}$  and  $\pm 5 \text{ V}$ .

The outputs of the two units are TTL/DTL compatible. Both require  $\pm 15 \text{ V}$  and  $+5 \text{ V}$ , and both come in a  $2 \times 4 \times 0.4$ -in. package.

CIRCLE NO. 258

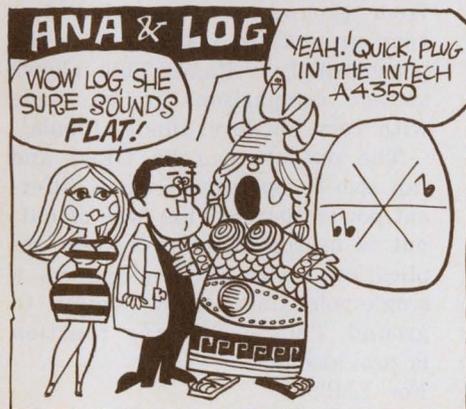

**ANALOGY**  
 INTECH'S A-4350 LOG AMPLIFIER IS THE EASY WAY TO SCALE A CURRENT OR VOLTAGE. IT'S SMALL AND INEXPENSIVE, BUT HAS AN 8 DECADE DYNAMIC RANGE,  $\pm 1\%$  ACCURACY AND  $\pm 0.04\%$  TEMPCO. SENSITIVITIES ARE  $2/3 \text{ V/DECADE}$ ,  $1 \text{ V/DECADE}$ , AND  $2 \text{ V/DECADE}$ . AND THE A-4351 DOES THE SAME FOR NEGATIVE INPUTS. BOTH ARE TRIMMABLE, NULLABLE AND UNSHORTABLE.

**intech** INCORPORATED (408) 244-0500  
 1220 COLEMAN, SANTA CLARA CA 95050

# Less than 1 $\mu$ V Offset!

## New Ultra-Low Thermal emf Reed Relays!



- Unique new method (pat. pend.) virtually eliminates thermal offsets, permits use of almost any type reed switch... Hg wet, dry, high voltage.
- Remarkably independent of ambient temperature, environment.
- Many contact forms, pin configurations available.
- Units also available at less than 500 nanovolts per switch, or less than 1 $\mu$ V differentially between switches.
- Greater than 10<sup>11</sup> ohms isolation resistance.
- Rugged molded package. Moderate price.

Write for Complete New Catalog MR-6.1



**COTO-COIL COMPANY, INC.**  
59 Pavilion Avenue, Providence, R. I. 02905  
Tel: (401) 941-3355

INFORMATION RETRIEVAL NUMBER 40

## TUNING DIODE GLOSSARY by MSI

### SUPER Q<sup>®</sup>

FOR SUPER QUALITY IN MSI DIODES.

THE 1N5461A, 1N5139, the MV & GC, our own HA & SQ SERIES GLASS DO-7, & DO-14, the CERAMIC PACKAGED ABRUPTS AND HYPERABRUPTS ARE SUPER MADE, SUPER RELIABLE, AND JUST PLAIN SUPER.

### HYPER Q<sup>™</sup>

FOR VERY HIGH Q WITH GOOD CAPACITANCE TUNING RATIO

THE HA1800 & 1900 SERIES HYPERABRUPTS IN DO-7 are great for UHF USES.

### HYPER C<sup>™</sup>

FOR BETTER TUNING RATIO WITH

GOOD Q THE 2001 THRU 2801 SERIES PROVIDE OCTAVE TUNING CAPABILITY FROM UHF THRU VHF TO HF. AVAILABLE IN PAIRS OR SETS TO TRACK  $\pm 3\%$  OVER SPECIFIED VOLTAGE TUNING RANGES. FOR VT FILTERS, SYNTHESIZERS, VCXO/TCXOs.

### GIGA-CAP<sup>™</sup>

FOR MICROWAVE TUNING WITH EXCELLENT Q AND

HYPERABRUPT TUNING RATIOS. A NATURAL FOR MICROWAVE TRANSISTOR TUNING AND THE BEST GUNN CONTROL AVAILABLE ANYWHERE.

FOR MORE COMPLETE DEFINITIONS, PLEASE WRITE


**MSI electronics inc.**  
34-32 57th STREET, WOODSIDE, N.Y. 11377

or call 212 672-6500

INFORMATION RETRIEVAL NUMBER 41

## ICs & SEMICONDUCTORS

# Comparator costs slashed by introduction of quad

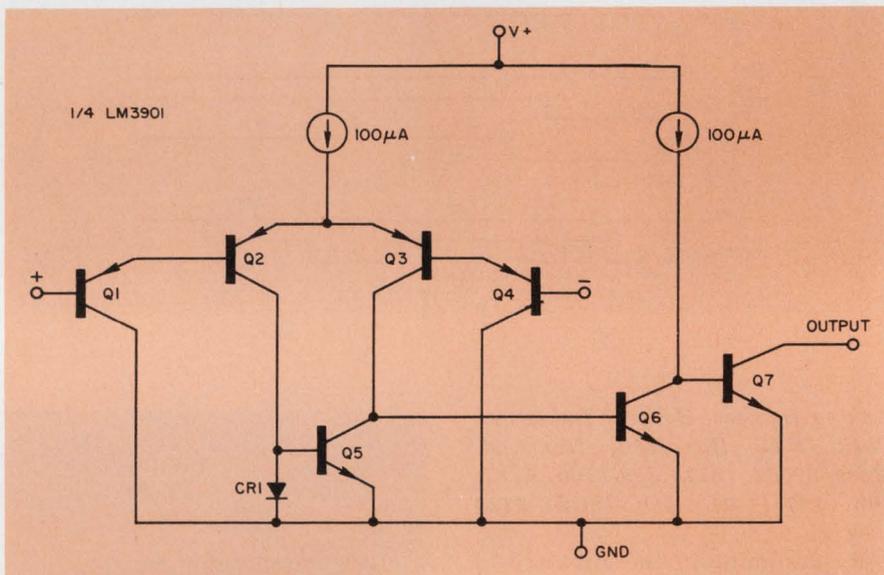

National Semiconductor Corp., 2900 Semiconductor Dr., Santa Clara, Calif. 95051. (408) 732-5000. P: See below; stock.

With the introduction of the industry's first quad comparator—National Semiconductor's LM3901—the cost of a single precision comparator reaches a new low. Consisting of four essentially LM-311 comparators on a single chip, the LM3901 is priced at \$3.80 (100-999), or 95¢ a comparator. In 1000-up quantities, the cost drops to 50¢ a comparator. By comparison, a single LM311 sells for \$3.15 (100-999).

Moreover the LM3901 features a total power current drain of only 800  $\mu$ A for all four comparators. This current is essentially independent of the magnitude of the power-supply voltage. And that can be as low as 2 V.

All four comparators are individually available for independent applications. The comparators can operate from a single power-supply voltage over the range of 2 to 36 V dc (or dual supplies over the range  $\pm 1$  to  $\pm 18$  V dc).

When operating from a 5-V supply, the power consumption is 4 mW, or only 1 mW per comparator. The output can sink a maximum current of 20 mA, and response time, as measured with a 100-mV input step (5-mV overdrive), is less than 1  $\mu$ s. Input current is typically 35 nA, with input offset current at 3 nA and input offset voltage of less than 3 mV, typically.

Another important feature is that the input common-mode voltage can range to ground even with one supply (see diagram). The input common-mode voltage range is from ground (or somewhat less than ground) to 1 V less than the power-supply voltage. This allows voltage comparisons to be made with very low-level input signals.

The outputs can be ORed and can also be operated from a different power source. This type of output is useful in many system applications since it functions as a single-pole single-throw switch to ground. Thus a clamping function is provided.

For LM3901

CIRCLE NO. 259

## LED/lamp drivers cut component needs

Texas Instruments Inc., P.O. Box 5012, M/S 308, Dallas, Tex. 75222. (214) 238-3741. SN74143N and SN74144N: \$3.60; stock.

Two monolithic TTL/MSI ICs each contain a four-bit synchronous counter, a four-bit latch, and a seven-segment decoder/LED or lamp driver. Designated the SN54/74143 and SN54/74144, these complex circuits each contain the equivalent of 86 gates. And each can be used to replace the SN54/74160 decade counter, an SN54/7475 four-bit latch, and an SN54/7447 seven-segment decoder/driver.

CIRCLE NO. 260

## Counters draw 85 mW with speeds to 23 MHz

Advanced Micro Devices Inc., 901 Thompson Pl., Sunnyvale, Calif. 94086. (408) 732-2400. Molded DIPs: \$6 (100 up).

A 4-bit synchronous up/down counter pair, the Am93L60 decade and Am93L66 hexadecimal counters, operate at speeds to 23 MHz with power dissipation of only 85 mW. The power is one-fourth, the speed, one-half of the standard-powered counterparts. The new counters offer separate up and down clocks and asynchronous parallel loading.

CIRCLE NO. 261

## SCRs, TRIACs in replacement line


GTE Sylvania Inc., 730 Third Ave., New York, N.Y. 10017. (212) 551-1000.

As part of a replacement line, the company offers a complete family of SCRs (5400 and 5500 series) and TRIAC devices (5600 and 5700 series). The SCRs range from a sensitive 800-mA device to a rugged 34-A unit. Also featured are a full range of stand-off voltage capabilities. The TRIAC devices include a 2.5-A-gate unit, a 40-A device and a selection of power TRIACs. They feature all standard values of stand-off voltages and many have four-mode triggering capability.

CIRCLE NO. 262

# Now you can specify:

- Clean-cut, modern design
- Time-Tested, tough phenolic case
- Environment-Free Viewing Area

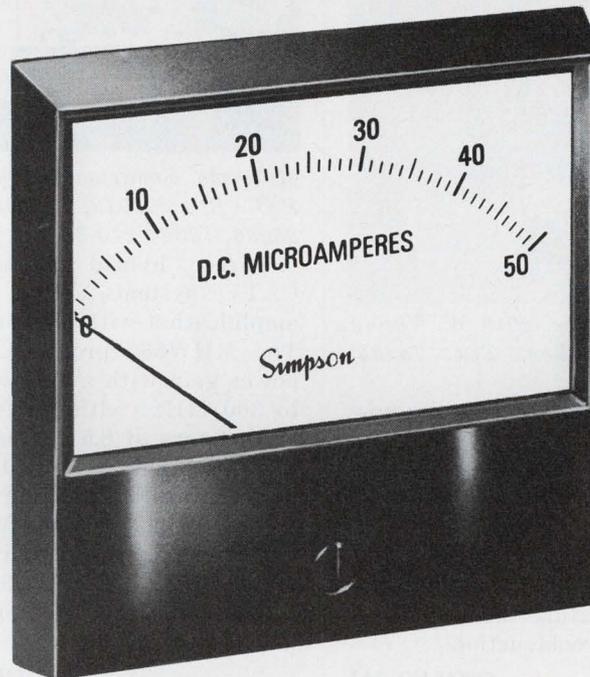

all in the new Simpson

## CENTURY SERIES

PANEL INSTRUMENTS

- 1½", 2½", 3½" and 4½" sizes. Ranges, scales and other characteristics to meet your exact requirements.
- Variety of movements. Matching Relays, Wattmeters and Elapsed Time Meters also available.

Standards now in stock at electronic distributors everywhere. For custom specials, see your Simpson Representative... he's listed in the Yellow Pages.


**Simpson**  
INSTRUMENTS THAT STAY ACCURATE



### SIMPSON ELECTRIC COMPANY

5200 W. Kinzie St., Chicago, Ill. 60644, Phone: (312) 379-1121  
Export Dept: 400 W. Madison St., Chicago, Ill. 60606, Cable SIMELCO  
IN CANADA: Bach-Simpson, Ltd., London, Ontario  
IN INDIA: Ruttonsha-Simpson Private, Ltd., International House,  
Bombay-Agra Road, Vikhroli, Bombay

### 8-A thyristors come in miniature ceramic cells

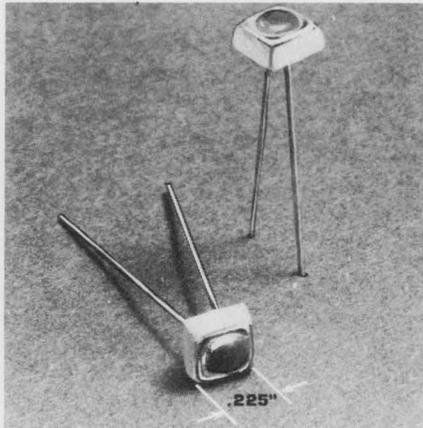


Hutson Industries, 2019 W. Valley View Lane, Dallas, Tex. 75234. (214) 241-3511.

An 8-A triac or SCR is now available in the company's Cermacels—miniature ceramic cells. The thyristors are available in 200 V, 300 V and 400 V ( $V_{DROM}$ ) ratings. The new devices are hermetically sealed and passivated with inorganic glass and feature the company's Di-Mesa chip construction.

CIRCLE NO. 263

### Hybrid CATV modules good to 300 MHz

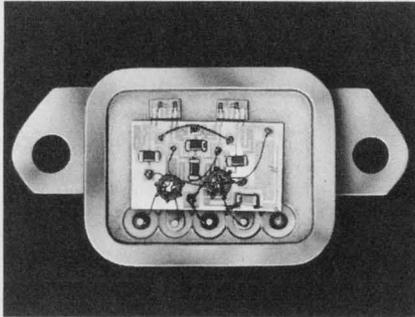


Motorola Semiconductor Products, P.O. Box 20912, Phoenix, Ariz. 85036. (602) 273-3466.

Three hybrid modules, for CATV systems, offer wideband amplification with low noise figure. The MHW560 provides 16 dB of power gain with a bandwidth of 40 to 300 MHz (within  $\pm 0.3$  dB). A noise figure of 8.5 dB maximum is specified. The MHW561 provides an additional 15 dB gain and is intended as the output function in a line extender. The third module type MHW562 is intended for use as the output amplifier in a trunk-line amplifier.

CIRCLE NO. 264

### Hybrid circuit forms basic building block

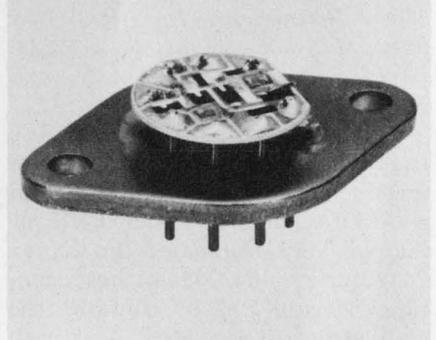

Ledex Inc., 123 Webster St., Dayton, Ohio 45401. (513) 224-9891. \$22 (100 up); 48 hrs. (25 units).

Over a dozen circuits to shape, stretch or squeeze pulses can be built using as a basic building block, the LMD-1—a hybrid thick-film control circuit and power driver. With two external resistors, for example, a Schmitt Trigger driver capable of handling 50 V, 10 A loads can be made. With a capacitor and resistor, a programmable pulser can be built with a pulse rate from 1000 pps to less than one pulse every ten minutes.

CIRCLE NO. 265

### T300: the cassette designed for data



Fully complies with **ANSI** and **ECMA** standards for digital data recording. It's the ultimate in cassettes — the only one with *performance* specifications:

- Zero dropouts — certified *after final assembly* to ANSI and ECMA specifications
- Off-center slot for use in drives built to ANSI and ECMA specifications
- Hinged record-lockout tabs can't be removed ... and misplaced
- Fiberglass-reinforced screwed case dissipates static charges — doesn't attract dust

Stocked worldwide in key cities for fast delivery. For brochure with performance specifications, write or call:




**INFORMATION TERMINALS**  
1160 Terra Bella Ave., Mountain View, CA 94040  
(415) 964-3600

INFORMATION RETRIEVAL NUMBER 43

### escap® 26PL

miniature DC motor with reinforced shaft  
now ... less than \$10\*

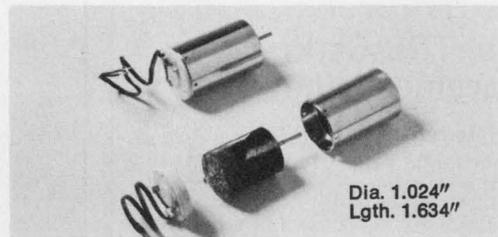

Dia. 1.024"  
Lgth. 1.634"

**no cogging**  
**torque up to 3.5 oz. in.**  
**speed up to 7000 r.p.m.**  
**mechanical time constant**  
**19.6 X 10<sup>-3</sup> sec**  
**made in switzerland**

Designed for instrumentation, computer peripheral tape decks, xy recorders, medical applications, oceanography applications


Portescap U.S. 730 Fifth Ave., New York, N.Y. 10019  
call us collect

In New York: (212) 245-7716 • In Los Angeles (213) 469-7393

\*Based on 1000 units or more

INFORMATION RETRIEVAL NUMBER 44

# FIFO memory chip boasts improved data-buffer specs

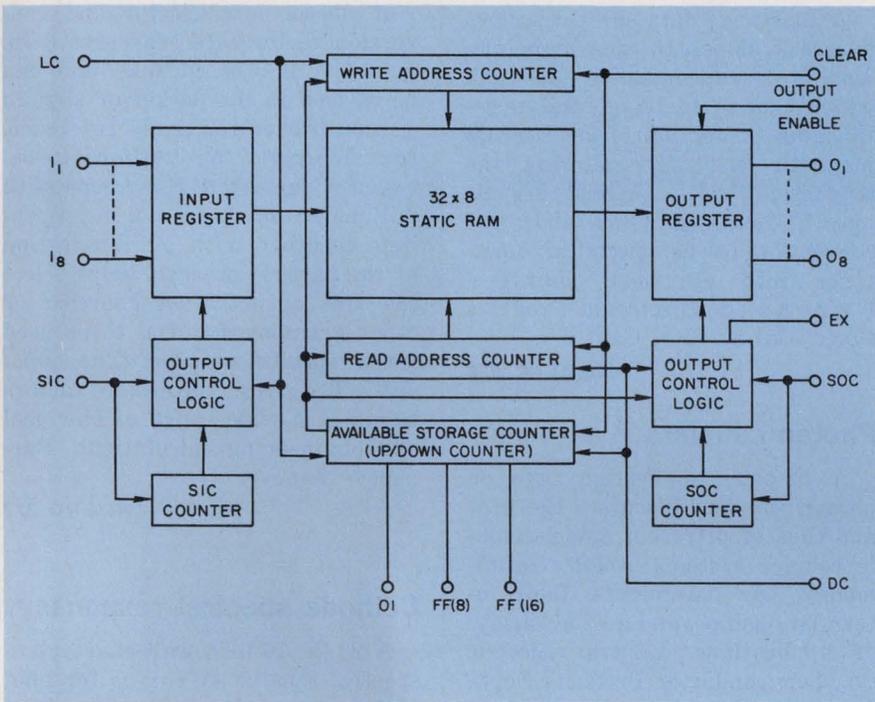

Signetics, 811 E. Arques Ave., Sunnyvale, Calif. 94086. (408) 739-7700. P&A: See below.

First came Fairchild's 3341 4-bit-by-64 word FIFO (first-in/first-out) memory—a monolithic IC that functions as an asynchronous data buffer. Now, close on the heels of the 3341, Signetics offers the 2535—a monolithic 8-bit-by-32-word FIFO buffer register with decreased fall-through time, serial/parallel input and output and more level indicators for data presence.

The use of either the Fairchild 3341 or Signetics 2535 IC allows two systems with different clock rates to communicate with each other. Each IC operates over a frequency range from dc to 1 MHz.

A major difference between the two FIFO memory chips results from the use of a 32 x 8-bit static RAM in the Signetics 2535 (see diagram). In the Fairchild device, a 64 x 4-bit register is used. The static RAM in Signetics' p-channel MOS device allows a greatly reduced fall-through time—the amount of time required for data transmission starting with an empty buffer. Signetics' 2535 has a

fall-through of 2 μs maximum. It's many times higher for the Fairchild device.

Another difference is the capability for serial or parallel operation at the input and output with the Signetics 2535. In the Fairchild 3341, both input and output must be operated serially. Thus additional circuitry would be needed when the 3341 is used to obtain the useful parallel mode of operation.

In another improvement, the Signetics' device provides 1/4, 1/2 and 3/4-fill signals in addition to buffer FULL and EMPTY. With the Fairchild IC, only FULL and EMPTY are given.

The disadvantages of the Signetics 2535 include higher price and larger package. In quantities of 100, the 2535 costs \$31.70 (vs \$20 for the Fairchild 3341). Packaging of the 2535 is 28-lead ceramic or plastic DIP (vs 16-lead DIP). Delivery of the new IC is two weeks (sample quantities).


For Fairchild 3341

CIRCLE NO. 266

For Signetics 2535

CIRCLE NO. 267

## NEW SHORTER CASE! SCHAUER 1-WATT ZENERS

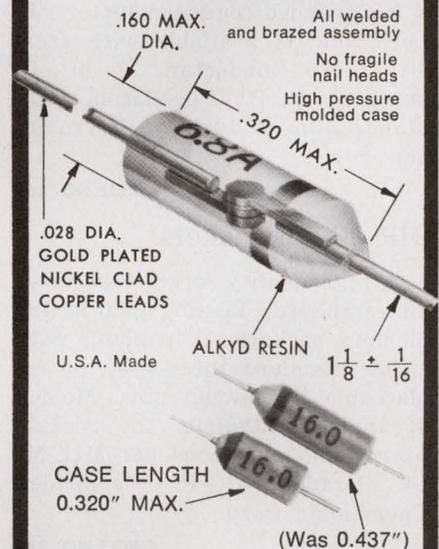

All welded and brazed assembly  
No fragile nail heads  
High pressure molded case

.028 DIA.  
GOLD PLATED  
NICKEL CLAD  
COPPER LEADS

U.S.A. Made

ALKYD RESIN  $1\frac{1}{8} \pm \frac{1}{16}$

CASE LENGTH  
.320" MAX.

(Was 0.437")

**SAME LOW PRICES FOR 1% TOLERANCE ZENERS**

**ANY VOLTAGE FROM 2.0 TO 18.0**

Quantity	Price Each
1-99	\$1.07
100-499	.97
500-999	.91
1000-4999	.86
5000 up	.82

**IMMEDIATE SHIPMENT**

Send for rating data and 20%, 10%, 5% and 2% tolerance prices.

Semiconductor Division

**SCHAUER**

MANUFACTURING CORP.

4511 Alpine Ave., Cincinnati, Ohio 45242  
Telephone 513/791-3030

## evaluation samples

### Header/connectors

A family of H-106 header/connectors have snap-on covers in four heights: 170, 220, 295 and 500 mils. The covers have a smooth surface to facilitate marking of customer part number or other identification. Cover material is glass-filled nylon. The units are available in 14 and 16 pin configurations. JOLO Industries.

CIRCLE NO. 268

### Ribbon cable

Flat-bonded round-conductor ribbon cable is available with from 10 to 30 conductors, 7 or 19 strands, and PVC insulation withstanding up to 1000 V. Bi-Tronics Inc.

CIRCLE NO. 269

### DIP 22-pin sockets

A high quality socket that takes all standard 22-pin dual-in-line memory packages is available with either standard three-wrap or replaceable three-wrap pins. Molded of diallyl phthalate, the sockets have flame resistance per MIL-M-14, Grade SDG-F. Cambridge Thermionic Corp.

CIRCLE NO. 270

### Brazing fixtures

Brazing and other holding fixtures made of alumina ceramic are fired to tolerances of  $\pm 0.5$  mils without machining. The high alumina content imparts a number of fixture advantages including dimensional stability and resistance to high temperatures (up to 2500 F), thermal shock, and wear factors such as chipping and breaking. Ceram Corp.

CIRCLE NO. 271

### Fasteners for fluorescents

Tinnerman fasteners provide support for bent tube fluorescents. The clips provide self-retained support for the U-shaped ends of the lamps, eliminating the need for screws, rivets or crimping. Eaton Corp., Engineered Fasteners Div.

CIRCLE NO. 272

## application notes

### Magnetic diodes

A four-page data sheet describes magnetic diodes, the new magnetic-sensitive semiconductor devices which change their internal resistance as a function of an external magnetic field. By altering the magnetic field, electrical signals may be obtained which allow the conversion of non-electrical quantities into electrical quantities. European Electronic Products Corp., Culver City, Calif.

CIRCLE NO. 273

### Photon couplers

A 32-page application note on photon couplers discusses the pros and cons of different optoelectronic coupler systems, coupler terminology, key parameters, their interrelationships, and a wide variety of applications. General Electric Co., Semiconductor Products Dept., Syracuse, N.Y.

CIRCLE NO. 274

### Hybrid package technique

A method of reflowing predeposited solder offers various advantages for standard hybrid packaging. In permitting multiple stacking of double-sided PC boards, many of the advantages of multilayer of equal circuit complexity and reliability are offered. Catalog No. 926-1 contains information on the select solder deposit technique. Amp Inc., Harrisburg, Pa.

CIRCLE NO. 275

### Thermistor applications

Thermistor Applications Data Requirements Guide (AG-1A) is designed to assist and reduce the time necessary to select the proper thermistor for applications which most often present the design engineer problems, such as: time delay, transistor compensation, coil compensation, surge suppression, temperature measurement—control and liquid level sensing. Fenwal Electronics, Framingham, Mass.

CIRCLE NO. 276

## design aids

### Screen conversion factors

A plastic size-selector and conversion factor card measures 3 in.  $\times$  6-3/4 in., is durable, and can be carried in the pocket or kept in a desk drawer for ready reference. One side gives the relationship between Tyler and U.S. screens with millimeter and fractional inch openings together with an illustration of the particle sizes. It helps select the size of activated charcoal or other granular material to be used for a specific purpose. The opposite side gives conversion factors to aid in a wide range of chemical and engineering calculations. Barnebey-Chaney.

CIRCLE NO. 277

### Cathode spectral response

A 23  $\times$  16-inch wall chart gives spectral sensitivity curves for photo-emissive cathodes and shows transmission characteristics for various window materials and other relevant data. EMI Electronics Ltd., Electron Tube Div.

CIRCLE NO. 278

### Plastics properties chart

The first six pages of "Plastics Properties Charts," treat 37 properties of thermoplastics, including a "Highlights" column on 19 plastics that industrial buyers have found helpful—a short primer on each "family" written in simple, direct language. The following six pages treat 36 properties of thermosets, with relevant footnotes. The concluding spread is devoted to 24 significant properties of industrial laminates. Resins and fillers, and characteristics and applications, are shown along the left-hand edge, and across the top are listed mechanical, electrical, and physical and thermal properties of popular laminates used in electronics, aerospace, and other applications. Commercial Plastics and Supply Corp.

CIRCLE NO. 279

## new literature

### Tone-burst generator

The Universal Tone-Burst Generator is described in a four-page brochure. All proprietary call systems with which the instrument can be used are listed. Operating features and applications are presented together with specifications. Singer Instrumentation, Los Angeles, Calif.

CIRCLE NO. 300

### Ac relays

Complete electrical and pricing information on solid-state ac relays is contained in a 12-page catalog. Hamlin, Inc., Lake Mills, Wis.

CIRCLE NO. 301

### Modems

The Model 2012, a synchronous modem capable of automatic answer operation at 2400-bits per second over dial-up telephone lines, is described in a six-page brochure. Included are descriptions of important features, detailed theory of operation and complete technical specifications. An outline drawing of the printed circuit card is included, as well as a block diagram, a data mode timing diagram, an illustration showing the transmitted signal frequency spectrum, and a block diagram of both calling and answering station call procedure sequence. Intertel Inc., Burlington, Mass.

CIRCLE NO. 302

### Logic modules

Details and prices of the J1000 range of logic modules are given in a brochure. Jasmin Electronics Ltd., Leicestershire, U.K.

CIRCLE NO. 303

### Comm connectors

Color-styled, all-plastic 50-contact Vitel connectors and plugs for the telephone industry are described in a 12-page catalog. The catalog also covers bridging adapters, flat cable assemblies, double-ended splices and a splice designed especially for the "interconnect" market. Viking Industries, Inc., Chatsworth, Calif.

CIRCLE NO. 304

## Nortronics has mini-digital products, data and capability

Nortronics designs, manufactures and delivers industry's most comprehensive line of Mini-Digital recording heads and allied products for modern applications in mini-computers, desk-top calculators, data entry systems, cassette recorders and quarter inch heads for the 3M Data Cartridge.

We also offer detailed technical and applications information through our series of Design Digests and other publications.

Perhaps most important, Nortronics

has unique expertise in Mini-Digital markets—the ability to help you select the head which will give your product the flexibility and reliability you demand at a price you can live with—and the ability to match your requirements for prototype or production quantities.

If you're designing Mini-Digital equipment, we have quite a story to tell. Write or call Nortronics today for engineering and sales information or request a copy of our Design Digest for Mini-Digital Recording.



'World's leader in magnetic heads'

**NORTRONICS COMPANY, INC.**

8101 Tenth Avenue North • Minneapolis, Minnesota 55427 • (612) 545-0401

INFORMATION RETRIEVAL NUMBER 46

# ENGINEERS WHO KNOW REFERENCE DIODES SPEC DICKSON

For voltage reference (TC Zener) diodes, knowledgeable engineers look to Dickson first because Dickson has been a specialist in reference diodes since 1960. This specialization just naturally means more quality built into every device. The standard line includes voltages from 6.2 to 200V and test currents from 0.5mA to 10mA. Try us! Write, today, for new 6-page Zener selection guide.


"The Specialists"



**DICKSON**  
ELECTRONICS CORPORATION

PHONE (602) 947-2231 TWX 910-950-1292 TELEX 667-406  
P. O. BOX 1390 • SCOTTSDALE, ARIZONA 85252

INFORMATION RETRIEVAL NUMBER 47

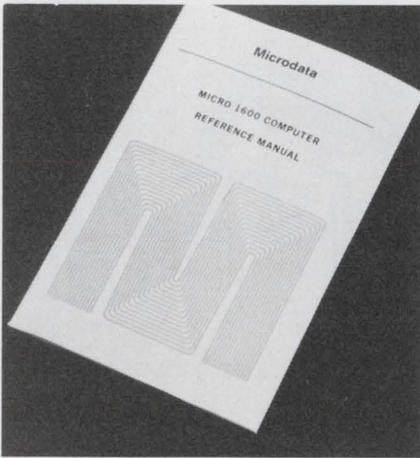

### Micro 1600 manual

An 88-page reference manual describes the Micro 1600 minicomputer. The manual has seven chapters and an appendix with a microcommand reference table. The seven chapters contain design features, system description, microcommand repertoire, control panel operation, microassembler program, input/output information, physical characteristics and system power. Microdata Corp., Santa Ana, Calif.

CIRCLE NO. 320

### Terminal blocks

Detailed specifications on a full line of quick-connect terminal blocks are given in a bulletin which covers 250, 187 and 110-mil terminal sizes. Underwriters Safety Device Co., Chicago, Ill.

CIRCLE NO. 321

### Thermal switch

Type R-3 bi-metal thermal switch is presented in a two-page bulletin. Included are a complete description, specifications and an installation drawing. Control Products, Inc., E. Hanover, N.J.

CIRCLE NO. 322

### Connectors

A machine-insertable connector for circuit boards that gives a mechanical through connection which resists impact, vibration and thermal shock is described in a four-page bulletin. Berg Electronics, Inc., New Cumberland, Pa.

CIRCLE NO. 323

### Graphic and digital recorders

A line of analog and digital recording instruments, programmable data acquisition systems, multipoint and event recorders are described in an eight-page catalog. Esterline Angus, Indianapolis, Ind.

CIRCLE NO. 324

### MOS modem

A six-page, two-color brochure describes a MOS modem featuring 4800 bps full-duplex operation. American Data Systems, Canoga Park, Calif.

CIRCLE NO. 325

### DIP transformers

A new catalog sheet covers data on 14 and 16-pin dual-in-line quad pac transformers, Series 1900. It includes drawings, maximum ratings, turns ratios, primary inductances and other specifications. Also shown is similar data on general-purpose pulse transformers and balanced center tapped transformers. Muir Industries, Inc., Tecate, Calif.

CIRCLE NO. 326

### Four-inch recorder

The Alden 400 "push-to-print" recorder is described in a two-page data sheet. Alden Electronics & Impulse Recording Equipment Co., Inc., Westboro, Mass.

CIRCLE NO. 327

### Add-on memories

Basic information on the company's line and add-on core memories and individual storage units are described on data sheets. Computer Hardware Consultants & Services, Inc., Newtown, Pa.

CIRCLE NO. 328

### Disc memory

Model L107MS disc memory system is described in a two-page data sheet. In addition to giving technical data and features of the system, the data sheet also contains a complete specifications list and dimensional drawing. The Singer Co., Librascope Div., Glendale, Calif.

CIRCLE NO. 329

### Disc system

A four-color, eight-page brochure describes the Model 844 universal controller and disc storage system for OEMs and end-users. Photographs illustrate the cabinetry. In addition, the brochure describes the design and applications and contains a descriptive specification sheet for different disc drives available with the new controller. Peripherals General, Inc., Cherry Hill, N.J.

CIRCLE NO. 330

### Data modems

A brochure describes a complete line of low-speed, Bell-compatible data modems. Pulsecom, Falls Church, Va.

CIRCLE NO. 331

### Portable chart recorders

Photos and specifications for the Model TR-711 portable analog strip chart recorder are provided in a bulletin. Complete basic specifications, as well as price and ordering information, are included. Prices are also provided for a special starter kit and accessories and options. Gulton Techni-Rite Electronics, E. Greenwich, R.I.

CIRCLE NO. 332

### Data processing

"Data on Demand," a 16-page, full-color brochure, explains the services the company provides for commerce, industry and government. These include the design and installation of computer-communications systems which gather data over any distance, process it and deliver it in the form required, as fast as necessary. Teleprocessing, Industries, Inc., Mahwah, N.J.

CIRCLE NO. 333


### EMC compatibility

A technical discussion, EDPF part number coding and specifications, dimensional data for EDPF series filters are discussed in a 68-page catalog, which is available for \$3. A capacitive and inductive reactance calculator is included. Cornell-Dublier, CDE, Marketing Communications, 150 Avenue L, Newark, N.J. 07101

# advertiser's index

Amperite .....	32
Ampex Computer Products Division .....	18
Amphenol Cadre Division.....	11
Anderson Jacobson .....	67
Avantek, Inc. ....	12
Baird-Atomic .....	67
Beckman Instruments, Inc. ....	31
Bourns, Inc. ....	4, 5
BPA .....	50B
By-Buk Company .....	80
CELCO (Constantine Engineering Laboratories Co.) .....	31
Centralab, the Electronics Division of Globe-Union, Inc. ....	65
Cipher Data Products .....	69
Constantine Engineering Labs. Co. (CELCO) .....	31
Coto Coil Company, Inc.....	72
Curtis Development & Mfg. Co., Inc. ....	65
Datum, Inc. ....	10
Dickson Electronics Corporation.....	77
ECC Corporation .....	7
Edmund Scientific Co. ....	67
Electronic Associates, Inc. ....	61
Engineered Components Company.....	81
Esterline Angus .....	17
Federal Scientific Corporation .....	80
General Electric Company.....	21
Grant Pulley & Hardware Co.....	27
Hayden Book Company, Inc.....	16
Harris Semiconductor .....	16B, 16C
Hewlett-Packard .....	16A
Hoffman Engineering Company.....	82
Hughes Aircraft Company.....	13
Hybrid Systems Corporation.....	70
Indiana General .....	Cover II
Industrial Electronic Engineers, Inc. ....	33, 34
Information Terminals .....	74
Intech, Incorporated .....	71
Johanson Manufacturing Corp.....	81
Kurz-Kasch, Inc. ....	63
Lafayette Radio Electronics .....	63
Licht Corporation .....	81
MCA Technology, Inc.....	79
MSI Electronics, Inc. ....	72
Molex, Incorporated .....	Cover III
Monolithic Dielectrics, Inc.....	67
National Semiconductor Corporation	25
Nicolet Instrument Corporation.....	16D
Nortronics Company, Inc. ....	77
Optigraph Systems, Inc.....	65
Philips Industries .....	50A
Portescap U. S. ....	74
Power/Mate Corp. ....	6
RCA Solid State Division.....	Cover IV
Rogan Brothers, Inc.....	29
Sanyo Products, Inc.....	81
Schauer Manufacturing Corp.....	75
Sensors, Inc. ....	81
Shakeproof Division, Illinois Tool Works, Inc. ....	30
Signetics Corporation .....	15
Siliconix Incorporated .....	38
Simpson Electric Company .....	73
Sycor, Inc. ....	47
Syntronics, Inc. ....	81
Tektronix, Inc. ....	37
Telex Communications Division.....	57
Texas Instruments Incorporated, Components Group .....	2, 23
Transco Products, Inc. ....	70
Transistor Devices, Inc. ....	80
Tri-Data Corporation .....	8, 9
U. S. Capacitor Corporation.....	63
Vishay Resistor Products .....	14
Wavetek .....	1
Woven Electronics .....	79

## SYSTEM DATA-

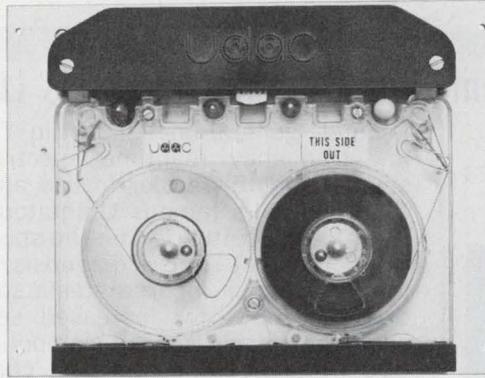

### UDAC STORES MORE!

Record by character on command, five track parallel format on quarter inch tape driven in a true incremental mode with 200 steps per inch.

Read by character or at slew rate with a speed of 600 steps per second.

The cartridge holds 300 feet of tape and five tracks let you store more data.

**UDAC**

mca technology inc.

13035 Saticoy St., No. Hollywood, Calif. 91605  
(213) 875-1900 \$660

INFORMATION RETRIEVAL NUMBER 48

# think woven

## for speed

Instant lead exposure! No trouble. No damage. Just snip the cut line or pull the binding thread. Another emphatic advantage of woven cable and one of the biggest time-money savers ever to hit a production line.

Write for our free folder "Fast Lead Exposure."

## WOVEN ELECTRONICS

A DIVISION OF SOUTHERN WEAVING COMPANY

P.O. Box 189, Mauldin, S.C. 29662, (803) 288-4411

INFORMATION RETRIEVAL NUMBER 49

Advertisements of booklets, brochures, catalogs and data sheets. To order use Reader-Service Card (Advertisement)

ELECTRONIC DESIGN's function is:

- To aid progress in the electronics manufacturing industry by promoting good design.
- To give the electronic design engineer concepts and ideas that make his job easier and more productive.
- To provide a central source of timely electronics information.
- To promote communication among members of the electronics engineering community.

**Want a subscription?** ELECTRONIC DESIGN is sent free to qualified engineers and engineering managers doing design work, supervising design or setting standards in the United States and Western Europe. For a free subscription, use the application form bound in the magazine. If none is included, write to us direct for an application form.

If you do not qualify, you may take out a paid subscription for \$25 a year in the U.S.A., \$35 a year elsewhere. Single copies are \$1.50 each.

**If you change your address,** send us an old mailing label and your new address; there is generally a postcard for this bound in the magazine. You will have to requalify to continue receiving ELECTRONIC DESIGN free.

**The accuracy policy of ELECTRONIC DESIGN is:**


- To make diligent efforts to ensure the accuracy of editorial matter.
- To publish prompt corrections whenever inaccuracies are brought to our attention. Corrections appear in "Across the Desk."
- To encourage our readers as responsible members of our business community to report to us misleading or fraudulent advertising.
- To refuse any advertisement deemed to be misleading or fraudulent.

Microfilm copies are available of complete volumes of ELECTRONIC DESIGN at \$19.00 per volume, beginning with Volume 9, 1961. Work is now in process to complete the microfilm edition of Volumes 1-8. Reprints of individual articles may be obtained for \$2.00 each, prepaid (\$.50 for each additional copy of the same article) no matter how long the article. For further details and to place orders, contact the Customer Services Department, University Microfilms, 300 North Zeeb Road, Ann Arbor, Michigan 48106 telephone (313) 761-4700.

**Want to contact us?** If you have any comments or wish to submit a manuscript or article outline, address your correspondence to:

Editor  
ELECTRONIC DESIGN  
50 Essex Street  
Rochelle Park, N.J. 07662

## 500-line Real-Time Spectrum Analyzer Acts Like 650-Lines




Second generation Mini-Ubiq™ Model UA-15A low frequency real-time spectrum analyzer — smaller, lighter, easier to use and less expensive than Federal's famous Ubiquitous® 500-line analyzer — is better for on-the-spot frequency analysis, machine noise diagnosis, computer automatic systems. Incorporates a sharper, computer-designed filter for increased selectivity — can separate closely spaced components as if it had 650 frequency lines. Widest choice of range — 12 ranges from 10Hz to 50kHz; highest frequency and amplitude accuracy; computer control of input amplitude range, analysis range, and presampling filter; operation with weighting function on or off; sweep termination adjustable for high sweep rates; earphone monitor of filtered input.

**Federal Scientific Corp.**

615 West 131st Street, New York, N.Y. 10027

CIRCLE NO. 171

## Create Your Own Power Supply Sub-Systems




New T. D. I. brochure offers designers complete details in grouping its famous line of adjustable range TDM (single output) and TDMD (dual output) power supply modules in a single package to meet exact requirements, without expensive cabling, racks or accessories. All modules feature front panel voltage and current limit adjustment, test points and indicator lamps. OV crowbar protection is built in. Outputs available 1.0 to 305 VDC and 0.06 to 60.0 AMPS,

**Transistor Devices, Inc.**

85 Horsehill Road, Cedar Knolls, N. J. 07927  
Tel. (201) 267-1900

CIRCLE NO. 172

## PC Drafting Aids Catalog



Thousands of time saving, cost saving artwork ideas are found in the By-Buk P-50 catalog of pressure sensitive printed circuit drafting aids. With the most practical artwork patterns for: TO cans, multi-pads, dual-inlines and flat packs featured. Donuts, connector strips, teardrops, ovals, tapes, tees, elbows, etc., by the hundreds are included in the most comprehensive list of sizes. Opaque black, transparent red and transparent blue materials for one and two-sided board designs. For a free copy and samples, write today.

CIRCLE NO. 173

**By-Buk Company**

Subsidiary of Webtek Corp., 4326 W. Pico Blvd.  
Los Angeles, California 90019 (213) 937-3511

# Electronic Design quick ads

New and current products for the electronic designer presented by their manufacturers.

## Advertising Sales Staff

Bryce Gray  
Sales Manager

### Rochelle Park, N.J. 07662

Robert W. Gascoigne  
Daniel J. Rowland  
50 Essex Street  
(201) 843-0550  
TWX: 710-990-5071

### Philadelphia

Thomas P. Barth  
50 Essex Street  
Rochelle Park, N. J. 07662  
(201) 843-0550

### Boston 02116

Richard L. Green  
20 Columbus Avenue  
Boston, Mass.  
(617) 482-7989

### Chicago 60611

Thomas P. Kavooras  
Berry Conner, Jr.  
200 East Ontario  
(312) 337-0588

### Cleveland

Thomas P. Kavooras  
(Chicago)  
(312) 337-0588  
(call collect)

### Los Angeles 90303

Stanley I. Ehrenclou  
Burt Underwood  
2930 Imperial Highway  
Inglewood, Calif  
(213) 757 0183

### San Francisco 94022

Jerry D. Latta  
P.O. Box 1248  
Los Altos, Calif.  
(415) 965-2636

### London W. 1

For United Kingdom and Holland  
Brayton C. Nichols

For Eastern Europe  
Peter Kehr

The American Magazine Group  
27 Maddox Street  
London, W. 1, England  
Phone: 499-0180

Cable: Ammagnic, London

### Verviers, Belgium

For Continental Europe


Andre Jamar  
1, Ru Mallar, 1  
087) 253.83 Telex 41563

### Tokyo

Haruki Hirayama  
Electronic Media Service  
5th Floor, Lila Bldg.,  
4-9-8 Roppongi  
Minato-ku  
Phone: 402-4556  
Cable: Electronicmedia, Tokyo



**AMERICAN BUSINESS PRESS, INC.**

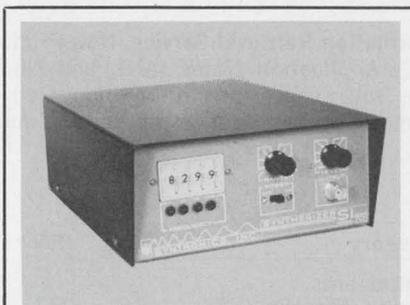


**New precision frequency synthesizer** at signal generator price. Covers from .1000 Hz to 9.999 MHz in 8 ranges. Frequency accuracy/plus and minus 10 ppm over 0-50° C./TTL square wave output. Various options available. Price \$495.00. Syntronics, Inc., 169 Millham Street, Marlboro, Ma., 01752. (617) 481-7827.

INFORMATION RETRIEVAL NUMBER 181



**Thin-Trim® variable capacitors** are designed to replace fixed tuning techniques. Applications include crystal oscillators, CATV amplifiers, communication and test equipment. Series 9410 has high Q's with five capacitance ranges from 1.0 - 4.5 pf to 10.0 - 50.0 pf. Johanson Manufacturing Corporation, Boonton, N. J. (201) 223-2676

INFORMATION RETRIEVAL NUMBER 182

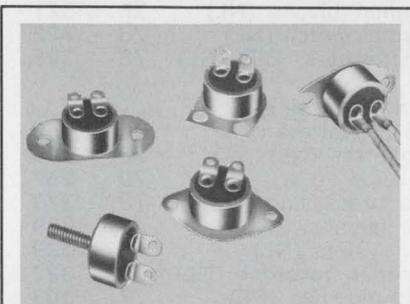


**Prototypes of precision snap-action thermostats** from Elmwood, widely specified for quick, reliable response; proven industrial and military performance record. Environ. expos. -85° to 550°F; narrow or wide diff.; rated to 15 amps. Wide choice of brackets, terminals. Elmwood Sensors, Inc. (401) 781-6500. TWX 710-381-6413.

INFORMATION RETRIEVAL NUMBER 183




**EC offers nearly 100 capacitance values** in its new line of 100-Volt Flat-Pak, Axial and Radial-Lead Metallized-Polypropylene Capacitors. Capacitors are epoxy encapsulated in Diallyl Phthalate. Stand-off feet are provided on both Flat-Pak and Radial Lead units. Engineered Components Co., 2134 W. Rosecrans Ave., Gardena, Cal. 90249. (213) 321-6565.

INFORMATION RETRIEVAL NUMBER 184

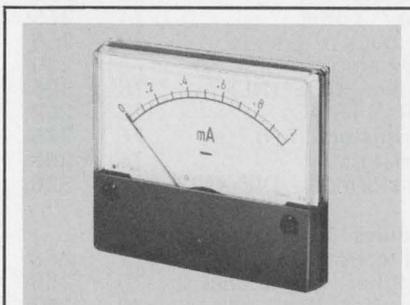

**High quality panel meters.** Extensive experience gives you a diverse line of reliable panel instrumentation. Please contact us for more detailed information. Sanyo Products Corp., P. O. Box 125, Shinjuku, Tokyo, Japan.


INFORMATION RETRIEVAL NUMBER 185

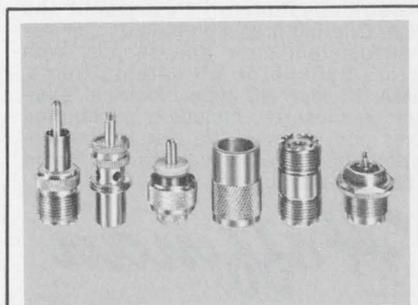

**Aside from the various types of connectors,** we have plugs, jacks, test leads, semi-conductors, resistors, capacitors, jumper cables, intercom sets, etc. LICHT CORPORATION, Toshin Bldg., No. 1-2, 2-chome, Sotokanda, Chiyoda-ku, Tokyo, Japan. Phone: 253-8785.

INFORMATION RETRIEVAL NUMBER 186

there's no  
such thing  
as "custom  
standard"  
but we  
come  
close.

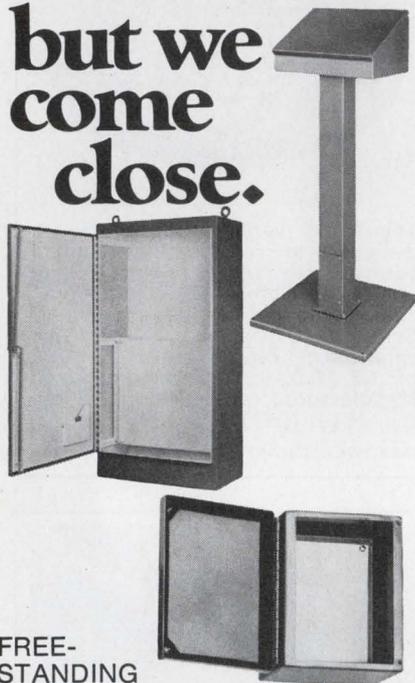

**FREE-STANDING**

NEMA 12 single door; single door, dual-access; two-door; two-door, dual-access. Versatile mounting panel and relay rack angle arrangements. EMI/RFI shielding optional.

**CONSOLES, CONSOLETS**

Nearly 2 dozen models with a large variety of accessories. Sturdy 14 gauge steel construction. All-welded seams, gasketed doors, oil tight. NEMA 12. EMI/RFI shielding optional.

**INSTRUMENT ENCLOSURES**

Oil-tight. 12 standard sizes, 6 x 6 x 4 to 14 x 12 x 6. 14 gauge steel, continuously welded seams. No holes or knockouts. Gasketed covers. Optional interior mounting panels.

Your needs for instrument enclosures vary widely and delivery is important. That's why there are Hoffman distributors strategically located throughout the U.S.A. Offering precision-built enclosures of all different sizes and shapes. With factory backup on all catalog items. NEMA 12 and JIC type electrical/electronic enclosures, including pushbutton boxes and wireway. We also do custom fabrication. Write for catalog and name of nearest distributor.

**Hoffman**<sup>®</sup>

**ELECTRICAL ENCLOSURES**

HOFFMAN ENGINEERING COMPANY  
Division of Federal Cartridge Corporation  
ANOKA, MINNESOTA DEPT ED-212

INFORMATION RETRIEVAL NUMBER 50

**product index**

**Information Retrieval Service.** New Products, Evaluation Samples (ES), Design Aids (DA), Application Notes (AN), and New Literature (NL) in this issue are listed here with page and Information Retrieval numbers. Reader requests will be promptly processed by computer and mailed to the manufacturer within three days.

Category	Page	IRN
<b>Components</b>		
brazing fixtures (ES)	76	271
CATV module	74	264
comparator, quad	72	259
connectors (NL)	78	323
counters	73	261
diodes, magnetic (AN)	76	273
fasteners (ES)	76	272
header/connector (ES)	76	268
LED/lamp drivers	73	260
photon couplers (AN)	76	274
relays, ac (NL)	77	301
sockets, DIP (ES)	76	270
spectral response (DA)	76	278
terminal blocks (NL)	78	321
thermal switch (NL)	78	322
transformers, DIP (NL)	78	326

<b>Data Processing</b>		
a/d converters	71	258
computers (NL)	78	320
converter, d/a	70	257
data processing (NL)	78	333
disc memory (NL)	78	329
disc system (NL)	78	330
four-inch recorder (NL)	78	327
logic modules (NL)	77	303
memories, add-on (NL)	78	328
modem, MOS (NL)	78	325
modems (NL)	77	302
modems (NL)	78	331
recorder, portable (NL)	78	332
recorders (NL)	78	324

<b>ICs &amp; Semiconductors</b>		
amplifier, operational	70	256
buffer register	75	267
CATV module	74	264
comparator, quad	72	259
counters	73	261
driver, power	74	265
flat pack	69	255
LED/lamp drivers	73	260
modem, MOS (NL)	78	325
SCRs, TRIACs	73	262
thermistors (AN)	76	276
thyristors	74	263
transformers, DIP (NL)	78	326

<b>Modules &amp; Subassemblies</b>		
a/d converters	71	258
amplifier, operational	70	256
converter, d/a	70	257

<b>Packaging &amp; Materials</b>		
board, solderless wrap	68	250
breadboard	69	254
cable, ribbon (ES)	76	269
chart, plastics (DA)	76	279
connectors (NL)	77	304
conversion card (DA)	76	277
edge connector	69	256

Category	Page	IRN
epoxy, potting	68	253
fasteners (ES)	76	272
flat pack	69	255
header/connector (ES)	76	268
hybrid packaging (AN)	76	275
tantalum powder	68	251
terminal blocks (NL)	78	321
terminations	68	252

**new literature**

computers	78	320
connectors	77	304
connectors	78	323
data processing	78	333
disc memory	78	329
disc system	78	330
four-inch recorder	78	327
logic modules	77	303
memories, add-on	78	328
modem, MOS	78	325
modems	77	302
modems	78	331
recorder, portable	78	332
recorders	78	324
relays, ac	77	301
terminal blocks	78	321
thermal switch	78	322
tone-burst generator	77	300
transformers, DIP	78	326

**application notes**

diodes, magnetic	76	273
hybrid packaging	76	275
photon couplers	76	274
thermistors	76	276

**design aids**

chart, plastics	76	279
conversion card	76	277
spectral response	76	278

**evaluation samples**

brazing fixtures	76	271
cable, ribbon	76	269
fasteners	76	272
header/connectors	76	268
sockets, DIP	76	270




**KONEKTCON® MAKES THIS EASY!** It's the Molex system that solves the most complex board-to-board, board-to-component, chassis-to-board interconnection problems. It's economical. Reliable. Quick. Versatile. Uses only four basic connectors. Unique rigid square wire male terminals permit stacking of multiple board connections to the same circuits. Molex vibration assembly method stakes up to 300 terminals per minute for wave soldering. Preassembled round male

terminal wafers also available for 2 to 18 circuits. Three female terminal assemblies provide incomparable flexibility: cable-to-board; board-to-board, parallel; board-to-board, perpendicular; and board-to-chassis. Plus a variety of options, including a 3-circuit power transistor. For technical specs call (312) 969-4550. Or write: Molex Incorporated, Lisle, Illinois 60532.


*...creating components that  
simplify circuitry*




CA3118AT  
CA3118T

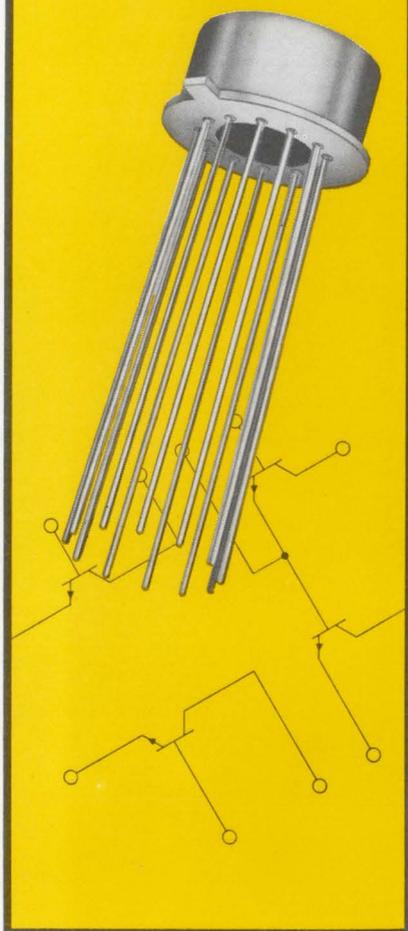

CA3146AE  
CA3146E

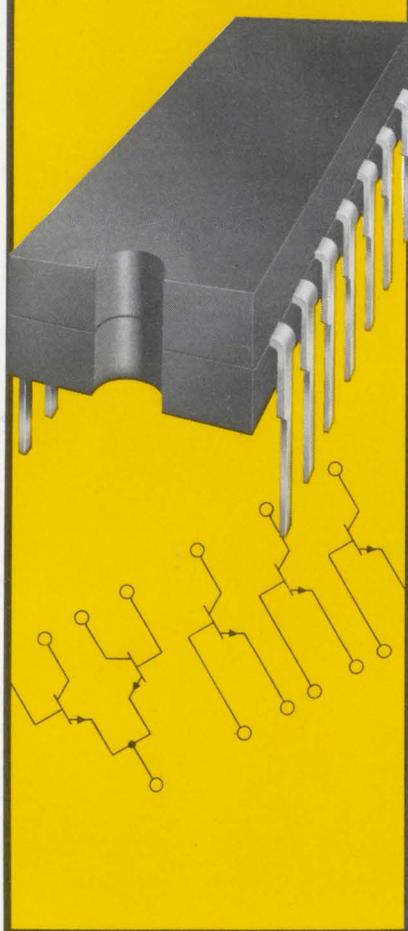

CA3183AE  
CA3183E

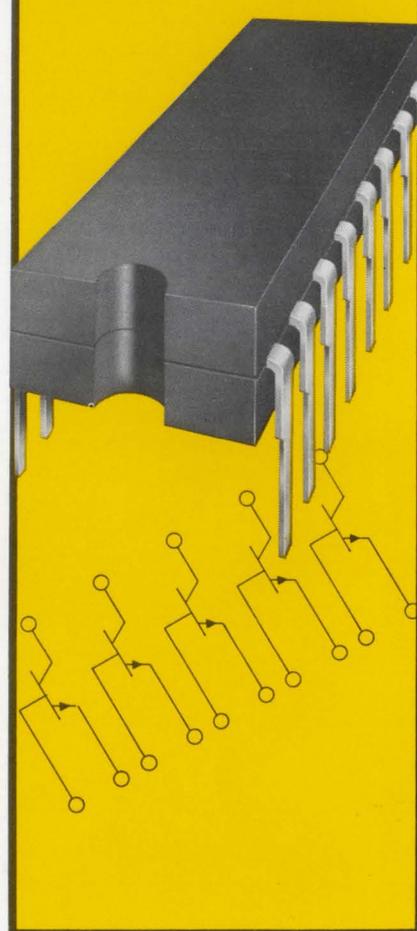

## We've UPPED our $V_{CEO}$ to 40 volts... to give you flexibility with extra muscle

We've taken our already popular CA3018, CA3046, CA3083 transistor arrays and upped their  $V_{CEO}$  ratings from 15 volts to 30 and 40 volts. The new CA3118AT, CA3118T, CA3146AE, CA3146E, CA3183AE, CA3183A now bring you a new level of design flexibility in our widely accepted line of monolithic transistor arrays.

They offer a broad variety of configurations — Darlingtons, differential amplifiers and uncommitted transistors — for communication, control, and instrumentation equipment. High-current types CA3183E and CA3183AE offer capability up to 75 mA.

If compact, economical design

and high voltage are important to you . . . use these new RCA arrays, CA3100 Series. They're the logical choice for lamp and relay drivers, thyristor triggering, and for most signal processing and switching systems from DC to 120 MHz. (If  $V_{CEO}$  to 15 volts meets your requirements, specify the standard CA3018, CA3018A, CA3045, CA3046 or CA3083.)

If you have been using discretes, take advantage of RCA's unequalled experience in the design and manufacture of high-quality transistor arrays. If you've been voltage- or current-limited by previous arrays — check RCA's six new types now.

For more information see your

RCA Representative or your local RCA Distributor. All types are available from stock in quantity for new designs. For technical data, write RCA Solid State, Section 571-2, Box 3200, Somerville, N.J. 08876.

Type	$V_{CEO}$	$I_C$ (max.) mA	Package	Price (1000-unit level)
CA3118AT	40	50	12L TO-5*	\$1.40
CA3118T	30	50	12L TO-5*	.98
CA3146AE	40	50	14L DIP**	1.40
CA3146E	30	50	14L DIP**	.98
CA3183AE	40	75	16L DIP**	1.50
CA3183E	30	75	16L DIP**	1.25

\*Operates over full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

\*\*Operates over ambient temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

International: RCA, Sunbury-on-Thames, U.K., or Fuji Building, 7-4 Kasumigaseki, 3-Chome, Chiyoda-Ku, Tokyo, Japan. In Canada: RCA Limited, Ste. Anne de Bellevue 810, Quebec.

INFORMATION RETRIEVAL NUMBER 247

**RCA Solid State**  
products that make products pay off