

12

60459840

2.3



---

**NOS VERSION 2  
ADMINISTRATION HANDBOOK**

---

**CDC® OPERATING SYSTEMS:**

**CYBER 180**

**CYBER 170**

**CYBER 70**

**MODELS 71, 72, 73, 74**

**6000**





---

**NOS VERSION 2  
ADMINISTRATION HANDBOOK**

---

**CDC® OPERATING SYSTEMS:**

**CYBER 180**

**CYBER 170**

**CYBER 70**

**MODELS 71, 72, 73, 74**

**6000**

# REVISION RECORD

REVISION	DESCRIPTION
A (10-05-84)	Manual released; reflects NOS 2.3 at PSR level 617. Features include default charge restriction, terminal input and output count at logoff, password randomization, a new CHARGE directive for the SUBMIT command, and support of the Mass Storage Archival Subsystem. Supports CYBER 180 computer systems.
Publication No. 60459840	

REVISION LETTERS I, O, Q, S, X AND Z ARE NOT USED.

© 1984  
by Control Data Corporation  
All rights reserved  
Printed in the United States of America

Address comments concerning this manual to:

Control Data Corporation  
Publications and Graphics Division  
4201 North Lexington Avenue  
St. Paul, Minnesota 55112

or use Comment Sheet in the back of this manual.

# LIST OF EFFECTIVE PAGES

New features, as well as changes, deletions, and additions to information in this manual, are indicated by bars in the margins or by a dot near the page number if the entire page is affected. A bar by the page number indicates pagination rather than content has changed.

PAGE	REV	PAGE	REV	PAGE	REV	PAGE	REV	PAGE	REV
Front Cover	-	2-49	A	5-13	A				
Title Page	-	2-50	A	5-14	A				
2	A	2-51	A	5-15	A				
3/4	A	2-52	A	5-16	A				
5	A	3-1	A	5-17	A				
6	A	3-2	A	5-18	A				
7/8	A	3-3	A	5-19	A				
9	A	3-4	A	5-20	A				
10	A	3-5	A	5-21	A				
1-1	A	3-6	A	5-22	A				
1-2	A	3-7	A	6-1	A				
2-1	A	3-8	A	6-2	A				
2-2	A	3-9	A	6-3	A				
2-3	A	3-10	A	6-4	A				
2-4	A	3-11	A	6-5	A				
2-5	A	3-12	A	6-6	A				
2-6	A	3-13	A	A-1	A				
2-7	A	3-14	A	A-2	A				
2-8	A	3-15	A	A-3	A				
2-9	A	3-16	A	A-4	A				
2-10	A	3-17	A	A-5	A				
2-11	A	3-18	A	A-6	A				
2-12	A	3-19	A	A-7	A				
2-13	A	3-20	A	A-8	A				
2-14	A	3-21	A	B-1	A				
2-15	A	3-22	A	B-2	A				
2-16	A	3-23	A	B-3	A				
2-17	A	3-24	A	B-4	A				
2-18	A	3-25	A	B-5	A				
2-19	A	3-26	A	B-6	A				
2-20	A	3-27	A	B-7	A				
2-21	A	3-28	A	Index-1	A				
2-22	A	3-29	A	Index-2	A				
2-23	A	3-30	A	Index-3	A				
2-24	A	4-1	A	Comment Sheet	A				
2-25	A	4-2	A	Back Cover	-				
2-26	A	4-3	A						
2-27	A	4-4	A						
2-28	A	4-5	A						
2-29	A	4-6	A						
2-30	A	4-7	A						
2-31	A	4-8	A						
2-32	A	4-9	A						
2-33	A	4-10	A						
2-34	A	4-11	A						
2-35	A	4-12	A						
2-36	A	4-13	A						
2-37	A	5-1	A						
2-38	A	5-2	A						
2-39	A	5-3	A						
2-40	A	5-4	A						
2-41	A	5-5	A						
2-42	A	5-6	A						
2-43	A	5-7	A						
2-44	A	5-8	A						
2-45	A	5-9	A						
2-46	A	5-10	A						
2-47	A	5-11	A						
2-48	A	5-12	A						



## PREFACE

---

This manual contains information necessary for the establishment and control of the operation of CONTROL DATA® Network Operating System (NOS) Version 2. Control Data Corporation developed NOS to provide network capabilities for interactive and transaction processing in addition to local and remote batch processing.

NOS 2 can operate on the following computer systems:

CDC® CYBER 180 Computer Systems  
Models 810, 830, 835, 845, 855

CDC CYBER 170 Computer Systems  
Models 171, 172, 173, 174, 175, 176, 720, 730, 740, 750, 760,  
815, 825, 835, 845, 855, 865, and 875

CDC CYBER 70 Computer Systems  
Models 71, 72, 73, and 74

6000 Computer Systems

## AUDIENCE AND ORGANIZATION

This manual contains the basic information required by an administrator for performing user validation and accounting activities. Section 1 introduces you to the user validation and accounting capabilities of NOS. Section 2 describes user validation in detail. This section also contains examples of the use of MODVAL. Section 3 describes user accounting and the special system file PROFIL. Section 4 describes resource accounting, section 5 describes account dayfile messages, and section 6 describes problem reporting.

## CONVENTIONS

Unless otherwise stated, it is assumed that you are in the batch subsystem when you enter commands from an interactive terminal.

Extended memory for model 176 is large central memory extended (LCME). Extended memory for models 810, 815, 825, 830, 835, 845, 855, 865, and 875 is unified extended memory (UEM). Extended memory for models 865 and 875 may also include extended core storage (ECS) or extended semiconductor memory (ESM). For all other NOS computer systems, extended memory is either ECS or ESM. These are the only forms of extended memory that can be shared in an ECS multiframe complex and can be accessed by a distributive data path (DDP).

In this manual, ECS refers to both ECS and ESM; the term extended memory, unless otherwise noted, refers to all forms of extended memory.

Programming information for the various forms of extended memory is in the COMPASS Version 3 Reference Manual and in the appropriate computer system hardware reference manual.

Command format interprets uppercase characters within command formats literally. Lowercase characters are variables and are described immediately following the line that shows the command format.

## RELATED PUBLICATIONS

The following is a list of NOS operating system manuals and NOS product set reference manuals.

NOS Manual Abstracts is a pocket-sized manual containing brief descriptions of the contents and intended audience of all NOS and NOS product manuals. The abstracts can be useful in determining which manuals are of greatest interest to you.

Control Data also publishes a Software Publications Release History of all software manuals and revision packets it has issued. This history lists the revision level of each manual that corresponds to a given level of software installed at a site. These manuals are available through Control Data sales offices or Control Data Literature Distribution Services, 308 North Dale, St. Paul, Minnesota, 55103.

You should be thoroughly familiar with the material in the following publications:

<u>Control Data Publication</u>	<u>Publication Number</u>
NOS Version 2 Operations Handbook	60459310
NOS Version 2 Reference Set, Volume 2 Guide to System Usage	60459670
NOS Version 2 Reference Set, Volume 3 System Commands	60459680

The following publications provide additional information about NOS and its product set.

<u>Control Data Publication</u>	<u>Publication Number</u>
COMPASS Version 3 Reference Manual	60492600
Message Control System Version 1 Reference Manual	60480300
Network Products Remote Batch Facility Version 1 Reference Manual	60499600
Network Terminal User's Instant	60459380
NOS Full Screen Editor User's Guide	60460420
NOS Screen Formatting Reference Manual	60460430
NOS Version 2 Applications Programmer's Instant	60459360
NOS Version 2 Diagnostic Index	60459390
NOS Version 2 Installation Handbook	60459320



<u>Control Data Publication</u>	<u>Publication Number</u>
NOS Version 2 Manual Abstracts	60485500
NOS Version 2 Reference Set, Volume 1 Introduction to Interactive Usage	60459660
NOS Version 2 Reference Set, Volume 4 Program Interface	60459690
NOS Version 2 Security Administrator's Handbook	60460410
NOS Version 2 System Overview	60459270
NOS Version 2 Systems Programmer's Instant	60459370
Remote Host Facility Access Method Reference Manual	60459990
Software Publications Release History	60481000
Text Editor Reference Manual	60436100
NOS Version 2 Analysis Handbook	60459300
Network Access Method Version 1 Network Definition Language Reference Manual	60480000

### **DISCLAIMER**

NOS and its product set are intended to be used only as described in this document. Control Data cannot be responsible for the proper functioning of undescribed features or parameters.



# CONTENTS

---

1. INTRODUCTION	1-1	S2, S3, and S4	4-4
		M1	4-4
		M2, M3, and M4	4-5
2. USER VALIDATION	2-1	MM	4-5
		AD	4-5
GENVAL	2-1	Minimum Display Value	4-5
MODVAL Validation File Manager	2-1	Minimum Charge Value	4-6
MODVAL Console Input	2-2	IO Increments	4-6
MODVAL Batch Input	2-14	MS Increments	4-6
MODVAL Command	2-15	MT Increments	4-8
Input Directive	2-18	PF Increments	4-8
Examples of MODVAL Use	2-38	Example of SRU Calculation	4-9
Special User Names	2-51	Multiplier Index Values and Actual Multiplier Values	4-11
		Screen Management Facility (SMF) and Full Screen Editor (FSE)	4-13
3. USER ACCOUNTING	3-1		
PROFILa Project Profile Manager	3-4		
Analyst (System Origin Job)			
Parameters	3-4	5. ACCOUNT DAYFILE MESSAGES	5-1
Analyst and Master User		Accounting Information	5-3
Parameters	3-9	Multilevel Security Information	5-9
Input Directives	3-13	Statistical Information	5-11
PROFILE Console Input	3-19	Usage Information	5-18
PROFILE Batch Input	3-23		
PROFILE Execution from a Terminal	3-23	6. PROBLEM REPORTING	6-1
Update from a Terminal	3-27	Programming System Report (PSR)	6-1
Inquiry from a Terminal	3-28	When to Write a PSR and Why	6-2
Listing from a Terminal	3-28	Writing an Effective PSR	6-3
CHARGE Command	3-29	PSR Supporting Information	6-3
		NOS System Problems	6-4
4. RESOURCE ACCOUNTING	4-1	Network Problems	6-4
		Common Products	6-5
SRU Formula	4-1	Remote Host Facility (RHF)	6-6
SRU Parameters	4-3		
SO and S1	4-3		

## APPENDIXES

A. GLOSSARY	A-1	B. ACCOUNT DAYFILE MESSAGES	B-1
-------------	-----	-----------------------------	-----

## INDEX

### FIGURES

2-1	First MODVAL Display, Left Screen	2-5	3-8	Master User Charge Number List (OP=L,LO=CM)	3-13
2-2	First MODVAL Display, Right Screen	2-6			
2-3	Second MODVAL Display, Left Screen	2-9	3-9	Master User Project Number List (OP=L,LO=PM)	3-13
2-4	Format of VALIDATION File Listing	2-17			
3-1	Representative Structure of a PROFILa File		3-10	Sample Input Stream for Use with PROFILE	3-14
3-2	Full File List (OP=L,LO=F)	3-3			
3-3	Full File Charge Number List (OP=L,LO=C)	3-5	3-11	PROFILE Initial Display, Left Screen	3-21
3-4	Full File Project Number List (OP=L,LO=P)	3-7	3-12	PROFILE, Right Screen	3-21
3-5	Charge Number List	3-8	3-13	PROFILE Charge Number, Left Screen	3-22
3-6	Project Number List (OP=L,CN=xxxx,PN=xxxxxxx)	3-10	3-14	PROFILE Charge and Project Numbers, Left Screen	3-24
3-7	Master User Full File List (OP=L,LO=FM)	3-10	6-1	Writing a PSR	6-2
		3-11			

### TABLES

1-1	Validation and User Accounting File Names	1-1	2-1	Input for Console Options	2-4
-----	--	-----	-----	---------------------------	-----

# INTRODUCTION

1

---

The user validation and user accounting capabilities of NOS are based on two special system files, VALIDUS and PROFILA.†

VALIDUS controls user validation, including the following:

- Who can use the system?
- What resources are available to users?
- What are the limits on job resource usage?

PROFILA controls user accounting, including the following:

- Who can be accounted for?
- What accounting parameters are assigned?
- When can the system be accessed?
- What are the limits on total resource usage?

As the structures of the user validation file and user accounting file change, concurrent file name changes can also occur to make it easier for sites to convert from one system to another. Table 1-1 lists the file names corresponding to the appropriate operating system levels.

Table 1-1. Validation and User Accounting File Names

System	User Validation File	User Indexes File	User Accounting File
NOS 2.0, 2.1	VALIDUZ	VALINDZ	PROFILB
NOS 2.2	VALIDUS	VALINDS	PROFILC
NOS 2.3	VALIDUS	VALINDS	PROFILC

VALIDUS contains user names, and PROFILA contains charge and project numbers. User names identify the user, the user's permanent files, and the user's resource limitations. Charge and project numbers control and record billing charges.

---

† In this manual, the user validation and accounting files are referred to as VALIDUS, VALINDS, and PROFILA. Refer to table 1-1 for a list of file names that correspond to the appropriate operating system levels.

To initialize the user validation file, use the GENVAL command described in section 2. To initialize the user accounting file, see section 3.

The billing unit that reflects the resources used by the system during a job or a session is called the system resource unit (SRU). Calculation in this unit provides the flexibility of weighing the usage of resources against one another. Section 4 describes the SRU formula. The parameters for SRU computation are related to the charge and project numbers. The PROFILA file contains indexes used to determine the SRU parameters to be used for computation while a charge and project number are in effect for the job or session.

Section 5 describes the history of system usage. Section 6 shows you how to inform Control Data of any problem that you may have with the software.

---

The VALIDUs file is a special system file maintained as a direct-access permanent file under user name SYSTEMX (user index 377777g). The VALIDUs file is created by GENVAL and managed by MODVAL, and can be updated only from a console as a system origin job. In addition, in a secured system, update of VALIDUs requires security administrator privileges.

### GENVAL

The GENVAL command creates a VALIDUs file and a corresponding VALINDs file on a family device that does not already have a VALIDUs file. This is usually a family device that has just been initialized. The new VALIDUs file contains only the special user names (refer to Special User Names).

Enter GENVAL from the console by typing one of the following:

GENVAL,FM=familyname. (under DIS)

or

X.GENVAL(FM=familyname) (under DSD)

Use the default family if the FM=familyname parameter is not specified. GENVAL aborts if a VALIDUs file currently exists under user index 377777g. After GENVAL creates the validation files, type one of the following commands to make the files fast-attach files (refer to System File Initialization in NOS 2 Analysis Handbook for more information on fast-attach files).

ISF,FM=familyname. (under DIS)

or

X.ISF(FM=familyname) (under DSD)

After you have completed this procedure, you can use MODVAL to add new user names to the VALIDUs file created.

### MODVAL VALIDATION FILE MANAGER

The validation file manager, MODVAL, can be executed from a system origin job or from a batch job. MODVAL can directly update the VALIDUs file only from a system origin job (using input directives or the K display). When run from a batch job, MODVAL cannot access the VALIDUs file; either a copy of the new file or a directive file is established as a local file and processed later by a system origin job to update the VALIDUs file.

## MODVAL CONSOLE INPUT

You can use the console options (DSD or DIS) to access VALIDUs with MODVAL according to the following general procedure. For our discussion, we will assume that you are under DSD. If you are under DIS, you do not have to type X.

1. Type:

B,O.

AB.

X.MODVAL.

2. The B,O display appears on the right screen. Note the job sequence name that is assigned to MODVAL. To the right of this entry, the following intensified message appears:

REQUEST \*K\* DISPLAY

3. Type:

K,jsn.

where jsn is the job sequence name shown on the B,O display.

4. The first MODVAL display appears on the left screen. It is a listing of the options available for manipulating the validation file VALIDUs (refer to figure 2-1).
5. Type in one of the following five console options available on the left screen. All of the batch input directives (refer to MODVAL Batch Input) are also available for console input. In addition, the following are provided specifically for console input. All directive entries must be prefixed by K and a period (K.). All examples in this section show K., although you may not have to type it.

<u>Options</u>	<u>Description</u>
K.C,username	Create option. The user name username is added to the VALIDUs file. At this point, enter input directives to set the characteristics of this user name.
K.D,username	Delete option. The user name username is deleted from the existing VALIDUs file. No further action is needed for this option. The user executing MODVAL cannot be the username deleted with this option. Permanent files associated with this username are not purged until a reformat of the VALIDUs file is done (MODVAL, OP=R).
K.I,username	Inquire option. Information for user name username is displayed on the second MODVAL display (refer to figure 2-3). You cannot use this option for data entry.
K.U,username	Update option. The user name username must be on the existing VALIDUs file. Enter input directives to update the characteristics of this user name.



<u>Options</u>	<u>Description</u>
K./username, parameter=value	Use this slant (/) directive to update username as you do with the U option; however, if username is not found, a new user name is created automatically. It is possible under this option to switch control directly from one user name to another without returning to the initial MODVAL display (refer to figure 2-1). If you use the / directive exclusively, input is analogous to batch input; that is, you can enter the parameter specification on the same line as username.

6. For a create, inquire, or update option, the second MODVAL display (refer to figure 2-3) replaces the first on the left screen.

Enter KK. to bring up the list of instructions on the right screen (refer to figure 2-2).

If you enter a create option (either by C or /), the new user name will appear with default values for the parameters. If the directive is included with the slant (/), it will appear on the display but will not, at this point, be entered on the file.

If you enter an update option (either by U or /), the existing user name will appear with current parameters. If a modification directive is included with a / input, the new value will appear on the screen but will not be entered on the file. From here, you will have to go to step 7.

If you enter an inquire option (K.I,username), the display will show the information requested, and the procedure will stop at this step. Enter K.END to return to the first MODVAL display (refer to figure 2-1) and to enter more user names and their associated parameters.

7. For a C or U option, type in the directive in with the format:

K.parameter=value

8. To cause the changes made by the create and update options to be written to the validation file, type:

K.END

If you do not want these changes to be made on the validation file, type:

K.DROP

To terminate the run without updating the validation file, type:

K.STOP

In the case of DROP or END, the first MODVAL display (refer to figure 2-1) will return to the left screen, and you can enter more user names and their associated parameters or enter K.END to terminate the run.

Table 2-1 summarizes the basic input for console options.

Table 2-1. Input for Console Options

Create	Delete	Inquire	Update
K.C,username K.parameter=value K.END† or K./username K.parameter=value K.END†	K.D,username K.END	K.I,username K.END†	K.U,username K.parameter=value K.END† or K./username K.parameter=value K.END
†At this point, enter K.END to terminate MODVAL, or enter another console option.			

K. MODVAL. JSN

MODVAL

VALIDUS          CREATED    yy/mm/dd.          UPDATED    yy/mm/dd.

INPUT DIRECTIVES ARE THE SAME AS BATCH INPUT DIRECTIVES.  
THE FOLLOWING DIRECTIVES ARE ALSO PROVIDED -

DIRECTIVE	DESCRIPTION
C,UN	CREATE OPTION. THIS DISPLAY ONLY.
D,UN	DELETE OPTION. THIS DISPLAY ONLY.
I,UN	INQUIRE OPTION. THIS DISPLAY ONLY.
U,UN	UPDATE OPTION. THIS DISPLAY ONLY.
/UN	TERMINATE INPUT FOR PRESENT USER NAME IF ANY, UPDATE VALIDUS FILE. INITIATE ACTION ON *UN*.

UN = 1-7 CHARACTER USER NAME.

K.END FROM THIS DISPLAY ENDS THE MODVAL RUN.

Figure 2-1. First MODVAL Display, Left Screen

K. MODVAL.

JSN

K DISPLAY COMMANDS

PAGE 1 OF 3

DROP TERMINATE INPUT FOR ACTIVE USER.  
END COMPLETE UPDATE OR INQUIRE OF ACTIVE USER. FROM  
INITIAL DISPLAY, END RUN.  
STOP TERMINATE INPUT FOR ACTIVE USER, IF ANY. END RUN.  
  
/UN TERMINATE INPUT FOR PRESENT USER NAME AND UPDATE  
VALIDUS FILE. INITIATE ACTION ON \*UN\*.  
+ PAGE LEFT DISPLAY FORWARD.  
- PAGE LEFT DISPLAY BACKWARD.  
( PAGE RIGHT DISPLAY FORWARD.  
) PAGE RIGHT DISPLAY BACKWARD.

PARAMETER INPUT

DATA ENTRY FORMAT IS OF THE FORM MT=XX,CM=XX,TL=XX, ETC.  
ALL NUMERIC FIELDS ARE ASSUMED TO BE DECIMAL UNLESS A  
POSTRADIX IS SPECIFIED. FOR EXAMPLE - 4000B

K.

Figure 2-2. First MODVAL Display, Right Screen (sheet 1 of 3)

K. MODVAL. JSN

MODVAL IDENTIFIERS

PAGE 2 OF 3

AW - ACCESS WORD (LEFT FROM BIT 0)

CPWC,CTPC,CLPF,CSPF,CSOJ,CASF,CAND  
CCNR,CSR, CSTP,CTIM,CUCP,CSAP,CBIO  
CPRT,CPLK,CQLK,CUST,CNVE,CMNT,CNOP  
CSAF,CNRD,COPR,CLTD

SO - REMOTE TERMINAL PROGRAM (LEFT FROM BIT 0)

CCLM,BCSM,TCSM,SLID,GLID,LFID,ABTM

UC - SERVICE CLASS (LEFT FROM BIT 1)

SY,BC,RB,TS,DI,NS,SS,MA,CT,IO,I1,I2,I3

SAL - SECURITY ACCESS LEVEL (LEFT FROM BIT 0)

LVLO,LVL1,LVL2,LVL3  
LVL4,LVL5,LVL6,LVL7

K.

Figure 2-2. First MODVAL Display, Right Screen (sheet 2 of 3)

K. MODVAL.

JSN

MODVAL IDENTIFIERS

PAGE 3 OF 3

SAV - SECURITY PRIVILEGE (RIGHT FROM BIT 59)

CSAP, COLD, CPWX, CFPX, CLJL, CLFL, CWLF, CULT

SAC - SECURITY ACCESS CATEGORY (LEFT FROM BIT 0)

CAT00, CAT01, CAT02, CAT03, CAT04, CAT05, CAT06  
CAT07, CAT08, CAT09, CAT10, CAT11, CAT12, CAT13  
CAT14, CAT15, CAT16, CAT17, CAT18, CAT19, CAT20  
CAT21, CAT22, CAT23, CAT24, CAT25, CAT26, CAT27  
CAT28, CAT29, CAT30, CAT31

K.

Figure 2-2. First MODVAL Display, Right Screen (sheet 3 of 3)

K. MODVAL. JSN

USER KTEST

PAGE 1 OF 5

CREATED yy/mm/dd.

UPDATED yy/dd/mm.

CONTENTS	DESCRIPTION
UI = 373737B	USER INDEX (1-377777B).
AL = 15B	APPLICATION ACCESS LEVEL (1-17B).
MT = 4	MAGNETIC TAPES (0-7).
RP = 0	REMOVABLE PACKS (0-7).

CONTENTS	VALUE	DESCRIPTION
CM = 76B	( 3737B)	CENTRAL MEMORY FL (0-77B).
EC = 12B	( 240B)	EXTENDED MEMORY FL (0-77B).
LP = 75B	( 62976)	LINES PRINTED (0-77B).
MS = 74B	(246272)	MASS STORAGE PRUS (0-77B).
SL = 71B	( 29248)	SRU LIMIT (0-77B).
TL = 50B	( 20544)	TIME LIMIT (0-77B).

I,KTEST.

K.

Figure 2-3. Second MODVAL Display, Left Screen (sheet 1 of 5)

K. MODVAL. JSN

USER KTEST

PAGE 2 OF 5

CONTENTS	VALUE	DESCRIPTION
CP = 20B	( 1024)	CARDS PUNCHED (0-77B).
PT = 52B	( 43520)	UNITS PLOTTED (0-77B).
CC = 73B	( 1008)	COMMANDS (0-77B).
DF = 67B	( 944)	DAYFILE MESSAGES (0-77B).
DB = 3	( 6)	DEFERRED BATCH (0-7).
DT = 45B	( 37)	DETACHED JOBS (0-77B).
CS = 5	( 20480)	INDIRECT ACCESS FILE SPACE (0-7).
DS = 6	( 32768)	DIRECT ACCESS FILE SIZE (0-7).
FC = 2	( 16)	PERMANENT FILE COUNT (0-7).
FS = 1	( 8)	INDIRECT ACCESS FILE SIZE (0-7).
AW = 0000000000017777777		ACCESS WORD (4 CHARACTERS).
CN = 1282		CHARGE NUMBER (1-10 CHARACTERS).
PN = 73C05923		PROJECT NUMBER (1-20 CHARACTERS).

K.

Figure 2-3. Second MODVAL Display, Left Screen (sheet 2 of 5)



K. MODVAL.

JSN

USER KTEST

PAGE 3 OF 5

CONTENTS	DESCRIPTION
SH =	SHELL PROGRAM NAME (1-7 CHARACTERS).
SO = 12B	SHELL PROGRAM OPTIONS (4 CHARACTERS).
SP = 0B	SYSTEM PROLOGUE FILE INDEX (1-77B).
UP =	USER PROLOGUE FILE NAME (1-7 CHARACTERS).
UC = BCSYTS	DEFAULT SERVICE CLASS FOR ORIGIN TYPES BC, RB, IA (2 OR 4 CHARACTERS).
VM = 26B	VALIDATION MASK (2 CHARACTERS).
IS = BATCH	INITIAL SUBSYSTEM (4-8 CHARACTERS).
PA = ODD	TERMINAL PARITY (EVEN OR ODD).
PX = FULL	TRANSMISSION (FULL OR HALF).
RO = 23	RUBOUTS (0-31).
TC = ASCII	CHARACTER SET (ASCII OR NORMAL).
TT = 713	TERMINAL TYPE (3-7 CHARACTERS).

K.

Figure 2-3. Second MODVAL Display, Left Screen (sheet 3 of 5)

K. MODVAL. JSN

USER KTEST

PAGE 4 OF 5

CONTENTS

DESCRIPTION

XB =	PASSWORDS MUST BE 4-7 CHAR.
XI =	BATCH PASSWORD EXPIRATION DATE (YYMMDD).
	INTERACTIVE PASSWORD EXPIRATION DATE (YYMMDD).
SAL = 377B	SECURITY ACCESS LEVELS (1-7 CHAR).
SAV = 7760B	SECURITY ACCESS PRIVILEGES (4 CHAR).
SAC = 037777777777	SECURITY ACCESS CATEGORIES (1-7 CHAR).
SC = UNLIMITED	SECURITY COUNT (0-77B).

K.

Figure 2-3. Second MODVAL Display, Left Screen (sheet 4 of 5)

K. MODVAL. JSN

USER KTEST

PAGE 5 OF 5

STATUS	APPLICATION	STATUS	APPLICATION
ON	IAF	ON	RBF
ON	TAF	ON	MCS
ON	TVF	ON	CS
ON	PLATO	ON	ITF
ON	TLF	ON	NJF
ON	INITMDI	OFF	PSU
ON	AP1	ON	AP2
ON	AP3		

K.

Figure 2-3. Second MODVAL Display, Left Screen (sheet 5 of 5)

## MODVAL BATCH INPUT

Batch jobs that use MODVAL cannot access the VALIDUs file, resident on user name SYSTEMX. Refer to Examples of MODVAL Use, example 15, to see how to update VALIDUs by creating a file of batch input directives that are automatically used by a system origin job as MODVAL input.

The following files are used by MODVAL in batch processing.

<u>Default Name</u>	<u>Use</u>
INPUT	File containing the input data directives that will be used to create or update the validation file VALIDUs.
NEWVAL	Interim copy of the new validation file that is to be created or reformatted.
VALIDUs	Old validation file that is to be updated or reformatted.
SOURCE	File that receives the source input for each user name.
VALINDs	File containing all the available user indexes for the present VALIDUs file. VALINDs is always used in conjunction with one of the validation files N=NEWVAL or P=VALIDUs (refer to MODVAL Command).
OUTPUT	File that receives output listings.

## MODVAL COMMAND

Access the MODVAL validation file manager with the MODVAL command; the following is the command format.

MODVAL,P<sub>1</sub>,P<sub>2</sub>,...,P<sub>n</sub>.

where each parameter is a keyword or a keyword equated to a value.

<u>P<sub>1</sub></u>	<u>Description</u>
CV=option	Specifies the conversion options used when converting from a previous version of a NOS validation file to a NOS 2.3 validation file.

<u>Option</u>	<u>Description</u>
A	Use this conversion option with OP=C to convert from a pre-NOS 2 validation file to a NOS 2.3 validation file. During the creation run, the input directive parameter TC=STANDARD is converted to TC=NORMAL.
C	Use this conversion option with OP=C to convert from a pre-NOS 2.3 validation file to a NOS 2.3 validation file. During the creation run, the input directive parameter AW=CNRD validates all users for charge and project number other than default.
D	Use this conversion option with OP=C to convert from a pre-NOS 2.3 validation file to a NOS 2.3 validation file. During the creation run, the input directive parameter AW=COPR validates all newly created users for password without randomization.
F	Use this conversion option with OP=C to convert from a pre-NOS 2.3 validation file to a NOS 2.3 validation file. During the creation run, the input directive parameter AW=NUL is converted to AW=NUL,AW=CSAF to force setting of the alternate family permission.

Multiple options are specified as a character string (CV=CDF).

<u>P<sub>i</sub></u>	<u>Description</u>
D	Indicates that MODVAL will not abort when directive errors are detected.
FA	Forces an attachment of VALIDUs and VALINDs for system origin type jobs (for options OP=S, U, or R). In a secured system, use of this parameter requires security administrator privileges.
FM=familyname	Name of the family the user wishes MODVAL to access. You can specify this option only from a system origin job. The default is the family under which the job is currently running.
I=infile	Local file name of the file that will contain input data or source data; default is INPUT.
L=outfile	File that receives list output; default is OUTPUT.
N=newfile	Local file name of the interim file that will become the newly created or reformatted validation file; default is NEWVAL.
OP=C	Create option. Processes the input file and creates the interim validation file (N=NEWVAL) and the file of associated user indexes (U=VALINDs).
OP=C,LO=E	Initiates the create (OP=C), then lists the errors encountered in processing.
OP=C,LO=EN or OP=C,LO	Produces a list of errors for the create processing.
OP=K	K display option. All other options (multiple OP specifications) are cleared, and you must enter instructions by using the K display.  OP=K is valid only for system origin jobs. The system files VALIDUs and VALINDs are automatically attached (the FA parameter is not necessary). In a secured system, use of this parameter requires security administrator privileges.  For a system origin job, if no parameters are specified and the call is  MODVAL.  the K display option is automatically selected. If parameters are not specified, OP=U is the default.
OP=L or OP=L,LO=A	Reads the validation file, sorts the copy by user name, and writes it to the output file for listing according to the format in figure 2-4.
OP=L,LO=AL	Same as LO=L since A is a default value.
OP=L,LO=EN or OP=L,LO	File will be sorted by user index.

MODVAL,OP=L,LO=N.				YY/MM/DD. HH.MM.SS.	PAGE	1
USER NAME	USER INDEX	CREATION DATE	LAST MOD DATE			
USERAAA	1	77/06/15.	81/06/21.			
USERBBB	10	79/04/04.	79/04/04.			
USERCCC	130	77/06/15.	78/02/14.			
USERDDD	260	81/10/08.	81/10/08.			
USERXYZ	4263	81/08/07.	81/08/07.			
LIBRARY	377776	77/06/15.	78/04/13.			
SYSTEMX	377777	77/06/15.	78/04/13.			

Figure 2-4. Format of VALIDATION File Listing

<u>P<sub>i</sub></u>	<u>Description</u>
OP=L,LO=L	Reads the information on the local file identified in the parameter list, sorts by user name, and writes it to the output file for listing according to the format in figure 2-4.
OP=L,LO=N	Reads the validation file, sorts the copy by user index, and writes it to the output file for listing according to the format in figure 2-4.
OP=L,LO=NL	Reads the information on the local file identified in the parameter list, sorts the copy by user index, and writes it to the output file for listing according to the format in figure 2-4.
OP=R	Reformats the validation file and purges all files of each deleted user. Until this option is selected, all files of deleted users remain in the permanent file system even though they cannot be accessed; this allows redefinition of a user (with UI parameter on input directive) if an error was made in deleting the user.
OP=S	Specifies a source run that returns the validation file specified by the P parameter (default=VALIDUs) to source format (directive images) on the file specified by the S parameter (default=SOURCE).
OP=U	Update option. Updates the local copies of VALIDUs and VALINDs with data on the input file. Prevents the job from being rerun and the toggling of validation bits twice. You can use this option with certain other options (for example, OP=URS). It is the default option for a nonsystem origin job or a system origin job for which at least one parameter is specified on the MODVAL command.
OP=U,LO=E	Initiates the update (OP=U) and then lists the errors encountered in processing.

<u>P<sub>i</sub></u>	<u>Description</u>
OP=U,LO=EN or OP=U,LO	Produces a list of errors for the update processing.
OP=Z	Command line update option. This is like the update option except that directives are included on the MODVAL command.
OP=Z,LO=E	Initiates the command line update (OP=Z), then lists the errors encountered in processing.
OP=Z,LO=EN or OP=Z,LO	Produces a list of errors for the command line update processing.
P=oldfile	Local file name of the copy of the old validation file that is to be updated or reformatted; default is VALIDUs.
RP	Indicates that passwords do not have to be specified on a create run (can only be used with OP=C). Use RP only if the input file was created using an OP=S run on an existing user validation file containing passwords shorter than the installation-required minimum.
S=sourcefile	File that will receive source data for each user name; default is SOURCE.
SI	Specifies that the input for a create run (OP=C) was generated by a previous source run (OP=S). The automatic creation of the special user names is suppressed. Special user names are defined later in this section. You should not use this parameter when creating a validation file in a secured system.
U=userfile	File containing the available user indexes of the current VALIDUs file; default is VALINDs.

## INPUT DIRECTIVE

An input directive enters user names under a create run (OP=C) and modifies existing user names under an update run (OP=U). The format of the input directive is

```
/username,parameter1=value1,parameter2=value2,...
```

where username is the 1- to 7-character user name being referenced and parameter<sub>i</sub>=value<sub>i</sub> is a system usage definition for this name. Valid characters for username are A through Z, 0 through 9, and \*. The user name parameter must begin with a / in column 1. The user name and all other parameters must end with a separator.

Valid separators include any character whose 6-bit display code value exceeds 44g (except -, /, =, and blank), as well as end-of-line. Thus, if an input directive parameter is last on an input directive, no other separator need follow it. An asterisk (\*) can separate all parameters except user names, charge numbers, and project numbers.



All parameters relative to a user name must appear before you enter another user name or end the input stream.

All data within a user name entry is free format to column 72. A parameter cannot be split between cards or lines, but a directive can be split. Blanks are ignored. To allow sequencing and identification of input directives, all data past column 72 is ignored.

Example:

The following is acceptable. The directive can be split between two lines.

```
/ROBERTR,AW=CSPF
AW=CLPF
```

Example:

The following is not acceptable, because a parameter is split between two lines.

```
/ROBERTR,AW=CSPF,AW=
CLPF.
```

The following is the list of the allowable parameters and their descriptions.

**NOTE**

In the following descriptions, bit 0 is the rightmost bit in a word.

<u>Parameter</u>	<u>Description</u>
AL=a1	Application access level. a1 is a 1- or 2-digit number in the range 0 through 178. This parameter defines the highest-level application with which the user can make an application-to-application connection. Access levels for applications are defined in OUTCALL statements (refer to Network Language Definition Reference Manual).
AP=appl	Application validation. appl is a 1- to 7-character application name that toggles a particular bit in the application permission field (bits 47 through 0) of the application validation word. If more than one application corresponds to a single bit, any of the application names for that bit may be specified for appl. For each bit that is set, a specific application or set of applications is accessible to the user. Blanks are suppressed.

Parameter

Description

The following application permission bits are defined in the application validation word.

<u>appl</u>	<u>Bit</u>	<u>Description</u>
IAF	0	Interactive Facility.
RBF	1	Remote Batch Facility.
TAF	2	Transaction Facility.
MCS	3	Message Control System.
TVF	4	Terminal Verification Facility.
CS†	5	Communication supervisor. A user validated for this application can become a diagnostic operator and, if also validated for permission bit CNOP, can become a network operator.
PLATO	6	PLATO education facility.
ITF	7	Interactive Transfer Facility.
TLF	8	Tie Line Facility.
NJF	9	Network Job Entry Facility.
INITMDI	10	Initiate Mainframe Device Interface.
PSU	11	Printer Support Utility.
AP1	12	Local application 1.
AP2	13	Local application 2.
AP3	14	Local application 3.
---	15-35	Reserved for CDC.
---	36-47	Reserved for installation.

The Network Validation Facility is automatically available to all Network Access Method (NAM) users; hence, no bit position is defined for this application. By default, no other applications are available to the user (bits 47 through 0 are zero).

---

†Refer to NOS 2 Analysis Handbook for information concerning the network operator and communication supervisor.

Parameter

Description

To set or clear all application permission bits in the application validation word, specify the following for appl.

- ALL Sets all application permission bits in the application validation word.
- NUL Clears all application permission bits in the application validation word.

AW=perm

Access word validation. perm is a 4-character designation that toggles a particular permission bit in the access word. For each bit that is set, special permission is given to that user. The bit is set when the parameter is first encountered, and it is cleared if the parameter is used again. A maximum of 36 entries per record is allowed. Blanks are suppressed.

The following permission bits are defined in the access word.

<u>perm</u>	<u>Bit</u>	<u>Description</u>
CPWC	0	User can change batch and interactive passwords.
CTPC	1	User can use the ACCESS subsystem commands (terminal use only).†
CLPF	2	User can create direct access permanent files.
CSPF	3	User can create indirect access permanent files.
CSOJ	4	User can have system origin capability from any job origin if the debug option is turned on by the operator.  User can also assign a device by specifying its EST ordinal. This does not require that the debug option be turned on.  User can also call the PP hardware diagnostics of the 881/883 pack reformatting utility FORMAT if engineering mode is enabled.
CASF	5	User can access the SYSTEM file (with the COMMON,SYSTEM command).
CAND	6	User can request nonallocatable devices (for example, magnetic tape units).
CCNR	7	User can use system without entry of charge or project number.

---

†Refer to NOS 2 Reference Set, Volume 3, for a description of access subsystem commands.

Parameter

Description

CSRP	8	User can issue removable auxiliary device commands.
CSTP	9	User has special TAF privileges of updating task libraries online.
CTIM	10	User is not logged off because of timeout.
CUCP	11	User can access system control point facility.
CSAP	12	User has special accounting privileges.†
CBIO	13	User has batch input/output (BIO) subsystem privileges.††
CPRT	14	User can preserve extended memory (use PROTECT command).
CPLK	15	User can transfer permanent files between hosts.
CQLK	16	User can transfer queued files between hosts.
CUST	17	User can specify a logical identifier (LID) of a mainframe on Job or on ROUTE command.
CNVE	18	User can access the NOS Virtual Environment (NVE) subsystem.
CMNT	19	User can use the Remote Diagnostic Facility.
CNOP	20	User can control network processing units (NPU's); that is, a user who is validated for the CS application can also become a network operator.†††
CSAF	21	User can specify an alternate family.
CNRD	22	User can specify a charge and project number other than the default (specified by CN and PN parameters).
COPR	23	User can specify a password without randomization.
CLTD	24	User is validated to specify preferred file residence as locked to disk on the SAVE, DEFINE, and CHANGE commands.

By default, all new user names are created with CPWC, CLPF, CCNR, CSPF, CNRD, COPR, and CSAF permissions, unless an AW parameter is entered. In this case, the user name is created with only those permissions specified.

†Refer to User Accounting for a description of special accounting user privileges.

††V carriage control character (refer to NOS 2 Reference Set, Volume 3).

†††Refer to NOS 2 Analysis Handbook for information concerning the network operator.

<u>Parameter</u>	<u>Description</u>
	To set or clear all permission bits in the access word, specify the following for perm.
	ALL Sets all permission bits in the access word.
	NUL Clears all permission bits in the access word.
CC=cc	<p>Maximum number of batch commands processed for a user. cc consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies unlimited batch command processing. If you omit this parameter, the system will supply a value of 34g. The system uses the formula</p> $\text{maximum batch commands} = (\text{cc} \times 20g) + \text{KCCI}^\dagger$ <p>to calculate the limit of batch commands processed.</p>
CM=cm	<p>Maximum central memory space a user is allowed. cm consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies all available central memory space of the machine. If you omit this parameter, the system will supply a value of 14g. The system uses the formula</p> $\text{central memory limit} = (\text{cm} \times 40g) + \text{KCMi}^\dagger$ <p>to calculate the central memory space limit expressed in units of 100g words.</p>
CN=chargenumber	<p>Charge number associated with the user. chargenumber is a 1- to 10-character string. Valid characters are A through Z, 0 through 9, and *. When you use default CHARGE command (CHARGE,*), this value is used. If the user does not have CNRD privileges (not restricted to default charge number), this is the only charge number allowed for this user.</p>
CP=cp	<p>Number of cards that can be punched from a user's routed punch file. cp consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies unlimited punched output. If you omit this parameter, the system will supply a value of 0. The system uses the formula</p> $\text{cards punched} = (\text{cp} \times 100g) + \text{KCPI}^\dagger$ <p>to calculate the limit of cards punched from a routed file.</p>

---

<sup>†</sup>Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.

Parameter

Description

CS=cs Cumulative size of all indirect access files for this user. The user is validated for the upper limit corresponding to the cs value specified.

<u>cs</u>	<u>Upper Limit Allowed (Octal Count of PRUs)</u>
0	Use job origin control
1	1000
2	2000
3	5000
4	10000
5	50000
6	100000
7	Unlimited

If CS is not specified, CS=0 is assumed.

DAC=username Delete user name. username is the user name that is to be deleted from the VALIDUs file. This user name must match the current user name as specified after the most recent /. Use this parameter only with update (OP=U) and K display options.

DB=db Maximum number of executing jobs and queued files the user is allowed to have in the system concurrently; db < 7. If db=7, an unlimited number of queued files of executing jobs is allowed. All noninteractive jobs and queued output files are counted. If you omit this parameter, the system will supply a value of 0. The system uses the formula

$$\text{jobs} = \text{db} \times 2$$

to calculate the limit of jobs.

If the user has the permission bit CSOJ set and the system is in debug mode, or if the job is of system origin, the DB parameter is ignored and an unlimited number of jobs is allowed.

DF=df Maximum number of MESSAGE requests the user can issue to the system and job dayfiles. df consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 778, which specifies unlimited MESSAGE requests. If you omit this parameter, the system will supply a value of 0. The system uses the formula

$$\text{maximum MESSAGE requests} = (\text{df} \times 208) + \text{KDFI}^\dagger$$

to calculate the limit of job MESSAGE requests.

---

<sup>†</sup>Refer to NOS 2 Installation Handbook for a description of this COMSACC parameters.

<u>Parameter</u>	<u>Description</u>
DS=ds	File size allowed for an individual direct access permanent file. The user is validated for the upper limit corresponding to the ds value specified.

<u>ds</u>	<u>Upper Limit Allowed (Octal Count of PRUs)</u>
0	Use job origin control
1	1000
2	2000
3	5000
4	10000
5	50000
6	100000
7	Unlimited

If DS is not specified, DS=0 is assumed.

DT=dt	Maximum number of detached jobs the user is allowed to have in the system concurrently. dt consists of two digits followed by a radix. Blanks are suppressed. The maximum value is 77 <sub>8</sub> , which specifies that an unlimited number of detached jobs is allowed. If you omit this parameter, the system will supply a value of 0. The system uses the formula
-------	---

$$\text{detached jobs} = dt + KDTI \dagger$$

to calculate the limit of detached jobs.

EB=password	Encrypted batch password. A 14-digit, octal encrypted password to be used for batch and system origin jobs.
-------------	---

EC=ec	Maximum extended memory space a user is allowed. ec consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77 <sub>8</sub> , which specifies all extended memory space of the machine. If you omit this parameter, the system will supply a value of 0. The system uses the formula
-------	--

$$\text{extended memory limit} = (ec \times 20_8) + KECI \dagger$$

to calculate the extended memory limit expressed in units of 1000<sub>8</sub> words.

EI=password	Encrypted interactive password. A 14-digit, octal encrypted password to be used for interactive jobs.
-------------	---

---

†Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.

Parameter

Description

FC=fc File count. fc is the maximum number of permanent files allowed to the user. The user is validated for the upper limit corresponding to the fc value specified.

<u>fc</u>	<u>Upper Limit Allowed (Octal)</u>
0	Use job origin control
1	10
2	20
3	30
4	40
5	50
6	100
7	Unlimited

If you do not specify FC, FC=0 will be assumed.

FS=fs Maximum file size allowed for an individual indirect access permanent file. The user is validated for the upper limit corresponding to the fs value specified.

<u>fs</u>	<u>Upper Limit Allowed (Octal Count of PRUs)</u>
0	Use job origin control; no controls are enacted
1	10
2	30
3	50
4	100
5	150
6	300
7	Unlimited

If you do not specify FS, FS=0 will be assumed.

FUI=userindex Force user index. userindex is the user index to be assigned to the user name specified after the most recent /, whether the user index is assigned to another user name or not. Use caution with this option because problems can occur when multiple user names are associated with the same user index. If the VALIDUs file is returned to source format (OP=S on MODVAL command) and a new VALIDUs file is created from this source, multiple user name per user index associations will be lost. Use this parameter only with update (OP=U) and K display options.

Since user indexes are usually thought of as octal values, be sure to add the radix B to indicate an octal value.



<u>Parameter</u>	<u>Description</u>
IS=subsystem	Initial subsystem for the terminal. You may specify one of the following values for each user name.

<u>subsystem</u>	<u>Description</u>
ACCESS	Access subsystem
BASIC	BASIC subsystem
BATCH	Batch subsystem
EXECUTE	Execute subsystem
FORTRAN	FORTRAN Version 5 subsystem
FTNTS	FORTRAN Extended Version 4 subsystem
NULL	Null subsystem

LP=lp	Number of lines that can be printed from a user's routed print file. lp consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies unlimited print output. If you omit this parameter, the system will supply a value of 0. The system uses the formula
-------	---

$$\text{lines printed} = (\text{lp} \times 2000g) + \text{KLPI}^\dagger$$

to calculate the limit of lines printed from a routed output file.

MS=ms	Maximum number of additional mass storage PRUs the user is allowed to allocate for your job. It applies to all file space written by the job, including direct access permanent files. ms consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies unlimited additional mass storage PRUs. If you omit this parameter, the system will supply a value of 1. The system uses the formula
-------	---

$$\text{PRU limit} = (\text{ms} \times 10000g) + \text{KMSI}^\dagger$$

to calculate the PRU equivalent of the actual mass storage tracks additionally allocated to the job files.

MT=mt	Number of magnetic tapes allowed; mt $\leq$ 7. If mt=7, unlimited tapes are allowed. If you omit this parameter, the system will supply a value of 0.
-------	---

---

<sup>†</sup>Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.

<u>Parameter</u>	<u>Description</u>						
PA=pa	Terminal parity for Remote Diagnostic Facility users. The terminal operates with even or odd parity. One of the following values may be entered for each user name record.						
	<table border="0"> <thead> <tr> <th style="text-align: left;"><u>pa</u></th> <th style="text-align: left;"><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>EVEN</td> <td>Terminal operates with even parity.</td> </tr> <tr> <td>ODD</td> <td>Terminal operates with odd parity.</td> </tr> </tbody> </table>	<u>pa</u>	<u>Description</u>	EVEN	Terminal operates with even parity.	ODD	Terminal operates with odd parity.
<u>pa</u>	<u>Description</u>						
EVEN	Terminal operates with even parity.						
ODD	Terminal operates with odd parity.						
PB=password	Batch password. A 1- to 7-character password used for batch, remote batch, and system origin jobs. This parameter is processed in the same way as the PW parameter; however, it applies only to the batch password.						
PI=password	Interactive password. A 1- to 7-character password used for interactive jobs (login to any NAM application). This parameter is processed in the same way as the PW parameter; however, it applies only to the interactive password.						
PN=projectnumber	Project number associated with the user. projectnumber is a 1- to 20-character string. Valid characters are A through Z, 0 through 9, and *. When you use the default CHARGE command (CHARGE,*), this value is used. If the user does not have CNRD privileges (not restricted to default charge number), this is the only charge number allowed.						
PT=pt	Number of plot units a user is allowed. pt consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 77g, which specifies an unlimited number of plot units allowed. If you omit this parameter, the system will supply a value of 0. The system uses the formula <p style="text-align: center;"><math display="block">\text{plot unit limit} = (\text{pt} \times 2000g) + \text{KPTI} \dagger</math></p> to calculate the limit of plot units a user may have.						
PW=password	A 1- to 7-character password (A through Z, 0 through 9). Blanks are not significant. This parameter sets both the batch and interactive passwords. When you enter PW to change the passwords, the associated password expiration dates are advanced to the current date plus the number of days defined as the default password expiration term (COMSACC symbol). The user passwords are not displayed on the MODVAL K displays, since they are stored internally as encrypted values. You can change the minimum required length for passwords by setting the MODVAL installation parameter RPWL to a value of from 0 to 7. The PW parameter is required with OP=C unless the RP parameter is specified on the MODVAL command or the minimum required password length is zero. If this parameter is not required and you omit it, the user must enter a null password at login.						

---

†Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.

<u>Parameter</u>	<u>Description</u>						
PX=mode	Transmission mode for Remote Diagnostic Facility users. There should be only one entry per user name record. Since the terminal operates in full- or half-duplex mode, either of the following values is available for mode.						
	<table border="0"> <thead> <tr> <th><u>mode</u></th> <th><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>FULL</td> <td>System enters echoplex mode automatically.</td> </tr> <tr> <td>HALF</td> <td>System does not enter echoplex mode automatically.</td> </tr> </tbody> </table>	<u>mode</u>	<u>Description</u>	FULL	System enters echoplex mode automatically.	HALF	System does not enter echoplex mode automatically.
<u>mode</u>	<u>Description</u>						
FULL	System enters echoplex mode automatically.						
HALF	System does not enter echoplex mode automatically.						
RL=ALL	Resource limits. This parameter sets all resource limits to unlimited values. Default creates user names SYSTEMX and NETOPS.						

The user has unlimited use of the following resources:

<u>Identifier</u>	<u>Resource</u>
CC	Batch commands
CM	Central memory field length
CP	Cards punched
CS	Cumulative indirect file size
DB	Deferred batch jobs
DF	Dayfile messages
DS	Direct access file size
DT	Detached jobs
EC	Extended memory field length
FC	Permanent file count
FS	Indirect access file size
LP	Lines printed
MS	Mass storage PRUs
MT	Magnetic tapes
PT	Units plotted
RP	Removable disk packs
SL	SRU limit
TL	CPU time limit

<u>Parameter</u>	<u>Description</u>
RP=rp	Number of removable disk packs allowed; $rp \leq 7$ . If $rp=7$ , unlimited removable disk packs are allowed. If you omit this parameter, the system will supply a value of 0.
RO=ro	Rubout count for Remote Diagnostic Facility users. This is the character count delay associated with the user's terminal. ro consists of two numeric characters followed by a radix. Blanks are suppressed. One value from 0 to 378 may be entered for each user name record. A value of 378 denotes that the system will use the default number for the user's terminal type.
SAC=category	Security access categories. category is a 1- to 7-character symbolic name that toggles a particular bit in the access category field (bits 31 through 0) of the security validation word. For each bit that is set, the corresponding access category is available to the user. Blanks are suppressed. These validations are checked only in a secured system.

The following access category bits are defined in the security validation word.

<u>category</u> †	<u>Bit</u>	<u>Description</u>
CATnn	nn	User is validated for access category nn ( $00 \leq nn \leq 31$ ).

To set or clear all access category bits in the security validation word, specify the following for category.

ALL	Sets all validation bits for the security access categories.
NUL	Clears all validation bits for the security access categories.

SAL=level	Security access levels. level is a 1- to 7-character symbolic name that toggles a particular bit in the access level field (bits 47 through 36) of the security validation word. For each bit that is set, the corresponding access level is available to the user. Blanks are suppressed.
-----------	--

In a secured system, a user must be valid for at least one access level in order to use the system. These validations are not checked in an unsecured system.

The following access level bits are defined in the security validation word.

---

†The site can redefine the names associated with the access categories. These are default values, which are defined in common deck COMSMLS.

Parameter

Description

<u>level†</u>	<u>Bit</u>	<u>Description</u>
LVL7	43	User is validated for access level 7.
LVL6	42	User is validated for access level 6.
LVL5	41	User is validated for access level 5.
LVL4	40	User is validated for access level 4.
LVL3	39	User is validated for access level 3.
LVL2	38	User is validated for access level 2.
LVL1	37	User is validated for access level 1.
LVL0	36	User is validated for access level 0.

By default, all new user names are created with LVL0 validation unless you enter a SAL parameter. In this case, the user is created with only those access levels specified.

To set or clear all access level bits in the security validation word, specify the following for level.

- ALL Sets all validation bits for the security access categories.
- NUL Clears all validation bits for the security access categories.

SAV=privilege

Security access validation. This parameter sets privileges that apply to both secured and unsecured systems. privilege is a 4-character designation that toggles a particular bit in the privilege field (bits 59 through 48) of the security validation word. For each bit that is set, the corresponding special permission is allowed to that user. A bit is set when the parameter is first encountered and cleared if the parameter is used again. Blanks are suppressed. The following privilege bits are defined in the security validation word.

<u>privilege</u>	<u>Bit</u>	<u>Description</u>
CSAP	59	User has security administrator privileges. This bit cannot be cleared by its owner; that is, the user executing MODVAL and clearing this permission bit must not be the user whose permission is being cleared.
COLD	58	User can execute online diagnostics. This bit applies to both secured and unsecured systems.

†The site can redefine the names associated with the access levels. These are default values, which are defined in common deck COMSMLS.

Parameter

Description

<u>privilege</u>	<u>Bit</u>	<u>Description</u>
CPWX	57	User can assign user password expiration date or term. This bit applies to both secured and unsecured systems.
CFPX	56	User can assign permanent file password and permit expiration date or term. This bit applies to both secured and unsecured systems.
CLJL	55	User can lower (downgrade) the access level of a job. This bit applies to secured systems only.
CLFL	54	User can lower (downgrade) the access level of local or permanent files. This bit applies to secured systems only.
CWLF	53	User can write to or extend files that are at a lower access level than the user's job (write-down privilege). This bit applies to secured systems only.
CULT	52	User can write to unlabeled magnetic tapes. This bit applies to both secured and unsecured systems.

To set or clear all privilege bits in the security validation word, specify the following for privilege.

<u>privilege</u>	<u>Description</u>
ALL	Sets all privilege validation bits.
NUL	Clears all privilege validation bits.

SC=count † Security count. This parameter specifies the number of security conflicts allowed before the user is denied access to the system. The security count is decremented by the system when any security conflict occurs. A value of 77g indicates an unlimited security count; 0 indicates that no access is allowed. If not specified, the default value is SC=50g. The security count is not included as output from a LIMITS command.

SH=sh Shell program name. sh is a 1- to 7-character name of the shell program for screening user commands. For the Remote Diagnostic Facility, the system library program name is RMSHELL.

---

†If the user name has security administrator privileges (CSAF security privilege), the expiration dates for both batch and interactive passwords are nonexpiring. The security count is unlimited. These values are set automatically and cannot be changed.

<u>Parameter</u>	<u>Description</u>
SL=s1	<p>Maximum SRU accumulation for a user's job. s1 consists of two numeric characters followed by a radix. All blanks are suppressed. The maximum value is 778, specifying unlimited SRU accumulation. If you omit this parameter, the system will supply a value of 0. The system uses the formula</p> $\text{maximum SRU accumulation} = [(s1 \times 100g) + KSLI] \times 108^\dagger$ <p>to calculate the maximum SRU accumulation that a user's job may have.</p>
SO=option	<p>Shell control option. option is a 4-character symbolic name that toggles a particular bit in the shell program control word (bits 0 through 6). Each bit that is set identifies a privilege allowed for a user. The bit is set when the parameter is first encountered and cleared if the parameter is used again.</p>

<u>option</u>	<u>Bit</u>	<u>Description</u>
ABTM	6	Clears shell processing if screening program aborts.
LFID	5	Allows load of shell program from local file.
GLID	4	Allows load of shell program from global library.
SLID	3	Allows load of shell program from system library.
TCSM	2	System monitors commands directly from terminal input.
BCSM	1	System monitors commands outside procedures.
CCLM	0	System monitors commands inside procedures.

By default, all new user names are created with shell options SLID and BCSM unless you enter an SO parameter. In this case, the user is created with only those options specified.

SP=sp	<p>System prologue name. sp is a 2-digit, octal, permanent file index that identifies the system prologue to execute. If specified, the prologue named PROCsp will be executed as the first commands of each job belonging to this user. The system prologue file PROCsp must be a permanent file under UN=LIBRARY, permitted to SYSTEMX.</p>
-------	---

---

<sup>†</sup>Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.

<u>Parameter</u>	<u>Description</u>								
TC=tc	Default character set to be used by the terminal. One of the following values is available for each user name.								
	<table border="0" style="margin-left: 40px;"> <thead> <tr> <th style="text-align: left;"><u>tc</u></th> <th style="text-align: left;"><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>ASCII graphic 63/64-character set</td> </tr> <tr> <td>ASCII</td> <td>ASCII 128-character set</td> </tr> </tbody> </table>	<u>tc</u>	<u>Description</u>	NORMAL	ASCII graphic 63/64-character set	ASCII	ASCII 128-character set		
<u>tc</u>	<u>Description</u>								
NORMAL	ASCII graphic 63/64-character set								
ASCII	ASCII 128-character set								
TL=t1	<p>Determines the maximum CPU time that a user's job step may run. t1 consists of two numeric characters followed by a radix. Blanks are suppressed. The maximum value is 778, which specifies unlimited CPU time for each job step. If you omit this parameter, the system will supply a value of 0. The system uses the formula</p> $\text{CPU time limit} = [(t1 \times 1008) + KTLI^\dagger] \times 108$ <p>to calculate the maximum CPU time that a user's job step may run.</p> <p>Further, for interactive jobs the system establishes a lower bound for the CPU time limit. The lower bound is determined by selecting the larger value of the CPU time limit described above or the CPU time limit calculated by multiplying UTIS<sup>††</sup> by 108.</p>								
TT=tt	Terminal type for Remote Diagnostic Facility users. You may specify one of the following values for each user name.								
	<table border="0" style="margin-left: 40px;"> <thead> <tr> <th style="text-align: left;"><u>tt</u></th> <th style="text-align: left;"><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>TTY</td> <td>Teletype or other ASCII compatible terminal</td> </tr> <tr> <td>BLKEDT</td> <td>Block mode terminal</td> </tr> <tr> <td>713</td> <td>CDC 713 display terminal</td> </tr> </tbody> </table>	<u>tt</u>	<u>Description</u>	TTY	Teletype or other ASCII compatible terminal	BLKEDT	Block mode terminal	713	CDC 713 display terminal
<u>tt</u>	<u>Description</u>								
TTY	Teletype or other ASCII compatible terminal								
BLKEDT	Block mode terminal								
713	CDC 713 display terminal								
UC=otsc	User default service class for each origin type. ot is a 2-character mnemonic for origin type, and sc is a 2-character mnemonic for the corresponding user default service class.								

<sup>†</sup>Refer to NOS 2 Installation Handbook for a description of this COMSACC parameter.  
<sup>††</sup>Refer to NOS 2 Installation Handbook for a description of this COMSREM parameter.



Parameter

Description

You may specify the following origin types:

<u>ot</u>	<u>Description</u>
BC	Batch origin type
RB	Remote batch origin type
IA	Interactive origin type

You may specify the following service classes:

<u>sc</u>	<u>Description</u>
SY	System service class
BC	Batch service class
RB	Remote batch service class
TS	Interactive service class
DI	Detached interactive service class
NS	Network supervisor service class
MA	Maintenance service class
CT	Communication task service class
In	Installation service class n ( $0 \leq n \leq 3$ )

The default service class for each origin type follows.

<u>ot</u>	<u>sc</u>	<u>Description</u>
BC	BC	Batch
RB	RB	Remote batch
IA	TS	Interactive

The origin type is always required. If you also specify a service class, it is assigned as the user default service class for the selected origin type. If you do not specify a service class, the default service class for the selected origin type will be assigned as the user default.

<u>Parameter</u>	<u>Description</u>
UI=userindex	<p>User index to be assigned to this user. If you do not supply this entry, the system will assign the next available user index. userindex consists of six numeric characters followed by a radix. Blanks are suppressed. The maximum value is 3777778. You cannot use this parameter with the K display or update option. You must use the FUI parameter instead.</p> <p>Since user indexes are usually thought of as octal values, be sure to add the radix B to indicate an octal value.</p>
UP=up	<p>User prologue name. up is a 1- to 7-character permanent file name that identifies the user prologue to execute. If specified, the user prologue will be executed as the first commands of each job belonging to the user, following the system and project prologues, if any.</p>
VM=sc	<p>Service classes that a user will be allowed to select. sc is a 2-character service class symbol that toggles a particular bit in the validation mask. For each bit that is set, the user is allowed the corresponding service class. A bit is set when the parameter is first encountered, and it is cleared if the parameter is used again.</p>

After the VM parameter is processed, the bits corresponding to the service classes specified by the UC parameter (or the defaults) are set. Therefore, all users are validated to use the user default service classes specified by the UC parameter, regardless of what is specified by the VM parameter (including NUL).

You may specify the following service classes:

<u>sc</u>	<u>Bit</u>	<u>Description</u>
--	0	Unused
SY	1	System service class
BC	2	Batch service class
RB	3	Remote batch service class
TS	4	Interactive service class
DI	5	Detached interactive service class
NS	6	Network supervisor service class
	7	Reserved
MA	8	Maintenance service class
CT	9	Communication task service class
IO	10	Installation service class 0

Parameter

Description

<u>sc</u>	<u>Bit</u>	<u>Description</u>
I1	11	Installation service class 1
I2	12	Installation service class 2
I3	13	Installation service class 3

To set or clear all service class bits in the validation mask, specify the following for sc.

<u>sc</u>	<u>Description</u>
ALL	Sets all service class validation mask bits.
NUL	Clears all service class validation mask bits.

**XB=yymmdd†** Batch expiration date. This parameter is the same as the XD parameter except that it sets only the batch password expiration date.

**XD=yymmdd†** Expiration date. This parameter sets the password expiration date for the batch and interactive passwords to yymmdd, and it sets the default date.

**XI=yymmdd†** Interactive expiration date. This parameter is the same as the XD parameter except that it sets only the interactive password expiration date. This is determined from the site-defined default expiration term.

**XT=term†** Password expiration date by term. This parameter adds a 1- to 4-digit expiration term value to the current date to calculate a new batch and interactive password expiration date. The term value can be from 0 to 4095 (7777g). Decimal is assumed unless the post radix B is specified. The default term value is site-defined. It is used to calculate the expiration date if neither XD nor XT is specified when you create a new user name or change the user password(s).

XT=0 sets the password to expire immediately. This temporarily disables a password without deleting it from the validation file.

You can set the password to nonexpiring by entering XT=4095 or XT=7777B or XT=\*

**XTB=term†** Batch password expiration date by term. This parameter is the same as the XT parameter except that only the batch password expiration date changes.

**XTI=term†** Interactive password expiration date by term. This parameter is the same as the XT parameter except that only the interactive password expiration date changes.

---

†If the user name has security administrator privileges (CSAP security privilege), the expiration dates for both batch and interactive passwords are nonexpiring. The security count is unlimited. These values are set automatically and cannot be changed.

## EXAMPLES OF MODVAL USE

The examples in this section give representative commands for exercising the MODVAL options both at the console and by batch input. System files are in user index 377777g. The system accepts the ISF command only in the idlefamily situation; therefore, before ISF,R=VALIDUs can be entered, the system must be emptied of all executing jobs. This may be a time-consuming task. Refer to NOS 2 Analysis Handbook for more information about the IDLEFAMILY and ISF commands.

### NOTE

These examples apply only to an unsecured system. In a secured system, the SUI command is not valid, so you must use a USER,SYSTEMX,password command instead. In examples in which you use the SUI command before a validation file exists, you must use a GENVAL command to create a validation file before the USER,SYSTEMX,password command is executed.

#### Example 1:

Example 1 creates a user name at the console by using the C,username format. MODVAL is called, and the B,0 display indicates the job sequence name for the job (jsn). The K display for the job is initiated. Following this is an entry of three user names with a password parameter for each.

```
X.MODVAL.  
  
K,jsn.  
  
K.C,USER201  
  
K.PW=ADMIT1  
  
K.END  
  
K.C,USER202  
  
K.PW=ADMIT2  
  
K.END  
  
K.C,USER203  
  
K.PW=ADMIT3  
  
K.END  
  
K.END
```

Example 2:

This example uses the / format at the console to create the same users as does example 1.

```
X.MODVAL.  
K,jsn.  
K./USER201,PW=ADMIT1  
K./USER202,PW=ADMIT2  
K./USER203,PW=ADMIT3  
K.END  
K.END
```

Example 3:

The procedure in this example creates the same users as do examples 1 and 2, but this is a batch job with default values used for the file names. The following is the command input.

```
ujn.  
USER,username,password,familyname.  
MODVAL,OP=C.  
SAVE,NEWVAL.  
SAVE,VALINDs=VAL.  
end-of-record  
/USER201,PW=ADMIT1  
/USER202,PW=ADMIT2  
/USER203,PW=ADMIT3  
end-of-information
```

This job produces indirect access permanent files. You must convert these files to direct access files. The following input at the console shows you how to do this.

```
X.DIS.  
USER,username,password,familyname.  
GET,NEWVAL.  
GET,VAL.  
SUI,377777.
```

Under DSD (toggle with \*):

```
IDLEFAMILY,est.          est is the EST ordinal of the device to be idled. This
                          is the device (the master device for user index
                          377777g) in which the validation file for the family
                          resides.
```

Under DIS (toggle with \*):

```
ISF,R=VALIDUs,FM=familyname.
PURGE,VALIDUs,VALINDs.
DEFINE,VALIDUs,VALINDs.
COPY,NEWVAL,VALIDUs,V.
COPY,VAL,VALINDs,V.
RETURN,VALIDUs,VALINDs.
ISF,E=VALIDUs,FM=familyname.
```

Example 4:

In this example, the same users (refer to previous examples) are created, but you put the directives in a separate file called PUTIN. The following indirect access file must be on mass storage before you submit the batch input.

```
File PUTIN:
/USER201,PW=ADMIT1
/USER202,PW=ADMIT2
/USER203,PW=ADMIT3
```

The batch input is:

```
ujn.
USER,username,password,familyname.
GET,PUTIN.
MODVAL,OP=C,I=PUTIN,N=VALNEW.
SAVE,VALNEW.
SAVE,VALINDs=VALX.
end-of-information
```

After this job has executed, make the same entries at the console as shown in example 3 to change these files to direct access files.

Example 5:

This example shows how to update the user information at the console by using the U,username format. The first two user names created in the earlier examples have different passwords.

```
X.MODVAL.  
K,jsn.  
K.U,USER201  
K.PW=ENTER1  
K.END  
K.U,USER202  
K.PW=ENTER2  
K.END  
K.END
```

Example 6:

In this example, you enter the previous parameters (refer to example 5) at the console with the / format.

```
X.MODVAL.  
K,jsn.  
K./USER201,PW=ENTER1  
K./USER202,PW=ENTER2  
K.END  
K.END
```

Example 7:

This example shows how you can update the same information as in examples 5 and 6 by means of batch input. First, copy the direct access permanent files VALIDUs and VALINDs to permanent files (direct or indirect) that can be accessed by the batch input and used in the MODVAL command. Before you do this at the console, you must create an idlefamily situation and enter the ISF,R=VALIDUs command.

```
X.DIS.  
SUI,377777.  
ATTACH,VALIDUs,VALINDs.  
COPY,VALIDUs,VAL.  
COPY,VALINDs,VALX.  
RETURN,VALIDUs,VALINDs.  
ISF,E=VALIDUs.  
USER,username,password,familyname.  
SAVE,VAL,VALX.
```

The batch input is:

```
ujn.  
USER,username,password,familyname.  
GET,VAL,VALX.  
MODVAL,OP=U,P=VAL,U=VALX.  
REPLACE,VAL,VALX.  
end-of-record  
/USER201,PW=ENTER1  
/USER202,PW=ENTER2  
end-of-information
```



The following console input shows how to transfer the modification made in example 7 back to the system validation files VALIDUs and VALINDs. You must use the M=W in the ATTACH to establish write permission relative to the direct access files. However, before you do this, you must create an idlefamily situation and enter an ISF,R=VALIDUs command.

```
X.DIS.  
  
SUI,userindex.  
  
FAMILY,familyname.  
  
GET,VAL,VALX.  
  
SUI,37777.  
  
ATTACH,VALIDUs,VALINDs/M=W.  
  
COPY,VAL,VALIDUs.  
  
COPY,VALX,VALINDs.  
  
RETURN,VALIDUs,VALINDs.  
  
ISF,E=VALIDUs,FM=familyname.
```

If you use the OP=Z option, it is not necessary to provide an input file and save it under 37777g. The Z option makes the changes directly as follows:

```
X.DIS.  
  
MODVAL,OP=Z./USER201,PW=ENTER1  
  
    (one user at a time)
```

#### Example 8:

The following is an example of the way you can delete a user from the console only.

```
X.MODVAL.  
  
K,jsn.  
  
K.D,USER203  
  
K.END
```

Example 9:

In this example, you initiate the reformatting of the validation file from the console. Before you use DIS and type in commands (no K display), you must create an idlefamilysituation and enter the ISF,R=VALIDUs. command. The OUTPUT file will have a listing of the purged indexes.

```
X.DIS.
SUI,377777.
ATTACH,VALIDUs,VALINDs/M=W.
MODVAL,OP=R.
REWIND,VALIDUs,NEWVAL.
COPY,NEWVAL,VALIDUs.
OUT.
RETURN,VALIDUs,VALINDs.
ISF,E=VALIDUs.
```

Example 10:

The procedure in the following example reformats the validation file with batch input, using indirect access copies made at the console of the direct access files. Before you do this, you must create an idlefamilysituation and enter the ISF,R=VALIDUs command.

```
X.DIS.
SUI,377777.
ATTACH,VALIDUs,VALINDs.
COPY,VALIDUs,VAL.
COPY,VALINDs,VALX.
RETURN,VALIDUs,VALINDs.
ISF,E=VALIDUs.
USER,username,password,familysituation.
SAVE,VAL,VALX.
```

The batch input is:

```
ujn.  
USER,username,password,familyname.  
GET,VAL,VALX.  
MODVAL,OP=R,P=VAL,U=VALX.  
SAVE,NEWVAL.  
REPLACE,VALX.  
end-of-information
```

Then enter the following from the console, after you have created an idlefamily situation and entered the ISF,R=VALIDUs command.

```
X.DIS.  
SUI,userindex.           (The userindex and familyname must correspond to the USER  
                           command in the batch job.)  
FAMILY,familyname.  
GET,NEWVAL,VALX.  
SUI,377777.  
ATTACH,VALIDUs,VALINDs/M=W.  
COPY,NEWVAL,VALIDUs,V.  
COPY,VALX,VALINDs,V.  
RETURN,VALIDUs,VALINDs.  
ISF,E=VALIDUs,FM=familyname.
```

Instead of the ATTACH, in which each COPY writes over an old file, you may use

```
PURGE,VALIDUs,VALINDs.  
DEFINE,VALIDUs,VALINDs.
```

and then copy to the empty files.

Example 11:

The following example shows how to return the validation file to source code at the console.

```
X.DIS.  
SUI,377777.  
MODVAL,OP=S,FA.  
SAVE,SOURCE.
```

Later, you could use this source code file to create a new VALIDUs file with:

```
GET,SOURCE.  
MODVAL,OP=C,I=SOURCE,SI.
```

The SI parameter suppresses the automatic creation of the special user names.

Example 12:

The following example shows how to return the validation file to source code, using batch input. First you must create an idlefamily situation and enter the ISF,R=VALIDUs command.

```
X.DIS.  
SUI,377777.  
FAMILY,familyname.  
ATTACH,VALIDUs,VALINDs.  
COPY,VALIDUs,VAL.  
COPY,VALINDs,VALX.  
RETURN,VALIDUs,VALINDs.  
ISF,E=VALIDUs,FM=familyname.  
USER,username,password,familyname.  
SAVE,VAL,VALX.
```

The batch input is:

```
ujn.  
USER,username,password,familyname.  
GET,VAL,VALX.  
MODVAL,OP=S,P=VAL,U=VALX.  
SAVE,SOURCE.
```

From the console, enter:

```
X.DIS.  
USER,username,password,familyname.  
GET,SOURCE.  
SUI,37777.  
SAVE,SOURCE.
```

Example 13:

The following example shows how to convert a validation file from an existing system (pre-NOS 2.3) to NOS 2.3 format. First deadstart the existing system, and then enter the following sequence of commands at the console.

```
X.DIS.  
  
SUI,377777.  
  
DEFINE,SOURCE.  
  
MODVAL,OP=S,FA.  
  
DROP.
```

When you have successfully converted the validation file to source, you must edit any validations that were unavailable in the existing system into the newly created source file by supplying appropriate directives. Deadstart a NOS 2.3 system and enter the following sequence of commands at the console. You must create an idlefamilly situation by entering the IDLEFAMILY command followed by the ISF,R=VALIDUs command.

```
X.DIS.  
  
SUI,377777.  
  
PURGE,VALIDUs,VALINDs.  
  
DEFINE,VALIDUs,VALINDs.  
  
ATTACH,SOURCE.  
  
MODVAL,OP=C,I=SOURCE,N=VALIDUs,CV=CDF.  
  
RETURN,VALIDUs,VALINDs.  
  
ISF,E=VALIDUs.  
  
DROP.
```

Note that you should not use the SI parameter of MODVAL when initially creating a NOS 2.3 validation file from a pre-NOS 2.2 validation file. You must recreate special user names such as SYSTEMX with new parameter values. Expect directive errors when doing this; they occur due to duplicate definitions of the special user names and should be ignored.

**NOTE**

It is not possible to use the source file from a NOS 2.3 validation file to create a validation file for a pre-NOS 2.2 system. Since the passwords are kept in encrypted form, you cannot use them to generate the necessary PW=password directives.

Example 14:

The procedure in the following example creates a VALIDUs file and a VALINDs file when there are no VALIDUs and VALINDs files already present; that is, it creates an initial VALIDUs file and an initial VALINDs file.

The local file PUTIN contains input directives for three user names.

```
/USER201,PW=ADMIT1
```

```
/USER202,PW=ADMIT2
```

```
/USER203,PW=ADMIT3
```

Enter the following at the console.

```
X.DIS.
```

```
SUI,377777.
```

```
DEFINE,VALIDUs,VALINDs.
```

```
MODVAL,I=PUTIN,N=VALIDUs,OP=C.
```

```
RETURN,VALIDUs,VALINDs.
```

```
ISF,E=VALIDUs.
```

Example 15:

The following example shows how to update the validation file by means of a system origin job using a directive file created by a batch or interactive job.

The job does the following:

1. Creates a directive file with the desired changes.
2. Uses local copies of the current VALIDUs and VALINDs files to verify that the input directives are correct. The local copies of the validation files must have been previously created by a system origin job and saved for future use. Note that you can change the current running validation file by using the PASSWOR,CHVAL or UPROC commands (refer to NOS 2 Reference Set, Volume 3).
3. Saves the directive file as a permanent file whose existence indicates that a MODVAL update should be performed. The directive file should be permitted to user name SYSTEMX with WRITE permission.

You then initiate a system origin job from the system console to periodically check for the existence of the directive file. Do this by using the procedure defined in file PROCFIL under user name SYSTEMX. Initiate the procedure by using the following command:

```
X.BEGIN (procedure)
```

The procedure for this example is:

```
.PROC,procedure.  
WHILE,TRUE,LOOP.  
GET,file/UN=user,NA.           (file is the directive file saved under user name user.)  
IF,FILE(file,AS),UPMOD.  
MODVAL,OP=U,FA,I=file.  
PURGE,file/UN=user.  
ENDIF,UPMOD.  
ROLLOUT,1200.                 (Check again in 20 minutes.)  
ENDW,LOOP.
```



## SPECIAL USER NAMES

User names whose user indexes are greater than AUIMX (which is defined as 377700<sub>8</sub> in common deck COMSACC) are considered special user names. To protect special user names from unauthorized access and to prohibit the use of special user names to access the system, all special user names are invalid during login or on USER commands (except from system origin jobs). You may create permanent files under the special user names by means of special system jobs or system origin jobs.

During a MODVAL creation run, if you do not specify the SI parameter on the MODVAL command, 16 special user names will be created. These include eight special user names that are used in an MSAS or MSS environment (SUBFAM<sub>i</sub>,  $i=0,1,\dots,7$ ), the Printer Support Utility (PSU) user names, the network operations user name (NETOPS), the PLATO user name (PLATOMF), the application library user name (APLLIB), the flawed files user name (FLAWPF), the library user name (LIBRARY), and the system user name (SYSTEMX). These user names are automatically created and require no action. The following directives create these special user names.

```
/SUBFAMO,UI=377760B,AW=ALL,PW=SUBFAMO,XT=0.
/SUBFAM1,UI=377761B,AW=ALL,PW=SUBFAM1,XT=0.
.
.
/SUBFAM7,UI=377767B,AW=ALL,PW=SUBFAM7,XT=0.
/PRINTO1,UI=377770B,AW=ALL,AP=PSU,PW=PRINTO1,RL=ALL,XT=0.
/PRINTO2,UI=377771B,AW=ALL,AP=PSU,PW=PRINTO2,RL=ALL,XT=0.
/NETOPS,UI=377772B,AW=ALL,PW=NETOP SX,AP=ALL,RL=ALL,XT=0.
/PLATOMF,UI=377773B,AW=ALL,PW=PLATOMF,XT=0.
/APLLIB,UI=377774B,AW=ALL,PW=APLLIB,XT=0.
/FLAWPF,UI=377775B,AW=ALL,PW=FLAWPF X,XT=0.
/LIBRARY,UI=377776B,AW=ALL,PW=LIBRARY,XT=0.
/SYSTEMX,UI=377777B,AW=ALL,PW=SYSTEMX,SAL=ALL,SAV=ALL,RL=ALL.
```

User names in permanent files cataloged under the SUBFAM<sub>i</sub>,  $i=0,1,\dots,7$ , are used during MSAS or MSS processing (refer to NOS 2 Analysis Handbook for more information). If you do not redo a MODVAL creation run, you must add these user names manually.

### NOTE

User indexes 37775<sub>8</sub> and 37776<sub>0</sub> through 37776<sub>7</sub> are used for special purposes in the permanent file system. Because of this, PFDUMP will dump only certain files on these user indexes. Therefore, do not attempt to save files on these user indexes.

The PSU defines and uses permanent files cataloged under the PRINTO1 and PRINTO2 user names.

Permanent files cataloged under the NETOPS user name are network description files, which describe the physical and logical configuration of the hardware and software elements that comprise the terminal network.

The PLATO application defines and uses permanent files cataloged under the PLATOMF user name.

Permanent files cataloged under the APPLLIB user name are application programs for which the accounting is based on usage. Many users access these programs, and they are charged accordingly. All such programs must be of the direct-access type and have execute-only mode. Files cataloged under the APPLLIB user name should be cataloged with the appropriate permanent file category, passwords, and permit information, to allow the desired alternate users access to the files.

PFLOAD uses the FLAWPF user name to designate sectors in the indirect access file chain that have flaws (sectors that produce disk errors when accessed). No permanent files can be cataloged under this user index.

Many users access permanent files cataloged under the LIBRARY user name. Typically, the information saved under user name LIBRARY consists of indirect access permanent files containing programs or text of general interest, such as application programs. You can access these indirect access files with the interactive LIB command (refer to NOS 2 Reference Set, Volume 3 for further information). Catalog the files under the LIBRARY user name with the appropriate permanent file category, passwords, and permit information to allow the desired alternate users access to the files.

Permanent files cataloged under the SYSTEMX user name are validation, project profile, resource, terminated dayfiles, and maintenance and job initiation procedures. Ordinary users should not be able to access this information.

When MODVAL creates the default special user names SUBFAM0 through SUBFAM7, PRINT01, PRINT02, NETOPS, PLATOMF, APPLLIB, FLAWPF, and LIBRARY, it sets the associated passwords as immediately expiring. These passwords are public knowledge since they appear in the source to MODVAL; setting them as immediately expiring forces the security administrator to change them and reset the expiration dates before the special user names can be used. Change the passwords of the special user names from a job under the user name SYSTEMX, which has a nonexpiring password. The security administrator should also change the password for user name SYSTEMX since it also appears in MODVAL.

The special system file PROFILa<sup>†</sup> contains the information required to control a user's accounting and access to the system. This access is controlled not only by charge numbers and project numbers but also by time in, time out, expiration for charge and project numbers, accumulated SRUs, and the use of up to eight resources defined by the installation.<sup>††</sup> In addition, the system writes all exercise of this access by individual users to the accounting dayfile, thereby affording the customer a time log as a basis for account billing. The system updates the accumulated SRUs when a user's job terminates or when another CHARGE command is executed.

You can use the system file PROFILa from the console and, if you are validated to be a master user, from a batch or interactive job.

PROFILa affords three levels of job accounting.

<u>Level of Accounting</u>	<u>Description</u>
Charge Number	This is the primary division of the customer's job accounting structure. It is a 1- to 10-character billing identifier.
Project Number	This is an optional second-level division of the charge number. It is a 1- to 20-character identifier of a particular project. You can also specify for a given project number the access time, resource limits, project prologue, and project epilogue parameters for this project.  Users who have been declared master users can enter and change project numbers and their associated parameters.
User Name	The third level is a 1- to 7-character identifier of the individual user who is allowed access to a designated project. This is the same user name that VALIDUs furnishes to verify system access (refer to the User Validation section of this manual).  The master user enters and deletes user names. A user can be validated for any number of projects under the same charge number or under different charge numbers.

---

<sup>†</sup>In this manual, the user accounting file is referred to as PROFILa. Refer to table 1-1 for a list of file names that correspond to the appropriate operating system levels.

<sup>††</sup>Limit and accumulation fields for these eight installation-defined resources have been reserved in PROFILa and are checked for exhaustion of the corresponding resource by routine CHARGE. However, the system provides no facility for the dynamic update of the accumulation fields as these resources are being used.

Although you can enter charge numbers, project numbers, and user names at the console, practical dictates of your site might require that you create only a shell of the PROFILa file; that is, that you enter just the charge numbers and the associated master users. This relatively constant information is furnished by the site personnel. Following this, the master users update the PROFILa file with the projects and users under their direct control. Figure 3-1 illustrates this two-stage structuring of a PROFILa file.

There are three classifications of access and modification to PROFILa:

- System origin jobs
- Special accounting users (CSAP set in the user access validation word)
- Master users

These classes appear in the order of the capability they provide. System origin jobs have complete access to PROFILa, with no restrictions regarding PROFILE options and directives. Special accounting users from nonsystem origin jobs have full capabilities on update, list, and inquire runs but may not perform create, source, or reformat runs. Master users from nonsystem origin jobs may not change any charge number parameters (such as SRU multiplier indexes) or installation-related parameters (such as installation accumulators or project expiration date) for a project number. A master user may alter values pertaining only to charge numbers for which that user is the defined master user.

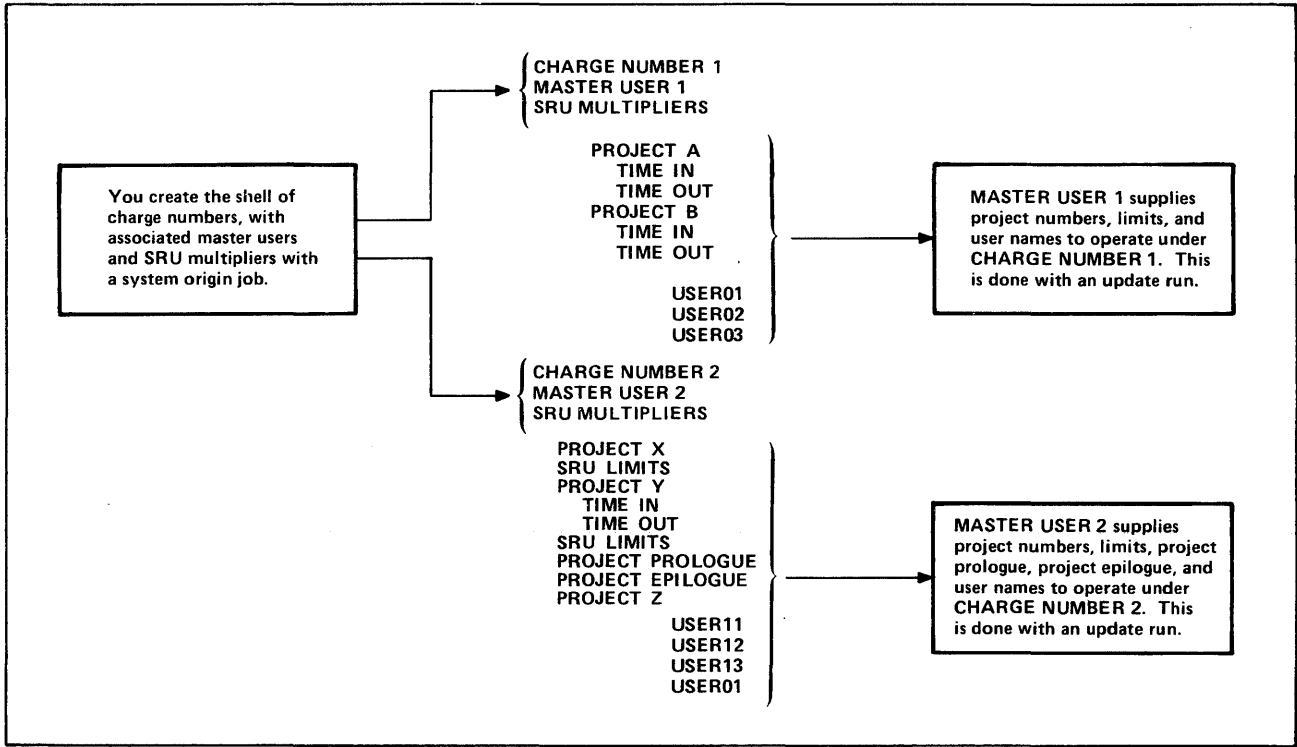


Figure 3-1. Representative Structure of a PROFILA File

## PROFILa PROJECT PROFILE MANAGER

You can create PROFILEa, the project profile file, only from the console by means of a system origin job (refer to PROFILE Console Input). Access and modification of an existing PROFILa file can be done from the console, a card reader (refer to PROFILE Batch Input), or an interactive terminal (refer to PROFILE Execution from a Terminal), depending on the option. In all cases, the PROFILE command calls options into execution. The format of the command is

PROFILE,p<sub>1</sub>,p<sub>2</sub>,...,p<sub>n</sub>.

where p<sub>1</sub> is a parameter used in defining project profile operations and files.

### ANALYST (SYSTEM ORIGIN JOB) PARAMETERS

<u>Pi</u>	<u>Description</u>
OP=C	Create option. Input directives are processed so as to create a new PROFILa file. Enter directives through the input file. Because this option defines a new project file, it must be previously undefined. This is the only option that does not require an existing project file containing at least one charge number.
OP=K	K display option. All other options (multiple OP specifications) are cleared, and you must enter instructions by the K display.  For a system origin job, if no parameters are specified and the command is  PROFILE.  the K display option will be automatically selected. In all other cases, OP=U is the default.
OP=R	R indicates a restructuring that rebuilds a copy of the current PROFILa file, discarding any deleted entries and reconstructing the directory to reduce file access. This restructured file replaces the existing PROFILa file. Do not specify OP=R if the PROFILa file is attached to any job or has a fast-attach status. Refer to System File Initialization in NOS 2 Analysis Handbook for more information on fast-attach files.

<u>P<sub>1</sub></u>	<u>Description</u>
OP=S	Returns the PROFILa file to source format (directive images) and places this source code on the source file (either S=source or SOURCE). This source file is used as the input for a later create or update.
FM=familyname	Name of the family the user wishes PROFILE to access. You can specify this option only from a system origin job.
S=filename	File that receives PROFILa source data for the option OP=S. Default is SOURCE.
OP=L,LO=F	Produces a full listing of the PROFILa file; figure 3-2 is an example.
OP=L,LO=C	Produces a listing of charge numbers only for the PROFILa file; figure 3-3 is an example.
OP=L,LO=P	Produces a complete charge number and project number listing for the PROFILa file; figure 3-4 is an example.

PROFILC FULL FILE LIST	OF FULL FILE.	PAGE	1
CHARGE NUMBER		yy/mm/dd.	hh/mm/ss.
1. 0552			
	CONTROLS FOR CHARGE NUMBER 0552		
CREATION DATE	yy/mm/dd.	EXPIRATION DATE	UNDEFINED
ENTRY *ACTIVE*		PROJECT COUNT = 5	
MU = GSY2447		PCL = (NO LIMIT)	
ISL = 77B	(NO LIMIT)	IR1 = 77B	(NO LIMIT)
IR2 = 77B	(NO LIMIT)	IR3 = 77B	(NO LIMIT)
IR4 = 77B	(NO LIMIT)	IR5 = 77B	(NO LIMIT)
IR6 = 77B	(NO LIMIT)	IR7 = 77B	(NO LIMIT)
IR8 = 77B	(NO LIMIT)		
M1 = 77B	( 1.000)	M2 = 74B	( 0.143)
M3 = 6B	( 0.006)	M4 = 77B	( 0.003)
AD = 77B	( 0.000)		

Figure 3-2. Full File List (OP=L,LO=F) (sheet 1 of 2)

CONTROLS FOR PROJECT NUMBER 0E00356

CREATION DATE	yy/mm/dd.	LAST CHANGE DATE	yy/mm/dd.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY	*ACTIVE*	EXPIRATION DATE	UNDEFINED
TI	= 0000	TO	= 0000
PFN	= PPROLOG	EFN	= PEPILOG
PUN	= USERNAM	EUN	= USERNAM
PPW	= *****†	EPW	= *****†
PCR	= A	ISV	= 77B (NO LIMIT)
SML	= (NO LIMIT)	SMA	= 45707
SIL	= (NO LIMIT)	SIA	= 45707
LR1	= (NO LIMIT)	AR1	= 0
LR2	= (NO LIMIT)	AR2	= 0
LR3	= (NO LIMIT)	AR3	= 0
LR4	= (NO LIMIT)	AR4	= 0
LR5	= (NO LIMIT)	AR5	= 0
LR6	= (NO LIMIT)	AR6	= 0
LR7	= (NO LIMIT)	AR7	= 0
LR8	= (NO LIMIT)	AR8	= 0

USER NUMBERS VALID TO USE 0E00356  
 DRK2642 JRL2422 KPH2421 MJP2423 REN2424  
 SDL2622

CONTROLS FOR PROJECT NUMBER 0E00361

CREATION DATE	yy/mm/dd.	LAST CHANGE DATE	yy/mm/dd.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY	*ACTIVE*	EXPIRATION DATE	UNDEFINED
TI	= 0000	TO	= 0000
PFN	= PPROLOG	EFN	= PEPILOG
PUN	= USERNAM	EUN	= USERNAM
PPW	= *****†	EPW	= *****†
PCR	= A	ISV	= 77B (NO LIMIT)
SML	= (NO LIMIT)	SMA	= 43777
SIL	= (NO LIMIT)	SIA	= 43777
LR1	= (NO LIMIT)	AR1	= 0
LR2	= (NO LIMIT)	AR2	= 0
LR3	= (NO LIMIT)	AR3	= 0
LR4	= (NO LIMIT)	AR4	= 0
LR5	= (NO LIMIT)	AR5	= 0
LR6	= (NO LIMIT)	AR6	= 0
LR7	= (NO LIMIT)	AR7	= 0
LR8	= (NO LIMIT)	AR8	= 0

USER NUMBERS VALID TO USE 0E00361  
 JJC2426 JMC2171 JXC2566 RLM2155 SDL2622

†If a password is defined for the project prologue or project epilogue, the password field appears as a string of asterisks. If no password is defined, the field is blank.

Figure 3-2. Full File List (OP=L,L0=F) (sheet 2 of 2)



PROFILC	CHARGE NUMBER LIST	OF FULL FILE.	PAGE
CHARGE NUMBER	MASTER USER	yy/mm/dd.	hh.mm.ss.
1. ABCD12	PLL2361		1
2. BOSTON			
3. TSTCHRG			
4. 0411	PLL2361		
5. 0520	PLL2361		
6. 0522	PLL2361		
7. 0523	PLL2361		
8. 0552	PLL2361		
9. 0560	PLL2361		
10. 0561	PLL2361		
11. 0580	PLL2361		
12. 0593	PLL2361		
13. 0594	PLL2361		
14. 0595	PLL2361		
15. 0912	PLL2361		
16. 0922	PLL2361		
17. 1097	PLL2361		
18. 1205	PLL2361		
19. 1212	PLL2361		
20. 1215	PLL2361		
21. 1218	PLL2361		
22. 1219	PLL2361		
23. 1220	PLL2361		
24. 1221	PLL2361		
25. 1226	PLL2361		
26. 1228	PLL2361		
27. 1229	PLL2361		
28. 1240	PLL2361		
29. 1242	PLL2361		
30. 1247	PLL2361		
31. 1250	PLL2361		
32. 1257	PLL2361		
33. 1258	PLL2361		
34. 1280			
35. 1292	PLL2361		
36. 1492	PLL2361		
37. 1493	PLL2361		
38. 1732	PLL2361		
39. 2908	PLL2361		
40. 3053	PLL2361		
41. 3054	PLL2361		
42. 3056	PLL2361		
43. 3572	PLL2361		
44. 3576	PLL2361		
45. 3585	PLL2361		
46. 3674	PLL2361		
47. 3910	PLL2361		
48. 3914	PLL2361		
49. 3917	PLL2361		
50. 4302			

Figure 3-3. Full File Charge Number List (OP=L,LO=C)

PROFILC PROJECT NUMBER LIST OF FULL FILE.  
CHARGE NUMBER            MASTER USER

PAGE            1  
yy/mm/dd. hh.mm.ss.

1. 0523                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   5053P01
  
2. 0552                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   OE00356                    OE00361  
   OE00377                    05527520  
   5076M52
  
3. 0560                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   05607520
  
4. 0561                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   0140107
  
5. 0580                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   0107403                    0110107  
   0110117
  
6. 0593                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   0B25550                    0B25850  
   0110103X
  
7. 0594                    PLL2361  
   VALIDATED PROJECT NUMBERS ARE -  
   C10508                    C10558  
   C20108                    0A301E5  
   0C10108                    330103

Figure 3-4. Full File Project Number List (OP=L,LO=P)

## ANALYST AND MASTER USER PARAMETERS

<u>Parameters</u>	<u>Description</u>
CV	Builds a source file from NOS 2.3 PROFILC. Suppresses project prologue and epilogue directives. This parameter is meaningful only with OP=S.
I=infile	File that contains input data for a create (OP=C) and an update (OP=U); default is INPUT.
L=outfile	File that receives output listings; default is OUTPUT.
P=profile	Project profile file; default is PROFILa. If specified, profile must not be a fast-attach file.
OP=U	Updates the project profile file with directives supplied by the input file. U is the default option for a nonsystem origin job or a system origin job for which at least one parameter is specified on the PROFILE command.
OP=T	Interactive update. Processing is the same as OP=U, but preliminary instructions are suppressed at the terminal.
OP=I,CN=chargenumber.	Charge number inquiry. All project numbers valid for charge number CN are written to the output file; figure 3-5 is an example.
OP=I,CN=chargenumber, PN=projectnumber.	Project number inquiry. The control values and all valid user names for project number projectnumber are written to the output file; figure 3-6 is an example.
OP=L,LO=FM	Full list of everything accessible on the PROFILa file by the master user; figure 3-7 shows a sample listing.
OP=L,LO=CM	Charge number list of all charge numbers accessible on the PROFILa file by the master user; figure 3-8 shows a sample listing.
OP=L,LO=PM	Project number list of all project numbers accessible on the PROFILa file by the master user; figure 3-9 shows a sample listing.
OP=L	Default is LO=F when the list option is called from a system origin job. The default is LO=FM if the job is not of system origin.

PROFILE,OP=I,CN=0552.

yy/mm/dd. hh.mm.ss.

CONTROLS FOR CHARGE NUMBER 0552

CREATION DATE	yy/mm/dd.	EXPIRATION DATE	UNDEFINED
ENTRY *ACTIVE*		PROJECT COUNT =	5
MU = PLL2361		PCL = (NO LIMIT)	
ISL = 77B	(NO LIMIT)	IR1 = 77B	(NO LIMIT)
IR2 = 77B	(NO LIMIT)	IR3 = 77B	(NO LIMIT)
IR4 = 77B	(NO LIMIT)	IR5 = 77B	(NO LIMIT)
IR6 = 77B	(NO LIMIT)	IR7 = 77B	(NO LIMIT)
IR8 = 77B	(NO LIMIT)		
M1 = 77B	( 1.000)	M2 = 74B	( 0.143)
M3 = 6B	( 0.006)	M4 = 77B	( 0.003)
AD = 77B	( 0.000)		

VALIDATED PROJECT NUMBERS ARE -

0E00356	0E00361
0E00377	05527520
5076M52	

Figure 3-5. Charge Number List

PROFILE,OP=I,CN=0552,PN=0E00356.

yy/mm/dd. hh.mm.ss.

CONTROLS FOR PROJECT NUMBER 0E00356

CREATION DATE	83/04/27.	LAST CHANGE DATE	83/06/30.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY *ACTIVE*		EXPIRATION DATE	UNDEFINED
TI = 0000		TO = 0000	
PFN = PPROLOG		EFN = PEPILOG	
PUN = USERNAM		EUN = USERNAM	
PPW = *****†		EPW = *****†	
PCR = A		ISV = 77B	(NO LIMIT)
SML = (NO LIMIT)		SMA = 45707	
SIL = (NO LIMIT)		SIA = 45707	
LR1 = (NO LIMIT)		AR1 = 0	
LR2 = (NO LIMIT)		AR2 = 0	
LR3 = (NO LIMIT)		AR3 = 0	
LR4 = (NO LIMIT)		AR4 = 0	
LR5 = (NO LIMIT)		AR5 = 0	
LR6 = (NO LIMIT)		AR6 = 0	
LR7 = (NO LIMIT)		AR7 = 0	
LR8 = (NO LIMIT)		AR8 = 0	

USER NUMBERS VALID TO USE 0E00356

DRK2642 JRL2422 KPH2421 MJP2423 REN2424  
SDL2622

†If a password is defined for the project prologue or project epilogue, the password field appears as a string of asterisks. If no password is defined, the field is blank.

Figure 3-6. Project Number List (OP=I,CN=xxxx,PN=xxxxxxx)

1. 0552

CONTROLS FOR CHARGE NUMBER 0552

CREATION DATE	yy/mm/dd.	EXPIRATION DATE	UNDEFINED
ENTRY *ACTIVE*		PROJECT COUNT =	5
MU =	GSY2447	PCL =	(NO LIMIT)
ISL =	77B (NO LIMIT)	IR1 =	77B (NO LIMIT)
IR2 =	77B (NO LIMIT)	IR3 =	77B (NO LIMIT)
IR4 =	77B (NO LIMIT)	IR5 =	77B (NO LIMIT)
IR6 =	77B (NO LIMIT)	IR7 =	77B (NO LIMIT)
IR8 =	77B (NO LIMIT)		
M1 =	77B ( 1.000)	M2 =	74B ( 0.143)
M3 =	6B ( 0.006)	M4 =	77B ( 0.003)
AD =	77B ( 0.000)		

CONTROLS FOR PROJECT NUMBER 0E00356

CREATION DATE	yy/mm/dd.	LAST CHANGE DATE	yy/mm/dd.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY *ACTIVE*		EXPIRATION DATE	UNDEFINED
TI =	0000	TO =	0000
PFN =	PPROLOG	EFN =	PEPILOG
PUN =	USERNAM	EUN =	USERNAM
PPW =	*****†	EPW =	*****†
PCR =	A	ISV =	77B (NO LIMIT)
SML =	(NO LIMIT)	SMA =	45707
SIL =	(NO LIMIT)	SIA =	45707
LR1 =	(NO LIMIT)	AR1 =	0
LR2 =	(NO LIMIT)	AR2 =	0
LR3 =	(NO LIMIT)	AR3 =	0
LR4 =	(NO LIMIT)	AR4 =	0
LR5 =	(NO LIMIT)	AR5 =	0
LR6 =	(NO LIMIT)	AR6 =	0
LR7 =	(NO LIMIT)	AR7 =	0
LR8 =	(NO LIMIT)	AR8 =	0

USER NUMBERS VALID TO USE 0E00356

DRK2642 JRL2422 KPH2421 MJP2423 REN2424  
 SDL2622

†If a password is defined for the project prologue or project epilogue, the password field appears as a string of asterisks. If no password is defined, the field is blank.

Figure 3-7. Master User Full File List (OP=L,LO=FM) (sheet 1 of 2)

CONTROLS FOR PROJECT NUMBER OE00361

CREATION DATE	yy/mm/dd.	LAST CHANGE DATE	yy/mm/dd.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY	*ACTIVE*	EXPIRATION DATE	UNDEFINED
TI	= 0000	TO	= 0000
PFN	= PPROLOG	EFN	= PEPILOG
PUN	= USERNAM	EUN	= USERNAM
PPW	= *****†	EPW	= *****†
PCR	= A	ISV	= 77B (NO LIMIT)
SML	= (NO LIMIT)	SMA	= 43777
SIL	= (NO LIMIT)	SIA	= 43777
LR1	= (NO LIMIT)	AR1	= 0
LR2	= (NO LIMIT)	AR2	= 0
LR3	= (NO LIMIT)	AR3	= 0
LR4	= (NO LIMIT)	AR4	= 0
LR5	= (NO LIMIT)	AR5	= 0
LR6	= (NO LIMIT)	AR6	= 0
LR7	= (NO LIMIT)	AR7	= 0
LR8	= (NO LIMIT)	AR8	= 0

USER NUMBERS VALID TO USE OE00361  
JJC2426 JMC2171 JXC2566 RLM2155 SDL2622

†If a password is defined for the project prologue or project epilogue, the password field appears as a string of asterisks. If no password is defined, the field is blank.

Figure 3-7. Master User Full File List (OP=L,LO=FM) (sheet 2 of 2)

PROFILC CHARGE NUMBER LIST OF MASTER USER CHARGE NUMBER	PLL2361 PAGE 1 yy/mm/dd. hh.mm.ss.
1. ABCD12 2. 0411 3. 0520 4. 0522 5. 0523 6. 0552 7. 0560	

Figure 3-8. Master User Charge Number List (OP=L,LO=CM)

PROFILC PROJECT NUMBER LIST OF MASTER USER CHARGE NUMBER	PLL2361 PAGE 1 yy/mm/dd. hh.mm.ss.
1. 0552 VALIDATED PROJECT NUMBERS ARE - OE00356                            OE00361 OE00377                            05527520 5076M52	

Figure 3-9. Master User Project Number List (OP=L,LO=PM)

### INPUT DIRECTIVES

Directives are available as input to PROFILE for the addition or updating of information concerning each charge number. The input stream for a PROFILE create (OP=C) or update (OP=U) is divided into two types of entries: charge number entries and directives.

A charge number entry must begin with a / in column 1 or with the CN= or ACN= directive. The 1 to 10 characters following the / or directive are the charge number name. A separator ends this name. Separators consist of all nonalphanumeric characters (except /, +, -, \*, and :), end-of-line, and end-of-card. Additional directives may immediately follow the separator.

The directives associated with a particular charge number must follow the charge number entry. All directives following a charge number entry apply to that charge number until another charge number entry occurs. A particular charge number can appear only once in an input stream on a creation run.

The directives applying to a particular charge number are further divided into master user and SRU multipliers, project number, and associated project number entries. The project number entry contains the data identifiers that establish the control values for this project and the list of user names that may access this project. The occurrence of duplicate project numbers under the same charge number entry is not allowed on a creation run.

Figure 3-10 illustrates a sample input stream.

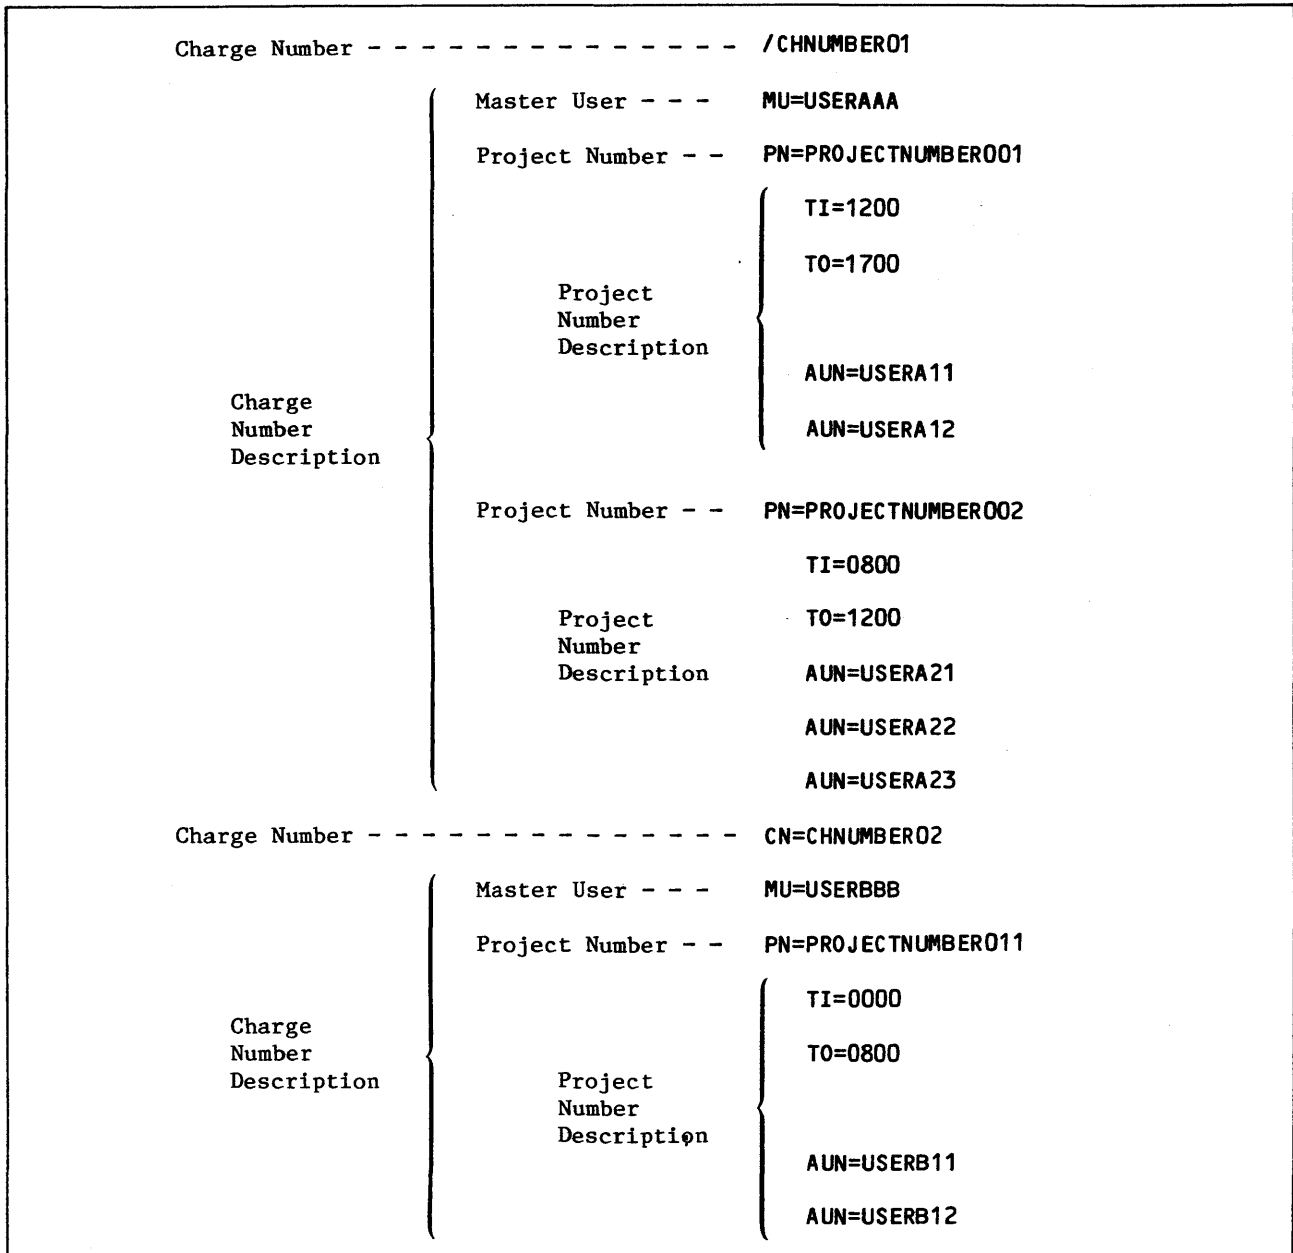


Figure 3-10. Sample Input Stream for Use with PROFILE



All directives following a charge number entry are in free format to column 72. Directives cannot be split between cards or lines. Blanks are ignored.

The following is the list of parameters and their descriptions.

<u>Parameter</u>	<u>Description</u>
ACN=cn	Add or activate charge number. A charge number is either created if it does not already exist or activated if it is inactive. However, the charge number must not exist when OP=C is specified.
AD=n	Index for the SRU constant used for the charging of resources not directly measurable by the system for this charge number. This may be one or two numeric digits. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. The maximum and default value of 778 gives system default. You can set AD only from a system origin job. (Refer to Multiplier Index Values and Actual Multiplier Values for more information on the use of this parameter.)
APN=pn	Add or activate project number. A project number is either created if it does not already exist or activated if it is inactive. However, the project number must not exist when OP=C is specified. A master user can specify this entry.
ARn†=x	For installation accumulator n, where n = 1,2,...or 8. For each n, ARn specifies the current number of resource units the project has used. When ARn surpasses LRn, the project is not available to users until either the limit or the accumulator is respecified.
AUN=un	Add user name. A 1- to 7-character alphanumeric identification of the individual or individuals who will have access to the project or projects under which this user name is entered. It is also the identification used by VALIDUs to establish system access (MODVAL Validation File Manager).  A single charge and project number can have a maximum of 4095 validated user names.  If you do not specify any user names for a project, all user names will be allowed to use it. A master user can specify this entry.
CEX=yymmdd	Charge number expiration date expressed as yymmdd. When the current date passes the expiration date, the charge number entry and all project entries under it are unavailable to users. However, a value of zero implies no restriction.
CN=cn	Charge number. This is a 1- to 10-character alphanumeric designation (including *). This directive performs the same function as the /. The specified charge number must exist and be active unless OP=C or CV is also specified; the parameter would then be interpreted as ACN. A master user can specify this entry.

---

†The system does not update these fields. Each site must provide this capability, if desired.

<u>Parameter</u>	<u>Description</u>
DCN=cn	Deactivate charge number. This directive does not destroy the specified charge number entry but sets its status such that the entry and all project entries under it are unavailable to users. PROFILE reformatting runs purge all deactivated entries. This entry is not allowed when OP=C is specified.
DPN=pn	Deactivate project number. This directive does not destroy the specified project number entry but sets its status such that the entry is not available to users. PROFILE reformatting runs purge all deactivated entries. This entry is not allowed when OP=C is specified. A master user can specify this entry.
DUN=un	Delete user name. Deletes the user name from the list of those who may access the project number. This entry can be specified by a master user.
EFN=efn	Epilogue file name. A 1- to 7-character alphanumeric file name that identifies the file on which the project epilogue program resides for a specified charge and project number. The project epilogue can be a procedure or a binary program. A null value means that no project epilogue program is defined. A master user can specify this entry.
EPW=epw	Epilogue file password. A 1- to 7-character alphanumeric password associated with the project epilogue file. A null value means that no password is present. A master user can specify this entry.
EUN=eun	Epilogue file user name. A 1- to 7-character alphanumeric user name under which the project epilogue file is cataloged. You must define an epilogue user name to execute the project epilogue file. A null value means that the file is accessed from the user's catalog. A master user can specify this entry.
IRn=x	Index for default value of installation limit register n, where n = 1,2,..,or 8.
ISL=x	Index for default value of the SRU installation limit register.
ISV=x	Index for SRU validation limit. It indicates the maximum SRU accumulation for any job using this charge and project number. A master user can specify this entry.
LRn=x	Installation limit register n, where n = 1,2,..,or 8. For each n, LRn specifies the maximum number of resource units (as defined by the installation) the project can use. However, a value of zero implies no restriction.

<u>Parameter</u>	<u>Description</u>
MU=mun	<p>Master user name having the capacity to update, inquire, and make listings for the projects entered under the same charge number as those of this master user.</p> <p>The master user must use this user name in jobs in which he or she is exercising project-oriented privileges.</p> <p>The master user name consists of from one to seven alphanumeric characters.</p> <p>There can be only one master user per charge number.</p>
M1=n	<p>Index used by the SRU multiplier to weight the calculated system resources not directly measurable for this charge number. The index may be one or two numeric digits. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. The maximum and default value of 778 gives system default. You can set M1 only from a system origin job. (Refer to Multiplier Index Values and Actual Multiplier Values for more information on the use of this parameter.)</p>
M2=n	<p>Index used by the SRU multiplier to weight input and output usage for this charge number. The index may be one or two numeric digits. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. The maximum and default value of 778 gives system default. You can set M2 only from a system origin job. (Refer to Multiplier Index Values and Actual Multiplier Values for more information on the use of this parameter.)</p>
M3=n	<p>Index used by the SRU multiplier to weight central memory field length usage for this charge number. The index may be one or two numeric digits. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. The maximum and default value of 778 gives system default. You can set M3 only from a system origin job. (Refer to Multiplier Index Values and Actual Multiplier Values for more information on the use of this parameter.)</p>
M4=n	<p>Index used by the SRU multiplier to weight extended memory field length usage for this charge number. The index may be one or two numeric digits. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. The maximum and default value of 778 gives system default. You can set M4 only from a system origin job. (Refer to Multiplier Index Values and Actual Multiplier Values for more information on the use of this parameter.)</p>
PCL=pci	<p>Project count limit. Maximum number of projects allowed under this charge number.</p>

<u>Parameter</u>	<u>Description</u>
PCR=pcr	Prologue charge required. This entry specifies under what conditions the charge required flag will be set upon termination of the project prologue program.

<u>Entry</u>	<u>Description</u>
PCR=null	Charge required flag is not set (default).
PCR=U	Charge required flag is set unconditionally.
PCR=A	Charge required flag is set only if the project prologue program aborts.

A master user can specify this entry.

PEX=yymmdd	Project number expiration date expressed as yymmdd. When the current date passes the expiration date, the project number is not available to users. However, a value of zero implies no restriction. A master user can specify this entry.
------------	--

PFN=pfm	Prologue file name. A 1- to 7-character alphanumeric file name that identifies the file on which the project prologue program resides for a specified charge and project number. The project prologue can be a procedure or a binary program. A null value means that no project prologue program is defined. A master user can specify this entry.
---------	---

PN=pn	Project number. This is a 1- to 20-character alphanumeric (including *) designation of a particular customer activity. The specified project number must exist and be active unless OP=C or CV is also specified; this parameter is then interpreted as APN. A master user can specify this entry.
-------	--

PPW=ppw	Prologue file password. A 1- to 7-character alphanumeric password associated with the project prologue file. A null value means that no password is present. A master user can specify this entry.
---------	--

PUN=pun	Prologue file user name. A 1- to 7-character alphanumeric user name under which the project prologue file is catalogued. A prologue user name must be defined in order for you to execute the project prologue file. A null value means that the file is accessed from the user's catalog. A master user can specify this entry.
---------	--

SIA=sia	SRU installation accumulator. This value specifies the current number of accumulated SRUs the project has used. The accumulator is updated at the end of a job and also when a second or subsequent CHARGE command is issued. When the SIA value exceeds the SIL value, the project is not available to users until either the limit or the accumulator is respecified.
---------	---

SIL=sil	SRU installation limit register. This value specifies the maximum number of accumulated SRUs the project may use, as controlled by the installation. However, a value of zero implies no restriction.
---------	---

<u>Parameter</u>	<u>Description</u>
SMA=sma	SRU master user accumulator. This value specifies the current number of accumulated SRUs the project has used. The accumulator is updated at the end of a job or terminal session and/or when a second or subsequent CHARGE command is issued. When the SMA value exceeds the SML value, the project is not available to users until either the limit or the accumulator is respecified. A master user can specify this entry.
SML=sml	SRU master user limit register. This value specifies the maximum number of accumulated SRUs the project may use, as controlled by the master user. However, a value of zero implies no restriction. A master user can specify this entry.
T=ti	Time of day before which the validated user cannot use this project number. This is expressed in 4-digit military time notation. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. Maximum value is 2400. A master user can specify this entry.
TO=to	Time of day after which the validated user cannot use this project number. This is expressed in 4-digit military time notation. A radix may follow to indicate decimal (D) or octal (B). If the radix is omitted, decimal is assumed. Maximum value is 2400; however, TI=TO implies no restriction. A master user can specify this entry.

## PROFILE CONSOLE INPUT

You can create a PROFILa file only by calling PROFILE from the console. Likewise, you can restructure an existing PROFILa file, return it to source, or read it to an output file as a full file listing only from the console. The remaining operations (update, inquiry, and master user listings) you can execute from console, batch (refer to PROFILE Batch Input), or a terminal (refer to PROFILE Execution from a Terminal).

A new PROFILa file can be created from the console by means of a DIS job. You call a preestablished input file of control values, then enter the PROFILE command with OP=C. The following example, given an input file (INPUT) with control values for structuring a new PROFILa file, is a creation run from the console.

X.DIS.

SUI,377777.

NOTE,INPUT.+/CN1000 (Where CN1000 is the first charge number to be created.)

PACK,INPUT.

PROFILE,OP=C,I=INPUT.

ISF,E=PROFILa.

Use the K display only for an update. With the K option, you enter directives from the console instead of from an input file. If you enter directives for an existing charge and project number, the control values change according to the directive.

Call the K display with:

X.PROFILE.

The B,0 display indicates the job sequence name assigned to PROFILE. To the right of this entry the following intensified message appears:

REQUEST \*K\* DISPLAY

Type:

K,jsn.

KK.

where jsn is the job sequence name for PROFILE. This brings the initial K display for PROFILEa to the left screen (refer to figure 3-11) and PROFILE K display commands to the right screen (refer to figure 3-12). You are now ready to create or update. If you enter the charge number, figure 3-13 appears on the left screen. When you enter a particular project number, the three screens shown in figure 3-14 are available. The following example illustrates an update input stream.

K./CHARGNUM1           (Use the / when PROFILE is updating an existing charge number.)

K.MU=MUSE1

K.END

K./CHARGNUM2

K.MU=MUSE2

K.END

K.STOP

```

K. PROFILE.          JSN

PROFILE

PROFILC      CREATED  yy/mm/dd.      LAST MODIFIED  yy/dd/mm.

```

Figure 3-11. PROFILE Initial Display, Left Screen

```

K. PROFILE.          JSN

                                PROFILE K DISPLAY COMMANDS

DROP          DROP DIRECTIVES ENTERED SINCE CHARGE OR PROJECT.
END           UPDATE PROFILE FILE AND TERMINATE CURRENT CHARGE.
STOP         TERMINATE PROCESSING.
+            PAGE LEFT SCREEN FORWARD.
-            PAGE LEFT SCREEN BACKWARD.

                                PROFILE DIRECTIVES

ACN=CHARN    ADD OR ACTIVATE CHARGE.
APN=PROJN    ADD OR ACTIVATE PROJECT.
CN=CHARN     SET CHARGE NUMBER, ACTIVE CHARGE MUST EXIST.
DCN=CHARN    DEACTIVATE CHARGE.

DPN=PROJN    DEACTIVATE PROJECT.
PN=PROJN     SET PROJECT NUMBER, ACTIVE PROJECT MUST EXIST.
/CHARN       SET CHARGE NUMBER, ACTIVE CHARGE MUST EXIST.

```

Figure 3-12. PROFILE, Right Screen

K. PROFILE. JSN

PROFILE

PROFILC            CREATED   yy/mm/dd.        LAST MODIFIED   yy/mm/dd.

CHARGE NUMBER    1282

CREATION DATE    83/04/27.            EXPIRATION DATE    UNDEFINED  
ENTRY            \*ACTIVE\*            PROJECT COUNT      3

MU =		PCL = (NO LIMIT)
M1 = 77B	( 1.000)	M2 = 77B ( 0.100)
M3 = 77B	( 0.003)	M4 = 77B ( 0.003)
AD = 77B	( 0.000)	ISL = 77B (NO LIMIT)
IR1 = 77B	(NO LIMIT)	IR2 = 77B (NO LIMIT)
IR3 = 77B	(NO LIMIT)	IR4 = 77B (NO LIMIT)
IR5 = 77B	(NO LIMIT)	IR6 = 77B (NO LIMIT)
IR7 = 77B	(NO LIMIT)	IR8 = 77B (NO LIMIT)

/1282

K.

Figure 3-13. PROFILE Charge Number, Left Screen



## PROFILE BATCH INPUT

As a master user, you can initiate an update, inquiry, or listing of the projects under your charge number by way of a batch job. The following is an example of a batch update in which you add a time in (TI) and a time out (TO) to one of your projects (PROJ2).

```
JOBUPDA.  
  
USER,username,password,familyname.  
  
PROFILE,OP=U.  
  
end-of-record  
  
/CHARGNUM1  
  
PN=PROJ2  
  
TI=1400  
  
TO=1800  
  
end-of-information
```

## PROFILE EXECUTION FROM A TERMINAL

As a master user, you can also initiate an update, inquiry, or listing of the projects under your charge number from an interactive terminal. To do this you must have master user status validated at login. After this validation is affirmed, you, as a master user, must enter the batch subsystem or use the X command in order to use the PROFILE command.

K. PROFILE. JSN

PROFILE PAGE 1 OF 3

PROFILC CREATED yy/mm/dd. LAST MODIFIED yy/mm/dd.

CHARGE NUMBER 1282

CREATION DATE 83/04/27. EXPIRATION DATE UNDEFINED  
ENTRY \*ACTIVE\* PROJECT COUNT 3

MU =		PCL = (NO LIMIT)	
M1 = 77B	( 1.000)	M2 = 77B	( 0.100)
M3 = 77B	( 0.003)	M4 = 77B	( 0.003)
AD = 77B	( 0.000)	ISL = 77B	(NO LIMIT)
IR1 = 77B	(NO LIMIT)	IR2 = 77B	(NO LIMIT)
IR3 = 77B	(NO LIMIT)	IR4 = 77B	(NO LIMIT)
IR5 = 77B	(NO LIMIT)	IR6 = 77B	(NO LIMIT)
IR7 = 77B	(NO LIMIT)	IR8 = 77B	(NO LIMIT)

PN=721PROJECT

K.

Figure 3-14. PROFILE Charge and Project Numbers, Left Screen (sheet 1 of 3)

K. PROFILE. JSN

PROFILE

PAGE 2 OF 3

PROJECT NUMBER 721PROJECT

CREATION DATE	yy/mm/dd.	LAST CHANGE DATE	yy/mm/dd.
LAST UPDATE DATE	UNDEFINED	LAST UPDATE TIME	UNDEFINED
ENTRY	*ACTIVE*	EXPIRATION DATE	UNDEFINED

TI = 0000

TO = 0000

PFN =

EFN =

PUN =

EUN =

PPW =

EPW =

PCR =

ISV = 77B (NO LIMIT)

SML = (NO LIMIT)

SMA = 0

K.

Figure 3-14. PROFILE Charge and Project Numbers, Left Screen (sheet 2 of 3)

K. PROFILE. JSN

PROFILE

PAGE 3 OF 3

PROJECT NUMBER 721PROJECT

SIL = (NO LIMIT)	SIA = 0
LR1 = (NO LIMIT)	AR1 = 0
LR2 = (NO LIMIT)	AR2 = 0
LR3 = (NO LIMIT)	AR3 = 0
LR4 = (NO LIMIT)	AR4 = 0
LR5 = (NO LIMIT)	AR5 = 0
LR6 = (NO LIMIT)	AR6 = 0
LR7 = (NO LIMIT)	AR7 = 0
LR8 = (NO LIMIT)	AR8 = 0

K.

Figure 3-14. PROFILE Charge and Project Numbers, Left Screen (sheet 3 of 3)

## UPDATE FROM A TERMINAL

As an interactive master user, you can initiate an update by issuing the command PROFILE,OP=U. Once this is initiated, the system prints the following block of information at the terminal.

THE FOLLOWING ARE VALID INPUT DIRECTIVES FOR  
UPDATE-

```
CN OR / - CHARGE NUMBER.
PN - PROJECT NUMBER.
APN - ADD OR ACTIVATE PROJECT NUMBER.
DPN - DEACTIVATE PROJECT NUMBER.
PEX - PROJECT NUMBER EXPIRATION DATE.
TI - TIME IN.
TO - TIME OFF.
PFN - PROLOGUE FILE NAME.
PUN - PROLOGUE USER NAME.
PPW - PROLOGUE PASSWORD.
PCR - PROLOGUE CHARGE REQUIRED OPTION.
      NULL - CHARGE REQUIRED NOT SET.
      U - UNCONDITIONAL.
      A - ON ABORT.
EFN - EPILOGUE FILE NAME.
EUN - EPILOGUE USERNAME.
EPW - EPILOGUE PASSWORD.
ISV - SRU VALIDATION LIMIT INDEX.
SML - SRU MASTER USER LIMIT.
SMA - SRU MASTER USER ACCUMULATOR.
AUN - ADD USER NUMBER.
DUN - DELETE USER NUMBER.
ACN - ADD OR ACTIVATE CHARGE NUMBER.
DCN - DEACTIVATE CHARGE NUMBER.
MU - MASTER USER NUMBER.
PCL - PROJECT COUNT LIMIT.
M1 - M4 - SRU MULTIPLIER INDICES.
AD - SRU CONSTANT INDEX.
CEX - CHARGE NUMBER EXPIRATION DATE.
ISL - INSTALLATION SRU LIMIT INDEX.
IR1 - IR8 - INSTALLATION LIMIT INDICES.
SIL - SRU INSTALLATION LIMIT.
SIA - SRU INSTALLATION ACCUMULATOR.
LR1 - LR8 - INSTALLATION LIMIT REGISTERS.
AR1 - AR8 - INSTALLATION ACCUMULATORS.
A NULL LINE COMPLETES DIRECTIVE INPUT PROCESSING.
```

Only for users with special accounting privileges.

You can suppress this informative printout by using the command option OP=T instead of OP=U. In all other respects, the operation of T is identical to that of U.

If charge and project numbers are required, the example will run as follows:

```
/ENTER DIRECTIVES
?/CHARG1
? PN=PROJ2
? TI=0800
? TO=1200
? (CR)
PROFILA UPDATED.
/
```

## **INQUIRY FROM A TERMINAL**

As a master user, you can request information on your current charge number and project numbers by means of an inquiry from a terminal. To do this, issue the command

```
PROFILE,OP=I,CN=chargenumber,PN=projectnumber.
```

where `chargenumber` is your charge number and `projectnumber` is the particular project for which you want information.

If you do not supply the charge number on the PROFILE command, PROFILE will output

```
ENTER CHARGE NUMBER
```

when it processes the command. You must type in the appropriate charge number. If you enter a null line, processing will end.

If you do not enter a project number on the command, or if you supply a charge number in response to ENTER CHARGE NUMBER, PROFILE will issue

```
ENTER PROJECT NUMBER
```

to the terminal and wait for you to enter the desired project number. If you enter a null line, output will consist of a list of valid project numbers under this charge number, and PROFILE will again respond

```
ENTER PROJECT NUMBER
```

If you enter a project number, output will consist of a list of the controls for and valid users of this project number. PROFILE will again respond

```
ENTER PROJECT NUMBER
```

until you enter a null line to indicate end of processing for the current charge number.

After output of the desired project number information, PROFILE issues

```
ENTER CHARGE NUMBER
```

to the terminal and waits for you to enter another charge number. If you enter a null line, processing will end.

## **LISTING FROM A TERMINAL**

As a master user, you can request an FM, CM, or PM listing from a terminal (refer to PROFILA Project Profile Manager). Figures 3-7, 3-8, and 3-9 show sample listings.

## CHARGE COMMAND†

The system routine CHARGE provides validation of your charge and project number. You will have to call CHARGE if the AW=CCNR option in your access word is not set (refer to MODVAL Validation File Manager). If a charge and project number are present in your validation file record (CN and PN MODVAL directives), these will be validated if no call to CHARGE is present.

When validation fails, the job is aborted and the appropriate error message is issued to the dayfile. If you are at a terminal, the message is returned to the terminal.

When validation is successful, the following events occur.

- Accounting information is written to the accounting dayfile (refer to Account Dayfile Messages for message formats).
- The accounting parameters associated with your charge and project numbers are inserted into the accounting formula (refer to the SRU Formula). They are used in calculating the billing unit until the end of the job or until another charge and project number are entered.
- The SRU accumulator is set to zero. The CP, MS, MT, and PF accumulators are not altered in any way. If you have selected the minimum charge installation option, and if the accumulated SRUs are less than the minimum charge amount, the minimum charge value is entered into the account dayfile (the Resource Accounting section describes the parameters and the minimum charge installation option).
- A project prologue program is executed if one is defined for the project number entered on the CHARGE command. If PCR=U is specified on the PROFILE command, the charge-required flag will be set upon termination of the project prologue program. If PCR=A is specified on the PROFILE command, the charge-required flag will be set only if the project prologue program aborts. When the charge-required flag is set, you must enter a valid CHARGE command to continue processing.

The PCR=U option allows you as the master user to restrict the use of a project number to a single application executed as a project prologue program.

The PCR=A option allows you as the master user to ensure that the project prologue program completes before any user programs can be run under the same project number. As a master user, you can use this feature to perform further validation checks on a user who executes a CHARGE command before allowing use of the project number. If the validation check were to fail, the project prologue program could execute the ABORT macro to set the charge-required flag for a binary program; or the project prologue program could execute a REVERT,ABORT command to set the charge-required flag for a procedure.

---

† Refer to NOS 2 Reference Set, Volume 3, for further information about the CHARGE command.

The following is the ordered list of the account dayfile and job dayfile messages issued whenever a new charge number is entered. These messages are not issued, however, when a required CHARGE command immediately follows an initial USER command.

```
hh.mm.ss. jsn s.  UDCP, xxxxxx.xxxSECS.  
hh.mm.ss. jsn s.  UDMS, xxxxxx.xxxKUNS.  
hh.mm.ss. jsn s.  UDMT, xxxxxx.xxxKUNS.  
hh.mm.ss. jsn s.  UDPF, xxxxxx.xxxKUNS.  
hh.mm.ss. jsn s.  UDAD, xxxxxx.xxxKUNS.  
hh.mm.ss. jsn s.  UDAC, xxxxxx.xxxUNTS.  
hh.mm.ss. jsn s.  ACSR, xxxxxx.xxxUNTS.  
hh.mm.ss. jsn s.  ACCN, chargenumber, projectnumber. (account dayfile only)
```

Section 5 contains a detailed description of account dayfile messages.



The basic accounting unit for NOS is the SRU. The SRU is a measurement of the resources used by a job or by a terminal session. The SRU algorithm combines measurements of the following resources into a single unit.

- Central memory field length
- Extended memory field length
- CPU time
- Mass storage usage
- Magnetic tape usage
- Permanent file usage
- Matrix algorithm processor (MAP) usage
- Application usage

The SRU calculation is dynamic; that is, each time the job or session uses additional amounts of the above resources, the SRU value is updated. The following sections provide the algorithm for calculating SRU values and a detailed description of SRU components.

The common deck COMSSRU contains the definitions for the SRU multipliers and associated parameters. It also defines the absolute ranges for these values. To obtain a listing of COMSSRU, assemble CALLSYS; the default values are shown. To change any default values, you must make modifications in COMSSRU and reassemble the appropriate NOS decks. These changes should normally be made as part of the installation process (refer to NOS 2 Installation Handbook for more information).

## SRU FORMULA

The system uses the following formula for SRU computation.

$$SRU = M1[CP + M2 \times IO + M3(CP + IO)CM + M4(CP + IO)EM + MM \times MP + AUC] + AD$$

Parameter	Description
CP	Central processor unit usage expressed in milliunits. The value of this parameter is determined by the following formula.
$CP = S0 \times CP0 + S1 \times CP1$	
CP0	Time accumulated on CPU 0 in milliseconds
CP1	Time accumulated on CPU 1 in milliseconds
S0,S1	Multipliers used to normalize CPU time when the system is running on a dual CPU machine

<u>Parameter</u>	<u>Description</u>
IO	A measure of the accumulated system activity related to input and output for a user. This parameter, expressed in milliunits, is defined by the following formula:  $IO = S2 \times MS + S3 \times MT + S4 \times PF$
MS	Mass storage activity accumulator. The IO Increments section describes the components of this parameter in detail.
MT	Magnetic tape activity accumulator. The IO Increments section describes the components of this parameter in detail.
PF	Permanent file activity accumulator. The IO Increments section describes the components of this parameter in detail.
S2,S3,S4	Multipliers used to weight MS, MT, and PF activity against one another.
CM	Central memory field length expressed in words divided by 1000g.
EM	Extended memory field length expressed in words divided by 1000g.
M1	Multiplier used to scale the overall SRU value.
M2	Multiplier used to weight the I/O activity against CPU time, central memory field length, and extended memory field length usage.
M3	Multipliers used to weight central memory field length, CPU time, and I/O activity.
M4	Multiplier used to weight extended memory field length, CPU time, and I/O activity.
MM	Multiplier used to scale MAP usage.
MP	A measure of the accumulated MAP activity for a user.
AUC	A measure of the accumulated application activity for a user.
AD	Incremental adder applied to the SRU value during accounting initialization.

The multipliers S0 through S4 and MM, as well as the default values for units of MS, MT, PF, MP, and AUC, are installation options that do not change during system execution. The multipliers M1 through M4 and the adder AD are also installation options, but they may change after system activity has begun. The default values for M1 through M4 and AD are set during job or session initialization. When you enter a charge number, you may specify different values for M1 through M4 and AD for use in the SRU calculation (refer to PROFILE Console Input). These parameters are retained in PROFILA and provide the central site with the flexibility of varying the billing unit for selected users.

## SRU PARAMETERS

The following paragraphs describe the SRU parameters and list their absolute ranges and default values. The COMSSRU name is listed along with the default value for each parameter. When SRU parameter default values are set, these values must lie within the absolute range for each parameter.

### SO AND S1

The system selects the values used for S0 and S1 at deadstart time from a list of multipliers defined for each type of CPU detectable by NOS. S0 is the primary multiplier and is used for all single CPU machines. For dual CPU machines, S0 is used for the first CPU (CPU 0) and S1 is used for calculations involving the second CPU (CPU 1). For example, if a site is running a 6700, the system assigns to S0 the value defined for a 6600 CPU and to S1 the value defined for a 6400 CPU. This allows a site with several systems to use different multipliers for different CPUs while using only one deadstart tape.

It is possible for you to transform this selection at deadstart by using the IPRDECK entry CPM. Use of this entry allows you to select any multiplier from the list in COMSSRU, which follows, to be used instead of the normally selected value. One advantage of this entry is that a site may charge differently for the use of a 6200 CPU or a 6400 CPU, although the software cannot normally detect the difference.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
CP62	1.0	6200 CPU
CP64	1.0	6400 CPU
CP65	1.0	6500 CPU
CP66	1.0	6600 CPU
CP67	1.0	6700 CPU
CP71	1.0	CYBER 71 CPU
CP72	1.0	CYBER 72 CPU
CP73	1.0	CYBER 73 CPU
CP74	1.0	CYBER 74 CPU
C171	1.0	CYBER 171 CPU
C172	1.0	CYBER 172 CPU
C173	1.0	CYBER 173 CPU
C174	1.0	CYBER 174 CPU
C175	1.0	CYBER 175 CPU
C176	1.0	CYBER 176 CPU
C720	1.0	CYBER 720 CPU
C730	1.0	CYBER 730 CPU

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
C740	1.0	CYBER 740 CPU
C750	1.0	CYBER 750 CPU
C760	1.0	CYBER 760 CPU
C810	1.0	CYBER 810 CPU
C815	1.0	CYBER 815 CPU
C825	1.0	CYBER 825 CPU
C830	1.0	CYBER 830 CPU
C835	1.0	CYBER 835 CPU
C845	1.0	CYBER 845 CPU
C855	1.0	CYBER 855 CPU
C865	1.0	CYBER 865 CPU
C875	1.0	CYBER 875 CPU
ICM1	1.0	Installation-
ICM2	2.0	selected CPU
ICM3	3.0	multiplier
ICM4	4.0	values
ICM5	5.0	

Absolute range: 0.1 to 50.0

## **S2, S3, AND S4**

These multipliers are used in the calculation of the IO parameter. In addition to providing weighting factors, they also convert units of resource usage (MS, MT, or PF) to milliunits of IO. For example, if the default value for S2 is used, 300 units of MS usage result in 300 milliunits of IO.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
S2SR	1.0	MS multiplier (S2)
S3SR	1.0	MT multiplier (S3)
S4SR	1.0	PF multiplier (S4)

Absolute range: 0.1 to 50.0

## **M1**

This multiplier is used as a scaling factor to increase or decrease the overall SRU value. This value may be changed from the system default for each charge number when the charge number is entered (refer to PROFILE Console Input and Multiplier Index Values and Actual Multiplier Values for further information).

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
M1SR	1.0	M1 multiplier

Absolute range: 0.1 to 25.5

## M2, M3, AND M4

These multipliers provide weighting of the various terms in the SRU calculation. You may change the values from the system default values for each charge number when you enter the charge number (refer to PROFILE Console Input and Multiplier Index Values and Actual Multiplier Values for further information).

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
M2SR	0.100	M2 multiplier
M3SR	0.003	M3 multiplier
M4SR	0.003	M4 multiplier

Absolute range: 0.001 to 1.023

## MM

This multiplier is used as a scaling factor for the MAP term in the SRU calculation.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
MPSR	1	MAP multiplier (MM)

Absolute range: 1 to 100

## AD

The value assigned to this parameter is applied to the SRU value during accounting initialization of a job or session. It thus serves as a one-time overhead increment. You may change this value from the system default for each charge number when you enter the charge number (refer to PROFILE Console Input and Multiplier Index Values and Actual Multiplier Values for further information).

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
ADSR	0	Incremental adder (AD)

Absolute range: 1 to 1000

In addition to the parameters that make up the SRU formula, the following values are also defined in COMSSRU.

## MINIMUM DISPLAY VALUE

This parameter defines the minimum value to be displayed at the end of each step in an interactive job. If the accumulated SRUs are less than this value, they are not displayed.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
MDSR	0.100	Minimum display value

Absolute range: 0.001 to 1.000

## MINIMUM CHARGE VALUE

This parameter defines the minimum SRU value to be applied against a charge number. If accumulated SRUs are less than this value, a charge equal to this value is applied.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
MCSR	1.000	Minimum charge value

Absolute range: 0.001 to 10.000

## IO INCREMENTS

The IO parameter in the SRU formula is a measure of the accumulated input and output system activity for a user. It accounts for MS activity, MT activity, and PF activity. Central site-defined increments control this parameter. The increments are assigned to various functions performed by the system. These functions include data transfer as well as other operations, such as file positioning.

This section describes the increments of MS, MT, and PF, which make up the measurable portion of the IO parameter. It lists the IO increments with COMSSRU names, default values, and absolute ranges.

## MS INCREMENTS

The formula for calculating the MS increment is as follows:

$$\text{MS increment} = \text{operation charge} + \text{penalty} + (\text{PRUs transferred} \times 2^{\text{IMPT}})$$

The system applies operation charges for the defined functions as follows:

<u>COMSSRU Name</u>	<u>Default Increment</u>	<u>MS Activity</u>
IMCL	1	Close
IMLL	1	Library load
IMOP	1	Open †
IMRD	2	Read
IMRU	1	Return, unload, or evict ††
IMSK	2	Skip †
IMWT	2	Write or overwrite

Absolute range for MS increments: 0 to 63

---

† There is no charge if the file is assigned to a terminal or if it is nonrandom and assigned to mass storage.

†† There is no charge if the file is not present.

The rewind and indefinite skip backward (skip count=77777g) functions incur no operation charge.

The close return and close unload functions incur an operation charge of

IMCL + IMRU.

The system applies an additional penalty for read-with-list operations (READLS, RPHRLS) based on the positioning interval.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>MS Activity</u>
IMPL	128	Positioning interval for IMRL penalty
IMRL	3	Read-with-list

For each random repositioning for a read-with-list operation, the system adds a penalty of IMRL for the following cases:

- When the random address specified by the next list entry is less than the previous random address (requiring a backward repositioning).
- When the random address specified by the next list entry exceeds IMPL PRUs forward from the previous position.

The formula for calculating the increments charged for PRUs transferred is as follows:

Number of increments = number of PRUs transferred x 2IMPT

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>MS Activity</u>
IMPT	2	Combined input and output (CIO) read, write, skip, open, and close operations requiring data transfer to/from mass storage (does not include system sector or EOI sector transfers)

The system accumulates the number of PRUs transferred for all operations requiring a data transfer, including the following:

- CIO read, write, and skip
- Random file directory positioning
- Transfer for open and close operations
- Skip backwards to end of record and end of file mark (EOR or EOF)†
- Random open directory positioning†

---

†There are no charges for the excess PRUs read to determine EOR and EOF boundaries.

## MT INCREMENTS

The formula for calculating the MT increment is as follows:

$$\text{MT increment} = (\text{tape blocks transferred}) \times (\text{operation charge})$$

There is a charge to the following increments for each magnetic tape operation.

<u>COMSSRU Name</u>	<u>Default Increment</u>	<u>MT Activity</u>
ITCL	1	Open or close
ITPO	2	Position
ITRL	5	Read L tape
ITRW	4	Read or write
ITWL	6	Write L tape

Absolute range for MT increments: 0 to 63

## PF INCREMENTS

The formula for calculating the PF increment is as follows:

$$\text{PF increment} = \text{operation charge} + \text{IPPR (PRUs transferred/IPPN)}$$

There is a charge to the following increments for each permanent file operation.

<u>COMSSRU Name</u>	<u>Default Increment</u>	<u>PF Activity</u>
IPAC	1	SETPFAC
IPAD	1	Alternate device access
IPAF	1	SETAF
IPAL	1	SETPFAL
IPAN	1	ASSIGNPF
IPAP	20	APPEND
IPAT	4	ATTACH
IPCE	0	Catalog entry returned
IPCG	1	CHANGE
IPCS	4	Catalog search
IPCT	1	CATLIST
IPDD	1	DROPDS
IPDF	4	DEFINE
IPDI	1	DROPIDS
IPDP	1	DELPFC
IPGT	1	GET or OLD
IPPA	1	Permit file access
IPPG	1	PURGE
IPPM	1	PERMIT
IPRP	1	REPLACE
IPRS	1	RPFSTAT
IPSA	1	SETASA
IPSD	1	SETDA
IPSV	1	SAVE
IPUA	1	UATTACH
IPUG	1	UGET
IPUR	1	UREPLACE
IPVA	1	VALIDUs access



There is a charge to the following increment each time a specified number of PRUs are transferred.

<u>COMSSRU Name</u>	<u>Default Increment</u>
IPPR	4

The following specifies the number of PRUs transferred before the IPPR increment is charged.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
IPPN	10	Using the default value, the IPPR increment is charged each time 10 PRUs are transferred.

Absolute range for PF increments: 0 to 63

Example:

The charge for an ATTACH,filename/PN=packname,UN=username command is calculated as follows:

IPAT+IPAD+IPVA+IPCS+IPPA (if permit data is available)

## EXAMPLE OF SRU CALCULATION

This section illustrates how an SRU value is obtained. The SRU formula is as follows:

$$SRU = M1 [CP + M2 \times IO + M3 (CP + IO) CM + M4 (CP + IO)EM + MM \times MP + AUC] + AD$$

The SRU Formula section describes the parameters. For this example, all default values are assumed except AD, which equals 1.0. Therefore, the following parameters are known.

S0 = 1.0	M1 = 1.0	AD = 1.0
S1 = 1.0	M2 = 0.100	
S2 = 1.0	M3 = 0.003	
S3 = 1.0	M4 = 0.003	
S4 = 1.0	MM = 1.0	

For this example, it is assumed that the job or session accumulated the following amounts of the specified resources.

9135 milliseconds of CPU time on CPU 0 (CP0 = 9135)  
 0 millisecond of CPU time on CPU 1 (CP1 = 0.0)  
 28,880 units of mass storage (MS = 28880)  
 No magnetic tape or permanent file usage (MT = 0.0, and PF = 0.0)  
 No extended memory usage (EM = 0.0)  
 10500g central memory field length  
 No MAP usage (MP = 0.0)  
 No application usage (AUC = 0.0)

To solve for the CP parameter, the following formula is used.

$$\begin{aligned}
 CP &= S0 \times CP0 + S1 \times CP1 \\
 &= 1.0 \times 9135 + 1.0 \times 0.0 \\
 &= 9135 \\
 &\text{so} \\
 CP &= 9135 \text{ milliseconds}
 \end{aligned}$$

To solve for the IO parameter, the following formula is used.

$$\begin{aligned} \text{IO} &= \text{S2} \times \text{MS} + \text{S3} \times \text{MT} + \text{S4} \times \text{PF} \\ &= 1.0 \times 28880 + 1.0 \times 0.0 + 1.0 \times 0.0 \\ &= 28,880 \\ &\text{so} \\ \text{IO} &= 28,880 \text{ milliunits} \end{aligned}$$

To solve for the CM parameter, the following formula is used.

$$\begin{aligned} \text{CM} &= (\text{central memory field length} + 777\text{g})/1000\text{g} \text{ (the 777g is used as a roundup factor)} \\ &= (10500\text{g} + 777\text{g})/1000\text{g} \\ &= 11\text{g} \\ &= 9 \\ &\text{so} \\ \text{CM} &= 9 \text{ units} \end{aligned}$$

To solve for the EM parameter, the following formula is used.

$$\begin{aligned} \text{EM} &= \text{extended memory field length in tracks} \\ &= 0 \\ &\text{so} \\ \text{EM} &= 0 \text{ units} \end{aligned}$$

To solve for the MP parameter, the following formula is used.

$$\begin{aligned} \text{MP} &= \text{MAP usage} \\ &= 0 \\ &\text{so} \\ \text{MP} &= 0 \text{ milliunits} \end{aligned}$$

To solve for the AUC parameter, the following formula is used.

$$\begin{aligned} \text{AUC} &= \text{application usage} \\ &= 0 \\ &\text{so} \\ \text{AUC} &= 0 \text{ milliunits} \end{aligned}$$

Since the AD parameter is specified in units and the remainder of the SRU equation is specified in milliunits, this part is computed first and converted into units. It can then be added to the AD parameter to obtain the number of SRUs.

$$\begin{aligned} \text{M1} &[\text{CP} + \text{M2} \times \text{IO} + \text{M3} (\text{CP} + \text{IO}) \text{CM} + \text{M4} (\text{CP} + \text{IO}) \text{EM} + \text{MM} \times \text{MP} + \text{AUC}] \\ &= 1.0[9135 + 0.100 \times 28880 + 0.003(9135 + 28880)9 + 0 + 1 \times 0 + 0] \\ &= 9135 + 2888 + 1026.405 + 0 \\ &= 13049.405 \\ &= 13049 \text{ milliunits} \\ &= 13.049 \text{ units} \\ &\text{so} \\ \text{SRU} &= 13.049 + \text{AD} \\ &= 13.049 + 1.0 \\ &= 14.049 \text{ units} \end{aligned}$$

So, during this job or session, 14.049 SRUs were accumulated.

## MULTIPLIER INDEX VALUES AND ACTUAL MULTIPLIER VALUES

When you assign charge numbers, you can specify certain multipliers (M1 through M4) and the adder (AD) in the SRU multiplier formula as other than the system default values. (Refer to the IO Increments section for a description of system default values.) In fact, you may assign to each charge number a unique set of multiplier and adder values. You do this by using the PROFILE command and the M1 through M4 directives (refer to PROFILE Console Input). Specify an index from 0 to 778 with each directive. This is then converted to the actual multiplier or adder value. The actual multiplier or adder value must lie within the absolute range defined by the system for that parameter. However, you can also specify for each multiplier or adder a subrange in which all multipliers or adders must lie. Do this by specifying upper and lower bounds for these parameters. The released values for these upper and lower bounds are contained in COMSSRU. The following lists the COMSSRU names and gives the released values.

<u>COMSSRU Name</u>	<u>Released Value</u>	<u>Description</u>
M1SL	0.5	M1 lower bound
M1SU	1.5	M1 upper bound
M2SL	0.050	M2 lower bound
M2SU	0.150	M2 upper bound
M3SL	0.001	M3 lower bound
M3SU	0.064	M3 upper bound
M4SL	0.001	M4 lower bound
M4SU	0.064	M4 upper bound
MASL	1	Adder (AD) lower bound
MASU	64	Adder (AD) upper bound

When you specify an index value for M1, M2, M3, M4, or AD under PROFILE, the value is converted to the actual multiplier (or adder) value by the following formula:

$$MI = I(MISU - MISL)/64 + MISL$$

<u>Parameter</u>	<u>Description</u>
MI	Actual multiplier (or adder) obtained
I	Multiplier (or adder) index value entered with a PROFILE directive
MISU	Multiplier (or adder) upper bound
MISL	Multiplier (or adder) lower bound

Two exceptions are these:

- If you enter the index value 0 in the PROFILE directive, an actual multiplier (or adder) value of 0 will be assigned.
- If you enter either the upper index value 778 or no index value in the PROFILE directive, the system default multiplier (or adder) will be assigned.

The PROFILE K display (refer to figure 3-14) shows the actual multiplier (or adder) value MI and the index value I.

The following example illustrates a conversion of an index value to an actual multiplier.

Example 1:

Assume that the released upper and lower bounds for M2 are used; that is,

M2SL = .050  
M2SU = .150

You specify a PROFILE directive

M2 = 32

for a particular charge number. This implies that the index value I in the formula

$$MI = I(MISU - MISL)/64 + MISL$$

is equal to 32.

Upon substitution,

$$\begin{aligned} M2 &= 32(.150 - .050)/64 + .050 \\ &= 3.200/64 + .050 \\ &= .050 + .050 \\ &= .10 \end{aligned}$$

Thus, the actual M2 multiplier for this charge number is .10.

After you have chosen upper and lower bounds for your multipliers (and adder), you may want to assign different actual multiplier values to certain charge numbers. To choose the proper index value to be specified on the PROFILE directives, use the following formula. (This is merely the previous formula solved for I.)

$$I = 64(MI - MISL)/(MISU - MISL)$$

I, MI, MISL, and MISU are the same as those defined previously.

Example 2:

Assume that the released upper and lower bounds for M2 are used; that is,

M2SL = .050  
M2SU = .150

and you wish to assign an actual M2 multiplier value of .10 to a particular charge number. To determine the appropriate index value for the PROFILE directive, use the following formula.

$$I = 64 (MI - MISL)/(MISU - MISL)$$

MI = .10 in this case.

Upon substitution,

$$\begin{aligned} I &= 64(.100 - .050)/(.150 - .050) \\ &= 64(.050)/(.100) \\ &= 64 \times .5 \\ &= 32 \end{aligned}$$

Thus, you should enter the PROFILE directive M2 = 32 for the particular charge number to specify an actual M2 multiplier value of .10.

## SCREEN MANAGEMENT FACILITY (SMF) AND FULL SCREEN EDITOR (FSE)

When the SMF subsystem is called by the operator, it performs some of the text editing functions on behalf of the user-callable editor FSE. Since SMF uses resources that would otherwise be used by FSE and be charged to the user, SMF and FSE use the application unit charge to simulate comparable resource accounting.

FSE calculates the application unit charge, using accumulators provided by SMF for mass storage operations, mass storage data transfer, and terminal output data transfer. The two mass storage accumulators provide a close approximation of the mass storage resource that actually would have been used by FSE if SMF had not been available. The terminal output accumulator is used to estimate the CP time used by SMF on behalf of each user, assuming a close correlation between output formatting and central processor overhead. The following parameter in COMSSRU provides the proportion of terminal output to CP resources.

<u>COMSSRU Name</u>	<u>Default Value</u>	<u>Description</u>
IFCO	0.100	Full Screen Editor CP resource expressed as milliseconds per word of terminal output

FSE converts the SMF accumulators into estimated central processor and mass storage resources, using the following calculations:

$$CP = (\text{output words transmitted}) \times IFCO$$

$$MS = (\text{operations} \times IMRD) + (\text{PRUs transferred} \times 2IMRW)$$

Then the application unit charge is calculated using the SETAUC macro. Refer to NOS 2 Reference Set, Volume 4 for a description of the SETAUC macro.



# ACCOUNT DAYFILE MESSAGES

The purpose of the account dayfile is to provide a history of system usage. Appendix B shows the product or program that prompts a message in the account dayfile. This history serves the following purposes:

- It provides the information needed for proper billing of the users of the system.
- It provides the information you need for analyzing the use of the system or any part of it. For example, you may want to determine the amount of magnetic tape usage.

Therefore, a standardized message format is provided to facilitate the analysis of the account dayfile. The following is the general format of the account dayfile message. All account dayfile messages have this general format.

hh.mm.ss. jsn s. geac, additional information.

<u>Message</u>	<u>Description</u>
hh.mm.ss.	Current time in the form of hour.minute.second. This field begins in column 2 and ends with a period. The system always places the field at the beginning of the message at the time it is entered into the account dayfile.
jsn	Job sequence name of the job that caused the entry of this message into the account dayfile. This field begins in column 13 and ends in column 16. The system places this field at the beginning of the message along with the time.
s	A single character in column 17 that describes the service class of the job. The system automatically adds this character when the message is entered into the account dayfile. The following service class types can be specified.

<u>s</u>	<u>Service Class</u>
A	Deadstart sequencing service class
B	Batch service class
C	Communication task service class
D	Detached interactive service class
M	Maintenance service class
N	Network supervisor service class
R	Remote batch service class
S	System service class
T	Interactive service class
X	Subsystem service class
0	Installation service class 0
1	Installation service class 1
2	Installation service class 2
3	Installation service class 3

<u>Message</u>	<u>Description</u>
geac	A unique 4-character message identifier that defines the particular activity identified. The field begins in column 21 and ends with a comma-blank (, ) or a period. The first character identifies the information group, the second character identifies the event that caused the message to be entered into the account dayfile, and the last two characters identify the activity being recorded. This field is further described later in this section.
additional information	Information that gives further detail to the activity identified by geac. The field begins in column 27 and ends with a period. This field is further described later in this section.

These message lines are free format. That is, each field defined in a message ends in either a comma-space or, if it is the last field in the message, a period. If a field is not used, it appears only as a comma-space or, if it is the last field in the message, it does not appear at all. The separator immediately follows the last character of the field. The field size can be any length, depending on the information being supplied.

Example:

SPAT, filename, , packname.

No alternate user access was specified during the permanent file attach operation.

SPAT, filename.

No pack name was required and no alternate user access was specified during the permanent file attach operation.

All account dayfile entries are grouped by a particular information type. The first character of the geac field (that is, g of geac) in the account dayfile message identifies each group type. The following are the group types.

<u>Type</u>	<u>Description</u>
Aeac	Accounting information
Seac	Statistical information
Ueac	Job usage information
Ieac	Installation information (reserved)
Meac	Multilevel security information



## ACCOUNTING INFORMATION

The A message group provides the information necessary for accounting purposes. These messages include information denoting the beginning and end of an accounting sequence, as well as all resources used. The message formats are as follows:

Aeac, additional information.

The events (e of Aeac) are defined as follows:

<u>Character</u>	<u>Event Description</u>
B	Beginning of a job
C	Change in the accounting activity
D	Disk activity
E	End of a job
M	Magnetic tape activity
P	Permanent file activity
R	Recovery operation
S	Suspension of a job
U	Unable to update PROFILA

The activity identifier (ac of Aeac) identifies the information being recorded and is event dependent.

The following is a list of the B activity messages.

ABAA, appl, name 1, name 2.  
ABAC, C1, username, familyname, appl.  
ABAC, C2, snode, dnode.  
ABAE, C1, username, familyname, appl.  
ABAE, C2, snode, dnode.  
ABAP, C1, username, familyname, terminalname.  
ABAP, C2, application.  
ABAR, appl, snode, dnode.  
ABCN, chargenumber, projectnumber.  
ABCN, SYSTEM, .  
ABEA, appl, name 1, name 2.  
ABER, C1, username, familyname, terminalname.  
ABER, C2, password.  
ABIC, chargenumber, projectnumber, terminalname.  
ABLQ, C1, jsn, yymmdd, hhmmss, dc.  
ABLQ, C2, xxxxxx.xxxKUNS, sc.  
ABRE, appl.  
ABSC, sc.  
ABST, system title.  
ABSV, system version.  
ABSY, yy/mm/dd.  
ABUN, username, familyname, terminalname.

<u>Identifier</u>	<u>Description</u>
ABAA	Denotes the successful establishment of an application-to-application connection by application appl in this host to another application identified by name 1 and name 2 in the same or another host.
ABAC	Denotes the successful establishment of an application-to-application connection to application appl in this host by an application identified by user username and family familyname in the same or another host, using logical links snode and dnode.
ABAE	Denotes an unsuccessful attempt to establish an application-to-application connection to application appl under user username and family familyname in this host, using logical links snode and dnode.
ABAP	Denotes the transfer of terminal terminalname, logged in under user username in the specified family, to application after validation by NVF.
ABAR	Denotes an invalid attempt to establish an application-to-application connection to application appl in this host, using logical links snode and dnode.
ABCN	Denotes the beginning of a charge sequence.  chargenumber    1- to 10-character alphanumeric charge number  projectnumber  1- to 20-character alphanumeric project number  This message is issued when a CHARGE command is executed or at the start of printing a print file. It is also issued at the beginning of a job if the user name requires a CHARGE command and the default charge number is validated implicitly.  The second form is issued during unit record accounting if no project number is in effect when the file is queued.
ABEA	Denotes an unsuccessful attempt to establish an application-to-application connection by application appl in this host to another application, identified by name 1 and name 2 in the same or another host.
ABER	Denotes an incorrect login attempt at terminal terminalname under user username in family familyname.
ABIC	Denotes the value of default charge and project numbers associated with a user name. The project number is optional. The message is issued without a terminal name when the first USER command is executed by a batch job. It is issued with a terminal name at login for an interactive job.

<u>Identifier</u>	<u>Description</u>
ABLQ	Denotes a file with job sequence name jsn placed in the input or output queue for the first time on date yymmdd and time hhmmss. The file has a disposition code of dc and a service class of sc. Refer to the ROUTE command in NOS 2 Reference Set, Volume 3, for a description of disposition codes and service class codes that may appear in this message. If subsequent ARRQ or AEPQ messages are issued for this file, their jsn will correspond to the jsn for this message, even if the file's job sequence name in the system has changed. The file length is specified in PRUs.
ABRE	Denotes that application appl has reached the allowed maximum number of unsuccessful attempts to establish an application-to-application connection.
ABSC	Denotes the initial service class of a job.
ABST	Denotes the beginning of an account file from the system with the indicated system title.
ABSV	Denotes the beginning of an account file from the system with the indicated system version.
ABSY	Denotes the beginning of a new account dayfile through initialization of dayfiles or dayfile termination on date yy/mm/dd. Two blanks separate yy from the comma that precedes it.
ABUN	Denotes the beginning of a job or terminal session under user username in the permanent file family familyname. terminalname is optional; if present, message represents NAM login at terminal terminalname.

The following is a list of the C activity messages.

ACCN, chargenumber, projectnumber.  
ACDT, DS, DATE. yy/mm/dd.  
ACDT, DS, TIME. hh.mm.ss.  
ACLK, jsn, pid, lid, ERR.  
ACSC, sc, newjsn, sruunits.  
ACSO, sruunits.  
ACSR, sruunits.  
ACUN, username, familyname.

<u>Identifier</u>	<u>Description</u>
ACCN	Denotes a change of charge with charge chargenumber and project projectnumber.
ACDT	Denotes a new date or time entered into the system.

<u>Identifier</u>	<u>Description</u>										
ACLK	Denotes remote host usage.										
	<table border="0"> <thead> <tr> <th><u>Parameter</u></th> <th><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>jsn</td> <td>Job sequence name of the job on the remote host for which the accounting entry is being made.</td> </tr> <tr> <td>pid</td> <td>Physical identifier of the remote host.</td> </tr> <tr> <td>lid</td> <td>Logical identifier of the mainframe that initiated the link.</td> </tr> <tr> <td>ERR</td> <td>Error. If present, the output file was discarded because user limits were reached.</td> </tr> </tbody> </table>	<u>Parameter</u>	<u>Description</u>	jsn	Job sequence name of the job on the remote host for which the accounting entry is being made.	pid	Physical identifier of the remote host.	lid	Logical identifier of the mainframe that initiated the link.	ERR	Error. If present, the output file was discarded because user limits were reached.
<u>Parameter</u>	<u>Description</u>										
jsn	Job sequence name of the job on the remote host for which the accounting entry is being made.										
pid	Physical identifier of the remote host.										
lid	Logical identifier of the mainframe that initiated the link.										
ERR	Error. If present, the output file was discarded because user limits were reached.										
ACSC	Denotes that service class has changed to sc or job sequence name has changed to newjsn. sruunits is the SRU accumulation at the time of the service class change.										
ACSO	Denotes the overflow of SRU accumulation in SRU units.										
ACSR	Denotes the end of an accounting block that used sruunits of SRUs. The SRU accumulator is displayed and cleared and is associated with the entering of a new charge and project number.										
ACUN	Denotes the change to user username under the permanent file family familyname.										

The following is a list of the D activity messages.

ADDI, est, familyname, dn.  
 ADDR, est, familyname, dn, lowerlevel, upperlevel.  
 ADDU, est, familyname, dn.  
 ADPD, est, packname, username.  
 ADPI, est, packname, username.  
 ADPM, est, packname, username, lowerlevel, upperlevel.

<u>Identifier</u>	<u>Description</u>
ADDI	Denotes an initialization operation on a permanent file device with EST ordinal est, family familyname, and device number dn.
ADDR	Denotes a recovery operation on a permanent file device with EST ordinal est, family familyname, and device number dn. The device has access level limits lowerlevel and upperlevel.
ADDU	Denotes an unloading operation on a permanent file device with EST ordinal est, family familyname, and device number dn.
ADPD	Denotes a dismounting operation on an auxiliary removable disk pack with EST ordinal est, pack packname, and user username.

<u>Identifier</u>	<u>Description</u>
ADPI	Denotes an initialization operation on an auxiliary removable disk pack with EST ordinal est, pack packname, and user username.
ADPM	Denotes a mounting and recovery operation on an auxiliary removable disk pack with EST ordinal est, pack packname, and user username. The disk pack has access level limits lowerlevel and upperlevel.

The following is a list of the E activity messages.

AEAA, C1, appl, name 1, name 2.  
 AEAA, C2, xxxxxxSECS.  
 AEAP, C1, username, familyname, terminalname.  
 AEAP, C2, application, xxxxxxSECS.  
 AEQP, C1, jsn, yymmdd, hhmss, dc.  
 AERR, ty.  
 AESR, sruunits.  
 AESY, yy/mm/dd.  
 AEUN, username, familyname, terminalname.

<u>Identifier</u>	<u>Description</u>
AEAA	Denotes that an application-to-application connection between application appl and another application identified by name 1 and name 2 has ended after an elapsed time of xxxxxx seconds.
AEAP	Denotes the end of connection of terminal terminalname to the specified application. Elapsed time of connection (xxxxxx, in seconds) may not agree exactly with the interval between corresponding ABAP and AEAP messages, because calculation of elapsed time is independent of the system function that prefixes the time field to the account dayfile message.
AEQP	Denotes that an active or inactive queued file created on date yymmdd at time hhmss with original job sequence name jsn is released from the system. The file has a disposition code of dc.
AERR	Denotes that the job was rerun after a deadstart (ty=ds) or by the operator (ty=op).
AESR	Denotes the end of a job that used sruunits SRUs under the current charge number. If sruunits is blank, the message AESR, . follows the completion of a print or punch file.
AESY	Denotes the end of an active account file on date yy/mm/dd. Two blanks separate yy from the comma that precedes it.
AEUN	Denotes the end of a terminal session under user username in the permanent file family familyname from terminal terminalname.

The following is a list of the M activity messages.

AMAS, est, vsn.  
AMRT, est, type.

<u>Identifier</u>	<u>Description</u>
AMAS	Denotes that magnetic tape equipment est is assigned with a volume serial number vsn. If the tape is unlabeled, vsn is not used. Two blanks separate est from the comma that precedes it.
AMRT	Denotes magnetic tape equipment est returned from the user. type specifies the type of drive returned and is specified as 639, 66x or 67x. Two blanks separate est from the comma that precedes it.

The following is a list of the P activity messages.

APPN.  
APPN, packname.

<u>Identifier</u>	<u>Description</u>
APPN	Denotes the entering of the default pack name. If no pack name is specified, the message denotes the clearing of the default pack name.

The following is a list of the R activity messages.

ARRQ, C1, jsn, yymmdd, hhmmss, dc.  
ARRQ, C2, xxxxxx.xxxKUNS, sc.  
ARSY, ln, yy/mm/dd.  
ARUN, username, familyname.

<u>Identifier</u>	<u>Description</u>
ARRQ	Denotes that a file created on date yymmdd at time hhmmss with original job sequence name jsn has been reentered in the active queue. The file has a disposition code of dc and a service class of sc. The file length is specified in PRUs.
ARSY	Denotes the recovery of the account dayfile at recovery level ln on the date yy/mm/dd.
ARUN	Denotes the recovery of an interactive job with user username and family familyname.

The following is the S activity message.

ASTx, username, familyname.

<u>Identifier</u>	<u>Description</u>
ASTx	Denotes that the user's job has been suspended:
<u>x</u>	<u>Description</u>
D	The suspension was caused by a user detachment.
H	The suspension was caused by a line disconnection.
P	The suspension was caused by a program-initiated detachment.
R	The suspension was caused by the recovery of the interactive subsystem.
T	The suspension was caused by a session timeout.

The following is the U activity message.

AUSR, sruunits.

<u>Identifier</u>	<u>Description</u>
AUSR	Denotes that sruunits of SRUs could not be recorded in PROFILA at overflow or end of account block.

## MULTILEVEL SECURITY INFORMATION

The M message group provides information relating to multilevel security activities. The message formats are as follows:

Meac, additional information.

The events (e of Meac) or aspects of security affected are defined as follows:

<u>Character</u>	<u>Security Activity</u>
F	Local file
J	Job access level
P	Permanent file
S	System operation
U	User operation

The activity identifier (ac of Meac) identifies the information being recorded and is event dependent.

The following is the F activity message.

MFFI, filename, newlevel.

<u>Identifier</u>	<u>Description</u>
MFFI	Denotes an invalid attempt to change the access level of local file filename to newlevel.

The following is the J activity message.

MJJI, oldlevel, newlevel.

<u>Identifier</u>	<u>Description</u>
MJJI	Denotes an invalid attempt to change the job access level from oldlevel to newlevel.

The following is the P activity message.

MPNF, filename, username, packname.

<u>Identifier</u>	<u>Description</u>
MPNF	Indicates that the user has attempted to access file filename belonging to alternate user username on pack packname and has been denied access (file-not-found error).

The following is a list of the S activity messages.

MSEQ, est, lowerlevel, upperlevel.  
MSOT, ot, lowerlevel, upperlevel.  
MSSA, username.  
MSSI, username.

<u>Identifier</u>	<u>Description</u>
MSEQ	Indicates that the operator has changed the access level limits for the unit record equipment with EST ordinal est.
MSOT	Indicates that the operator has changed the access level limits for origin type ot.
MSSA	Indicates that security unlock status has been set at the console with user username.
MSSI	Denotes an invalid attempt to set security unlock status at the console with user username.



The following is a list of the U activity messages.

MUPW.  
MUPX.

<u>Identifier</u>	<u>Description</u>
MUPW	Indicates that the user has changed the user password.
MUPX	Indicates that the user has changed the user password expiration date.

## STATISTICAL INFORMATION

The S message group provides information relating to the various activities of the system. The message formats are as follows:

Seac, additional information.

The events (e character of Seac) are defined as follows:

<u>Character</u>	<u>Event Description</u>
A	Subsystem abort
B	Subsystem begin
C	Accumulator displayed and cleared
E	Subsystem end
M	MSAS staging or destaging request
I	Informative message
P	Permanent file information
R	Subsystem recovery
T	MSS staging or destaging requests

The following is the A activity message.

SANW, application, jsn.

<u>Identifier</u>	<u>Description</u>
SANW	Denotes application failure during a job with job sequence name jsn.

The following is a list of the B activity messages.

SBER, application, jsn.  
 SBNW, application, jsn.

<u>Identifier</u>	<u>Description</u>
SBER	Denotes invalid NETON attempt by application during a job with job sequence name jsn.
SBNW	Denotes successful NETON by application during a job with job sequence name jsn.

The following is a list of the C activity messages.

SCLI, node, C1, port, 0, tttttt11111.  
 SCLI, node, C2, ssssscccccc.  
 SCLI, node, C3, bbbbbppppppaaaaaa.  
 SCMT, est, ppppppp, t.  
 SCNQ, node, C1, cccccddddd11111.  
 SCNQ, node, C2, gggggrrrrrrssssss.  
 SCNQ, node, C3, pppppiiiiinnnnn.  
 SCNQ, node, C4, wwwwww.  
 SCTU, node, C1, port, 0, tttttt11111.  
 SCTU, node, C2, ssssscccccc.  
 SCTU, node, C3, bbbbb.

<u>Identifier</u>	<u>Description</u>
SCLI	Denotes the number of blocks and characters transmitted and received and the number of X.25 connections rejected on the line connected to the indicated port of the NPU with node number node. The port number is hexadecimal; all other values are decimal.

<u>Field</u>	<u>Description</u>
ttttt	Number of blocks transmitted
11111	Number of blocks received
sssss	Number of characters transmitted/32
cccc	Number of characters received/32
bbbb	Number of bad blocks retransmitted
pppp	Number of X.25 PAD connections rejected due to too few enable circuits
aaaa	Number of X.25 application-to-application connections rejected due to too few enable circuits

SCMT Denotes the number of magnetic tape PRUs transferred to or from unit est; t denotes whether the blocks were read (t=R) or written (t=W). Two blanks separate est from the comma that precedes it.

<u>Field</u>	<u>Description</u>
pppppp	Number of PRUs

<u>Identifier</u>	<u>Description</u>
SCNQ	Indicates various statistics about the NPU with node number node. All values are decimal.

<u>Field</u>	<u>Description</u>
cccccc	Percentage of CPU used in tenths of a percent
dddddd	Average number of data buffers
llllll	Lowest regulation level reached
gggggg	Number of inputs rejected due to NPU regulation
rrrrrr	Average number of characters per second received from the host
ssssss	Average number of characters per second sent to the host
pppppp	Number of active batch output devices
iiiiii	Number of active batch input devices
nnnnnn	Number of interactive connections
wwwwww	Average number of worklists processed per second

SCTU Denotes the number of blocks and characters transmitted and received on the line connected to the indicated port of the NPU with node number node. The port number is hexadecimal; all other values are decimal.

<u>Field</u>	<u>Description</u>
tttttt	Number of blocks transmitted
llllll	Number of blocks received
ssssss	Number of characters transmitted/32
cccccc	Number of characters received/32
bbbbbb	Number of bad blocks retransmitted

The following is a list of the E activity messages.

SEMC, xxxxxx.xxxKUNS.  
 SENW, application, jsn.

<u>Identifier</u>	<u>Description</u>
SEMC	Denotes program disconnection from the message control system (MCS) and weighted number of calls to MCS.
SENW	Denotes NETOFF by application during job with job sequence name jsn.

The following is a list of the I activity messages.

SIAD.  
 SIDT, yy/mm/dd.  
 SISC, nn.  
 SISC.  
 SIUN, username.

<u>Identifier</u>	<u>Description</u>
SIAD	Denotes the dumping of the account dayfile.
SIDT	Current date; issued every hour, on the hour. Two blanks separate yy from the comma that precedes it.
SISC	Denotes the user security count decremented to the value nn. If issued with no parameter, it denotes that the user has violated security, but that the system was unable to decrement the user security count because VALIDUs was not currently available, or because the user had a security count of unlimited or zero.
SIUN	Denotes an attempt to enter a secondary user username while the secondary USER command feature is disabled or the username,password, or familyname is incorrect.

The following is a list of the M activity messages.

SMBD, filename/userindex/familyname.  
 SMBS, filename/userindex/familyname.  
 SMED, filename/userindex/length/code.  
 SMES, filename/userindex/length/code.  
 SMLD, SM=sm, CSN=csn, ID=cm.  
 SMUL, SM=sm, CSN=csn, ID=cm.

<u>Identifier</u>	<u>Description</u>
SMBD	Denotes MSAS beginning of destaging operation for file filename, user index userindex, and family familyname.
SMBS	Denotes MSAS beginning of staging operation for file filename, user index userindex, and family familyname.
SMED	Denotes MSAS end of destaging operation for file filename and user index userindex. The file length is specified in PRUs. The following return codes are valid.

<u>Code</u>	<u>Description</u>
0	No errors.
1	No space available.
2	No storage module available.
3	No cartridge or group available.
4	File has a different alternate storage address(asa).
5	Permanent file error or destage abandoned.
6	Catalog access error.
7	Cartridge overflow not permitted.

Identifier

Description

<u>Code</u>	<u>Description</u>
10	Group full.
11	Disk read error.
12	Cartridge lost.
13	SSEXEC closed to destage.

SMES Denotes MSAS end of staging operation for file filename and user index userindex. The file length is specified in PRUs. The following return codes are valid.

<u>Code</u>	<u>Description</u>
0	No errors.
1	No errors, but the alternate storage address (asa) is cleared.
2	Temporary cartridge busy.
3	SETAF failed.
4	SETDA or UREPLAC failed.
5	Permanent file data error.
6	Permanent file linkage error.
7	AU out of range.
10	PFC entry obsolete.
11	File length error.
12	Obsolete catalog.
13	Disk full.
14	Disk write error.
15	Cartridge lost.
16	Storage module off.
17	Unknown hardware problem.
20	7990 catalog not online.
21	7990 catalog input or output error.

SMLD Denotes an MSAS cartridge load request. The cartridge is identified by storage module sm, cartridge serial number csn, and cartridge manufacturer cm.

SMUL Denotes an MSAS cartridge unload request. The cartridge is identified by storage module sm, cartridge serial number csn, and cartridge manufacturer cm.

The following is a list of the P activity messages.

SPAC, filename, username, packname.  
SPAL, filename, username, packname.  
SPAP, filename, username, packname.  
SPAS, filename, username, packname.  
SPAT, filename, username, packname.  
SPCG, filename, username, packname.  
SPCT, filename, username, packname.  
SPDD, filename, username, packname.  
SPDF, filename, username, packname.  
SPDI, filename, username, packname.  
SPDP, filename, username, packname.  
SPGT, filename, username, packname.  
SPPG, filename, username, packname.  
SPPM, filename, username, packname.  
SPRP, filename, username, packname.  
SPRS, filename, username, packname.  
SPSA, filename, username, packname.  
SPSD, filename, username, packname.  
SPSF, filename, username, packname.  
SPSV, filename, username, packname.  
SPUA, filename, username, packname.  
SPUG, filename, username, packname.  
SPUR, filename, username, packname.

<u>Identifier</u>	<u>Description</u>
SPAC	Denotes permanent file SETPFAC operation.
SPAL	Denotes permanent file SETPFAL operation.
SPAP	Denotes permanent file APPEND operation.
SPAS	Denotes permanent file ASSIGNPF operation.
SPAT	Denotes permanent file ATTACH operation.
SPCG	Denotes permanent file CHANGE operation.
SPCT	Denotes permanent file CATLIST operation.
SPDD	Denotes permanent file DROPDS operation.
SPDF	Denotes permanent file DEFINE operation.

<u>Identifier</u>	<u>Description</u>
SPDI	Denotes permanent file DROPIDS operation.
SPDP	Denotes permanent file DELPFC operation.
SPGT	Denotes permanent file GET or OLD operation.
SPPG	Denotes permanent file PURGE operation.
SPPM	Denotes permanent file PERMIT operation.
SPRP	Denotes permanent file REPLACE operation.
SPRS	Denotes permanent file RPFSTAT operation.
SPSA	Denotes permanent file SETASA operation.
SPSD	Denotes permanent file SETDA operation.
SPSF	Denotes permanent file SETAF operation.
SPSV	Denotes permanent file SAVE operation.
SPUA	Denotes permanent file UATTACH operation.
SPUG	Denotes permanent file UGET operation.
SPUR	Denotes permanent file UREPLACE operation.

The following is a list of the T activity messages.

STD1, filename.  
 STD2, filename.  
 STD3, filename.  
 STD4, filename, length.  
 STD5, filename.  
 STF1, newfl.  
 STF2, newfl.  
 STF3, newfl.  
 STF4, newfl.  
 STS2, filename.  
 STS3, filename.  
 STS4, filename, length.  
 STS5, filename.  
 STS6, filename.

<u>Identifier</u>	<u>Description</u>
STD1	Denotes file attached for MSS destage.
STD2	Denotes MSS cartridge loaded for destage.
STD3	Denotes MSS copy to be initiated for destage.
STD4	Denotes MSS copy complete for destage.
STD5	Denotes PFC updated for destage.

<u>Identifier</u>	<u>Description</u>
STF1	Denotes acquiring MSS streaming buffer.
STF2	Denotes returning MSS streaming buffer.
STF3	Denotes MSS FL increase.
STF4	Denotes MSS reduced to IDLE FL.
STS2	Denotes MSS cartridge loaded for stage request.
STS3	Denotes MSS copy to be initiated for stage request.
STS4	Denotes MSS copy complete for stage request.
STS5	Denotes PFC updated for stage request.
STS6	Denotes MSS copy from first cartridge complete for a multicartridge file.

## USAGE INFORMATION

The U message group provides a breakdown of the usage of the system for a particular user. The message formats are as follows:

Ueac, usage count descriptor.

The events (e of Ueac) are defined as follows:

<u>Character</u>	<u>Event Description</u>
B	Accumulator begun
C	Accumulator displayed and cleared
D	Accumulator displayed and continued
E	Accumulator displayed and ended

The activities (ac characters of Ueac) are defined as follows:

<u>Character</u>	<u>Activity Description</u>
AC	Application unit charge
AD	SRU adder accumulator
AU	Application program accumulator
CI	Characters transmitted into the system
CO	Characters transmitted out of the system
CP	CPU time



<u>Character</u>	<u>Activity Description</u>
CR	Cards read
CT	Characters transmitted into or out of the system
LP	Lines printed
LS	Link size (size of file in PRUs transmitted between mainframes)
LV	Lines printed, V carriage control encountered
MP	Matrix array processor III (MAP III) activity accumulator
MS	Mass storage activity
MT	Magnetic tape activity
PC	Cards punched
PF	Permanent file activity
PL	Plotter activity

Each accumulator has a numerical value followed by a 4-character unit descriptor. The following are the descriptors.

<u>Descriptor</u>	<u>Value</u>
KCHS	Kilocharacters
KCDS	Kilocards
KLNS	Kilolines
KPLS	Kiloplotunits
KUNS	Kilounits
SECS	Seconds
UNTS	Units

The following is a B activity message.

UBAU, xxxx.

<u>Identifier</u>	<u>Description</u>
UBAU	Denotes the beginning of the application program accumulator for application xxxx.

Certain C event activity messages contain fields mi and eqn, identifying the equipment on which the particular activity took place. The mi characters are the machine identifier (MID entry in CMRDECK; refer to NOS 2 Analysis Handbook). The eqn characters are either the EST ordinal or terminal name of the device that performed the activity.

The following is a list of all C activity messages.

UCAC, xxxxxx.xxxUNTS.  
 UCAD, xxxxxx.xxxKUNS.  
 UCCI, xxxxxx.xxxKCHS.  
 UCCO, xxxxxx.xxxKCHS.  
 UCCR, mi, eqn, xxxxxx.xxxKCDS.  
 UCCT, xxxxxx.xxxKCHS.  
 UCLP, mi, eqn, xxxxxx.xxxKLNS.  
 UCLS, ty, xxxxxx.xxxKUNS.  
 UCLV, mi, eqn, xxxxxx.xxxKLNS.  
 UCMP, xxxxxx.xxxKUNS.  
 UCMS, xxxxxx.xxxKUNS.  
 UCMT, xxxxxx.xxxKUNS.  
 UCPC, mi, eqn, xxxxxx.xxxKCDS.  
 UCPF, xxxxxx.xxxKUNS.  
 UCPL, mi, eqn, xxxxxx.xxxKPLS.

<u>Identifier</u>	<u>Description</u>										
UCAC	Denotes the value of the AUC accumulator for a job when overflow occurred.										
UCAD	Denotes the value of the SRU adder accumulator for a job when overflow occurred.										
UCCI	Denotes the number of characters transferred into the system for a job (for interactive subsystem).										
UCCO	Denotes the number of characters transferred out of the system for a job (for interactive subsystem).										
UCCR	Denotes the number of cards read into the system for a job on equipment mi, eqn (described previously).										
UCCT	Denotes the value of the terminal input and output counter when an overflow condition occurred.										
UCLP	Denotes the number of lines printed for a job on equipment mi, eqn (described previously).										
UCLS	Denotes the amount of data sent or received over the network. The file length is specified in PRUs for file type ty.										
	<table border="0" style="margin-left: 40px;"> <thead> <tr> <th style="text-align: left;"><u>ty</u></th> <th style="text-align: left;"><u>Description</u></th> </tr> </thead> <tbody> <tr> <td>IN</td> <td>Input file</td> </tr> <tr> <td>PF</td> <td>Permanent file</td> </tr> <tr> <td>PR</td> <td>Print file</td> </tr> <tr> <td>PU</td> <td>Punch file</td> </tr> </tbody> </table>	<u>ty</u>	<u>Description</u>	IN	Input file	PF	Permanent file	PR	Print file	PU	Punch file
<u>ty</u>	<u>Description</u>										
IN	Input file										
PF	Permanent file										
PR	Print file										
PU	Punch file										
UCLV	Denotes the number of lines printed for a job in which the V carriage control character was used on equipment mi, eqn (described previously).										
UCMP	Denotes the value of the MAP III activity accumulator for a job when overflow occurred.										

<u>Identifier</u>	<u>Description</u>
UCMS	Denotes the value of the mass storage activity accumulator for a job when overflow occurred.
UCMT	Denotes the value of the magnetic tape activity accumulator for a job when overflow occurred.
UCPC	Denotes the number of cards punched for a job on equipment mi, eqn (described previously).
UCPF	Denotes the value of the permanent file activity accumulator for a job when overflow occurred.
UCPL	Denotes the number of plot units plotted for a job on equipment mi, eqn (described previously).

The following is a list of the D activity messages.

UDAC, xxxxxx.xxxUNTS.  
UDAD, xxxxxx.xxxKUNS.  
UDCI, xxxxxx.xxxKCHS.  
UDCO, xxxxxx.xxxKCHS.  
UDCP, xxxxxx.xxxSECS.  
UDCT, xxxxxx.xxxKCHS.  
UDMP, xxxxxx.xxxKUNS.  
UDMS, xxxxxx.xxxKUNS.  
UDMT, xxxxxx.xxxKUNS.  
UDPF, xxxxxx.xxxKUNS.

<u>Identifier</u>	<u>Description</u>
UDAC	Denotes the AUC accumulator for a job.
UDAD	Denotes the SRU adder accumulator for a job.
UDCI	Denotes the number of characters transferred into the system for a job (currently available only for interactive jobs).
UDCO	Denotes the number of characters transferred out of the system for a job (currently available only for interactive jobs).
UDCP	Denotes the accumulated CPU time for a job.
UDCT	Denotes the accumulated input and output character count of a job.
UDMP	Denotes the MAP III activity accumulator for a job.
UDMS	Denotes the mass storage activity accumulator for a job.
UDMT	Denotes the magnetic tape activity accumulator for a job.
UDPF	Denotes the permanent file activity accumulator for a job.

The following is a list of the E activity messages.

UEAC, xxxxxx.xxxUNTS.  
 UEAD, xxxxxx.xxxKUNS.  
 UEAU, xxxxxx.xxxUNTS.  
 UECI, xxxxxx.xxxKCHS.  
 UECO, xxxxxx.xxxKCHS.  
 UECP, xxxxxx.xxxSECS.  
 UECT, xxxxxx.xxxKCHS.  
 UEMP, xxxxxx.xxxKUNS.  
 UEMS, xxxxxx.xxxKUNS.  
 UEMT, xxxxxx.xxxKUNS.  
 UEFF, xxxxxx.xxxKUNS.

<u>Identifier</u>	<u>Description</u>
UEAC	Denotes the AUC accumulator for a job.
UEAD	Denotes the SRU adder accumulator for a job.
UEAU	Denotes the application program accumulator for a job step.
UECI	Denotes the number of characters transferred into the system for a job (currently available only for interactive jobs).
UECO	Denotes the number of characters transferred out of the system for a job (currently available only for interactive jobs).
UECP	Denotes the CPU time for a job.
UECT	Denotes the terminal input and output activity accumulator for a job.
UEMP	Denotes the MAP III activity accumulator for a job.
UEMS	Denotes the mass storage activity accumulator for a job.
UEMT	Denotes the magnetic tape activity accumulator for a job.
UEFF	Denotes the permanent file activity accumulator for a job.

The following usage summary for a job is always issued.

UeCO, xxxxxx.xxxKCHS.	Interactive jobs only
UeCI, xxxxxx.xxxKCHS.	Interactive jobs only
UeAC, xxxxxx.xxxUNTS.	
UeAD, xxxxxx.xxxKUNS.	
UePF, xxxxxx.xxxKUNS.	
UeMS, xxxxxx.xxxKUNS.	
UeMT, xxxxxx.xxxKUNS.	Tape users only
UeCP, xxxxxx.xxxSECS.	

The character e is an event identifier described in this section.

---

The existence of NOS and its product set (COBOL, FTN, NAM, etc.) represent years of effort; much of this effort involved the writing and testing of software components. Your particular implementation may utilize the software in unanticipated ways, resulting in various system problems. This section is provided to help you understand the steps necessary for resolving these problems. Control Data has made every effort possible to minimize the possibility of system problems. We have found that more than half of the problems officially reported have been reported before, so chances are very good that the status of your problem is known and that a solution already exists. We maintain an extensive data base of information concerning reported software problems and solutions. This information is accessible to you by way of an online utility called SOLVER.

SOLVER can display information from two logically different data bases. The Programming System Report (PSR) data base contains detailed descriptions of and resolutions for specific problems that were found during our testing or by our customers. The Installation Bulletins (IB) data base contains important information for building systems. This information is updated regularly and is categorized according to the release levels of the system.

There is an organization within Control Data known as Central Software Support (CSS), which provides telephone consultation regarding NOS and its products. This service is useful for the following:

- Isolating the cause of a software failure.
- SOLVER usage and validation.
- Software usage.

(Your Control Data salesperson will provide you with CSS's telephone number if you have a product support contract with Control Data.)

### PROGRAMMING SYSTEM REPORT (PSR)

Submitting a PSR is the official way to inform Control Data of any problem you have with our software. You can do this by sending in a properly filled out PSR form (available from your local Control Data office) or by generating the PSR online, using SOLVER. Instructions for filling out a PSR are on the back of the form. SOLVER contains extensive online HELP to guide you through a PSR writing session. Figure 6-1 summarizes the steps for submitting a PSR.

1. Describe the problem; identify the following:
  - a. The feature that failed
  - b. Where the feature is documented
  - c. The nature of the failure
  - d. The seriousness of the consequences (priority)
  - e. The frequency of the problem
  - f. Whether there is a pattern
  - g. Whether there is a solution
  - h. Whether you have analyzed the problem or corrective code
2. Define the environment; specify the following:
  - a. NOS release level
  - b. Product release level
  - c. Your installation options
  - d. Additional code (Control Data and local)
  - e. Hardware problem at time of error
  - f. Recent changes made to the hardware
3. Provide additional problem documentation such as memory dumps and listings.

Figure 6-1. Writing a PSR

#### WHEN TO WRITE A PSR AND WHY

The steps for determining whether to write a PSR against NOS or any of its products are as follows:

1. Verify the information indicating that the problem really exists. Check the appropriate documentation to ensure that the product was installed properly and was designed to do what you have attempted.
2. Use SOLVER to determine whether or not your problem is a known problem with a solution. Be sure to query both PSRs and IBs. If your problem has already been reported, log into the INTEREST IN OPEN PSR listing (instead of submitting another PSR).
3. If the problem is unknown to SOLVER and you have questions concerning it, contact CSS.

Users write PSRs to document problems and to have them corrected. Before you write a PSR, you should have satisfied two conditions: (1) you have proceeded through step 3 (listed earlier), and (2) you think there is enough information to locate the cause of the problem (and fix it). This is very important for the quick resolution of your problem. If additional information is necessary, you will be contacted.

## WRITING AN EFFECTIVE PSR

It is very important that you write a clear and descriptive problem statement in the PSR. This includes a concise statement describing the software failure (which feature of the software failed and the nature of the failure). Usually it is a good idea to provide references to the documentation, stating that your particular use of the software is both defined and permitted. If the manual is unclear or incomplete, be sure to mention it. For example, "Nowhere in the manual is this particular combination prohibited. Page 20 gives a similar example." The following is a good example of a problem description.

"The system console screen goes blank after execution of the command QDSPLAY,jsn. This situation occurs only when the P display is occupying the left screen."

The impact of the problem is very important. Control Data personnel work on PSRs in order of priority. Your stating the consequences of the problem will help to define its importance to the person working on it. Relevant questions include the following: Is there a way to avoid the problem? Is the occurrence of the problem predictable? How often does the problem occur? How many people depend upon the feature that has failed? Is the system usable as a whole, in part, or not at all?

For example:

"...This problem with SMFEX is not seen by users of FSEEX. But use of FSEEX severely impacts our system performance, due to the frequent movement of jobs by NOS to accommodate the 100 users who require the Full Screen Editor. The system is primarily being used for application code development."

The environment in which the problem occurs must be stated in the PSR. A software environment includes the release level of NOS, the release level of the product(s), and the installation options. Include in the PSR the descriptions of any additional Control Data code (idents) and local code (listings of) in the product or system part in question. It is most important to consider the hardware environment if there have been recent changes in the hardware or if the hardware seems to be functioning poorly or improperly (for example, memory parity errors or disk errors).

Problem documentation other than the description of the problem is almost always required. This should include all the information necessary for reproducing the problem, plus any listings, memory dumps, or the like that were generated at the time you experienced the problem. A failing test case is the most useful piece of support material for your PSR. If you have done any analysis of the problem, be sure to provide the details and a description of the original symptoms. Include any corrective code your analysis has produced. It is preferable to put the test cases, data files, locally generated code, and any suggested code on tape. Be sure to mark all the supporting materials clearly with your submitter reference number. This helps identify the problem and PSR with which they are associated.

## PSR SUPPORTING INFORMATION

Most of the support documentation that follows should be readily available to you, or it should have been generated at the time the problem occurred. This section describes the necessary support documentation for PSRs against NOS and its most commonly used products and subsystems.

Please contact CSS if you have questions about gathering the relevant support materials.

## NOS SYSTEM PROBLEMS

Problems occurring with NOS fall into two areas: those that affect the general operation of the system and those that affect the usability of the system. Examples of the first are system hangs and aborts. Hangs can be identified by the PP HUNG or HUNG PP messages displayed on the system console. Aborts are identified by a CPUMTR ERROR EXIT message. Support documentation for operational problems should include the following:

- An express deadstart dump (EDD) tape†
- SYSTEM/ACCOUNT/ERRLOG/MAINLOG dayfiles for at least the last hour preceding the problem
- Copy of your deadstart tape
- Listings of all PP and CPU routines that have been locally modified and seem to be related to the problem
- A copy of the job and the data for that job if the system problem is associated with the execution of a particular job
- For permanent file problems, the relevant PFDUMP tape and PFCAT output

Usability problems are most often caused by improperly functioning commands. Support documentation for usability problems should include all the material necessary for reproducing the problem (procedures, files, and programs).

## NETWORK PROBLEMS

Network problems also fall into two areas: NAM/CCP and network applications (RBF, IAF, TAF, and the like). The following list describes the documentation necessary for analyzing NAM/CCP problems.

- Relevant NPU dumps and the NPU link listing
- Field length dumps (if generated) and dayfiles for NAM, NS, CS, and NVF (network trace files for the corresponding time frame are very useful)
- MAINLOG/ERRLOG for the time frame specified in NAM's dayfile
- Listings of all local code in NAM, NS, CS, and NVF
- Listings of the UCCP and USERBPS files that were used in building CCP
- The NCF and LCF in effect at the time of the problem

---

†If PP MTR is suspected as part of the problem (for example, the clock is dead), the operator should toggle the PP barrel switch before generating the EDD tape (to save the contents of MTR).



In general, analysis of a problem with one of the network applications requires both the field length dump of the application and the applications dayfile. The network trace file is also very useful. If usability problems with an application occur, all the documentation needed to enable reproduction of the problem must be included in the PSR.

Specifics concerning IAF and TAF:

#### IAF

- Sense switches 1 and 6 are set by default in the IAF procedure file. To obtain a field length dump of IAF for any abnormal conditions, set switch 3 also.
- If an interactive terminal hangs, set sense switch 4 (in addition to those above) before idling IAF in order to obtain a dump of IAF's field length. Specify in the PSR the JSN of the interactive job that was hung.
- Refer to a listing of any locally generated code in IAF.
- If a PP hangs due to an interactive job, leave IAF running at a control point when an express deadstart dump is taken.

#### TAF

- Refer to a listing of any locally generated code in TAF and its related decks.
- For terminal or network communication problems, perform a network trace.
- For data base related problems, obtain a copy of all xxJ files, data base files, and the source code for any relevant tasks associated with the problem.
- Obtain a copy of the task library for any LIBTASK problem.
- Include TAF's Initialization and Recovery Report and dayfile with any PSRs written against TAF.
- Include TAF's field length dump and matching listing for any hang or abort.

### COMMON PRODUCTS

Analysis of problems with any of the compilers or associated products (such as CRM, DDL, and the Loader) requires the following: the source program, the data needed for input (if applicable), a load map, a field length dump (if applicable), and the dayfile. Instructions for the proper execution of the program are essential. Programs using CDCS require the appropriate schema and subschema.

## REMOTE HOST FACILITY (RHF)

The supporting documentation for problems with RHF parallels that which is necessary for network problems. The list below summarizes this documentation.

- System dayfiles for both systems; RHF subsystem's dayfile and application's dayfile for both systems.
- An express deadstart dump for hang or inoperative conditions. (Any field length dumps of the RHF and its applications that are generated should be included with the PSR).
- Simultaneous dumps of both local and remote NADs for hang and inoperative conditions.
- Listings of the local modifications, load maps, and files involved in the problem.
- RCFGEN input/output (such as configuration files), HPA output, and copies of all trace files.
- LID configuration files for both systems.

# GLOSSARY

A

## Abort

To terminate a program, job, or job step when an error condition (hardware or software) exists from which the program or computer cannot recover.

## Access Category

Refer to File Access Category and System Access Categories.

## Access Code

A hardware/software security code assigned to each NAD on the network. A NAD may communicate only with other NADs having matching codes.

## Access Level

A property of each file, job, and equipment on a secured system. It is used to indicate the sensitivity of information in the file or job, or the sensitivity of information that can be processed by the equipment. On a secured system, there are up to eight access levels corresponding to increasing levels of sensitivity. Authorization can be given for access to some or all of those levels. Refer also to File Access Level, Job Access Level, and System Access Levels.

## Access Level Limits

Refer to Job Access Level Limits.

## Account Dayfile

A dayfile that provides a history of system usage over the life of the account dayfile. It provides information necessary for accurate billing and system usage analysis.

## AP

The application permission.

## Application

Refer to Application Program.

## Application Program

A program resident in a host computer that provides an information storage, retrieval, and/or processing service to a remote user via the data communication network and the Network Access Method. Application programs use the system control point feature of NOS to communicate with the Network Access Method.

In the context of network software, an application program is not an interactive job, but rather a terminal servicing facility that provides terminal users with a specific processing capability such as remote job entry from batch terminals, transaction processing, entry and execution of interactive jobs, and so forth. For example, the standard Control Data interactive facility IAF makes terminal input and output appear the same to an executing program as file input and output; IAF is a network application program, but the executing program using IAF is an interactive job.

## ASCII

American National Standard Code for Information Interchange. The standard character set and code used for information interchange between systems. It is a 7-bit code representing a prescribed set of 128 characters.

## Attach

The process of making a direct access permanent file accessible to a job by specifying the proper permanent file identification and passwords.

## Auxiliary Device

A mass storage device that is not part of a permanent file family. Auxiliary devices can contain direct or indirect access permanent files.

## BASIC

Beginner's All-purpose Symbolic Instruction Code is an elementary programming language available to the user. Also, a subsystem that uses the BASIC compiler.

## Batch Job

The instructions and data that are submitted as a complete unit without further intervention on the user's part. The job can be punched on cards or created and submitted from a terminal.

## Beginning-of-Information (BOI)

The start of the first programmer record in a file is known as the beginning-of-information. System information, such as tape labels on sequential files or indexes, does not affect the beginning-of-information.

## Binary File

A noneditable file that contains a precompiled program.

## Bit

An abbreviation of binary digit. It is a single digit, 0 or 1, in a binary number, and also represents the smallest unit of information. A central memory word (one storage location) contains 60 bits.

## Byte

A group of bits. Unless prefixed (for example, a 6-bit byte), the term implies 8-bit groups. When used for encoding character data, a byte represents a single character.

## Central Memory (CM)

The main storage device whose storage cells (words) can be addressed by a computer program and from which instructions and data can be loaded directly into registers. The instructions can be executed and the data can be manipulated from these registers.

## Charge Number

An alphanumeric identifier the installation uses to allocate charges to individual users for system usage.

## Command

A sequence of words and characters that call a system routine to perform a job step. The command must conform to format specifications and end with either a period or a right parenthesis. A command is sometimes called a control statement.

## Control Statement

Refer to Command.

## Dayfile

A chronological file created during job execution. It forms a permanent accounting and job history record. Dayfile messages are generated by operator action or when commands are processed. A copy of the dayfile is printed with the output for each job. The user must explicitly request it in an interactive job.

## Deadstart

The process of initializing the system by loading the operating system library programs and any of the product set from magnetic tape or disk. Deadstart recovery is reinitialization after system failure.

## Default

A system-supplied option used when the user does not supply the option.

#### Direct Access File

A NOS permanent mass storage file that can be attached to a job. All changes to this file are made on the file itself rather than on a temporary copy of the file (compare with Indirect Access File).

#### DIS (Job Display)

A system peripheral processor program similar to system display (DSD) that provides communication between a job in central memory and the operator at the console. It permits the operator to control execution of the program through the console keyboard.

#### Display Code

A 6-bit character code set that represents alphanumeric and special characters.

#### DSD (System Display)

The operating system program that provides communication between the operator and the system by accepting control information typed on the console keyboard and by displaying to the operator information pertinent to all jobs known to the system. DSD is permanently assigned to peripheral processor 1.

#### End-of-File (EOF)

A boundary within a sequential file, but not necessarily the end of a file that can be referenced by name. The actual end of a named file is defined by EOI. For labeled tape, EOF and EOI (denoted by the EOF1 label) are the same. For multiframe tape files, EOF and EOI do not correspond. In the product set manuals, an end-of-file is also referred to as an end-of-partition.

#### End-of-Information (EOI)

The end of data on a file. Information appearing after this point is not considered part of file data. In card decks, it is a card with a 6/7/8/9 multiple punch in column 1. On mass storage devices, it is the position of the last written data. On labeled tape,

it is the EOF1 label. CYBER Record Manager defines end-of-information in terms of file residency and organization.

#### End-Of-Record (EOR)

An indicator that marks the end of a logical record. Also referred to as end-of-section.

#### Error Flag

A character or bit that signals the occurrence or presence of an error.

#### ESM

The extended semiconductor memory.

#### Execution

An input job is in execution after it is selected by the operating system and assigned to a control point. A job remains in execution until terminated, but it can be temporarily swapped or rolled out by the operating system.

#### Family Device

A mass storage permanent file device associated with a specific system. A family may consist of 1 to 63 logical devices. Normally, a system runs with one family of permanent file devices available. However, additional families may be introduced during normal operation. This enables users associated with the additional families to access their permanent files via the alternate family.

#### Family Name

Name of the permanent file storage device or set of devices on which all permanent files are stored. When a user requests a permanent file, the system looks for it on this family (group) of devices. Usually a system has only one family of permanent file devices, but it is possible to have alternate families in the system. Users may have to specify a family when they log in. The family name is given by an employer or instructor or by computer center personnel.

#### Field Length

The area in central memory allocated to a particular job; the only part of central memory that a job can directly access. Also the number of central memory words required to process a job.

#### File

A collection of information referred to by a file name (from one through seven alphanumeric characters). A user can create a file at the terminal or retrieve a file from permanent file storage for use during a terminal session.

#### File Access Category

A property of a permanent file used by the creator of the file on a secured system to restrict access of the file to a particular group of users. A secured system supports up to 32 access categories. Authorization can be given to use some, all, or none of those categories. Refer also to System Access Categories.

#### File Access Level

A property of each file on a secured system used to indicate the sensitivity of information contained on the file. A file is assigned the current job access level by default when it is created or stored; the file creator may specify any access level for that file that is within the set of access levels valid for the job, the system, the file creator, and (for interactive jobs) the communication line to the host mainframe. If a file is accessed on a secured system, the user must be validated for the access level of the file. Refer also to Access Level, Job Access Level, and Job Access Level Limits.

#### File Category

Each permanent file is assigned a category of private, semiprivate, or public.

#### File Count

A maximum number of permanent files allowed each user.

#### Flag

A character or bit that signals the occurrence or presence of a particular condition.

#### Indirect Access File

A NOS permanent file accessed by making a temporary copy of the file (GET or OLD command). A user creates or alters it by saving or substituting the contents of an existing temporary file (REPLACE or SAVE command). (Compare with Direct Access File.)

#### Input

Information flowing upline from terminal to host.

#### Input File

The system-defined file that contains the entire job the user submits for processing. It is also known as the job file.

#### Input Queue

A set of input files waiting to be assigned to control points by the operating system.

#### Interactive Facility (IAF)

An application that provides a terminal operator with interactive processing capability. The interactive facility makes terminal input/output and file input/output appear the same to an executing program.

#### Interactive Job

A job initiated from an interactive terminal.

#### Job

All activity associated with a terminal session from login to logoff.

## Job Access Level

On a secured system, each job has an access level. This is the default access level that is assigned to files that are created or stored in the job. A job's initial access level is the lower access level limit for the job. The job's access level is automatically raised to the access level of any file from which information is read. The user can change the access level with the SETJAL command. Refer also to Job Access Level Limits.

## Job Access Level Limits

An upper limit and a lower limit that determine the range of access levels that are valid for a particular job on a secured system. All files used in a given job must have an access level within the job's access level limits.

## Job Sequence Name (JSN)

The unique, system-defined name assigned to every executing job or queued file. The JSN is a string of four alphabetic characters.

## Job Status

A job attribute kept in the job's executing job table (EJT) entry. It is used by the system to determine whether a job is rolled in or rolled out. If the job is rolled out, job status indicates why it was rolled out.

## Keyword

A symbol used within a command which identifies a specific function. It is one of the the predefined words.

## Local File

Any file that is currently associated with a job. Local files include all temporary files and attached direct access files.

## Local File Name

The file name assigned to a file while it is local (assigned) to a job. The name is contained in the local file name table.

## Login

The procedure used to gain access to the system.

## Logout

The procedure used to end a terminal session.

## MODVAL

A validation file manager that creates and manages the VALIDUs file.

## NOS

The network operating system.

## Operating System

The set of system programs that controls the execution of computer programs and provides scheduling, error detection, input/output control, accounting, compilation, storage assignment, and other related services.

## Order Dependent

Used to describe items that must appear in a specific order.

## Order Independent

Used to describe items that need not appear in any specific order. Parameters, particularly those with keywords, may be order-independent.

## Output

The information flowing downline from host to terminal.

## Output File

The system-defined file that contains the output from job processing. It is also known as the print or punch file.

## Parameter

A variable that is given a specific value for a particular purpose or process.

## Password

A name or word entered during login to provide extra security for the user name. A unique password ensures that no one else can log into the system with that user name and access its files. A password is initially given by an employer, an instructor, or by computer center personnel.

## Permanent File

A mass storage file that is cataloged by the system so that its location and identification are always known to the system. Permanent files cannot be destroyed accidentally during normal system operation. They are protected by the system from unauthorized access according to privacy controls specified when they are created.

## Permanent File Family

The permanent files that reside on the family devices of a specific system.

## Procedure

A user-defined set of instructions that can be referenced by name. The instructions consist of procedure directives and system commands.

## PROFILa File

A system file that controls user accounting.

## Project Epilogue

A program that is executed automatically at the end of an account block for which its related charge and project numbers are in effect. An epilogue program can be used to output resource usage information to a terminal user or a user's dayfile or to save information about the terminating account block on a permanent file for tracking by the master user.

## Project Number

An alphanumeric identifier that may be required at installation for accounting and billing to a specific project. If it is required, the project number is

entered during the login procedure. It is assigned by personnel at your installation.

## Project Prologue

A program that is executed automatically at the beginning of an account block after its related charge and project numbers are validated, but before any user program processing begins. A prologue program can be used as a convenience to users of a project number for access of project files or output of messages to the user. It can also be used to perform further validation on a user before allowing use of a charge and project number or to restrict use of a project number to a single application executed as a prologue.

## Screen Management Facility (SMF)

A subsystem that alters the performance characteristics of the Full Screen Editor (FSE). The absence or presence of SMF is not detectable by the user of FSE. Performance can be optimized by disabling SMF for small mainframes and interactive workloads, and by enabling SMF for large configurations and heavy workloads.

## Secured System

A system in which a mandatory security mechanism has been enabled during deadstart. A secured system protects information by enforcing restrictions based on access levels and access categories, and restricts many sensitive system functions to security administrators.

## Security Administrator

A secured system prevents users and operators from performing certain functions that could result in the unauthorized disclosure or modification of information. These functions can only be performed by a person who is designated a security administrator. A security administrator is always authorized to access the highest level of information stored on the system. This person performs functions in the areas of installation, user validation, system operation, and system maintenance.



### Security Unlock Status

This status of the system console applies only to a secured system and must be set by a security administrator. The console must be in security unlock status in order for the security administrator to perform certain functions that are restricted on a secured system.

### SMF

Refer to Screen Management Facility.

### Subfamily

Each permanent file family consists of eight subfamilies, subfamily 0 through subfamily 7. The lower 3 bits of the user index identify the subfamily to which a user belongs.

### System Access Categories

On a secured system, a set of access categories is set during level 0 deadstart. This set may consist of some, all, or none of the 32 possible access categories. While the system is running in security mode, a user may only use access categories that are within the set of system access categories.

### System Access Levels

On a secured system, a range of access levels is set during level 0 deadstart. This range may contain some or all of the eight possible access levels. While the system is running, users may only use access levels that are within the range of system access levels.

### System Resource Unit (SRU)

A unit of measurement of system usage. The number of SRUs includes the central processor time, memory usage, and input/output resources used for a given job.

### Transaction Facility (TAF)

An application program that provides the transaction terminal with access to a data base. A terminal using TAF can enter, retrieve, and modify information in the data base.

### Unsecured System

A system in which the multilevel security mechanism has not been enabled during deadstart. The restrictions based on access levels and access categories are not enforced on an unsecured system.

### User Index

A unique 17-bit identifier associated with each user name. The user index is used by the permanent file manager to identify the device and catalog track for the user's permanent files.

### User Job Name (UJN)

A one- to seven-character alphanumeric name you specify to replace the system defined JSN for a queued file or an executing job.

### User Name

A name given to users by their employer, instructor, or computer center personnel. A user name has certain resources and privileges assigned to it. When logging in to the system, a user specifies his or her user name as identification to the system, so that it knows that that person is an authorized user and what resources he or she is entitled to use. A user name also represents a specific catalog in the permanent file system. All files that a user makes permanent are associated with his or her user name and this catalog.

### Validation File

A file that contains validation information for all users (user names, passwords, resources allowed, and so on).

**VALIDUs File**

A system file used to control user validation.

**VALINDs File**

A system file used to control user indexes.

**Word**

A group of bits (or 6-bit characters) between boundaries imposed by the computer system. A word is 60 bits in length. The bits are numbered 59 through 0, starting from the left. A word is also composed of five 12-bit bytes, numbered 0 through 4 from the left.

## ACCOUNT DAYFILE MESSAGES

B

This appendix contains a list of account dayfile messages and the product, the program, or deck that issued the message. The product, the program, or the deck is indicated in parentheses.

- MCS (Message Control System)
- MSS (Mass Storage Facility Subsystem)
- MAS (Mass Storage Archival Subsystem)
- NHP (Network Host Products)
- NOS (Network Operating System)
- RHF (Remote Host Facility)

Lowercase letters within a message are used to identify fields that are variable.

<u>Message</u>	<u>Product/Program</u>
ABAA, appl, name 1, name 2.	NHP
ABAC, C1, username, familyname, appl. ABAC, C2, snode, dnode.	NNP
ABAE, C1, username, familyname, appl. ABAE, C2, snode, dnode.	NHP
ABAP, C1, username, familyname, terminalname. ABAP, C2, application.	NHP/NVFTIAM
ABAR, appl, snode, dnode.	NHP
ABCN, chargenumber, projectnumber. ABCN, SYSTEM, .	NOS/CHARGE, CPM, OAP
ABEA, appl, name 1, name 2.	NHP
ABER, C1, username, familyname, terminalname. ABER, C2, password.	NHP/NVFTIAM
ABIC, chargenumber, projectnumber, terminalname.	NHP/NVF NOS/CHARGE
ABLQ, C1, jsn, yymmdd, hhmss, dc. ABLQ, C2 xxxxxx.xxxKUNS, sc.	NOS/DSP, 1DS,1TA
ABRE, appl.	NHP
ABSC, sc.	NOS/CHARGE

<u>Message</u>	<u>Product/Program</u>
ABST, system title.	NOS/REC
ABSV, system version.	NOS/REC
ABSY, yy/mm/dd.	NOS/REC,SFM
ABUN, username, familyname, terminalname.	NOS/CHARGE NHP/NVFTIAM RHF/PTFS
ACCN, chargenumber, projectnumber.	NOS/CHARGE,CPM
ACDT, DS, DATE. yy/mm/dd.	NOS/1DS
ACDT, DS, TIME, hh.mm.ss.	NOS/1DS
ACLK, jsn, pid, lid, ERR.	RHF/ACTLOG,PTFS
ACSC, sc, newjsn, sruunits.	NOS/CPM,1RI
ACSO, sruunits.	NOS/OAU
ACSR, sruunits.	NOS/CPM,1RI
ACUN, username, familyname.	NOS/CHARGE RHF/PTFS
ADDI, est, familyname, dn.	NOS/IMS
ADDR, est, familyname, dn, lowerlvl, upperlvl.	NOS/MSM
ADDU, est, familyname, dn.	NOS/MSM
ADPD, est, packname, username.	NOS/MSM
ADPI, est, packname, username.	NOS/IMS
ADPM, est, packname, username, lowerlvl, upperlvl.	NOS/MSM
AEAA, C1, Appl, name 1, name 2. AEAA, C2, xxxxxxSECS.	NHP
AEAP, C1, username, familyname, terminalname. AEAP, C2, application, xxxxxxSECS.	NHP/NVFTIAM
AEQP, C1, jsn, yymmdd, hhmmss, dc.	NOS/ODQ
AERR, ty.	NOS/1AJ
AESR, sruunits.	NOS/QAP,1AJ
AESY, yy/mm/dd.	NOS/SFM
AEUN, username, familyname, terminalname.	NHP/NVFTIAM
AMAS, est, vsn.	NOS/1MT

<u>Message</u>	<u>Product/Program</u>
AMRT, est, type.	NOS/1MT
APPN.	NOS/CPM
APPN, packname.	NOS/CPM
ARRQ, C1, jsn, yymmdd, hhmmss, dc.	NOS/DSP,QFM
ARRQ, C2, xxxxxx.xxxKUNS, sc.	
ARSY, ln, yy/mm/dd.	NOS/REC
ARUN, username, familyname.	NOS/1MA
ASTD, username, familyname.	NOS/1MA
ASTH, username, familyname.	NOS/1MA
ASTP, username, familyname.	NOS/1MA
ASTR, username, familyname.	NOS/1MA
ASTT, username, familyname.	NOS/1MA
AUSR, sruunits.	NOS/CPM,1AJ,1RO
MFFI, filename, newlevel.	NOS/LFM,PFM
MJJI, oldlevel, newlevel.	NOS/CPM
MPNF, filename, username, packname.	NOS/PFM
MSEQ, est, lowerlevel, upperlevel.	NOS/1DS
MSOT, ot, lowerlevel, upperlevel.	NOS/1DS
MSSA, username.	NOS/1DS
MSSI, username.	NOS/1DS
MUPW.	NOS/MODVAL
MUPX.	NOS/MODVAL
SANW, application, jsn.	NHP
SBER, application, jsn.	NHP
SBNW, application, jsn.	NHP
SCLI, node, C1, port, 0, tttttt111111.	NHP/CSESES
SCLI, node, C2, sssssccccc.	
SCLI, node, C3, bbbbbb.	
SCMT, est, pppppppp, t.	NOS/1MT
SCNQ, node, C1, cccccddddd111111.	NHP/CSESES
SCNQ, node, C2, gggggrrrrrrrsssss.	
SCNQ, node, C3 ppppppiiiiinnnnn.	
SCNQ, node, C4, wwwwww.	

<u>Message</u>	<u>Product/Program</u>
SCTU, node, C1, port, 0, tttttt111111.	NHP/CSESES
SCTU, node, C2, sssssscceccc.	
SCTU, node, C3, bbbbbb.	
SEMC, xxxxxx.xxxKUNS.	MCS/MCS\$RNA, MCS\$Q02
SEMW, application, jsn.	NHP
SIAD.	NOS/DAYFILE, STIMULA
SIDT, yy/mm/dd.	NOS/1MB
SISC.	NOS/OAV
SISC, nn.	NOS/OAV
SIUN, username.	NOS/CPM, DSP
SMBD, filename/userindex/familyname.	MAS
SMBS, filename/userindex/familyname.	MAS
SMED, filename/userindex/length/code.	MAS
SMES, filename/userindex/length/code.	MAS
SMLD, SM=sm, CSN=csn, ID=cm.	MAS
SMUL, SM=sm, CSN=csn, ID=cm.	MAS
SPAC, filename, username, packname.	NOS/PFM
SPAL, filename, username, packname.	NOS/PFM
SPAP, filename, username, packname.	NOS/PFM
SPAS, filename, username, packname.	NOS/PFM
SPAT, filename, username, packname.	NOS/PFM
SPCG, filename, username, packname.	NOS/PFM
SPCT, filename, username, packname.	NOS/PFM
SPDD, filename, username, packname.	NOS/PFM
SPDF, filename, username, packname.	NOS/PFM
SPDI, filename, username, packname.	NOS/PFM
SPDP, filename, username, packname.	NOS/PFM
SPGT, filename, username, packname.	NOS/PFM
SPPG, filename, username, packname.	NOS/PFM

<u>Message</u>	<u>Product/Program</u>
SPPM, filename, username, packname.	NOS/PFM
SPRP, filename, username, packname.	NOS/PFM
SPRS, filename, username, packname.	NOS/PFM
SPSA, filename, username, packname.	NOS/PFM
SPSD, filename, username, packname.	NOS/PFM
SPSF, filename, username, packname.	NOS/PFM
SPSV, filename, username, packname.	NOS/PFM
SPUA, filename, username, packname.	NOS/PFM
SPUG, filename, username, packname.	NOS/PFM
SPUR, filename, username, packname.	NOS/PFM
STD1, filename.	MSS/EXHLR
STD2, filename.	MSS/EXHLR
STD3, filename.	MSS/EXHLR
STD4, filename, length.	MSS/EXHLR
STD5, filename.	MSS/EXHLR
STF1, newf1.	MSS/EXSERV
STF2, newf1.	MSS/EXSERV
STF3, newf1.	MSS/EXINIT,EXMAIN
STF4, newf1.	MSS/EXMAIN
STS2, filename.	MSS/EXHLR
STS3, filename.	MSS/EXHLR
STS4, filename, length.	MSS/EXHLR
STS5, filename.	MSS/EXHLR
STS6, filename.	MSS/EXHLR
UBAU, xxxx.	NOS/CPM
UCAC, xxxxxx.xxxUNTS	NOS/OAU
UCAD, xxxxxx.xxxKUNS.	NOS/OAU
UCCI, xxxxxx.xxxKCHS.	NOS/1TA

<u>Message</u>	<u>Product/Program</u>
UCCO, xxxxxx.xxxKCHS.	NOS/1TA
UCCR, mi, eqn, xxxxxx.xxxKCDS.	NOS/QAP,1AJ
UCCT, xxxxxx.xxxKCHS.	NOS/1TA
UCLP, mi, eqn, xxxxxx.xxxKLNS.	NOS/QAP
UCLS, ty, xxxxxx.xxxKUNS.	RHF/ACTLOG,PTFS
UCLV, mi, eqn, xxxxxx.xxxKLNS.	NOS/QAP
UCMP, xxxxxx.xxxKUNS.	NOS/OAU
UCMS, xxxxxx.xxxKUNS.	NOS/OAU
UCMT, xxxxxx.xxxKUNS.	NOS/OAU
UCPC, mi, eqn, xxxxxx.xxxKCDS.	NOS/QAP
UCPF, xxxxxx.xxxKUNS.	NOS/OAU
UCPL, mi, eqn, xxxxxx.xxxKPLS.	NOS/QAP
UDAC, xxxxxx.xxxUNTS.	NOS/1RI
UDAD, xxxxxx.xxxKUNS.	NOS/CPM
UDCI, xxxxxx.xxxKCHS.	NOS/CPM
UDCO, xxxxxx.xxxKCHS.	NOS/CPM
UDCP, xxxxxx.xxxSECS.	NOS/CPM
UDCT, xxxxxx.xxxKCHS.	NOS/CPM
UDMP, xxxxxx.xxxKUNS.	NOS/CPM
UDMS, xxxxxx.xxxKUNS.	NOS/CPM
UDMT, xxxxxx.xxxKUNS.	NOS/CPM
UDPF, xxxxxx.xxxKUNS.	NOS/CPM
UEAC, xxxxxx.xxxUNTS.	NOS/1AJ
UEAD, xxxxxx.xxxKUNS.	NOS/1AJ
UEAU, xxxxxx.xxxUNTS.	NOS/1AJ
UECI, xxxxxx.xxxKCHS.	NOS/1MA
UECO, xxxxxx.xxxKCHS.	NOS/1MA
UECP, xxxxxx.xxxSECS.	NOS/1AJ



<u>Message</u>	<u>Product/Program</u>
UECT, xxxxxx.xxxKCHS.	NOS/1AJ
UEMP, xxxxxx.xxxKUNS.	NOS/1AJ
UEMS, xxxxxx.xxxKUNS.	NOS/1AJ
UEMT, xxxxxx.xxxKUNS.	NOS/1AJ
UEPF, xxxxxx.xxxKUNS.	NOS/1AJ



# INDEX

- Account dayfile messages
  - General format 5-1
  - Message group
    - Accounting (A) 5-3
    - Description 5-2
    - Multilevel security (M) 5-10
    - Statistical (S) 5-11
    - Usage (U) 5-18
- Accounting
  - Resource 4-1
  - Special users 3-2
  - User 1-1; 3-1
- Application usage 4-1
  
- Billing identifier 3-1
  
  
- Central memory field length 4-1
- Central Software Support (CSS) 6-1
- CHARGE command 2-23; 3-1,29
- Charge number
  - Entries 3-13
  - Inquiry 3-9
  - List 3-10
- Common products 6-5
- Console input options 2-4
- CPU time 4-1
- Create option 2-2; 3-4
  
  
- Deactivate
  - Charge number 3-16
  - Project number 3-16
- Default service class 2-34
- Delete
  - Option 2-2
  - User name 3-16
  - User name parameter 2-24
- DIS 2-2
- DSD 2-2
  
  
- Epilogue
  - File name 3-16
  - File password 3-16
- Examples of MODVAL use 2-38
  
  
- Expiration date 2-37
- Extended memory field length 4-1
  
  
- Fast-attach files 2-1
- Full Screen Editor (FSE) 4-13
  
  
- GENVAL 1-2; 2-1
  
  
- Inquire option 2-2
- ISF command 2-1
  
  
- K.DROP 2-3
- K.END 2-3
- K.STOP 2-3
  
  
- Limits
  - Job resource usage 1-1
  - Total resource usage 1-1
- Listing
  - Full file
    - Charge number 3-7
    - Project number 3-8
  
  
- Magnetic tape usage 4-1
- MAP usage 4-1
- Mass storage usage 4-1
- Master user
  - Full file list 3-11
  - Validated 3-1
- Master users 3-2
- MODVAL
  - Console input 2-2
  - Default user names 2-52
  - Examples 2-38
  - First display
    - Left screen 2-5
    - Right screen 2-6
  - Validation file manager 2-1
- Multilevel security information 5-10

Multiplier values  
Actual 4-11  
Index 4-11  
Multipliers 4-2

Network problems 6-4  
NOS system problems 6-4

Option  
Create 2-2  
Delete 2-2  
Inquire 2-2  
Update 2-2

Parameters  
Analyst 3-9  
Master user 3-9  
Password parameter 2-28  
Permanent file usage 4-1  
Problem reporting 6-1

PROFIL  
Charge number directives 3-13  
Directives 3-2  
Input directives 3-13  
Options 3-2

PROFILA  
File 3-2,19  
File structure 3-3  
Special system file 1-1

PROFILE  
Analyst parameters 3-4  
Batch input 3-23  
Charge and project numbers left screen 3-24  
Charge number left screen 3-22  
Console input 3-19  
Execution from a terminal 3-23  
Input directives 3-19  
Inquiry from a terminal 3-28  
Listing from a terminal 3-28  
Right screen 3-21  
Update from a terminal 3-27

PROFILE command 3-4  
Programming system report (PSR) 6-1

Project  
Number 3-1  
Number inquiry 3-9  
Number list 3-10  
Number parameter 2-28

Prologue  
Charge 3-18  
File name 3-18  
File password 3-18

PSR  
Example 6-3  
Programming system report 6-1  
Supporting documentation 6-3  
When to write and why 6-2

Remote Host Facility (RHF) 6-6  
Resource accounting 4-1  
RHF (Remote Host Facility) 6-6

Screen Management Facility (SMF) 4-13  
Security  
Access categories 2-30  
Access levels 2-30  
Access validation 2-31  
Administrator privileges 2-1  
Service class 2-36

Shell  
Control option 2-33  
Program name 2-32

Software  
Failure 6-1  
Usage 6-1  
SOLVER usage and validation 6-1

Special  
Accounting users 3-2  
System file 2-1  
User names 2-51

SRU  
Algorithm 4-1  
Formula 1-2; 4-1  
Parameters 4-3  
System resource unit 1-2; 4-1

System  
Origin jobs 3-2  
Problems 6-1  
System resource units  
Description 4-1  
Examples of calculations 4-9  
Formula 4-1  
IO increments 4-6  
MS increments 4-6  
MT increments 4-8  
PF increments 4-8

Update option 2-2  
User  
Accounting 1-1; 3-1  
Validation 1-1; 2-1

User index file  
VALINDS 1-1  
VALINDZ 1-1

User name  
  Default 2-52  
  Deleting 3-1  
  Entering 3-1  
  Special 2-51  
User prologue name 2-36  
User validation 1-1  
User validation file  
  VALIDUS 1-1  
  VALIDUZ 1-1

VALIDUs 2-1  
VALIDUS  
  Special system file 1-1  
  User validation file 1-1  
VALIDUZ user validation file 1-1  
VALINDs 2-1  
VALINDS user index file 1-1  
VALINDZ user index file 1-1  
  
Writing a PSR 6-2  
Writing an effective PSR 6-3



## COMMENT SHEET

MANUAL TITLE: CDC NOS Version 2 Administration Handbook

PUBLICATION NO.: 60459840

REVISION: A

NAME: \_\_\_\_\_

COMPANY: \_\_\_\_\_

STREET ADDRESS: \_\_\_\_\_

CITY: \_\_\_\_\_ STATE: \_\_\_\_\_ ZIP CODE: \_\_\_\_\_

This form is not intended to be used as an order blank. Control Data Corporation welcomes your evaluation of this manual. Please indicate any errors, suggested additions or deletions, or general comments below (please include page number references).

Please Reply

No Reply Necessary

CUT ALONG LINE

NO POSTAGE STAMP NECESSARY IF MAILED IN U.S.A.

FOLD

FOLD



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

**BUSINESS REPLY MAIL**  
FIRST CLASS      PERMIT NO. 8241      MINNEAPOLIS, MINN.

POSTAGE WILL BE PAID BY

**CONTROL DATA CORPORATION**

Publications and Graphics Division  
ARH219  
4201 North Lexington Avenue  
Saint Paul, Minnesota 55112



CUT ALONG LINE

FOLD

FOLD







CONTROL DATA CORPORATION