

Microsystems

Volume 4/Number 4

April 1983

**Ways
to use
micros for
gathering
experimental
data in
the lab
-direct
connection
or the
IEEE-488
bus?**

The IEEE-488 Bus in the Lab

Richard Newrock explains the facilities provided by the IEEE-488 General Purpose Interface Bus (GPIB), with practical guidance on design considerations affecting its use. In a second article, Richard Newrock gives a detailed review of the Pickles & Trout S-100/IEEE-488 interface board and its accompanying packages.

Other Instrumentation Interfaces

Joseph Long describes instrumentation interfaces developed to introduce chemistry students to computerization in the lab.

Ralph Place and Kirk Bailey discuss the problems encountered in bringing up a CP/M-86 on the STD bus for digitizer analysis of photographic material.

More on CP/M Plus

Bruce Ratoff concludes his two-part discussion of the advanced features of CP/M Plus.

Software Reviews


Chris Terry reviews utilities from Norway, as well as POWER (which replaces DDT, STAT, and other CP/M functions) and a keyboard redefinition program.

Hardware Review


Ernest Mau gives an in-depth review of the Morrow Designs' Decision 1, a versatile S-100 system in the middle price range.




SUPERIOR GRAPHICS HAVE COME DOWN TO EARTH.



"Three Atoms" Courtesy of Greg Abram, University of North Carolina at Chapel Hill



"Aurora" By Richard Katz, Vectrix Corporation



"Integrated Circuit Design" Courtesy of Floyd J. James, University of North Carolina at Chapel Hill



"In The Beginning" By Richard Katz, Vectrix Corporation

\$1995 AND THE FIRST AFFORDABLE HIGH RESOLUTION COLOR GRAPHICS MACHINE IS YOURS

VX128

- **VERY HIGH RESOLUTION** 672 by 480 pixels individually addressable
- **EIGHT COLORS PER PIXEL** 3 bit planes of memory totalling 128K graphics RAM
- **ON-BOARD 16 BIT MICRO-COMPUTER** Intel 8088 microprocessor with additional PROM and RAM and built-in expansion capability
- **3D GRAPHICS SOFTWARE PACKAGE** built-in command set includes: rotation, scaling, translation, perspective, clipping, viewport, polygon, and filled polygon
- **HARDWARE LINE AND ARC GENERATION** on-board VLSI graphics display controller, 1600 nano-seconds pixel drawing time

- **USER DEFINABLE CHARACTER GENERATION** built-in character set includes zoom, slant, and variable spacing, or upload your own character definitions




VECTRIX

- **SERIAL AND PARALLEL INTERFACE** 300-19.2K baud and 8 bit parallel port
- **USER FRIENDLY COMMAND FORMAT** supports high level language and hexadecimal transmissions

VX384


- **512 COLORS PER PIXEL** 9bit planes of memory with 384K graphics RAM
- **COLOR LOOKUP TABLE** 8 bit digital-to-analog converters provide a 16 million color palate
- **INCLUDES ALL FEATURES** of VX128 for total of \$3995
- **VXM HIGH RESOLUTION COLOR MONITOR** RGB analog input with 24 kilohertz scan rate, long persistence phosphor \$1295
- **COLOR GRAPHIC PRINTER** with interface cable \$1295

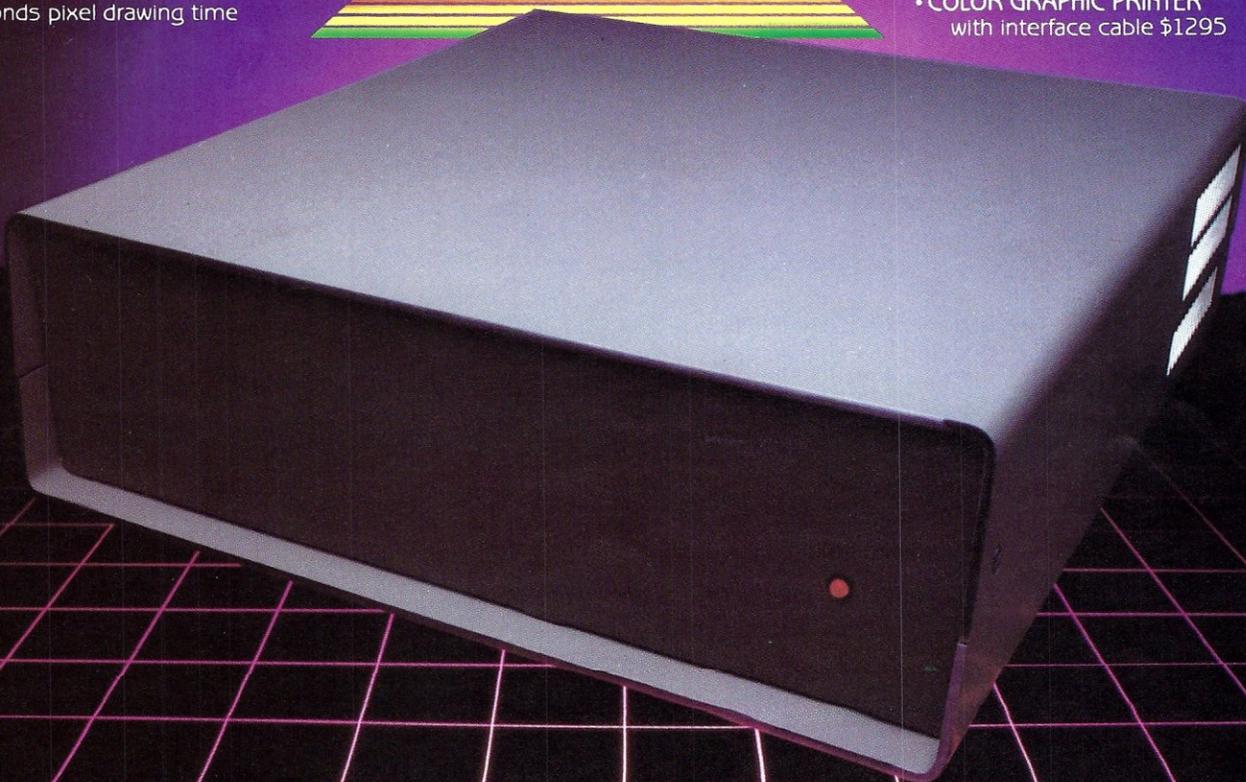

For additional information on VX128, VX384, VXM Monitor or VXP Printer call Toll Free 1-800-334-8181, or 919-272-3479, or write Vectrix Corporation, 700 Battleground Avenue, Greensboro, NC 27401

CIRCLE 15 ON READER SERVICE CARD

Now Our Family Tree Is Complete

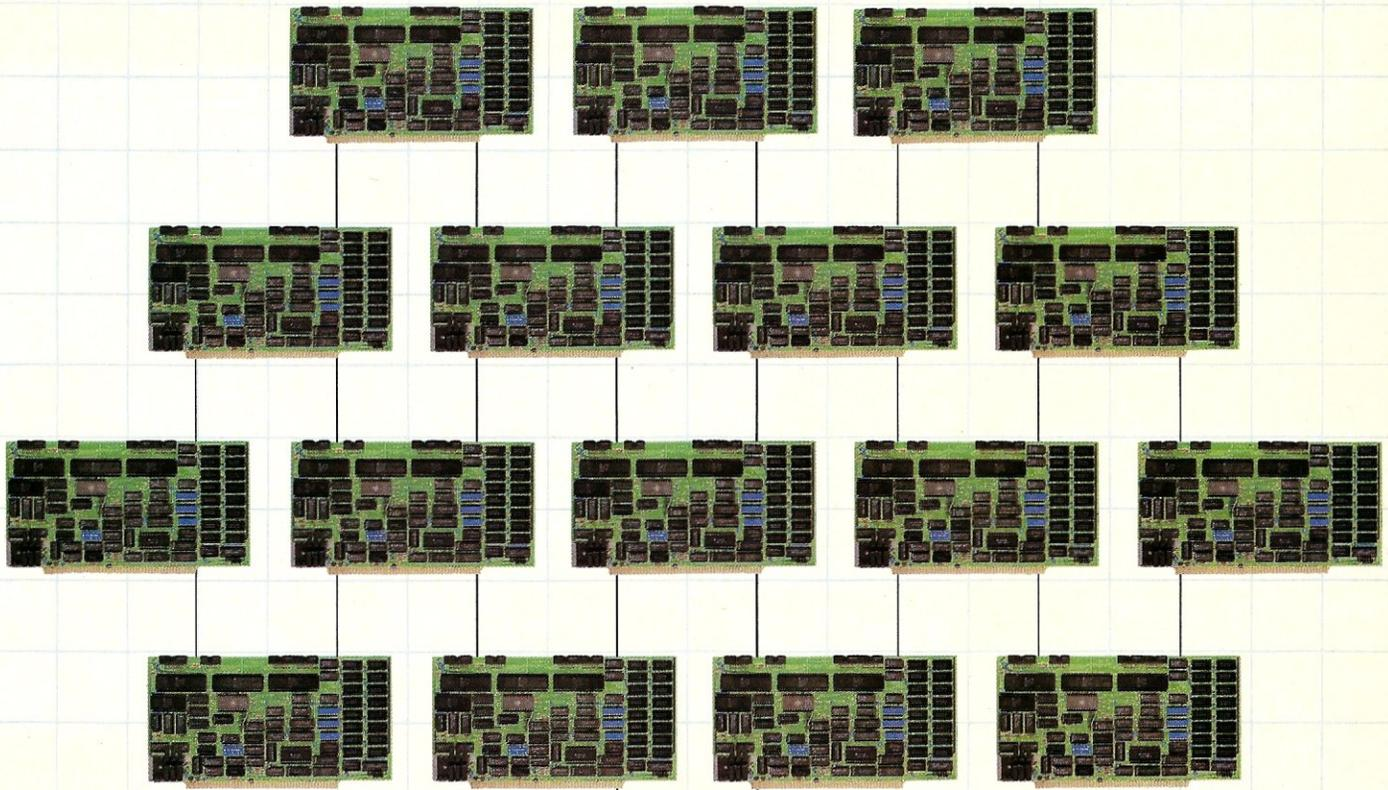

SBC-1 (Above) A multiprocessing slave board computer with Z-80 CPU (4 or 6 MHz), 2 serial ports, 2 parallel ports, and up to 128K RAM. Provides unique 2K FIFO buffering for system block data transfers. When used with TurboDOS or MDZ/OS the results are phenomenal!

HD/CTC (Left) A hard disk and cartridge tape controller combined together on one board! A Z-80 CPU (4 or 6 MHz); 16K ROM, and up to 8K RAM provide intelligence required to relieve disk I/O burden from host system CPU. Round out your multiprocessing system with an integrated mass storage/backup controller.

Systemmaster® (Right) The ultimate one board computer; use it as a complete single-user system or as the "master" in a multi-processing network environment. Complete with Z-80A CPU, 2 serial and 2 parallel ports, floppy controller, DMA, real time clock, and Teletek's advanced CP/M BIOS. Also supports MP/M-II, MDZ/OS, and TurboDOS.



TELETEK

9767F Business Park Drive
Sacramento, CA 95827
(916) 361-1777
Telex #4991834
Answer back-Teletek

Your Single Source Family of S-100 Products.

All you dBASE II™ hotshots are about to get what you deserve.

You've written all those slick dBASE II programs.

Business and personal programs. Scientific and educational applications. Packages for just about every conceivable information handling need.

And everybody who sees them loves them because they're so powerful, friendly and easy to use.

But that's just not good enough.

Uh-uh.

Because now you can get the gold and the glory that you really deserve.

Here's how.

We've just released our dBASE II RunTime™ application development module.


And it can turn you into an instant software publisher.

The RunTime module condenses and encodes your source files, protecting your special insights and techniques, so you can sell your code without giving the show away.

RunTime also protects your margins and improves your price position in the marketplace. If your client has dBASE II, all he needs is your encoded application. If not, all you need to install your application is the much less expensive RunTime module.

We'll tell the world.

With your license for the dBASE II RunTime module, we provide labels that identify your program as a dBASE II application, and you get the benefit of all the dBASE II marketing efforts.

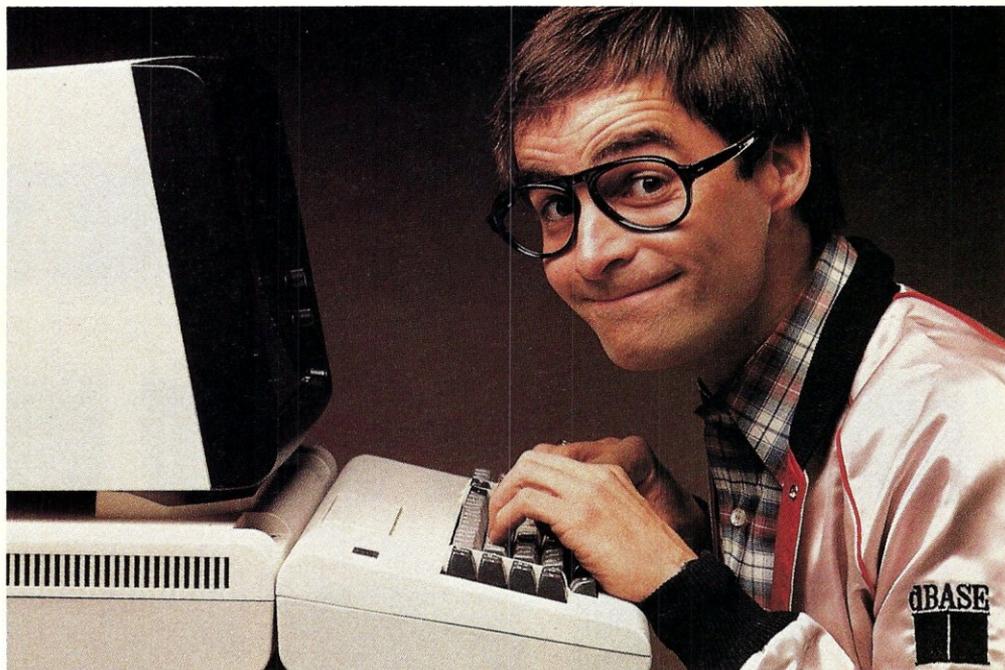

We'll also provide additional "how to" information to get you off and running as a software publisher sooner.

And we'll make your products part of our Marketing Referral Service. Besides putting you on our referral hotline, we'll publish your program descriptions and contact information in *dBASE II Applied*, a directory now in computer stores world-wide.

Go for it.

But we can't do any of this until we hear from you.

For details, write RunTime Applications Development, Ashton-Tate, 10150 West Jefferson Boulevard, Culver City, CA 90230.

Or better yet, just call (213) 204-5570. And get what you deserve today.



ASHTON · TATE

Now our \$29.95 complete Pascal for CP/M is an even better bargain...

WHAT THEY SAID ABOUT

JRT PASCAL 2.0:

CREATIVE COMPUTING, Nov. '82 "...While there is no such thing as a free lunch, JRT Pascal at \$29.95 (which includes postage) certainly allows the user to experience champagne and caviar at cafeteria prices..."

INTERFACE AGE, Oct. '82 "...JRT Pascal is following the example set by Software Toolworks (Sherman Oaks, CA) of offering quality software at extremely low price..."

INFOWORLD, Aug. 16, '82 The magazine's 'Software Report Card' rated JRT's

documentation 'good' and performance, ease of use and error handling 'excellent'—the highest rating.

AND NOW: JRT PASCAL 3.0—

with all the features that earned 2.0 so much praise—PLUS the many new features shown here. The price?—**still just \$29.95!** This astonishing price includes the complete JRT Pascal system on diskettes and the new expanded user manual. Not a subset, it's a complete Pascal for CP/M.*

Faster and more reliable than ever, for beginner or expert, engineer or businessman, JRT Pascal 3.0 provides a set of features unequalled by any other Pascal... or any other language.

OUR NO-RISK OFFER:

When you receive JRT Pascal 3.0, look it over, check it out, compare it with similar systems costing ten times as much. If you're not completely satisfied, return it—with the sealed diskettes unopened—within 30 days, and your money will be refunded in full. That's right: *satisfaction guaranteed or your money back!*

A JRT bonus: if you want to copy the diskettes or manual—so long as it's not for resale—that's o.k. with us. Pass it on to your friends. But don't delay. Send the coupon or phone today and start enjoying the Pascal advantage; at \$29.95, there's no reason to wait!

announcing new JRT Pascal 3.0...

NEW Full support for indexed files

NEW CRT screen formatting and full cursor control

NEW Facilities for formatting printed reports

Graphing procedures

Statistic procedures

14 digit BCD FLOATING POINT arithmetic

True dynamic storage

Advanced assembly interface

NEW File variables and GET/PUT

NEW Dynamic arrays

Random files to 8 megabytes with variable length records

64K dynamic strings

Activity analyzer prints program use histogram

No limits on procedure size, nesting or recursion

More than 200 verbal error messages


Maximum program size: more than 200,000 lines

Separate compilation of auto-loading external procedures

Extended CASE statement

Fast one-step compiler; no link needed

Efficient compiler needs only 85K diskette space

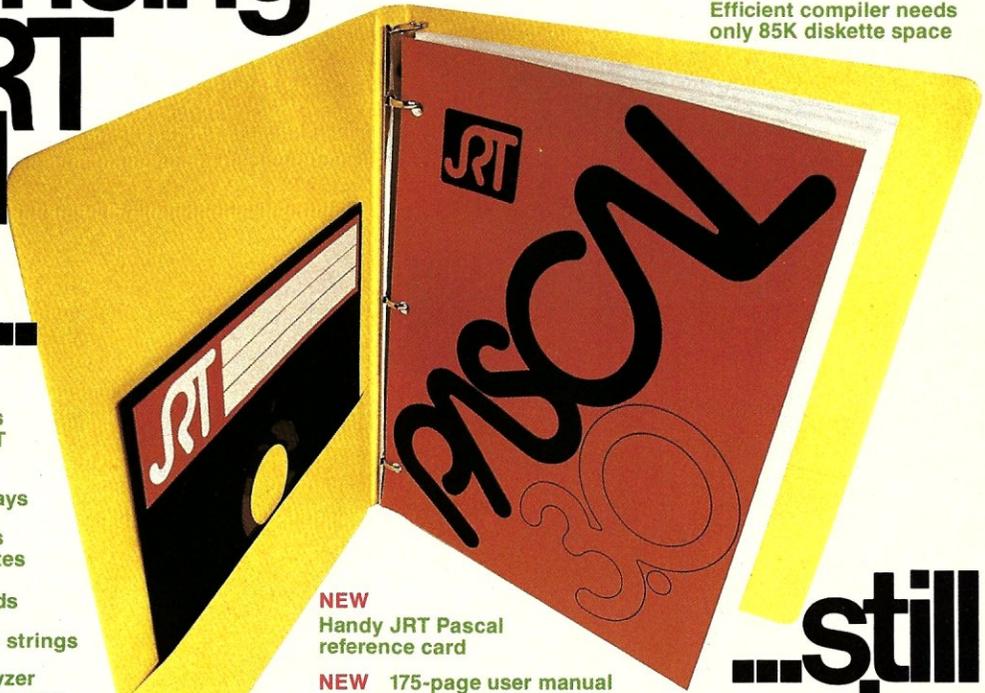

NEW Handy JRT Pascal reference card

NEW 175-page user manual with protective 3-ring binder and 5-1/4" or 8" diskettes

NEW SEARCH procedure for fast table look-up

...still only

\$29.95!

JRT/PASCAL 3.0

Send to **JRT SYSTEMS** or phone **415/566-5100**
550 Irving Street/E1
San Francisco, CA 94122

Here's my \$29.95; please send me JRT Pascal. I understand that if I'm not completely satisfied, I can return it within 30 days—with the sealed diskettes unopened—for a full refund. (Allow 2-3 weeks for shipping.)

I need the 5-1/4" diskettes for Apple CP/M; Heath, Hard Sector; Heath, Soft Sector; Northstar; Osborne; Superbrain; Televideo; Xerox 820. I need 8" SSD diskettes.

Name _____

Address _____

City _____ State _____ Zip _____

Check C.O.D. MasterCard VISA
(CA residents add sales tax. Add \$6 for shipping outside North America.)

Card # _____ Exp. _____


Signature _____

*CP/M is a Digital Research TM.

A 56K CP/M system is required.

CIRCLE 114 ON READER SERVICE CARD

Bored Waiting? Here's The Board You've Been Waiting For.

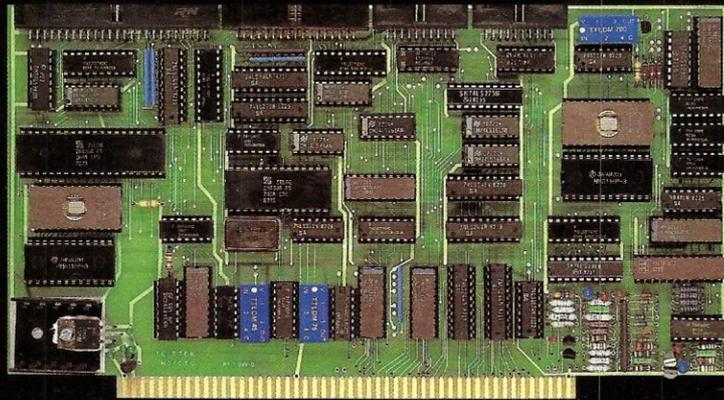

A hard disk and cartridge tape controller together on one board? Magic? Not really. It's Teletek's HD/CTC. The hard disk and cartridge tape drive controller provide the support necessary to interface both rigid-disk drives and a cartridge tape deck to the S-100 bus.

- A Z-80A CPU (optionally Z-80B) providing intelligent control of the rigid-disk and cartridge tape drives.
- Support of 5 $\frac{1}{4}$ " rigid-disk drives with transfer rates of

5 megabits per second. Minor changes of the on-board components allow the support of other drive types/sizes and transfer rates up to 15 megabits per second. (Interface to disk drive is defined by software/firmware on-board.)

- Controller communications with the host processor via 2K FIFO at any speed desirable (limited only by RAM access time) for a data block transfer. Thus the controller does not

constrain the host processor in any manner.

- Two 28-pin sockets allowing the use of up to 16K bytes of on-board EPROM and up to 8K bytes of on-board RAM.
- Individual software reset capability.
- Conforms to the proposed IEEE-696 S-100 standard.
- Controller can accommodate two rigid-disk drives and one cartridge tape drive. Expansion is made possible with an external card.

Teletek's HD/CTC Offers A Hard Disk
Controller, Plus Cartridge Tape Controller,
All On One Board.

TELETEK

9767F Business Park Drive Sacramento, CA 95827 (916) 361-1777 Telex #4991834 Answer back-Teletek

© Teletek 1983

CIRCLE 220 ON READER SERVICE CARD

Contents

Microsystems

Volume 4/Number 4
April 1983

IEEE-488 Bus Tutorial by Richard S. Newrock Learn what the IEEE-488 GPIB bus does and how to use it_____	34
Interfacing Microcomputers to Laboratory Instruments by Joseph W. Long Teaching students how a North Star Horizon II can speed data collection and leave more time for analysis_____	62
The "Standard" CP/M-86 Hardware System in the Lab by Ralph L. Place and Kirk A. Bailey Solving the problems encountered in setting up a photoanalysis system_____	70
The Pickles & Trout IEEE-488/IEEE-696 Bus Converter by Richard S. Newrock/ Detailed review of a GPIB interface board and its software_____	74
Implementing CP/M Plus, Part 2 by Bruce R. Ratoff Date/time support, multisector disk I/O, and non-disk I/O_____	84
A Garland of Utilities by Chris Terry Reviews of some outstanding utilities_____	90
Decisions on the Decision I by Ernest E. Mau Review of another important system from the Morrow product line_____	98
Hooking Made Easy by Kenneth M. Piggott How to make a simple S-100 circuit card extractor_____	104

DEPARTMENTS

Editor's Page_____	8
News and Views_____	10
Letters to the Editor_____	14
The CP/M Bus_____	18
In the Public Domain_____	30
Software Directory_____	106
New Products_____	108

What's wrong with CP/M®?

Hard to operate • Too many commands and options • Too many ways perfectly good programs can fail • Not enough specifically helpful messages...

It needs OKARA™!

In 1981-82, many vendors marketed CP/M user interfaces (also called front ends, shells or menu drivers).

All of them (save one) were mastodons: slow, clumsy, inflexible, disk-hungry, hard to install, and overpriced. Their buyers usually tried them, sighed, shelved them, and forgot them.

OKARA, on the other hand, is a gazelle. Once you have tried OKARA, you will never willingly go back to bare CP/M. Why? Because OKARA is

- Incredibly fast:** It operates at memory speed.
- Automatic** and nearly invisible in operation.
- Flexible** and programmable — You decide how it communicates and just how much control it exercises.
- Immediately usable** by the most casual beginner, yet powerful enough for the most demanding OEM.
- In some ways **more capable than CP/M 3.0**, yet it runs on CP/M 2.2.
- Field proven** in many real-world applications.
- Low priced:** \$39.95.

This is the same first-quality software package we used to sell for \$150. We now proudly join the industry-wide trend toward reasonable software prices.

OKARA runs on any standard CP/M 2.2 system. We distribute it in CP/M-standard 8" SSSD, Northstar SSDD, and Osborne SD formats.

Order today. We're sure you'll be delighted, and we have stacks of testimonial letters to prove it. We are...

KIAI
systems

180 Grand Ave.
Suite 900
Oakland
CA 94612
(415) 654-8671

California residents add sales tax. Add \$3.00 for COD's, \$10.00 for net 30. CP/M is a trademark of Digital Research.

Microsystems

Staff

Sol Libes editor
 Chris Terry technical editor
 Ian Darwin/Dave Fiedler/Dave Hardy/Bill Machrone/
 Ernest E. Mau/Bruce Ratoff/Anthony Skjellum contributing editors
 Andrew Bender/David Gewirtz/Fred Gohlke/Steve Leibson/
 Don Libes/Randy Reitz assisting editors
 Ann Ovodow editorial coordinator
 Nancy Metz editorial secretary

Mariano Nicieza art editor

Jeff Weiner advertising director

Advertising Sales Offices

ADVERTISING DIRECTOR

Jeff Weiner, *Microsystems*
 Ziff-Davis Publishing Company
 One Park Avenue
 New York, NY 10016
 (212) 725-7957

NEW ENGLAND, MIDATLANTIC

Jim Beloff, *Microsystems*
 Ziff-Davis Publishing Company
 One Park Avenue
 New York, NY 10016
 (212) 725-3452

SOUTHEAST

Mark Browning
 Browning Publications
 P.O. Box 81306
 Atlanta, GA 30366
 (404) 455-3430

ADVERTISING COORDINATOR

Rosemarie Caruso, *Microsystems*
 Ziff-Davis Publishing Company
 One Park Avenue
 New York, NY 10016
 (212) 725-5386



MIDWEST

Jeff Edman, The Pattis Group
 4761 W. Touhy Avenue
 Lincolnwood, IL 60646
 (312) 679-1100

SOUTHERN CALIFORNIA,

SOUTHWEST

Barbara Farkas, Ziff-Davis Publishing
 3460 Wilshire Blvd.
 Los Angeles, CA 90010
 (213) 387-2100

NORTHERN CALIFORNIA,

NORTHWEST

Jeff Cohen, Ziff-Davis Publishing
 3030 Bridgeway
 Sausalito, CA 94965
 (415) 331-7133

CANADA

Frank Lederer, The Pattis Group
 1623 Yonge St.
 Toronto, Ontario M4T2H1
 (416) 482-6288

DIRECT RETAIL SALES

Lynn Kujawa, Ziff-Davis Publishing
 One Park Ave.
 New York, NY 10016
 (212) 725-7679

Microsystems is published by the Consumer Computer & Electronics Division of Ziff-Davis Publishing Company

Peter J. Blank, creative director

VICE PRESIDENTS

J. Scott Briggs, marketing

Carole Mandel, circulation

Eileen Markowitz, general manager

PRESIDENT

Larry Sporn

MICROSYSTEMS (ISSN #0199-7955) is published monthly by Ahl Computing, Inc., a subsidiary of Ziff-Davis Publishing Company, One Park Avenue, New York, N.Y. 10016. David Ahl, President; Elizabeth B. Staples, Vice-President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary.

Second Class postage paid at New York, NY 10016 and at additional mailing offices. POSTMASTER: Send address changes to MICROSYSTEMS, PO Box 1987, Morristown, NJ 07960. Subscriptions are \$24.97 for 12 issues. Canadian prices are \$5.00 per year additional; other foreign \$8.00 per year additional (U.S. currency only). For information or questions about subscriptions phone: (800) 631-8112.

Copyright © 1983 by Ahl Computing, Inc. CP/M is a registered trademark of Digital Research.

Editorial correspondence is welcomed and should be sent to: MICROSYSTEMS, One Park Avenue, New York, NY 10016. Phone: (212) 725-6856.

For information on commercial advertising, write to: MICROSYSTEMS Advertising Dep't., One Park Avenue, New York, NY 10016, or call Jeff Weiner at (212) 725-7957.

VISISCHEDULE SUPERCALC VISICALC WORDSTAR D.B. MASTER MULTI PLAN VISIFILE dBASE II

AZTEC SUBMARINE COMMANDER WIZARDRY—SCENARIO I PREPPIE CANYON CLIMBER DEADLINE STAR RAIDERS CENTIPEDE ZORK II

NEVER INVEST IN SOFTWARE AGAIN!

unless you can "test" it first, from
United Computer's SOFTWARE RENTAL LIBRARY

You can now RENT the most popular software available for just
15% of Manufacturers' Retail Price

- Eliminate the risk—rent first!
- All purchases are 20% Off of Manufacturer's Suggested List
- 100% of rental fee applies toward purchase
- Rentals are for 7-days (plus 3 days grace for return shipping)

There are now 2 different plans to choose from:

Join the **Game Group** for only \$50.00 per year and receive your first computer game rental **FREE**. Then rent as many games as you like for only 15% of Mfrs. Sugg. Retail Price.* Minimum order, 3 game rentals

Join the **Business Group** for only \$125.00 per year and receive your first rental **FREE**. Then rent as many business application programs as you like for only 15% of Mfrs. Sugg. Retail Price.*

REMEMBER, THESE ARE NOT DEMOS, BUT ORIGINAL UNRESTRICTED SOFTWARE PROGRAMS

(complete with manuals in original manufacturers' packages)

To Immediately Order, or for more information:

Money Orders or credit cards



Checks allow 2 weeks

*plus postage and handling. Some programs may require 2-4 weeks delivery.

BUSINESS HOURS

Mon-Fri: 8:30-5:30
Saturday: 8:30-2:00
Pacific Time Zone

Toll Free CALL 1-800 992-7777

In California CALL 1-800 992-8888

In L.A. County CALL 1-213 823-4400

VOLKSWRITER DATA PERFECT FILE MANAGER 80+ SCREENWRITER PROFESSIONAL PFS: GRAPH THE SENSIBLE SPELLER VISTREND/PLOT

FROGGER CHOPLIFTER GORF DAVID'S MIDNIGHT MAGIC EASTERN FRONT (1941) ZORK I


Editor's Page

by Sol Libes

It is with great pleasure that I can tell you that *Microsystems* magazine is doing really well. Total circulation is now approaching 50,000 with approximately one-third in dealer/newsstand sales and the rest direct subscribers. It must mean that we are doing things right . . . in other words, serving the needs of our readers. And we expect to continue as the leading magazine for the sophisticated user of microcomputer systems.

Incidentally, *Microsystems* is having its circulation figures audited by the publishing industry's independent auditing organization. So you can believe that our figures are accurate.

Also, we are in the process of conducting another of our reader surveys. We have selected 2,000 subscribers at random and mailed them our questionnaire and a one-dollar bill. If you are one of the lucky recipients of the questionnaire . . . congratulations . . . but please fill it out and return it to us. We really read your comments

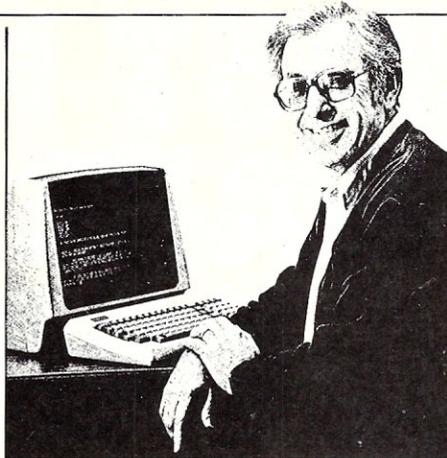

and they provide a terrific feedback to us on how to improve *Microsystems*.


You may have also noticed that we have finally gotten our act together and are getting issues out on time . . . in fact we are getting them in the mails so that they have been arriving in subscriber's mailboxes by the first of the month. And we have done that while going from bimonthly to monthly publication. We think that is quite an accomplishment.

Upcoming issues

We are working on some terrific issues that will highlight the following topics:

- MayS-100 Standard & Components Directory
- June Computer Graphics
- July Business Oriented Software
- August Computer Communications
- September 16-bit Systems
- October UNIX On Micros - Part II
- November Local Area Networks

The photo below were taken at a breakfast meeting of RCPM Sysops and public domain software groups. The meeting, sponsored by *Microsystems*, was held in conjunction with CP/M-83 (San Francisco, Jan. 20-23, 1983). An article on what took place will appear in the May issue. 

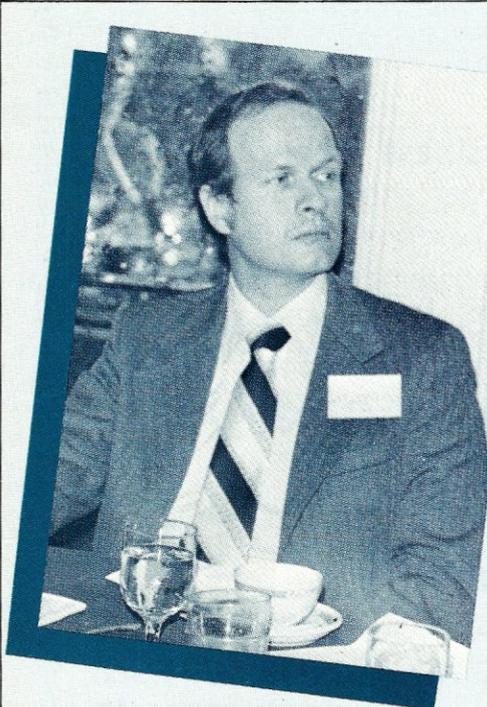


Above left: Ward Christensen (CPMUG software librarian).



Above right: Sol Libes (standing), Ward Christensen, Bill Bolton (CPMUG, Australia), Trevor Howard. **Below right:** Bruce Ratoff, Bill Chin, Robert Todd (SIG/M Coordinators).

Chairman of the Boards

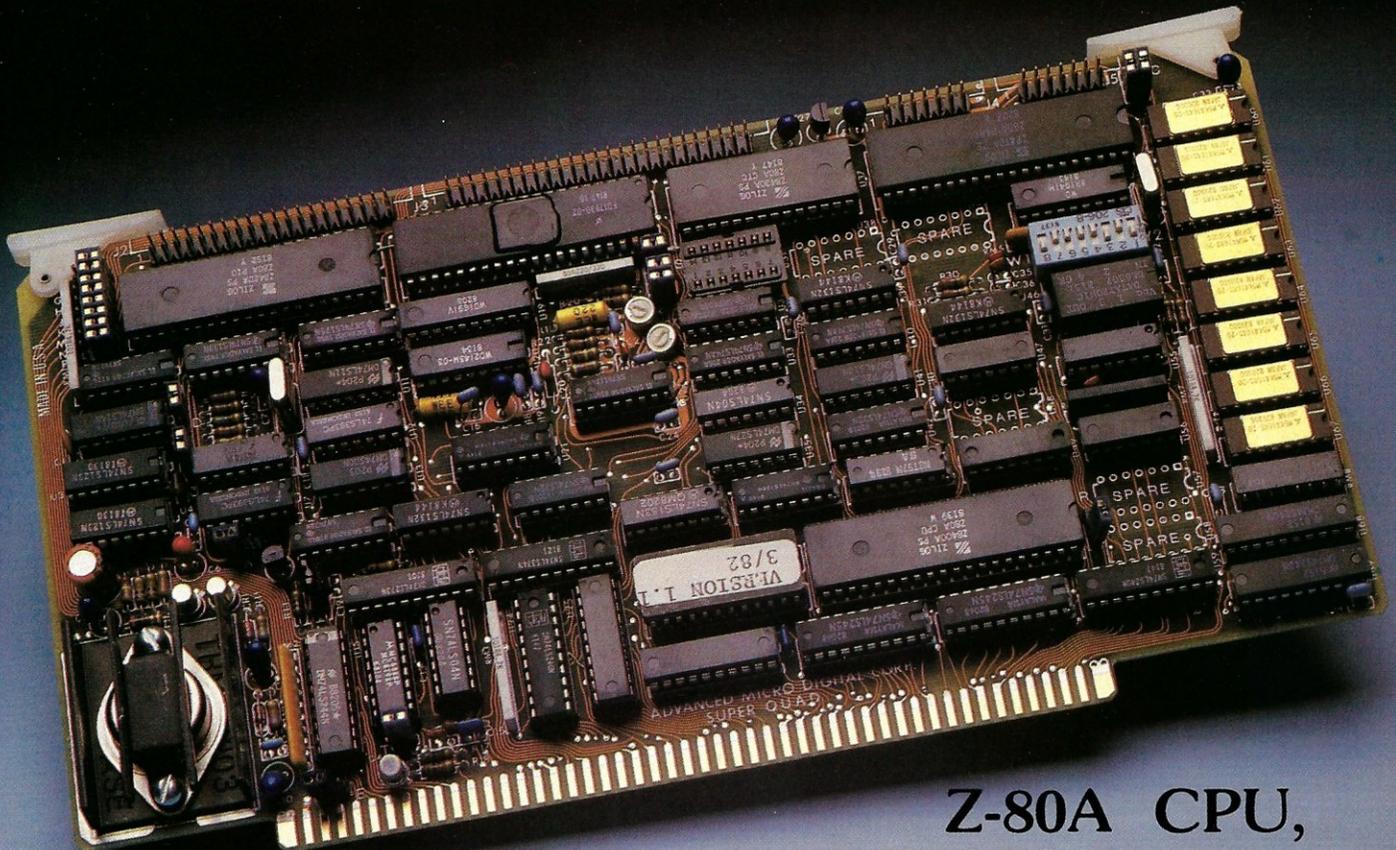

Z-80A CPU, Floppy Disk Controller, 64K of Memory, Serial & Parallel I/O Ports . . . all on a SINGLE S-100 BOARD!

Advanced Digital is the leader in S-100 single board computers. Our attention to quality workmanship, our outstanding performance and proven reliability have made our SUPER QUAD "computer on a board" number one.

Now SUPER QUAD® has been elected "Chairman of the Boards" in the expanding Multi-Processing marketplace. SUPER QUAD functions as the Bus Master and takes charge of many SUPER-SLAVE® processor boards.


SUPER QUAD is so complete, it actually replaces the traditional 4-board S-100 computer and for only \$875.00.

Look at these features:

- IEEE S-100 Standard
- Z-80A CPU
- 64K of Bank Select Memory as well as extended addressing
- Double density floppy disk controller. Both 8" or 5-1/4" Disk Drives
- 2 serial & 2 parallel I/O ports (RS-232 and intelligent hard disk interface).
- 2K or 4K of monitor EPROM
- Runs with CP/M®, MP/M® and turbo-DOS™

- One year warranty.
- Free copy of bios disk.

Advanced Digital's SUPER-SLAVE processor boards are the ideal directors to work with the Chairman of the Boards and Turbo-DOS® operating system in a multi-user, multi-processor system.

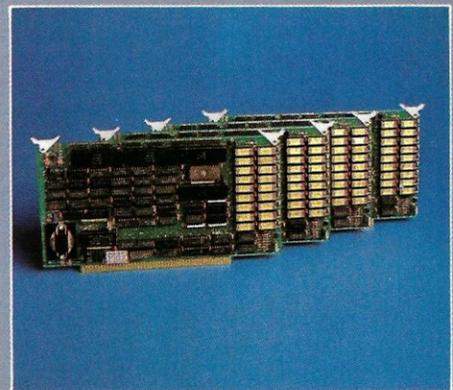

 **ADVANCED
DIGITAL
CORPORATION**

Ask about our new HDC-1001 Hard Disk Controller for both 8" or 5-1/4" hard disk drives, only \$500 retail. For more information, write or call: Sales Dept.

12700-B Knott Street • Garden Grove, California 92641 • (714) 891-4004 TELEX 678401 tab irin

® Registered Trademark of Digital Research Corp.
™ Registered Trademark of Software 2000 Inc.

CIRCLE 148 ON READER SERVICE CARD


© Copyright 1981 Advanced Digital Corp.

News & Views

by Sol Libes

Rumors. . . .

It is expected that at next month's National Computer Conference, at least 20 companies will introduce UNIX systems based on the 68000 and 80286. Also, expect at least two companies to show prototypes of high-capacity optical read/write systems. Moreover, several other companies can be expected to introduce portable computers: Rumors are that both Tandy and IBM will bring out portable machines. And, look for Osborne to introduce their two new portables: One, a lower-cost unit weighing 40% less than the current unit, and the second, having a 9" display instead of the current 5-incher. Expect both to have some form of IBM-PC compatibility. . . . There are rumors that Memotech, a manufacturer of peripherals for the Sinclair ZX81/Timex 1000, will shortly introduce a 5¼" disk drive add-on

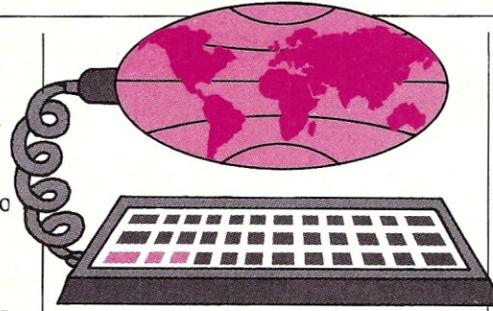

for the ZX81 that will include CP/M and an enhanced keyboard. They are expected to sell it for \$300. Add some additional memory, and you should be able to have a minimal CP/M system for under \$800.

Computer hobbyists to meet


Over 15,000 avid computer hobbyists are expected at the Trenton Computer Festival on April 16 and 17. The big attraction is an outdoor flea market that covers about 20 acres, where hobbyists can buy every-

thing from complete used computer systems and components to used software and rare out-of-print manuals. Sellers and traders set up tables and sell off the back of their cars.

Called the "Trenton Computer Festival," it is now in its eighth year and has the distinction of being the first personal computer show ever held. It is held on the campus of Trenton State College, Trenton, New Jersey. There will also be an indoor commercial exhibitor area, speakers, user group meetings, and a banquet.

The Trenton Computer Festival is sponsored by three non-profit organizations: The Amateur Computer Group of New Jersey, Philadelphia Area Computer Society, and Trenton State Computer Society. For information call (609) 771-2487 or write: TCF-83, Trenton State College, Trenton NJ 08625.


PICK A SYSTEM!

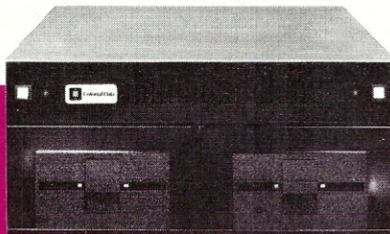

\$2295.
5 MB STORAGE



◀ **COMPLETE** ▶

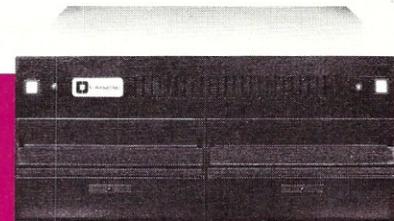

\$2795.
1.2 MB STORAGE

We're offering you our SB-80 system in either 5 1/4" or 8" disk drives, your choice. Either way your system comes with a full size (12" diagonal) non-glare tiltable green screen with 24 lines by 80 character format. Its multi-character set offers blinking cursor, underlining, reverse video, and half and zero intensity. The movable, detachable keyboard has a numeric pad with cursor control and function keys.

- Single Board Technology ■ CP/M® Operating System
- 4 MHz Z80A CPU ■ 64K 200ns Main Memory
- 8-Inch Dual Density Floppy Drives
- 5 1/4-Inch Dual Density Floppy Drives
- 2-Serial Ports ■ 2-Parallel Ports
- 4-Counter/Timers ■ Expandable

For further information about this limited offer call or write:



Colonial Data

Nationwide on-site and depot repair service
through the professionals at INDESERV.

©CP/M is a registered trademark of Digital Research, Inc.

Colonial Data Services Corp., 105 Sanford Street, Hamden, Conn. 06514 • (203) 288-2524 • Telex: 956014
CIRCLE 75 ON READER SERVICE CARD

GREAT PRICES!

ASHTON-TATE

dbase II	\$529
C. Itoh	
PROWRITER SERIAL	\$639
PROWRITER PARALLEL	489
F10-55	1399

COMSHARE TARGET

PLANNER CALC	\$79
TARGET FINANCIAL MODELING	249

FORCE II

MATHSTAR	\$99
----------------	------

FOX & GELLER

DUTIL	\$68
QUICKCODE	229

HAYES

MICROMODEM II	\$289
1200 BAUD SMARTMODEM	589
CHRONOGRAPH	199
SMARTMODEM	224

IDS

PRISM 132 PRINTER	\$ 1649
IDS PRISM 80 PRINTER	1049
MICROPRISM PRINTER	599

ISA

SPELLGUARD	\$189
------------------	-------

LEXISOFT

SPELL CHECK	\$225
-------------------	-------

MICROPRO

CALCSTAR	\$189
DATASTAR	239
INFOSTAR	CALL!
MAILMERGE	89
SPELLSTAR	149
WORDSTAR	279
WORDSTAR CUSTOMIZATION NOTES	299

MAXELL

FD-1 8" SINGLE SIDED	\$41.50
FD-2 8" DOUBLE SIDED	48.95
MD-1 5" SINGLE SIDED	31.25
5" DOUBLE SIDED	47.10

MICROSOFT

BASIC COMPILER	\$299
M/SORT	165
MICROSOFT COBOL 80	559
MICROSOFT COBOL 80 with msort	675
MULISP/muSTAR	169
MULTIPLAN	229
muSIMP/muMATH	199
Z80 SOFTCARD PREMIUM PACK	599

MICROSTUFF

CROSSTALK	\$119
-----------------	-------

NOVATION

CAT ACCOUSTIC MODEM	\$146
D CAT DIRECT CONNECT MODEM	156

SORCIM

ASSEMBLY CODE TRANSLATOR	\$93
PASCAL M	131
SUPERCALC	189

SUPERSOFT

DIAGNOSTIC I	\$65
DIAGNOSTICS II	84
DISK DOCTOR	84
STACKWORKS FORTH	153
C COMPILER	153
FORTRAN RATFOR	284
SSS FORTRAN IV	219
SSS RATFOR	88
TERM I	131
TERM II	150
UTILITIES I	53
UTILITIES II	53
TINY PASCAL	74

TELEVIDEO

910 TERMINAL	\$656
912C VIDEO TERMINAL	806
920C VIDEO TERMINAL	868
925 TERMINAL	825

WHITESMITH

C COMPILER	\$600
PASCAL	437

ZENITH

Z19 VIDEO TERMINAL	\$899
ZENITH 12" GREEN MONITOR	129

CIRCLE 91 ON READER SERVICE CARD

CALL TOLL-FREE 1-800-523-9511

IN PENNSYLVANIA:
1-215-868-8219

MICROHOUSE introduces innovative products periodically. Please call for the new CP/M menu.

PRICES MAY VARY WITH DIFFERENT FORMATS. ALL PRICES AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE CALL OR WRITE FOR SPECIFICS.

1444 LINDEN ST./BOX 499 BETHLEHEM, PA 18016

WE WANT YOU TO KNOW ...

MICROHOUSE

News & Views continued . . .

UNIX/C CBBS starts

C-LINE, A Computer Bulletin Board System supporting UNIX/C users is now in operation (2000-0900 hours weekdays, 24 hours weekends; 110-710 baud). The phone number is (201) 625-1797, and the sysop is David Fiedler (who has authored several articles on UNIX AND C for *Microsystems*). The system is running CP/M-Microshell with 2 Mbytes of files. It caters to news and rumors about UNIX,

UNIX-like systems, and C software. The sysop promises on-line instruction in UNIX and C.

Public domain software

The SIG/M software group has released volumes 85 through 91, containing new utilities and the SYSLIB integrated library of macros.

These disks are available on many RCPM systems and local CP/M user groups or from SIG/M, Box 97, Iselin, NJ 08830.

Audio/Visuals . . .

Bell Laboratories is offering two videotapes on the UNIX operating system. One gives an overview and shows how it is used. The second gives more details on UNIX. The cassette tapes are \$100 VHS/Beta) or \$140 (PAL/SECAM). They are available from MGS Services, Inc., 619 W. 54th St., NY, NY 10019.


The SIGGRAPH (Special Interest Group on Computer Graphics) of ACM (Association for Computing Machinery) has available 35-mm slides and video tapes on computer-generated graphics. For more information contact: Tom DeFanti, UICC/EECS, Box 4348, Chicago, IL 60680; (312) 996-5485.

News bits . . .

Digital Equipment Corp. (DEC) has agreed to distribute the Bridge software package from Virtual Microsystems. The Bridge allows CP/M-based software to run on DEC mini-computers. . . . Digital Research is expected to shortly introduce a Fortran Compiler. . . . A new magazine for UNIX and C users is being published by World UNIX & C, 30 Mowry St., Box 5314, Mt. Carmel, CT 06518; tel: (203) 288-0283. A subscription is \$12/year (\$16 if invoiced).


Erratum

In "Four SBCs Reviewed" (Feb '83), the price of the Intercontinental Micro Systems board in Table 1, p. 75 should be \$995, not \$1025. Also, we inadvertently showed a second view of the Sierra SBC-100 board instead of the Advanced Digital Super Quad. The correct photo of the Super Quad board is shown below.

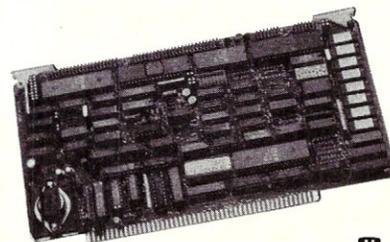

MEET OUR FAMILY

The InfoSoft Family of
MicroComputer Operating
Systems

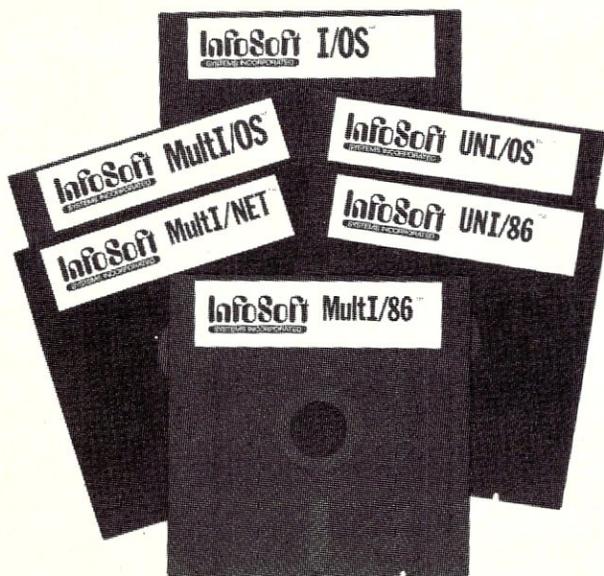

Over 100,000 users
can't be
wrong

INTRODUCE ME! I AM A:


Dealer Distributor Computer
Manufacturer

NAME _____
COMPANY _____
ADDRESS _____
CITY _____
STATE _____ ZIP _____
PHONE _____

Please have a salesman call
 Send literature only

Info
SYSTEMS INCORPORATED
80 WASHINGTON STREET
PO BOX 640
NORWALK, CT 06856
(203) 866-8833
TWX 710-468-0037

CIRCLE 96 ON READER SERVICE CARD

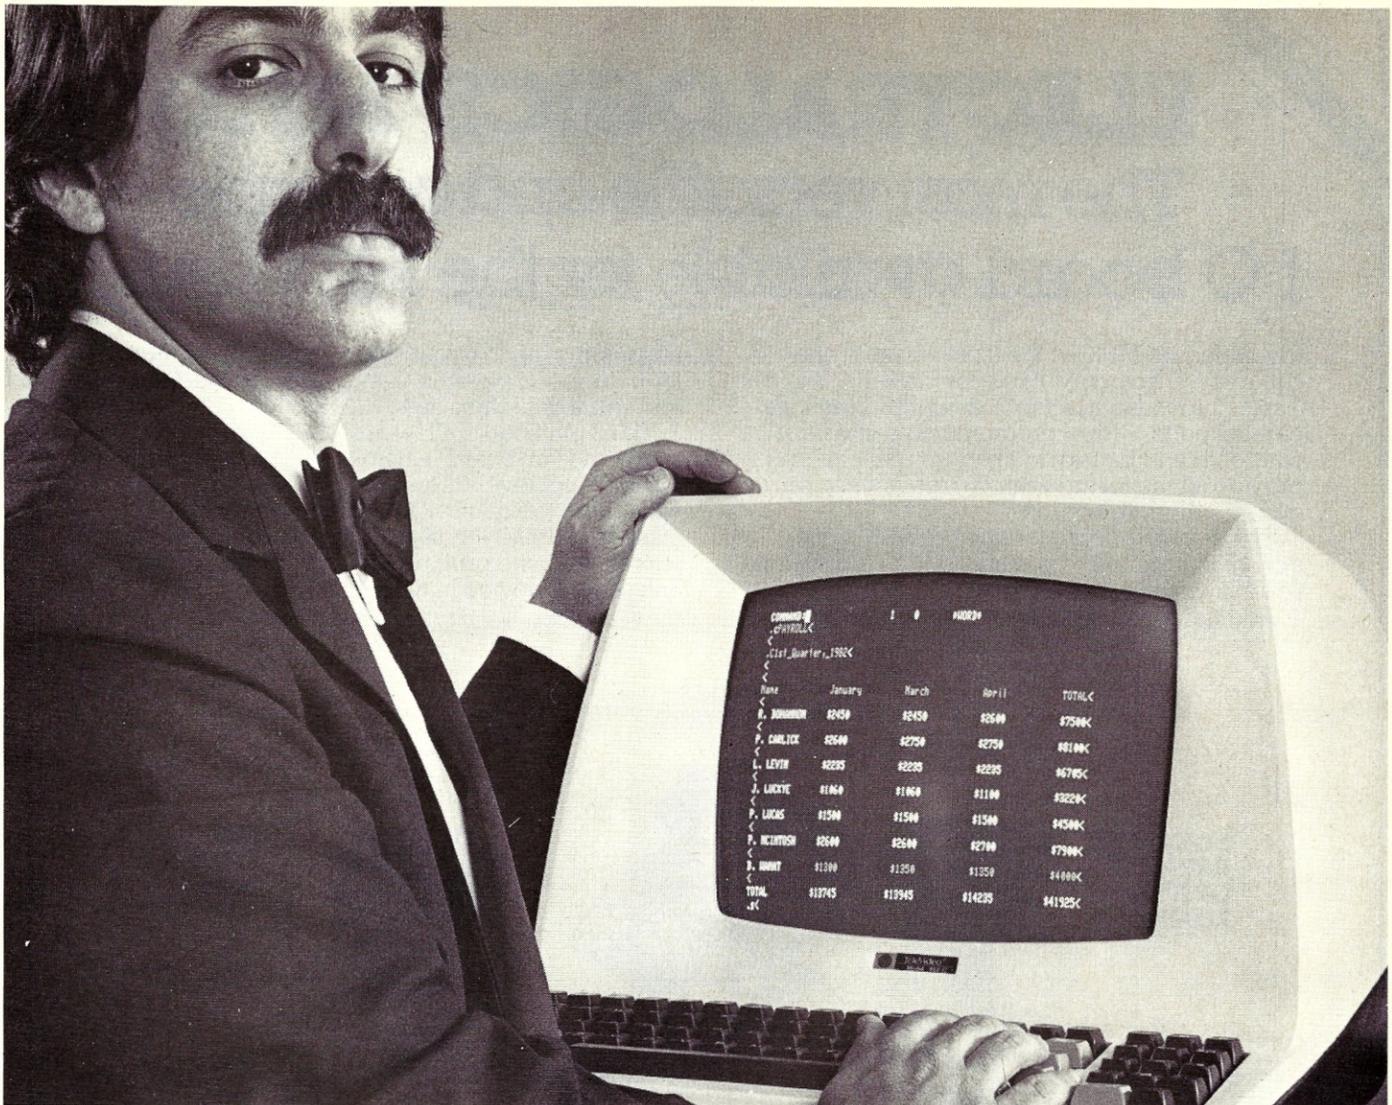

#1 with Words. A+ with Numbers.

Spellbinder Word Processing and Office Management Software.

Spellbinder processes words *and* numbers.

So you save time and improve accuracy in any document: Financial statements. Budgets. Reports. Invoices.

Spellbinder lines up columns of numbers for faster data entry; calculates rows and columns; and puts the totals where you want them.

Spellbinder performs a number of mathematical functions, such as addition, subtraction, and multiplication; extends figures (for example, *6 dictionaries @ \$12.35 = \$74.10*); adds tax to invoices; and displays convenient reference tables.

You can edit numbers within a column, or move a column to a different location. Spellbinder's integrated forms handler saves time and manpower on multiple invoices, reports, and other documents.

The software for discriminating users.

Whether you process numbers or words, you'll appreciate Spellbinder's unrivalled ease-of-use and superior capabilities. Spellbinder and an inexpensive microcomputer easily outperform *dedicated* word processing systems costing *up to three times* more. IBM is a registered trademark of IBM Corporation.

Spellbinder features flexible printing options; mass mailing and legal text capabilities; plus forms handler and boiler plate features for commonly used documents.

Spellbinder makes word processing much easier, much faster, and much less expensive. In fact, many of our users convert from some of the better known (and more costly) systems.

You should be just as discriminating. See your nearest dealer for a demonstration of Spellbinder. Or call Lexisoft at (916) 758-3630.

Now available in 8086 and IBM® Personal Computer format.

Spellbinder[™]
**Spellbinder Word Processing
 and Office Management System.**

A product of Lexisoft, Inc.
 Box 267, Davis, CA 95616 ☐ (916) 758-3630

Introducing...

ELECTRALOGICS' MFIO

The most versatile and capable I/O board available for the S-100 bus.

Electralogic's MFIO is the most versatile and capable I/O board available for the S-100 bus. The 8 asynchronous serial ports, 2-8 bit bidirectional parallel ports, 8 level programmable interrupt controller and battery backed-up real time clock provide all the features which traditionally required 3 or more boards.


The design meets the needs of OEM's and system integrators who demand high density and reliability in their products.

Additional capabilities include: extended I/O

addressing, up to 6 wait states, jumper selectable for high speed systems, easy to use interface cards and serial data rates up to 57.6 K baud.

The 2 pin boards allow any of 20 interrupt sources (11 on board + 9 from S100 bus) to activate 1-8 interrupt levels. The board comes complete with extensive manual and source listings for standard CP/M* BIOS, interrupt driven BIOS, clock set routine, time print routine, diagnostic routines and sample device initialization routines.

*CP/M is a trademark of DIGITAL RESEARCH, INC.

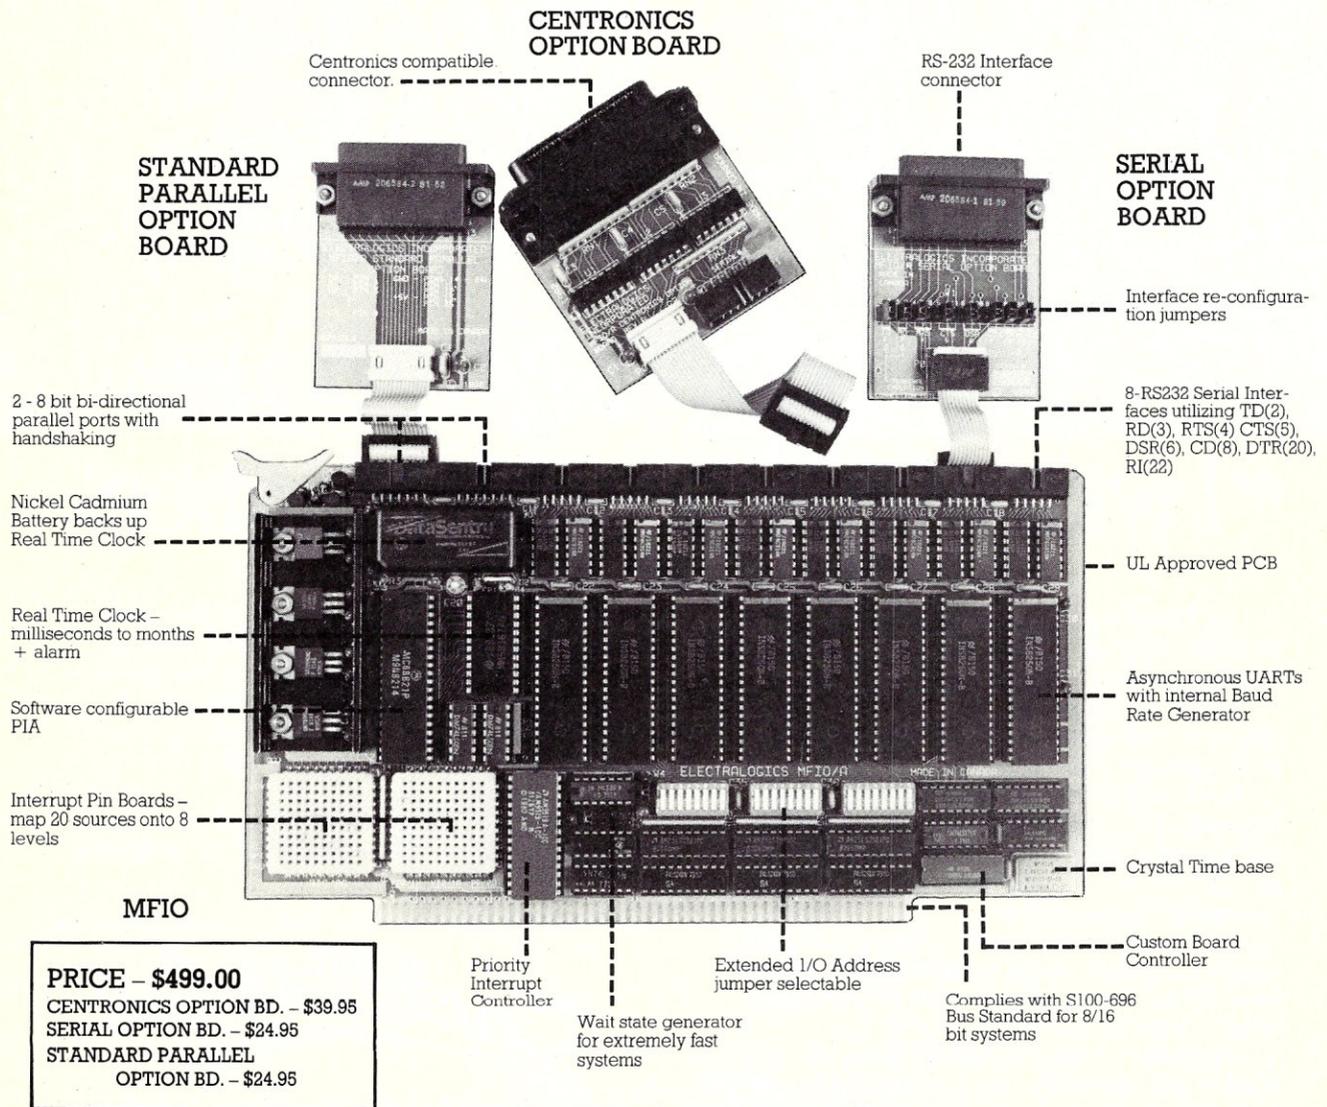

Electralogics™

— Incorporated —

Manufactured by:
ELECTRALOGICS INCORPORATED
 39 Durward Place, Waterloo, Ontario
 Canada N2L 4E5 Tel: 519-884-8200


CIRCLE 58 ON READER SERVICE CARD
 OEM and Dealer Inquiries Invited

Letters to the Editor

Sir,

I have just finished reading Mr. Paul H. Earley's article "Twenty-six Megabytes for Your Computer" in the November/December 1982 issue of *Microsystems*. The article was quite interesting, especially since the company I worked with used a Morrow M26 as part of a computer system to be installed in a client's offices. While I agree with Mr. Earley's comments on this Hard Disk System, there are some additional remarks regarding the M26 that I feel should be presented to your readers.

The M26 was attached to an IEEE-696 S-100 based multi-processor microcomputer using dual 8" floppies with a Tarbell controller. The computer system was configured from its assembly to use the M26 and was in use for a period of approximately 4½ months. During this time I found the M26 to be generally reliable, with certain

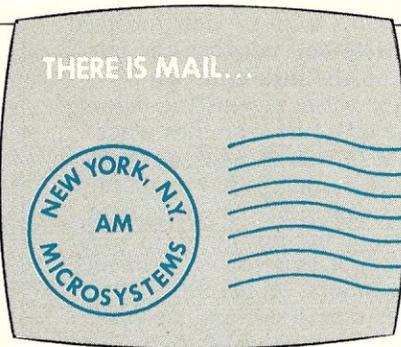

reservations.

One of the first things I noticed about the M26 was, as Mr. Earley stated, its "no-frills" design. This also extended to the chassis and cover. Despite the rather large size of the unit, it has no supports for the cover other than the sides. As a result, the cover has little solid structural strength and cannot safely support another unit on top of itself. Further, it is too heavy to sit directly on top of anything other than a table (assuming it is a table-top model, as was ours and appar-

ently that of Mr. Earley). While we were able to place the computer chassis on top of the floppy disk unit, the M26 could only be used to hold manuals, forms, and other relatively lightweight items. Considering the area covered by the M26, this was a distinct disadvantage.

The noise from the cooling fan, which Mr. Earley described "as being quite loud" is very loud. This would be annoying enough by itself but when combined with the noise from the fans in the computer and the floppy disk unit, it becomes almost unbearable for any extended period of time. The client who was to receive the system decided it would have to be installed in a back storeroom rather than one of the offices due to this noise.

The documentation and software provided for installation were in my opinion far less satisfactory than Mr. Earley de-

CP/M[®] for the 68000

Fully configured hard disk development systems, based on CompuPro hardware, are now available from Gifford Computer Systems. The total price with hardware and software? Only \$9990. All you need is an RS-232 terminal to be up and running. Each system is covered by a two year, 24 hour replacement warranty. Systems are available for delivery now.

Hardware

- 8 MHz Motorola MC68000™ CPU
- 256K high speed static RAM
- 2.4 Mbyte floppy disk storage
- 21 Mbyte formatted Winchester disk
- 9 serial ports
- Real time clock/calendar
- 20 slot IEEE 696/S-100 motherboard

Upgrades for CompuPro based computers.

- CompuPro™ 68000 CPU (8 MHz) \$ 850.00
- CP/M-68K™ from Digital Research \$ 350.00
- 20 Mbyte Winchester disk subsystem with
CBIOs drivers \$3,595.00

Software

- CP/M-68K™ from Digital Research
- C compiler from Digital Research
- 68000 assembler from Digital Research
- Mince visual editor from Mark of the Unicorn

GIFFORD
COMPUTER SYSTEMS

1922 Republic Avenue, San Leandro, CA 94577
(415) 895-0798 A division of G&G Engineering

I'D LIKE THE WHOLE STORY.
Please send me your brochure.

Name _____ Title _____
Organization _____
Address _____
City _____ State _____ Zip _____
Phone _____

Please have a representative call me.

CP/M is a registered trademark of Digital Research. CP/M-68K is a trademark of Digital Research. MC68000 is a trademark of Motorola. Mince is a trademark of Mark of the Unicorn. CompuPro is a trademark of Godbout Electronics.

GIFFORD COMPUTER SYSTEMS CENTERS SAN LEANDRO, CA 94577 (415) 895-0798 SAN FRANCISCO, CA 94104 (415) 391-4570
 LOS ANGELES, CA 90064 (213) 477-3921 OKLAHOMA CITY, OK 73112 (405) 840-1175 HOUSTON, TX 77046 (713) 877-1212

CIRCLE 155 ON READER SERVICE CARD

Letters to the Editor continued . . .

scribes. I assume that much of this is due to Mr. Earley's previous knowledge of CPM. Our experience showed that a good working knowledge of CP/M was essential before starting the installation, and even with this knowledge a good bit of trial-and-error work was required. This is not a job for a beginner, nor is it something someone with a low frustration point should attempt.

The one major problem encountered with the M26 from a

hardware point of view involved the drive belt between the motor and the disk unit. On a number of occasions the belt came off of the spindles when the M26 was turned on. Our limited resources led us to decide to turn off the entire computer, including the M26, when it was not going to be used for a few hours. Apparently the power-ups (less than one per day) overstressed the belt. The belt came off on an average of more than once every two

weeks and required 20 to 30 minutes to correct. This fairly large amount of time was needed because three or more tries were usually necessary before the belt would stay in place. On one occasion the belt broke completely and had to be replaced. Morrow was helpful in this situation, and the replacement belt arrived in three days at a cost (including shipping) of approximately \$31. It appeared that the motor of the M26 simply accelerated too quickly for the disk to follow.

Overall, the Morrow M26 and its cousins, the M20 and M10 hard disks, are very useful additions to any computer system. It is not, however an installation that should be undertaken by a novice, given the type of documentation and software provided with the unit. The hardware itself, although solid and basically well designed, has some problems that can cause trouble. Anyone considering acquiring a hard disk such as any of these should take these problems into account along with the comments and considerations put forward in Mr. Earley's article.

David H. Ternes
695 Kennedy Drive
Bloomfield, IN 47424

Sirs:

Microsystems has done many nice things for me in the two or so years it's been arriving in my mail, but your publication of Digital Research's CP/M patches (Jul/Aug '82) really got me going!

In addition to their intrinsic value for improving CP/M, they're a great tutorial. Someone at DR went to considerable bother—a characteristic that I didn't know DR possessed—to demonstrate several approaches to patching. Easily the best tutorial on DDT I've seen. And I've read all the books.

Working through the exercises in your tutorial has doubled the number of articles about CP/M that I understand!

Bruce W. Armstrong, M.D.
423 S. Poplar St.
Centralia, IL 62801

* * * TECHNICAL SALES AND SUPPORT STAFF * * *

Our ads have appeared continuously in *Byte Magazine* since 1977. We are *Byte's* oldest advertiser after Cromemco and Godbout. Then why are our ads suddenly appearing in *Microsystems* and *Dr. Dobbs*? Our product lines and technical staff address the needs of sophisticated, informed and intelligent users such as readers of *Microsystems* and *Dr. Dobbs*. Although we have added some non-S-100, home computer systems to our catalog, we will continue to focus on more sophisticated, high performance, high technology equipment.

MASTER MAX: Z-80, IEEE 696 S-100 system with dual 8" drives. Features Intercontinental CPZ48000 single card computer. 4 DMA channels and universal interrupt controller give great versatility and speed. \$2,540 includes CP/M. OPTIONS: ICMS slave cards, TURBODOS (single or multi user), double sided drives, single or dual Winchester subsystem, 220v/50hz.

IMS MULTI USER SYSTEMS: Z-80, S-100. CP/M compatible Turbodos cuts link/edit time in half. Z80 code, interrupt driven. Up to six times faster than CP/M; up to 35% increased disk capacity. Slave cards give each user own CPU, 64K RAM, 2 I/O. No speed degradation as users are added! On site service for NY quad state area.

GODBOUT DUAL PROCESSOR 816 SYSTEMS: 8085/8088. Multi or single user. Unique version of MP/M allows simultaneous use of both processors.

CROMEMCO DUAL PROCESSOR SYSTEM: Z80/68000, multi or single user under CROMIX.

LOMAS and SEATTLE 8086 implemented by J.D. Owens in choice of several S-100 mainframes w/ dual drives. 10MHZ option, dynamic or static RAM. CP/M 86 or MSDOS.

GRAPHICS: MICROANGELO (S-100) OR MIRAGE (RS232). Monochrome or color. AUTOCAD: Interactive graphic software for engineers, architects, others. HOUSTON INSTRUMENTS digitizer and plotters.

S-100 BOARDS: Godbout, Systems Group, SSM, Tarbell, Morrow, CCS, Sierra Data, Teletex, Intercontinental Micro and others.

ACT SINGLE OR DUAL WINCHESTER SUBSYSTEMS: Dual version solves back up problem. Implemented for CP/M, TURBODOS, TRS 80, IBM PC, Osborne, Apple, many others.

MODEMS: U. S. Robotics DC Hayes compatible modems at much lower prices.

PERIPHERALS: CRTS (Televideo, Hazeltine, Zenith, Wyse, others); many dot matrix and letter quality printers, floppy disk subsystems (Shugart, Qume, Tandon, Per Sci). Full line of RAM and other accessories for IBM PC.

SPECIAL INVENTORY SALE: (while they last) IMS boards at 25% off list price.

We also offer EPSON QX10, Otrona Attache, NEC Advanced Personal Computer, Morrow Micro Decision, Cromemco C10.

3270 NETWORK: Teletype controllers, printers and terminals. Cost effective.

CALL OR WRITE FOR FREE PRODUCT SPECS ON ANY ITEM WE CARRY

WE EXPORT Overseas Callers: Phone (212) 448-6298
TWX 710 588 2844 or Cable: OWENSASSOC

JOHN D. OWENS Associates, Inc.

12 Schubert Street, Staten Island, New York 10305

(212) 448-6283 (212) 448-2913 (212) 448-6298

7 Good reasons why you should subscribe to *Creative Computing*.



It's the Number One magazine of computer applications and software!

There's one place you can always be sure of learning more about microcomputer software and applications: *Creative Computing*.

Every month *Creative Computing* provides you with a continuing education on everything related to microcomputers and computer equipment. Useful articles, "how to" tutorials, exciting new applications, games and "no holds barred" reviews of the latest software and equipment make up a major part of *Creative Computing's* editorial content.

We give you probing features on programming breakthroughs and important news. Plus in-depth articles on elementary, intermediate and advanced software and applications topics—to help you develop your knowledge and skills, save hundreds (perhaps thousands) of dollars in unneeded software, discover uses for your personal computer that you might never have considered. Articles that increase your overall "computer consciousness." Here's how:

1 *Creative Computing* gives you things to actually do with a computer.

Just owning a computer isn't enough. You've got to know what to do with it. That's why applications are our primary focus. Text editing, animation, graphics, business simulations, data base and file systems, music synthesis, control of household devices, communications, games—some of the applications and software you'll learn about in *Creative Computing*.

2 *Creative Computing* discusses business applications in simple, nontechnical language.

If you're a business person who needs to know about the latest developments in word processing and office applications, turn to *Creative Computing*. We clarify such business applications as investment analysis, futures evaluations, data base management, mailing list programs, text editing, word processing and simulations. And all the software available for business people.

3 *Creative Computing* helps you decide which computer equipment is best for you.

Our tough, no-nonsense equipment profiles arm you with the facts before you walk into a computer store. You'll know the right questions to ask and how to cut through the jargon and sales hype. We give you authoritative guidance in deciding what you need, what you don't need—and what's right for you and your pocketbook.

4 *Creative Computing* covers computer education in depth.

We started out as a computer education publication, and we're still committed to the educational community. We regularly carry articles on designing educational software, evaluating educational software, teaching concepts and terminology in computer education, text editing applications for literature and computer simulations in the classroom—plus a great deal more.

5 *Creative Computing* brings you hours of mind-expanding game entertainment.

We've got a soft spot for the computer game addict—and computer game software. We know you want to understand more about the new computer games flooding the market: which ones are easiest to learn? Require the most skill? Offer the most surprises? Give you the best graphics? Provide the most challenge? Contain a new twist? *Creative Computing* brings you the answers.

6 *Creative Computing* features the state of the art.

Columns on the most popular personal computers, a "software legal forum," letters to the editor. Reviews of books, games, organizations, dealers and events. Fascinating interviews with leading innovators, equipment designers, program developers and game inventors—men and women who'll give you a real glimpse of the future!

7 Our price is right.

By subscribing to *Creative Computing* now, you can save as much as 33% off the full subscription price. To learn elsewhere what you'll learn from *Creative Computing*, you might spend hundreds of dollars in course fees and books. Then you'd have to winnow out what you could use from all that you'd learned. But *Creative Computing* does that for you, so you'll have time to enjoy your own computing interests. And that saving of time makes this offer very inexpensive indeed.

**Join over 150,000
Creative Computing readers
by subscribing today!
Just use the coupon
at right.**

SAVE UP TO 33%!

Creative Computing • P.O. Box 5214 • Boulder, Colorado 80322

YES! Send me *Creative Computing* for:

- One year (12 issues) for \$19.97—I save 20%!
- Two years (24 issues) for \$36.97—I save 26%!
- Three years (36 issues) for \$49.97—I save 33%!

Savings based on full one-year subscription price of \$24.97.

Check one: Payment enclosed. Bill me later. 8H344

Mr. / Mrs. / Ms. _____
(please print full name)

Address _____ Apt. _____

City _____

State _____ Zip _____

Offer valid in U.S. and possessions only. Please allow 30 to 60 days for delivery of first issue.

The CP/M Bus

by Anthony Skjellum

This column is planned as a CP/M forum. Readers are encouraged to send in questions about CP/M, which I will try to answer.

Macros and Macros Assemblers: Part II

Macro instructions are a convenient facility provided by sophisticated assemblers. An introduction to macros was presented in the "CP/M Bus," *Microsystems* Nov/Dec '82. Readers should refer to this article.

REPT . . . ENDM revisited

In the previous installment on macros, an example using the REPT . . . ENDM macro sequence to produce a 7-byte area filled with zeros was in error. This is the correct form of the example:

```
AREA:  REPT  7
      DB    0
      ENDM
```


The symbol VALUE used in the original example is not needed.

Use of comments in macros

Normally, assembly language comments are delimited with the semicolon (;) character. Macros may also have comments within their definitions. However, the comments will be stored within the symbol table and added into the assembly language output at each macro expansion. This is usually not required and can also consume significant space in the assembler's symbol table. To avoid this overhead, assemblers such as Digital Research's MAC interpret a double semicolon, or fat semicolon (;;), as a special macro comment. Such comments are not stored in the symbol table and will not appear in macro expansions.

Redefining stored macros

It is often desirable to have a stored macro behave specially

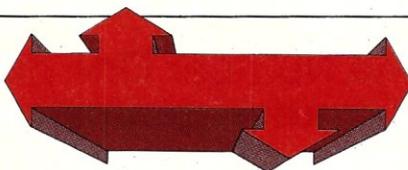

on its initial invocation. This permits various initializations to be done. A macro may be redefined by placing a stored macro definition of the same name within the original definition. A simple example follows:

```
CPHLDE MACRO
JMP    @@SKIP    ;; compare hl to de
           ;; skip the subroutine
           ;; which follows:
@@CP:   STA    @@ACC    ;; save accumulator
           MOV    A,L
           CMP    E      ;; compare low orders
           JNZ   @@CPEX  ;; no compare
           MOV    A,H
           SBB   D      ;; compare high orders
           ;; setting flags
@@CPEX: LDA    @@ACC    ;; recover accumulator
           RET     ;; and exit
@@ACC:  DB    0        ;; data area.
@@SKIP:                ;; where to jump to.
           ;; redefinition:
           ;;
CPHLDE MACRO           ;; redefine for subsequent
CALL   @@CP            ;; calls
           ;; this is all required
           ;; end redefinition
           ;;
           CPHLDE      ;; first invocation
           requires an expansion
           ENDM        ;; end macro
```

The above example compares the DE and HL register pairs accordingly. On the first invocation, the subroutine @@CP: is assembled. This subroutine is preceded by a jump so that the main body of code (which called CPHLDE) skips the subroutine. After the subroutine is assembled, a redefinition macro is encountered. This redefinition changes CPHLDE to be a simple subroutine call to the @@CP subroutine just assembled. Finally, an actual compare request is generated by calling the newly defined form of CPHLDE. This is included so that a comparison of HL and DE will occur as a result of the first macro call. In order to clarify the above macro and comments, the code caused by the initial use of CPHLDE is shown here:

```
           JMP    @@SKIP
@@CP:   STA    @@ACC
           MOV    A,L
           CMP    E
           JNZ   @@CPEX
           MOV    A,H
           SBB   D
@@CPEX: LDA    @@ACC
           RET
@@ACC:  DB    0
@@SKIP:                CALL   @@CP
```

Subsequent uses of CPHLDE cause just the last line of the macro to be assembled.

A note on LOCALS

In the previous installment, an example was included ("CMP16") to illustrate the use of LOCAL symbols. In the above macro, all but one symbol can be local. The @@CP symbol cannot be since it will be referenced by subsequent invocations of the redefined form of CPHLDE. None of the symbols have to be local since the subroutine @@CP: is assembled only once. Use of locals would be a matter of programming caution used to help avoid collision of symbol names with other programs segments. To give the macro the preferred form, the following would be added as the second line of the macro:

```
LOCAL @@SKIP,@@CPEX,@@ACC
```

which would make the symbols @@SKIP, @@CPEX, and @@ACC local and prevent potential problems.

Nested definitions

Above we discussed the possibility of redefining a macro within itself. It is also possible to define other macros within the body of a macro definition. Note that the macros specified in this way are not known to the assembler until the section of the enclosing macro which defines them is expanded. For example, consider a case where console input is to be performed via a macro called CONI. An assembly-time flag called INPFLG determines which type of BDOS input will be used. This check could be done at each invocation of the input macro, but conditional macro definition will result in faster assembly since the check is done only once.

```
INPFLG EQU    ...           ;; depends on choice
ENTRY   EQU    5           ;; std. CP/M
DEFINE  MACRO           ;; macro define creates CONI
IF      NOT INPFLG        ;; use bdos fn 6
CONI    MACRO
LOCAL  LOCAL
CJP:   MVI    CJP, E,0FFH    ;; request input
        MVI    C,6         ;; bdos direct i/o
        CALL  ENTRY        ;; execute call
        ORA   A            ;; received char?
        JZ    CJP          ;; no...
        ENDM              ;; end first choice def.
ELSE   MACRO
CONI    MVI    C,1         ;; bdos console read
        CALL  ENTRY        ;; execute call
        ENDM              ;; end second choice def.
ENDIF  ENDM              ;; end conditional expr.
ENDM   ENDM              ;; end def of DEFINE
```

**Master Programmer Pavel Breder Does It Again! NEW SUPER POWER! (version 3.3)
puts you in control of CP/M. Now for CP/M 86 and MP/M 86, too.**

"POWER IS A GREAT PROGRAM" - InfoWorld Software Review Nov 8/82

POWER!

The first super program that puts you in control of CP/M.®

POWER! works with CP/M or MP/M on any computer.

POWER! gives you complete control over CP/M!

Ever accidentally erased a file?
POWER! restores erased files!

Ever fiddled with PIP in copying files? POWER! replaces PIP and is faster and easier. You simply pick files to be copied from a numbered menu. POWER! feeds the names to CP/M for you - no need to type file names, no typing errors...ever!

Tired of CP/M's scrolling through text files? POWER! goes through files for you, page by page, file by file, or line by line with instant halt at your finger tips.

Ever lost data on a glitched disk? POWER! tests disks and fixes glitched disks.

Damaged Directory? POWER! allows you to repair the directory!

Afraid of HEX numbers? POWER! automatically converts HEX to DECIMAL, BINARY & ASCII.

Need to patch or change a program? POWER! searches memory, displays memory, and lets you change memory wherever you want.

Want to locate a file? POWER! sorts the directory, searches all disks or all user areas automatically for files for you.

Annoyed at having to keep a system disk in Drive A:? POWER! doesn't require a system disk in any drive.

Renamed a file using = and all that typing? POWER! lets you pick files from a numbered menu and prompts for every action.

Ever accidentally overwritten a file? POWER! checks first and asks permission.

Need to manipulate data on a disk? POWER! reads and writes any track or sector independently.

Ever make a mistake in the DDT? POWER! loads disk data to ANY memory address, not just 100, and writes to the disk from any memory address. POWER! Single-Steps through memory, moves memory, compares memory sectors, tests memory, allows you to change memory and saves to disk using Decimal numbers.

NOW POWER! permits you to securely lock any file with your password to protect sensitive information from prying eyes. PASSWORD program included FREE with every POWER! order.

Dislike BDOS errors? POWER! ends BDOS errors, and gives you a way out.

Trouble identifying files? POWER! marks original files and their copies for you. POWER! also compares files and finds identical copies regardless of name.

Can't remember odd file or program name abbreviations? POWER! lets you deal with disk files by number. Never type or mistype file names again.

POWER! does more..NEW version of over 55 command utility programs is the only CP/M housekeeper you will ever need to really get control of your computer. A great buy, too, at less than \$2.75 each.

MORE THAN



ONLY \$149 (\$2.75 EA. UTILITY)

PRICE TO GO UP SOON

POWER! frees your disk space since it uses less than 15K.

POWER! versions for CP/M or MP/M on any computer.

**TRY IT ON US!
MONEY BACK GUARANTEE**

Previous purchasers of POWER! Exchange your original disk for updated version with the new commands and brand new manual. \$35.00 credit card, check or C.O.D.

JOIN OTHER POWER USERS

- | | | |
|-------------------|---------------------|-------------------|
| E. I. Dupont | Xerox Corp | AMF |
| Sperry Univac | Conn. Gen. Life | Syracuse Univ |
| NY Stock Exchange | Princeton Univ | Olivetti |
| Livermore Labs | ITT | New Mexico State |
| Union Carbide | Dow Chemical | Monsanto Chemical |
| UC Berkeley | Advanced Logic Sys. | Univ Minnesota |
| UC San Francisco | Charlston Univ | US Dynamics |
| Bendix Corp | Univ Helsinki | Citi Bank |
| Ford Motor Co. | Honeywell | |

COMPUTING! 2519 Greenwich, San Francisco, CA 94123

See Us at CPM 83 Show



COMPUTING! 2519 Greenwich, San Francisco, CA 94123

**TOLLFREE (800) 428-7825 Ext 96B DEALERS and OEM's
IN CA: (800) 428-7824 Ext 96B (415) 567-1634**

CP/M \$149 CP/M-86 \$149 MP/M \$198 *California add 6.25% sales tax.*

Card No. _____ Ex Date _____

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Computer _____

Software Associates

now introduces a new line of affordable, quality software

\$35⁰⁰
EACH

DATABASE SYSTEM

A user-friendly file management system. Includes:

- On-screen design of input and report formats
- Multiple field keys with capability to search on any field
- Query language included for easy retrieval of file information

SORT PACKAGE

A stand-alone, easy to use sorting package using fast heapsorting. Includes:

- Sorting on up to 10 keys
- May be parameter file driven
- A separate file merge capability

INDEX CARD FILE

A computerized index card file with user designed format. Includes:

- 60-column x 14-line size
- Search for any keyword(s) within file
- Sort "cards" into smaller categories
- Perform mathematical functions on given portions of a card

SOFTWARE ASSOCIATES

38A W. Oakland Avenue
Oakland, N.J. 07421
(201) 337-2002

Formats: IBM PC (PC-DOS or CP/M-86); Osborne; NorthStar; Altos. Call about the availability of other formats.

Requirements: CP/M-80, CP/M-86, IBM PC-DOS (MS-DOS); 64K RAM; Addressable cursor terminal; Printer capable of 132 column.

Terms: Money order, cashiers check, Visa, MasterCard, personal or company check (allow 14 days to clear), COD (add \$4.00) - Include \$5.00 for shipping and handling, N.J. residents add 6% sales tax. All software shipped UPS (ground). UPS Blue Label add \$3.00 per item.

Trademarks: Software Associates; IBM, IBM PC-DOS - International Business Machines, Inc.; CP/M-80, CP/M-86 - Digital Research, Inc.; MS-DOS - Microsoft, Inc.; Osborne - Osborne Computer Corporation; NorthStar - North Star Computers, Inc.; Altos - Altos Computer Systems.

© 1983 SOFTWARE ASSOCIATES

CIRCLE 12 ON READER SERVICE CARD

THE CP/M BUS continued . . .

The macro DEFINE would need to be invoked before the macro CONI could be used.

Redefinition and conditional macro definition may also be combined to have a macro redefine itself in more than one way depending on the value of a given symbol. For example, we could rename the above macro DEFINE as CONI and thus combine conditional definition with redefinition. This would also require an explicit CONI request after the redefinition so that console input would occur on the first use. The above macro would now have the following form:

```
CONI MACRO
IF NOT INPFLG
CONI MACRO
LOCAL CJP
CJP: MVI E,0FFH
MVI C,6
CALL ENTRY
ORA A
JZ CJP
ENDM
ELSE
CONI MACRO
MVI C,1
CALL ENTRY
ENDM
ENDIF
CONI ;; request input
;; for first invocation
ENDM
```

Careful use of the above techniques can be used to produce versatile macro libraries.

Announcing errors

As soon as macros take parameters, the possibility of erroneous parameters must be considered. The following technique is used to announce such errors:

```
... ;; somewhere in a macro
IF cond ;; some condition met
'ERROR -- name of macro -- bad input'
EXITM
ENDIF
...
```

The assembler will flag the quoted string as an illegal operation and hence print it. This will alert the programmer to the situation. The EXITM statement is included to prevent the further expansion of the macro in which the error was discovered.

The MACLIB statement

Once a collection of macros has been created and debugged, it is convenient to place them in a single library file for reference by future programs. This is facilitated by the MACLIB statement. More than one MACLIB may be used in a program, and

THE CP/M BUS continued . . .

these requests are normally placed near the beginning of the module. MACLIB is called as follows:

MACLIB LIBRARY

where LIBRARY.LIB is a file on the currently logged-in drive. It is also possible to specify the drive in the usual CP/M convention. The MAC assembler comes with several useful libraries, some of which will be discussed in future columns.


MACLIB may not be used to include code (other than in macros) but can be used to include symbol definitions (EQUates and SETs). This can be immensely useful since definition libraries can be included. Such libraries can include symbolic names for the BDOS function numbers and symbolic names for special addresses within the CP/M memory map. This helps to standardize usages of symbol names and also to eliminate unnecessary bugs arising from typographical errors involving special constants.

THE CURE PACKAGE

Backup your valuable data and programs with **dataCURE**, the industry's first diskette archiver with both **error detection** and **error correction**.

Not only does **dataCURE** take bad sectors out of service so diskettes don't have to be scrapped: It **does more . . .**

Its unique software logic gives you **corrected copies** of bad diskettes **automatically** and **quickly** with **no hardware changes**.



User-friendly **dataCURE's** function menu includes:

HELP-COPY-PROTECT-DETECT-CORRECT-UNERASE-RETIRE-EDIT

Designed for 48K CP/M 2.2 with two drives (one of which may be a Winchester), dataCURE is distributed in 8" SSSD CP/M format. It handles all diskette sector sizes to 1024 bytes.

\$100 including UPS Blue. (In NJ add \$6.00 tax.)

Orders only: 800-225-0103 any day, any hour.

COLORADO ONLINE
Suite 100
40 Balfour Lane
Ramsey, NJ 07446

NJ Orders: 201-327-5155 any day, any hour.
Inquiries: 201-327-5155 Mon-Fri 9-5 or request callback.
Inquire about **dataCURE** for CP/M lookalikes.
Dealer inquiries invited.

CP/M is a trademark of Digital Research Incorporated. The trademark **dataCURE**, and the service mark **COLORADO ONLINE** are owned by Colorado Online Systems, Incorporated.




CIRCLE 125 ON READER SERVICE CARD

THE P&T BUS GOES TO THEM ALL!

The P&T-488 interface enables you to use your S-100 computer and any of these operating systems and languages to communicate with 488 equipment.

The P&T-488 supports **FIVE** languages!

- Basic:
 - Microsoft
 - CBasic 2*
 - Cromemco
 - North Star
- Pascal:
 - Pascal/M™
 - Pascal/MT+™
- Fortran: Microsoft
- C: Quality Systems
- Assembler

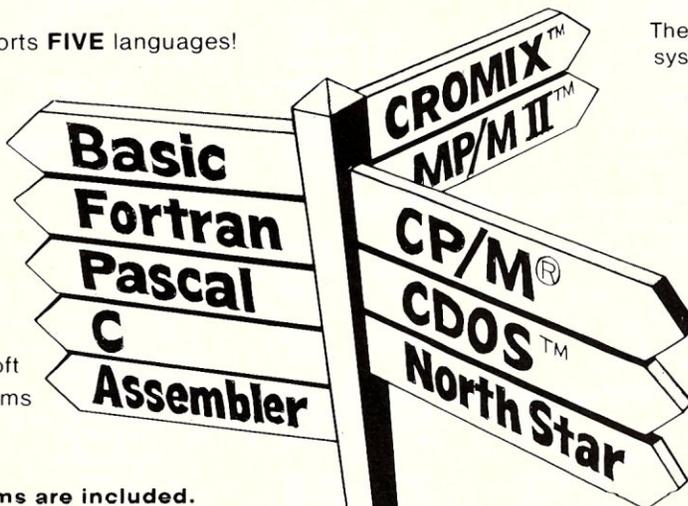

Sample Programs are included.

- * CP/M and CBasic 2 are registered trademarks, and MP/M II and Pascal/MT+ are trademarks of Digital Research, Inc.
- * CDOS and CROMIX are trademarks of Cromemco, Inc.
- * Pascal/M is a trademark of Sorcim

The P&T-488 supports **5** operating systems, **2** of which are multiuser!

The P&T-488 includes useful utilities!

- Interactive **bus monitor** aids setting up test equipment.
- **Self test** checks the interface for proper operation

The P&T-488 is **complete!** Interface, manual, programs on disk, 18" cable and connector mounting hardware are all included for \$450 (domestic, FOB Goleta).

PICKLES & TROUT
BOX 1206 • GOLETA • CA 93116
(805) 685-4641



CIRCLE 61 ON READER SERVICE CARD

CLAMP-ON TESTER ABSOLUTELY FREE!

SEE BELOW FOR DETAILS



MODEL SK7100

INDISPENSABLE TOOL NEEDED BY ELECTRIC/ELECTRONIC TECHNICIANS

The most advanced Clamp-On Tester with many performance features

- Range selection knob automatically advances the specific scale
- Easy reading - no confusion
- Accurate AC current measurements assured because of round clamp core with built-in balanced coils
- Most reliable taut band, internal core-magnet meter
- Trigger lock device, retains reading for use in hard to get places
- Automatic "Zero-Adjust" ohms scale
- Overload protection up to 150% for one minute ON ALL RANGES
- Test leads lock-in for added safety
- Accuracy $\pm 3\%$ full scale on all ranges
- Accessories included: carry case, test leads and instructions
- Size: 8.25x3.25x1.4"
- Reasonably priced
- Full satisfaction - money back guarantee

10 USEFUL RANGES	
AC Current	6, 15, 60, 150, 300, 600A
AC Voltage	150, 300, 600V
Resistance	0-20k Ω (1k Ω center scale)



FULL 100% RETURN PRIVILEGE GUARANTEED

Personal Switcher POWER SUPPLY For Lab or Original Equipment

FEATURES: Efficient 30 kHz switching frequency • Four Models satisfy most applications • Years of trouble-free service • Each side AC line fuse protected • Tele-Tale LED "Pwr-On" Panel Indicator • Three separate voltage outputs • Metal enclosure provides physical and EMI protection • For experimental use or permanent power source • Soft start feature protects critical circuits • Parallel operation acceptable for higher current needs • Push-in terminals, accept wire or test lead • Light-weight, easy to use • AC line cord permanently attached • Most reliable power source for a variety of uses and applications • 48 hour burn-in assures MTBF of 3 1/2 years, reasonably priced at \$1.90/watt • Full one year guarantee • 2-tone anodized case • Custom volt/current outputs on special order • Input surge protection • Automatic short circuit protection and restorator • UL recognized components • Handy Service Aid

SPECIFICATIONS: Input: 90-132VAC, 47-440Hz • Dual AC Input Fuses • Line Regulation: $\pm 0.1\%$ Max. for 10% input change • Load Regulation: $\pm 0.2\%$ Max. on #1 Output • Ripple Noise: Typ. 1% PP Max. • Over Voltage Protection • Reverse Polarity Protection • Compact, only 7 1/2" x 4" x 2 1/4" • Fast load transient response • 5 volt adj. $\pm 10\%$ DC Output: 42 Watts continuous • 70% Efficiency

Qty.	Model	Output #1	Output #2	Output #3	Total
	PS-1	5V-6A	+12V-0.5A	-12V-0.5A	
	PS-2	5V-6A	+15V-0.4A	-15V-0.4A	
	PS-3	5V-6A	+12V-0.5A	-5V-1A	
	PS-4	5V-3A	+24V-0.6A	-24V-0.6A	

FREE SK-7100 Clamp-On Tester with any 4 Units Purchased. NC Price of any Personal Switcher or SK Tester is \$99.50 each.

NOTICE: We reserve the right to limit quantity of FREE SK tester's with each order.

CALL TOLL FREE 1-800-373-1455 Within MASSACHUSETTS 1-617-682-6936

Lcom inc 1545 Osgood St. Unit 11AF, No. Andover, MA 01845

Charge to: MasterCard Visa American Express Check/Money Order

Card # Exp. Date

Name

Address

City State Zip

Signature SCHOOLS-LABS: QUANTITY PRICING (10 or more) ON REQUEST

CIRCLE 107 ON READER SERVICE CARD

THE CP/M BUS continued . . .

Parameter evaluation

When evaluating a parameter, the assembler ignores any leading and trailing blanks and tab characters. The parameter must be enclosed in a single set of angle brackets if spaces and tabs are to be included as part of a parameter. (A single set of balanced angle brackets will be removed before the parameter is passed.)

Also, quoted strings are left untouched except for a single level of substitution involving the ampersand operator discussed previously. A numeric evaluation and escape character are also provided. These will be discussed in the next section.

For a summary of parameter alterations effected by the MAC assembler, see Mac Macro Assembler: Language Manual and Applications Guide, page 64.

Numeric evaluator

When a symbol is passed to a macro, it is the symbol's ASCII name, not its numeric value, which is given to the macro. If



BLACK MARKET INC

"Our boys will give you the best price in the world . . . or else."

SYSTEMS

System	LIST	BMI
Godbout/CompuPro		
System A	\$5495	\$4295
System B	6995	5395
System C	8995	6595
Seattle Computer		
System II	3785	2895
System I	2990	2295
Gazelle	6995	CALL

DOT MATRIX PRINTERS

Printer	LIST	BMI
Okidata Microline		
82A 5 only	\$649	\$385
83A	995	675
DataSouth DS-180	1595	1195
Mannesmann Tally		
MT-160I	845	595
MT-160L	990	695

LETTER QUALITY PRINTERS

Printer	LIST	BMI
Diablo	620	\$1595
	630	2711
NEC Spinwriters		
	3510	1895
	7710	2825
3510 Sheet Feeder	1110	825

TERMINALS

Terminal	LIST	BMI
Televideo	925	\$995
	950	1195
Visual Tech		
50/Green	770	665
200/Green	1270	925

S-100 BOARDS

Board	LIST	BMI
Godbout/CompuPro		
CPU 86/87	\$695	\$485
CPU 85/88	425	315
Disk 1	495	375
Disk 2	795	565
RAM 16	650	375
RAM 21	1350	775
Interfacer 4	395	295
System Sup. 1	395	295
Seattle Computer		
Best on the Market		
8086 CPU/Support w/MS-DOS 2.0	895	625
8087 Option w/Software	395	295
Disk Master	425	295
RAM 64	795	495
4 Port Serial	310	195

BMI

Box 3215, Hayward, CA 94540 (415) 785-7499
Terms: Money Order or Certified/Cashiers Check

CIRCLE 175 ON READER SERVICE CARD

Introducing the serious business solution.

Multi-User, Multi-Processing at a Credible Price. MultiNet sets the standard for multi-user business systems. Even the basic two-user system comes complete with everything you need. A master microprocessor and two user microprocessors, 20 megabytes to 104 megabytes of high performance 5¼-inch Winchester disk, 13.4-megabyte cartridge tape, 1.2 megabyte industry standard 8" floppy diskette, distributed processing operating system, CP/M—at a price any business can afford: \$9,995. It's easily and quickly expandable to 8 users—just insert another user processor for each user. Clean and simple. On top of this, MultiNet allows the intermixing and simultaneous operation of 8-bit (Z-80) and 16-bit (8086/8087) user processors within a single system. Or start with an 8-bit system now and expand with 16-bit processors in the future. MultiNet also offers local area networking—up to 16 MultiNet systems—for users wishing to access programs and data on remote systems.

Programs For Every Application.

Just load and go. With MultiNet, each user can have their own CP/M application software programs and data, or each can run the same. Run your accounts payable, accounts receivable, general ledger, customer data base or any of the thousands of CP/M programs available with the fast data handling and response features of a true multi-processor system. Install MultiNet for today's 8-bit programs and it will be ready for tomorrow's 16-bit programs. What's more, the master operating system allows each user to have a dedicated processor while handling the sharing and management of common services such as disk, tape and printers. Complete file/record updating, multi-user record locking and powerful automatic print spooling are provided.

From MicroSystems International,

The Leader In Microcomputer Design.

MultiNet is a design breakthrough. We've taken the very best, most reliable components money can buy and combined them in a single esthetically pleasing package. Components and modules can be swapped in minutes instead of hours. And MultiNet is designed to last years instead of months. **MultiNet: The Serious Business Solution from MicroSystems International.**

- Dual 5¼" Winchesters
- Cartridge Tape Drive
- Industry standard 8" Floppy Disk Drive
- S-100 Module
- Dual whisper-quiet fans
- I/O connector
- Actively terminated bus
- Constant voltage transformer
- Multi-level power protection


For more information, write or call Customer Information Services, MicroSystems International, 12 Mercer Rd., Natick, MA 01760. (617) 655-9595.

Dealer inquiries are invited

**MicroSystems
International**

See us at Comdex, Atlanta

TM
MultiNet

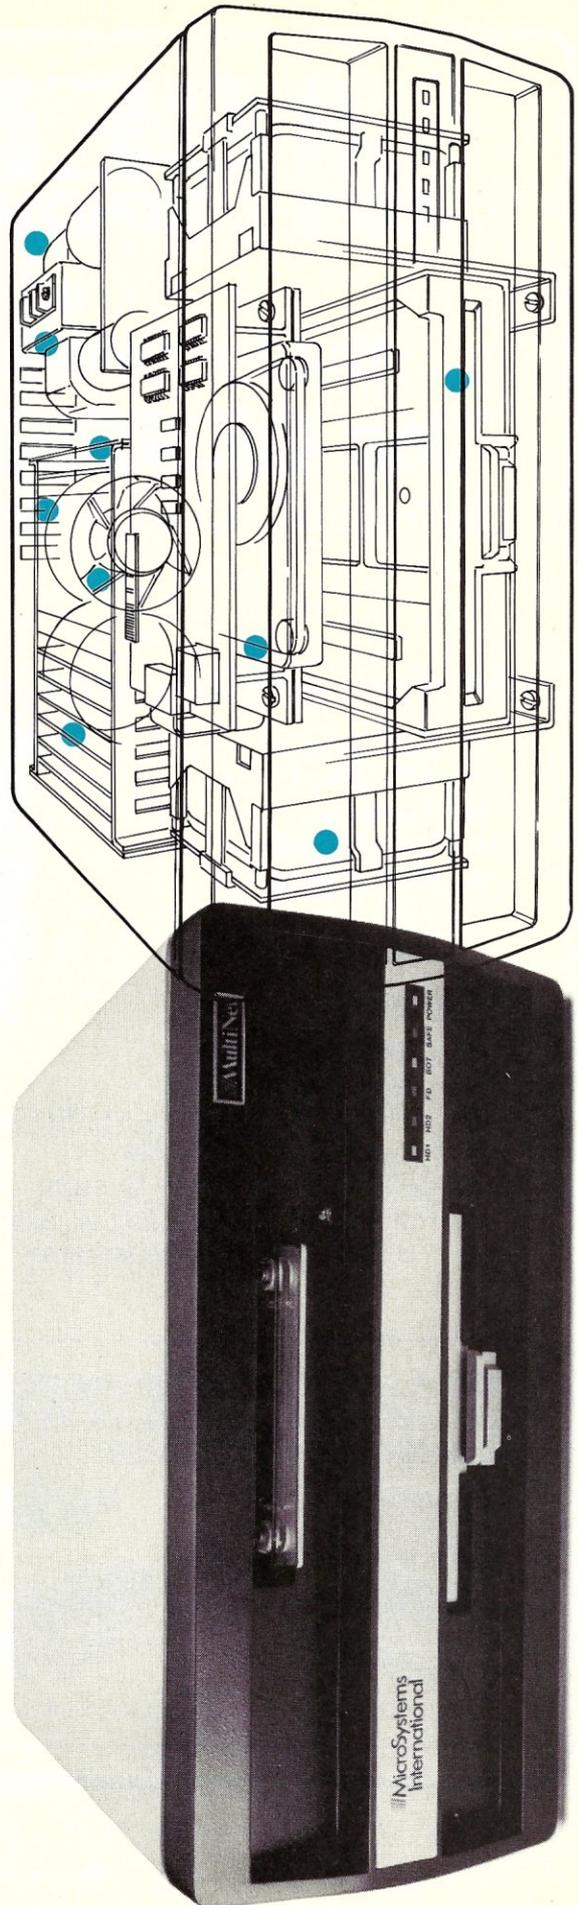

CIRCLE 145 ON READER SERVICE CARD

GENESIS COMPUTER CORPORATION


introduces...

the Price & Performance Leader **the GENESIS 8D S-100 micro**

A COMPLETE DUAL 8" DISK DRIVE S-100 MICROCOMPUTER
FOR ONLY... **\$1995⁰⁰**

THE IDEAL MICROCOMPUTER FOR:

- ★ Business
- ★ Education
- ★ Industry
- ★ Development
- ★ Networking

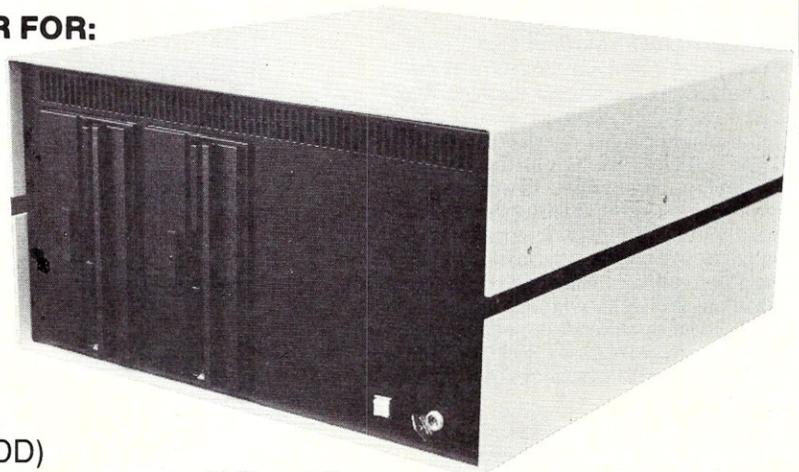


FEATURES:

- ★ Z80A CPU 4MHz
- ★ 64K Dynamic RAM
- ★ 2 800K 8" disk drives (SSDD)
- ★ Floppy Disk Controller
- ★ CPM 2.2 Operating System (MPM and TURBODOS Available)
- ★ 10 Slot IEEE 696 Mainframe
- ★ 2 Serial Ports
- ★ 2 Parallel Ports
- ★ DMA
- ★ Keylock ON/OFF Switch

**COMPLETE THE SYSTEM WITH OUR
INEXPENSIVE TERMINAL AND PRINTER
COMBINATION FOR ONLY**



ADDS
VIEWPOINT



C. ITOH PROWRITER

\$925


COMPUTER CORPORATION

1444 LINDEN ST.
P.O. BOX 1143
BETHLEHEM, PA 18018
(215) 861-0850

*SCHOOLS AND BUSINESSES
ASK ABOUT OUR LEASE/
PURCHASE ARRANGEMENTS*

THE CP/M BUS continued . . .

the value of the symbol, rather than its name, is required, the percent (%) character must precede the symbol name. Numeric expressions involving the values of symbols may also be used. For example, imagine a macro EXAMPL which requires a symbol's name and its value plus three. Such information would be passed as follows:


EXAMPL SYMBL, %SYMBL+3

The first parameter will be the string SYMBL, while the second will be the ASCII string representing the numeric expression. Thus if SYMBL had the value 15 (assigned previously with SET or EQU), the second parameter would be the ASCII string 18.

Escape character

The escape character is a caret or up-arrow (^) and is used to prevent evaluation of dummy parameters within the body of a macro. This is done by a caret preceding the parameter. The caret can also be used to

BIG STEPPER Stepping-Motor Driver Box



Apple

Radio Shack

IBM pc

DEC

SELF-CONTAINED! HOOKUP AND GO!

Provides all required power

Drives 4 motors while sensing 8 limit switches
Up to 5 amps per winding
with complete optoisolation

PARALLEL BIG STEPPER: \$450

*Direct program control

SERIAL BIG STEPPER: \$850

*RS232 compatible, obeys simple commands

STEPPING-MOTOR TIPS COOKBOOK \$5

Centre Computer Consultants
P.O. Box 739
State College, PA 16801
(814)237-4535


PARALLEL INTERFACE FOR APPLE

24 bits total: 16 out/8 in
\$90

Parallel Interface for
TRS 80 (Model I & III)
48 bits total: 32 out/16 in
\$95


CIRCLE 29 ON READER SERVICE CARD

Mix Live Video, Digitized Scenes, & Color Graphics

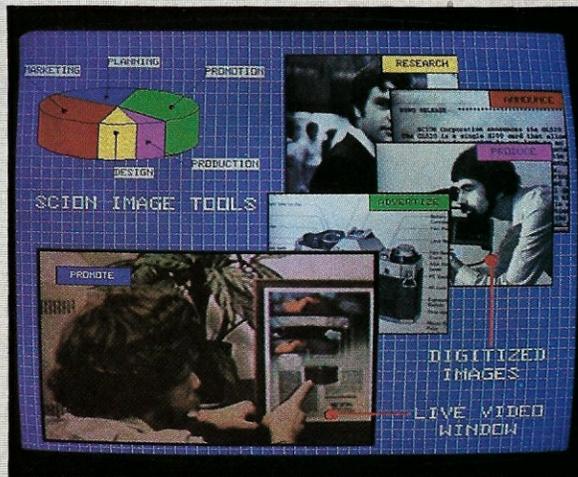

into striking 512x480, 256-color
presentational graphics displays

with the MicroAngelo (R) Image Tools™ Package

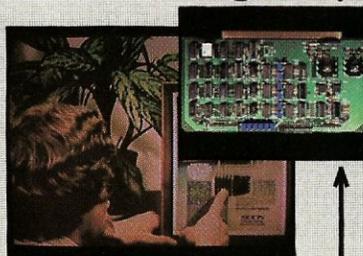

SCION GL520
Gen-Lock/Mix
Board

← camera,
VCR, or
video disk



SCION CS5080
MicroAngelo (R)
Color System
with multiple
transparencies




SCION FG520
FrameGrabber
Board, with
image editing
software

SCION
if the image is important.
12310 Pinecrest Rd./Reston, VA 22091
(703) 476-6100 TWX: 710-833-0684

CIRCLE 229 ON READER SERVICE CARD

The Tax Break You've Been Looking For!

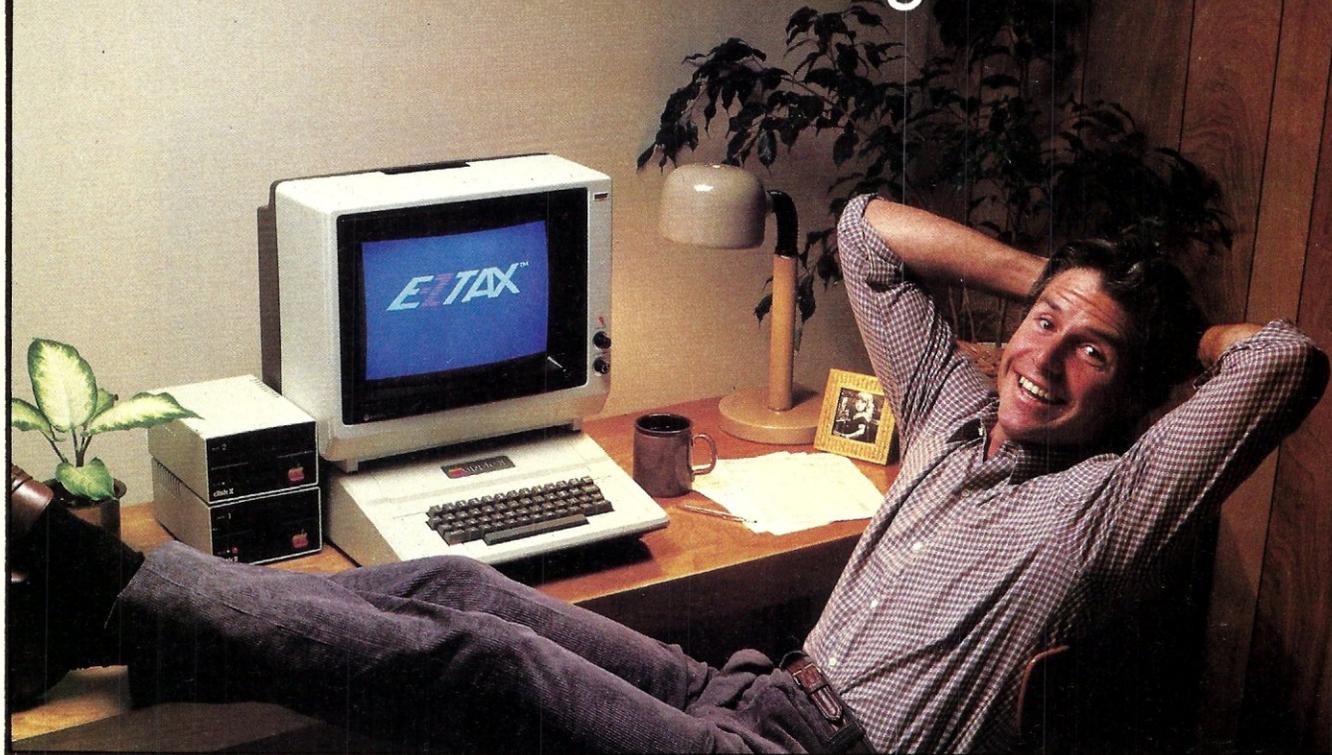

You Just Found It!

E-Z Tax. The simplest tax preparation software ever developed was designed for your Apple II personal computer.

Now you can prepare your own tax return without **any** knowledge of taxes or computer programming. From the moment you insert the E-Z Tax floppy disk, you'll be in full control. Every question is self-prompting and nothing is overlooked.

If you make a mistake, the program lets you know about it immediately. If you need tax help, just press a button and you'll get the answer. *Its simply the most amazing tax preparation software ever.*

COUPON

Please send me the following # of kits requested:

_____ APPLE II _____ IBM PC
_____ ATARI 400 & 800 _____ CP/M

TOTAL REQUESTED

x \$69.95 each

_____ Total

_____ Plus Postage & Handling (\$4/kit)

_____ Plus C.O.D. Charges (\$3/kit)

_____ **TOTAL ORDER**
(Enclose payment for this amount.)

ACT NOW!

Send: Check Money Order C.O.D.
Charge my credit card: Visa Mastercard

Card # _____ Exp. Date _____

Signature _____

Name _____

Address _____

City _____ State _____ Zip _____

Mail this coupon to: **TAX HELP, INC.**

Prints on Federal Forms

When you're finished, E-Z Tax will print out your tax return on official federal forms. If you don't have a printer, just fill in the forms from the data on the screen.

If you need help, you can call E-Z Tax's toll free customer service phone number.



E-Z Tax prepares the following IRS forms and schedules:

1040A	2106
1040 EZ	2119
1040 page 1 & 2	2210
Schedule A	2440
Schedule B	2441
Schedule C	3468
Schedule D	3903
Schedule E	4137
Schedule F	4684
Schedule G	4972
Schedule R/RP	5695
Schedule W	6251
1040 ES	6252
1040 SE	

ACT NOW!

You just found the tax preparation program you've been looking for. Now here's how you can get your hands on it...

- Fill in the coupon, or
- Call toll-free to order over the phone. Just give the operator your credit card number or request a C.O.D. shipment.

Only \$69.95
TAX DEDUCTIBLE

EZ TAX

Your E-Z Tax Kit Includes...

- E-Z Tax Software Program (2 Disks)
- E-Z Tax Guide Book
- Over 35 Official Federal Tax Forms for 1982 Tax Returns
- Tax Organizer Envelopes
- Instruction Guide
- Warranty Card



BOX 7676
SAN JOSE, CA 95150
(408) 998-1040
WATS LINE: (800) 331-1040 - USA
(800) 344-1040 - CA

THE CP/M BUS
continued . . .

force the assembler to treat other special characters (e.g. ';') literally within parameters. Note that the character must still be a printable ASCII character and that a literal caret is represented by a pair of carets ('^^'). Note also that the up-arrow performs no special function within the confines of a quoted string.

Conclusion

In this installment of "CP/M Bus," we have discussed more about the use of macro instruction sequences. More information about macros will be given in future installments of this column.

Coming next month:

S-100/IEEE-696 Standard Update,
by Sol Libes.

S-100 Product Directory,
by Sol Libes.

Review of the CompuPro MPX-1 Intelligent I/O Board,
by Dennis Thovson



MCDISPLAY™

\$175.00

THE BEST MBASIC DISPLAY INTERFACE EVER DEVELOPED!

Let MCDISPLAY handle the interface to the program user in your application program. For CP/M.

ORDER YOUR COPY TODAY

CALL COLLECT (803) 244-8174

DEMO PACKAGE \$10.00 MANUAL \$25.00
CHECK, MONEY ORDER, P.O., VISA, MASTERCARD




MasterComputing Inc.

P.O. Box 17442
Greenville, SC 29606
(803) 244-8174

CP/M is a trademark of DIGITAL RESEARCH
MBASIC is a product of Microsoft

GET THE BEST OUT OF CP/M™ WITH WAVE MATE'S *BULLET*

- Cost Effective
- Highest Performance of any 4MHZ Z80 Board
- 128 K Usable RAM
- Enhanced Software to Optimize CP/M
- DMA Track Buffered Disk Controller
- Only 8 x 10.7 inches in size
- Power only 5v @ 1.5 a.
- Use any Serial Terminal and Centronics compatible printer
- Capable of supporting MP/M

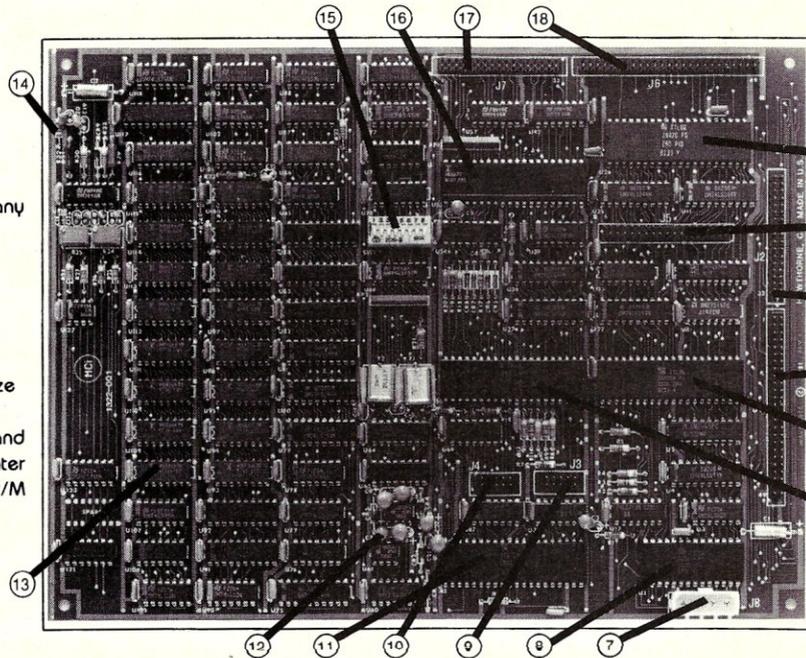


- 1 Printer/Winch Port
- 2 Printer Conn.
- 3 Winch. Conn.
- 4 Exp. Data Bus
- 5 CPU Chip
- 6 DMA Chip
- 7 Power
- 8 Clock Timer Cont.
- 9 First Serial Port
- 10 2nd Serial Port
- 11 DART
- 12 Charge Pump
- 13 128K RAM
- 14 Data Separator
- 15 Boot Disk Setter
- 16 Floppy Disk Contr.
- 17 5 1/4" Floppy Conn.
- 18 8" Floppy Conn.

WAVE MATE INC.
14009 S. Crenshaw Blvd.
Hawthorne, CA 90250
(213) 978-8600 Telex: 194369



WAVE MATE INTERNATIONAL
159 Chee de Vleurgat
1050 Brussels, Belgium
Tel: (02) 649 10 70 Telex: 24050

CIRCLE 63 ON READER SERVICE CARD



S-100 MEMORY BOARDS

64K STATIC RAM - Jade

Uses new 2K x 8 static RAMs, fully supports IEEE 696 24 bit extended addressing, 200ns RAMs, lower 32K or entire board phantomable, 2716 EPROMs may be subbed for RAMs, any 2K segment of upper 8K may be disabled, low power typically less than 500ma.

MEM-99152B Bare board	\$49.95
MEM-99152K Kit less RAM	\$99.95
MEM-32152K 32K kit	\$199.95
MEM-56152K 56K kit	\$289.95
MEM-64152K 64K kit	\$299.95
Assembled & Tested	add \$50.00

256 RAMDISK - SD Systems

ExpandoRAM III expandable from 64K to 256K using 64Kx1 RAM chips, compatible with CP/M, MP/M, Oasis, & most other Z-80 based systems, functions as ultra-high speed disk drive when used with optional RAMDISK software.

MEM-65064A 64K A & T	\$474.95
MEM-65128A 128K A & T	\$574.95
MEM-65192A 192K A & T	\$674.95
MEM-65256A 256K A & T	\$774.95
SFC-55009000F RAMDISK sftwr CP/M 2.2	\$44.95
SFC-55009000F RAMDISK with EXRAM III	\$24.95

64K RAM BOARD - C.C.S.

IEEE S-100, supports front panels, bank select, fail-safe refresh 4MHz, extended addressing, list price \$575.00 - less than half price!!!

MEM-64565A	\$199.95
------------	----------

S-100 VIDEO BOARDS

MICROANGELO - Scion

Ultra-high-resolution 512x480, 256 color or black & white S-100 video board.

IOV-1500A A & T	\$799.95
-----------------	----------

LETTER QUALITY PRINTERS

LETTER QUALITY PRINTER - COMREX


Uses standard daisy wheels and ribbon cartridges, 16 CPS bi-directional printing, semi-automatic paper loader (single sheet or fan fold), 10/12/15 pitch, up to 16" paper, built-in noise suppression cover.

PRD-11001 Centronics parallel	\$899.95
PRD-11002 RS-232C serial model	\$969.95
PRA-11000 Tractor Option	\$119.95

STARWRITER F-10 - C. Itoh

New 40 CPS daisy wheel printer with full 15" carriage, uses standard Diablo print wheels and ribbons, both parallel and serial interfaces included.

PRD-22010 Starwriter F-10	\$1495.95
---------------------------	-----------



S-100 I/O BOARDS

THE BUS PROBE - Jade

Inexpensive S-100 Diagnostic Analyzer

So your computer is down. And you don't have an oscilloscope. And you don't have a front panel... You're not alone - most computers have their occasional bad days. But without diagnostic equipment such as an oscilloscope (expensive!) or a front panel (expensive!), it can be very difficult to pinpoint the problem. Even if you have an extender board with a superfast logic probe, you can't see more than one signal at a time. You're stuck, right?

Not anymore; Jade is proud to offer our cost-effective solution to the problems mentioned above: **THE BUS PROBE.**

Whether you're a hobbyist with a cantankerous kluge or a field technician with an anxious computer owner breathing down your neck, you'll find **THE BUS PROBE** speeds your repair time remarkably. Just plug in **THE BUS PROBE** and you'll be able to see all the IEEE S-100 signals in action. **THE BUS PROBE** allows you to see inputs, outputs, memory reads and writes, instruction fetches, DMA channels vectored interrupts, 8 or 16 bit wide data transfers, plus the three bus supply voltages.

TSX-200B Bare board	\$59.95
TSX-200K Kit	129.95
TSX-200A A & T	\$159.95

I/O-4 - SSM Microcomputer

2 serial I/O ports plus 2 parallel I/O ports.

IOI-1010B Bare board w/manual	\$35.95
IOI-1010K Kit with Manual	\$179.95
IOI-1010A A & T	\$249.95

I/O-5 - SSM Microcomputer

Two serial & 3 parallel ports, 110-19.2K Baud

IOI-1015A A & T	\$289.95
-----------------	----------

INTERFACER 4 - CompuPro

3 serial, 1 parallel, 1 Centronics parallel.

IOI-1840A A & T	\$314.95
IOI-1830C CSC	\$414.95

S-100 EPROM BOARDS

PB-1 - SSM Microcomputer

2708, 2716 EPROM board with on-board programmer.

MEM-99510K Kit with manual	\$154.95
MEM-99510A A & T with manual	\$219.95

PROM-100 - SD Systems

2708, 2716, 2732 EPROM programmer with software.

MEM-99520K Kit with software	\$189.95
MEM-99520A A & T with software	\$249.95

DUAL DISK SUB-SYSTEMS

Disk Sub-Systems - Jade

Handsome metal cabinet with proportionally balanced air flow system, rugged dual drive power supply, power cable kit, power switch, line cord, fuse holder, cooling fan, neoprene rubber feet, all necessary hardware to mount 2-8" disk drives, power supply, and fan, does not include signal cable.

Dual 8" Sub-Assembly Cabinet

END-000420 Bare cabinet	\$49.95
END-000421 Cabinet kit	\$199.95
END-000431 A & T	\$249.95

8" Sub-Systems - Single Sided, Double Density

END-000423 Kit w/2 FD100-8Ds	\$650.00
END-000424 A & T w/2 FD100-8Ds	\$695.00
END-000433 Kit w/2 SA-801Rs	\$999.95
END-000434 A & T w/2 SA-801Rs	\$1195.00

8" Sub-Systems - Double-Sided Double Density

END-000426 Kit w/2 DT-8s	\$1224.95
END-000427 A & T w/2 D-8s	\$1424.995
END-000436 Kit w/2 SA-851Rs	\$1274.95
END-000437 A & T w/2 SA-851Rs	\$1474.95

8" SLIMLINE SUB-SYSTEMS

Dual Slimline Sub-systems - Jade

Handsome vertical cabinet with scratch resistant baked enamel finish, proportionally balanced air flow system, quiet cooling fan, rugged dual drive power supply, power cables, power switch, line cord, fuse holder, cooling fan, all necessary hardware to mount 2-8" slimline disk drives, does not include signal cable.

Dual 8" Slimline Cabinet

END-000820 Bare cabinet	\$59.95
END-000822 A & T w/o drives	\$179.95

Dual 8" Slimline Sub-Systems

END-000823 Kit w/2 TM848-1	\$919.95
END-000824 A & T w/2 TM848-1	\$949.95
END-000833 Kit w/2 TM848-2	\$1149.95
END-000834 A & T w/2 TM848-2	\$1179.95

S-100 CPU BOARDS

SBC-200 - SD Systems

4 MHz Z-80A CPU with serial & parallel I/O, 1K RAM, 8K ROM space, monitor PROM included.

CPC-30200A A & T	\$329.95
------------------	----------

THE BIG Z - Jade

2 or 4 MHz switchable Z-80 CPU board with serial I/O, accommodates 2708, 2716, or 2732 EPROM, baud rates from 75 to 9600.

CPU 30201B Bare board w/manual	\$35.00
CPU-30201K Kit with Manual	\$149.95
CPU-30201A A & T with Manual	\$199.95

2810 Z-80 CPU - C.C.S.

2 or 4 MHz Z-80 CPU with serial IO port & on board monitor PROM, front panel compatible.

CPU-30400A A & T with PROM	\$289.95
----------------------------	----------

CPU-Z CompuPro

2 or 4 MHz Z80A CPU, 24 bit addressing.

CPU-30500A 2/4 MHz A & T	\$279.95
CPU-30500C 3/6 MHz CSC	\$374.95

8085/8088 - CompuPro

Both 8 & 16 bit CPUs, standard 8 bit S-100 bus, up to 8 MHz, accesses 16 Megabytes of memory.

CPU-20510A 6 MHz A & T	\$398.95
CPU-20510C 6/8 MHz CSC	\$497.95

PLACE ORDERS TOLL FREE

Continental U.S.
800-421-5500

Inside California
800-262-1710

For Technical Inquires
or Customer Service call:
213-973-7707

We accept cash, checks, credit cards, or Purchase Orders from qualified firms and institutions.
Minimum prepaid order \$15.00 California residents add 6 1/2% tax. Export customers outside the US or Canada please add 10% to all prices. Prices and availability subject to change without notice. Shipping and handling charges via UPS Ground 50¢/lb. UPS Air \$1.00/lb. minimum charge \$3.00

5 1/4 DISK DRIVES

Tandon TM100-1 single-sided double-density 48 TPI MSM-551001 _____ \$219.95 ea 2 for \$199.95 ea
Shugart SA400L single-sided double-density 40 track MSM-104000 _____ \$234.95 ea 2 for \$224.95 ea
Shugart SA455 half-size double-sided 48 TPI MSM-104550 _____ \$349.95 ea 2 for \$329.95 ea
Shugart SA465 half-size double-sided 96 TPI MSM-104650 _____ \$399.95 ea 2 for \$379.95 ea
Tandon TM100-2 double-sided double-density 48 TPI MSM-551002 _____ \$294.95 ea 2 for \$269.95 ea
Shugart SA450 double-sided double-density 35 track MSM-104500 _____ \$349.95 ea 2 for \$329.95 ea
Tandon TM100-3 single-sided double-density 96 TPI MSM-551003 _____ \$294.95 ea 2 for \$269.95 ea
Tandon TM100-4 double-sided double-density 96 TPI MSM-551004 _____ \$394.95 ea 2 for \$374.95 ea
MPI B-51 single-sided double-density 40 track MSM-155100 _____ \$234.95 ea 2 for \$224.95 ea
MPI B-52 double-sided double-density 40 track MSM-155200 _____ \$344.95 ea 2 for \$334.95 ea

5 1/4" Cabinets with Power Supply

END-000216 Single cab w/power supply _____	\$69.95
END-000226 Dual cab w/power supply _____	\$94.95

S-100 MOTHERBOARDS


ISO-BUS - Jade

Silent, simple and on sale - a better motherboard.
6 Slot (5 1/4" x 8 5/8")

MBS-061B Bare board _____	\$22.95
MBS-061K Kit _____	\$39.95
MBS-061A A & T _____	\$69.95
12 Slot (9 3/4" x 8 5/8")	
MBS-121B Bare board _____	\$34.95
MBS-121K Kit _____	\$69.95
MBS-121A A & T _____	\$109.95
18 Slot (14 1/2" x 8 5/8")	
MBS-181B Bare board _____	\$54.95
MBS-181K Kit _____	\$99.95
MBS-181A A & T _____	\$149.95

8" DISK DRIVES

Siemens FDD 100-8 single-sided double-density MSF-201120 _____	\$274.95 ea 2 for \$249.95 ea
--	--------------------------------------

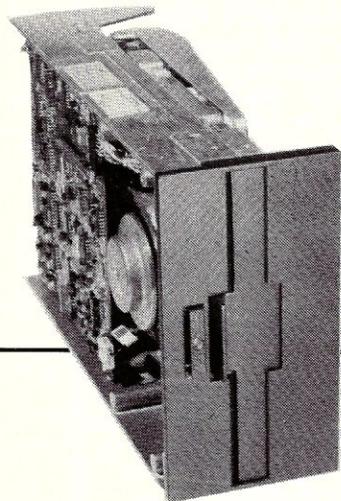

MODEMS

SMART BUY in MODEMS - Signalman

1200 and/or 300 baud, direct connect, automatic answer or originate selection, auto-answer/auto-dial on deluxe models. 9v battery allows total portability, full one year warranty.

IOM-5600A 300 baud direct connect _____	\$89.95
IOM-5610A 300 baud Deluxe _____	\$149.95
IOM-5620A 1200/300 baud Deluxe _____	\$369.95
IOM-5650A 300 baud for Osborne _____	\$119.95

SMARTMODEM - Hayes

Sophisticated direct-connect auto-answer/auto-dial modem, touch-tone or pulse dialing. RS-232C interface, programmable.

IOM-5400A Smartmodem _____	\$224.95
IOK-1500A Hayes Chronograph _____	\$218.95
IOM-2010A Micromodem II w/Term prgm _____	\$329.95
IOM-2012A Terminal program for MMII _____	\$89.95
IOM-1100A Micromodem 100 _____	\$368.95
IOM-5500A Smartmodem 1200 _____	\$599.95

1200 BAUD SMARTMODEM - Hayes

1200 and 300 baud, all the features of the standard Smartmodem plus 1200 baud, 212 compatible, full or half duplex.

IOM-5500A Smartmodem 1200 _____	\$599.95
--	----------

1200 BAUD SMART CAT - Novaton

103/212 Smart Cat & 103 Smart Cat, 1200 & 300 baud, built-in dialer, auto re-dial if busy, auto answer/disconnect, direct connect, LED readout displays mode, analog/digital loop-back self tests, usable with multi-line phones.

IOM-5241A 300 baud 103 Smart Cat _____	\$229.95
IOM-5251A 1200 baud 212/103 Smart Cat _____	\$549.95
IOM-5261A 300 baud 103 J-Cat _____	\$129.95

J-CAT™ MODEM - Novation

1.5 the size of ordinary modems, Bell 103, manual or auto-answer, automatic answer/originate, direct connect, built-in self-test, two LED's and audio "beeps" provide complete status information.

IOM-5261A Novation _____	\$149.95
---------------------------------	----------

S-100 DISK CONTROLLERS

DISK 1- CompuPro

8" or 5 1/4" DMA disk controller, single or double density, single or double sided, 10MHz.

IOD-1810A A & T _____	\$449.95
IOD-1810C CSC _____	\$554.95

VERSAFLOPPY II - SD Systems

Double density disk controller for any combination of 5 1/4" and 8" single or double sided, analog phase-locked loop data separator, vectored interrupts. CP/M 2.2 & Oasis compatible, control/diagnostic software PROM included.

IOD-1160A A & T with PROM _____	\$359.95
SFC-55009047F CP/M 3.0 with VF-II _____	\$99.95

2242 DISK CONTROLLER - C.C.S.

5 1/4" or 8" double density disk controller with on-board boot loader ROM, free CP/M 2.2 & manual set.

IOD-1300A A&T with CP/M 2.2 _____	\$399.95
--	----------

DOUBLE D - Jade

High reliability double density disk controller with on-board Z-80A, auxiliary printer port, IEEE S-100 can function in multi-user interrupt driven bus.

IOD-1200B Bare board & dhwr man _____	\$59.95
IOD-1200K Kit w/hdwr & stwr man _____	\$299.95
IOD-1200A A & T w/hdwr & stwr man _____	\$325.95
SFC-59002001F CP/M 2.2 with Double D _____	\$99.95

EPROM ERASERS

ULTRA-VIOLENT EPROM ERASERS

Inexpensive erasers for industry or home.

XME-3100A Spectronics w/o timer _____	\$69.50
XME-3101A Spectronics with timer _____	\$94.95
XME-3200A Economy model _____	\$49.95

SINGLE BOARD COMPUTER

SUPERQUAD - Adv. Micro Digital

Single board, standard size S-100 computer system, 4 MHz Z-80A, single or double density disk controller for 5 1/4" or 8" drives, 64K RAM, extended addressing, up to 4K of EPROM; 2 serial & 2 parallel I/O ports, real time interrupt clock, CP/M compatible.

CPC-30800A A & T _____	\$724.95
IOX-4232A Serial I/O adapter _____	\$29.95

NEW! CP/M PLUS 3.0

CP/M 3.0 is Didital Research's latest version of the industry standard disk operating system. It features many performance improvements, such as intelligent record buffering, improved directory handling, "HELP" facility, time date stamping of files and many more improvements. AND A TREMENDOUS INCREASE IN SPEED!!!, it is fully CP/M 2.2 compatible and requires no changes to your existing application software. Available only to Versafloppy II owners with CBC-200 CPU's.

- CP/M compatible
- Easily customized
- Easier to learn and use
- High performance file system
- Automatic disk log-in of removable media
- Support for 1 to 16 banks of RAM
- Supports up to 16 drives of 512 Megabytes each
- Up to ten times faster than CP/M 2.2
- Console I/O re-direction
- Easy to use system utilities with HELP facility
- Powerful batch facility
- Designed for application programmers
- Resident system extensions

SFC-55009057F CP/M 3.0 8" with manual _____	\$200.00
SFC-55009057M CP/M 3.0 Manual _____	\$30.00

THREE BOARD SET - SD Systems

FREE
CP/M 3.0
Save \$800.00

S-100 board set with 4 MHz Z-80A, 68K of RAM expandable to 256K, serial and parallel I/O ports, double-density disk controller for 5 1/4" and 8" disk drives, new and improved CP/M 3.0 manual set, system monitor, control and diagnostic software. Includes SD Systems SBC-200, 64K ExpandoRAM III, Versafloppy II, and FREE CP/M 3.0 - all boards are assembled & tested.

*64K Board Set with FREE CP/M 3.0 _____	\$1195.00
256K Board Set with FREE CP/M 3.0 _____	\$1395.00

LIMITED QUANTITY

JADIE

Computer Products

4901 West Rosecrans, Hawthorne, California 90250

CIRCLE 16 ON READER SERVICE CARD

In the Public Domain

by Chris Terry


This month I will be summarizing the high-level language processors that are available in the CPMUG and SIG/M libraries. Assemblers, cross-assemblers and related utilities will be discussed in a future column.

BASIC

Six different versions of Basic, ranging from "tiny" to elaborate are available in the CPMUG. Volume 11 contains TINIDISK, a version of the Wang Palo Alto Basic originally described in *Dr. Dobb's Journal*. The ASM source code for the interpreter is provided, together with a .COM file and a .DOC file containing full instructions for use. This was designed in the days when an 8K memory board could set you back \$400 or so; the interpreter occupies only 3K and is consequently somewhat limited. But, believe it or not, TINIDISK is accompanied by a version of Star Trek (6K) which can be run with TINIDISK!

At a slightly more elaborate level is Processor Technology's BASIC/5 interpreter. The original cassette version occupied 5K; this adaptation to run under CP/M 1.3 occupies 8K. Again, a somewhat limited interpreter without transcendental functions or any form of sub-string handling. I ran the original cassette version and found it adequate for simple games (such as those in David Ahl's "101 Games for Computers"); I have never given this CP/M version anything of a workout, though I was able to bring it up under CP/M 1.4 and run one of the guessing games.

Volumes 31 and 32 of CPMUG contain the source code, documentation and executable module of an early version of Tarbell Basic. This needs a lot of experimentation. I tried to run version 12.1 (much later than this public domain version) and found the

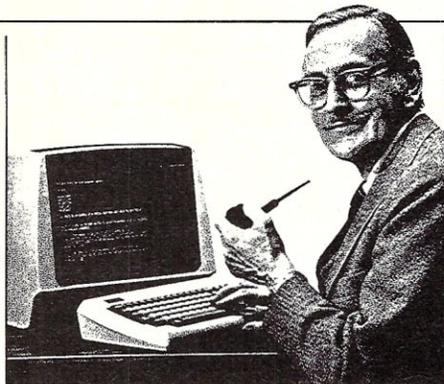

editor infuriating and difficult to work with, and there were still some bugs. In its day this was a very advanced interpreter with WHILE . . . WEND and other structures absent even from Microsoft's Version 4, but I found the editor so tricky that I gave up on it—other people tell me they had better luck.

Probably the two most useful versions are the Lawrence Livermore interpreter in Volumes 2 and 10 of CPMUG, and EBASIC, included in Volume 26 of the SIG/M library. EBASIC is a semicompiler with a runtime interpreter, and is the ancestor of CBASIC, CBASIC2 and CB-80. This is more powerful than the other public domain Basics, in that it has higher precision, requires no line numbers except in statements that are the targets of GOTOs or GOSUBs, and has better control structures. However, it is somewhat slow and is less convenient than an interpreter when it comes to debugging. EBASIC was supplied free with CP/M by various disc controller manufacturers, and the manual is still available from various sources. An EBASIC Help file is available on SIG/M Vol. 14 (requires HELP.COM in Vol. 13 to run it); this gives you on-line help relating to EBASIC procedures, error messages, etc. SIG/M Vol. 26 was also published (without change) as CPMUG Vol. 53. Floating Point conversion routines for EBASIC appear in Vols. 29 & 30, together with the PL/M

source of the compiler and runtime interpreter.

Other procedure-oriented languages

FOCAL, a language similar to Basic supplied by Digital Equipment Corp. for use on their PDP/8 and other machines, was adapted to run under CP/M and issued in CPMUG Vol. 16. ALGOL/M, a subset of Algol-60, is available with full documentation and a useful set of test and demonstration programs in Algol/M on CPMUG Vol. 28.


RATFOR (the acronym stands for RATIONAL FORtran) is a preprocessor for Fortran source programs. It allows control structures such as IF . . . ELSE, WHILE, REPEAT UNTIL, FOR . . . NEXT, BREAK, and INCLUDE, and generates standard Fortran statements. A .COM file of the preprocessor is contained in CPMUG Vol. 24; a faster version for Z80 only is in CPMUG Vol. 49, together with the RATFOR source, documentation, and some demonstration programs. The output of the RATFOR preprocessor can be compiled with the Microsoft Fortran-80 compiler.

A Pascal compiler (written in Pascal) is available in SIG/M Vol. 50. This differs somewhat from standard Pascal, but the differences are fully documented. A preprocessor makes a single pass over the source code, generating a sort of p-code which is written to disk. A two-pass translator then scans the p-code and generates 8080 object code which is linked to a runtime library by using PIP.

Threaded languages

Two languages of this type are available in the public domain: FORTH11 (SIG/M 13, republished as CPMUG 65) and STOIC (CPMUG 23 & 25). Both of these languages use Reverse Polish Notation and a threaded block structure that allows you to define your own

64K STATIC RAM MEMORY

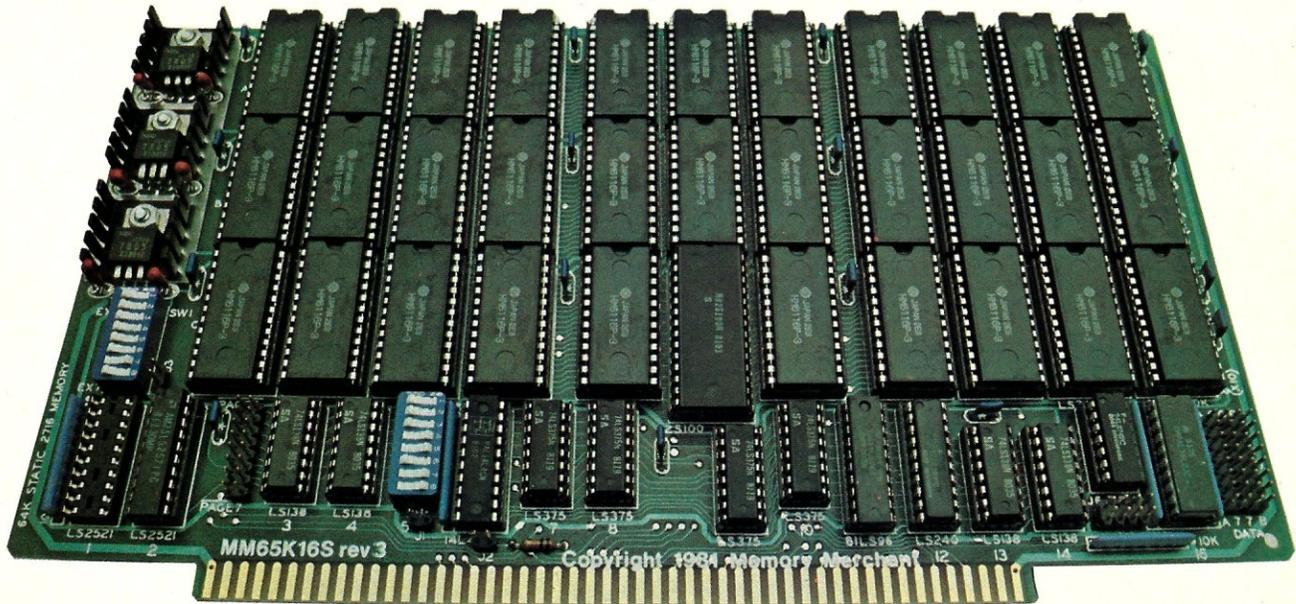

S-100 STATIC MEMORY BREAKTHROUGH

Finally, you can buy state-of-the-art S-100/IEEE 696 static memory for your computer at an unprecedented savings.

Memory Merchant's memory boards provide the advanced features, quality and reliability you need for the kind of operational performance demanded by new high-speed processors.

Completely Assembled.

These memory boards are not kits, nor skeletons — but top-quality, high-performance memories that are shipped to you completely assembled, burned-in, socketed, tested and insured with one of the industry's best warranties.

Superior Design & Quality.

Memory Merchant's boards are created by a designer, well known for his proven ability in advanced, cost-efficient memory design. Innovative circuitry provides you with highly desired features and incredible versatility.

Only first-quality components are used throughout, and each board is rigorously tested to assure perfect and dependable performance.

No Risk Trial.

We are so convinced that you will be absolutely delighted with our boards that we extend a no-risk trial offer. After purchasing one of our boards, you may return it (intact) for any reason within 15 days after shipment and we will refund the purchase price (less shipping).

NEW S-100 PRODUCTS COMING SOON:

- * DUAL 8/16 BIT CPU BOARD
- * 128K 8/16 BIT STATIC RAM
- * 256K 8/16 BIT DYNAMIC RAM

\$629.

48K PARTIALLY POPULATED \$519.
32K PARTIALLY POPULATED \$409.

64K RAM, MODEL MM65K16S

- 64K x 8-bit
- Speed in excess of 6 MHz
- Uses 150ns 16K (2K x 8) static RAMS
- Ultra-low power (435 Ma. max. — loaded with 64K)
- Bank Select **and** Extended Addressing
- A 2K window which can be placed anywhere in the 64K memory map
- Four independently addressable 16K blocks organized as:
 - Two independent 32K banks **or**
 - One 64K Extended Address Page **or**
 - One 48K and one 16K bank for use in MP/M¹ (option)
- Each 32K bank responds independently to phantom
- 2716 (5V) EPROMS may replace any or all of the RAM
- Field-proven operation in CROMEMCO CROMIX* and CDOS*.
- Compatible with latest IEEE 696 systems such as Northstar, CompuPro, Morrow, IMS, IMSAI front panel, Altair and many others.

OEM and DEALER inquiries invited.



14666 Doolittle Drive
 San Leandro, CA 94577
 (415) 483-1008

CIRCLE 98 ON READER SERVICE CARD


FULL TWO-YEAR WARRANTY.

The reliability of our boards, through quality-controlled production and proven performance, has enabled us to extend our warranty to a full two years. That's standard with us, not an option. This includes a 6-month exchange program for defective units.

Shipped direct from stock.

All Memory Merchant's boards are shipped direct from stock, normally within 48 hours of receipt of your order. Call us at (415) 483-1008 and we may be able to ship the same day.

16K RAM, Model MM16K14

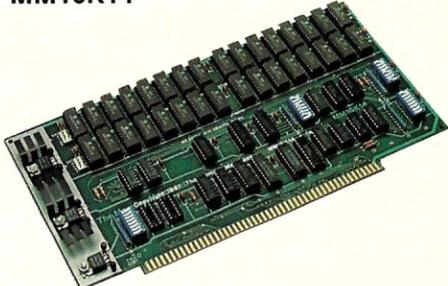


16K STATIC RAM \$169.

16K x 8 Bit
 Bank Select & Extended Addressing
 Four independently addressable 4K blocks
 One 4K segment equipped with 1K windows
 Uses field-proven 2114 (1K x 4) RAMS
 Low Power (less than 1.2 Amps)
 Runs on any S-100 8080, 4 MHz Z-80 or 5 MHz 8085 system.

Prices, terms, specifications subject to change without notice.

*Cromix and CDOS are trademarks of CROMEMCO.
¹MP/M is a trademark of Digital Research

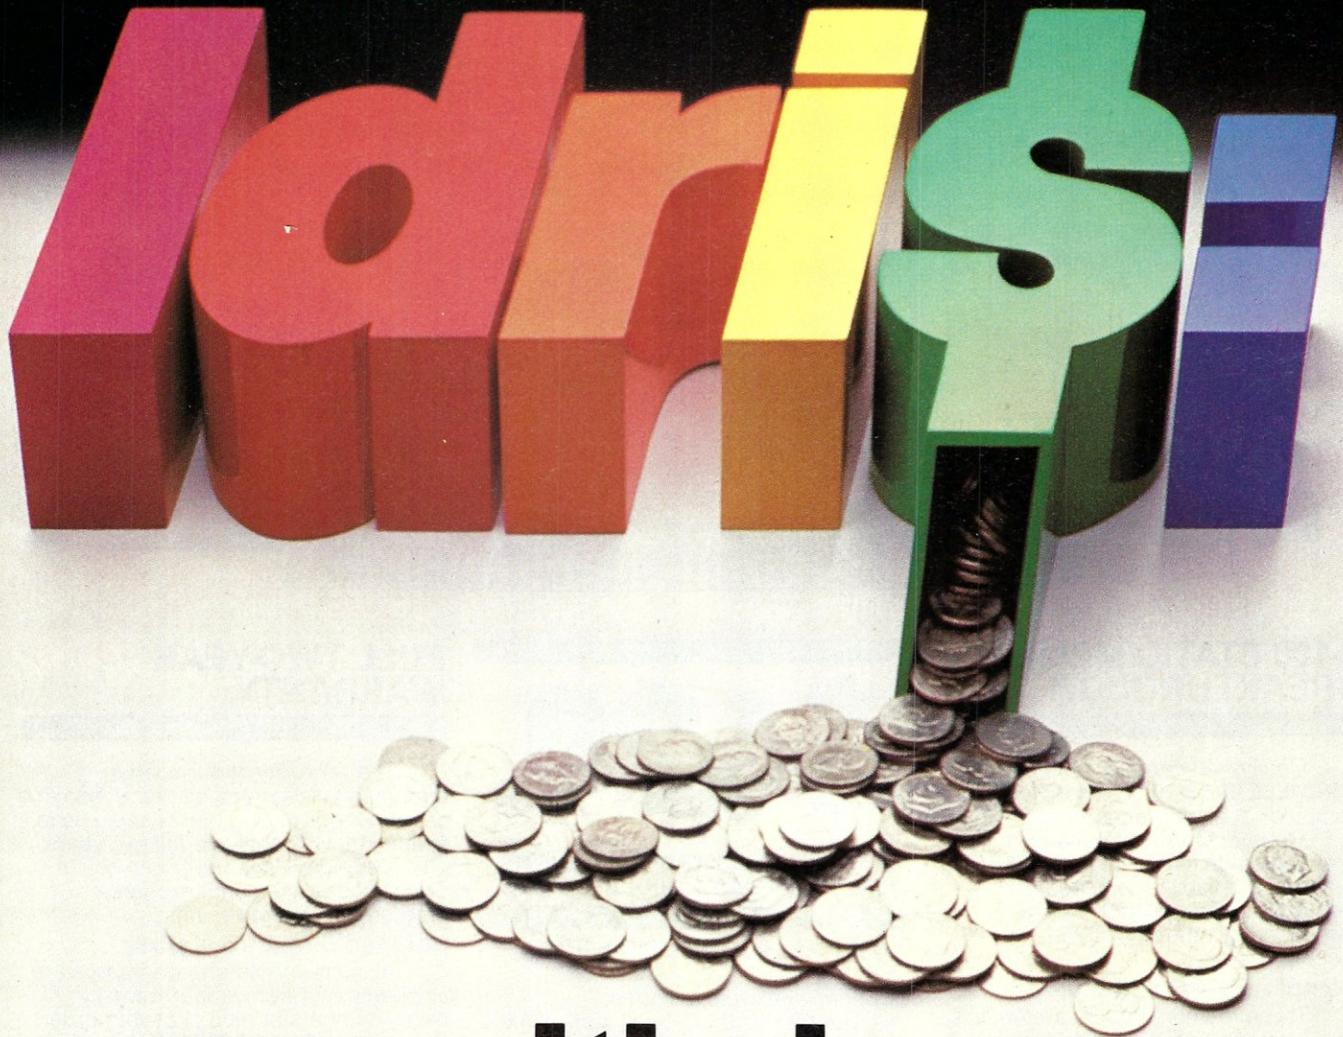

UNIX, with change.

Idris is a trademark of Whitesmiths, Ltd. / UNIX is a trademark of Bell Laboratories.

Put off by the UNIX price tag and licensing restrictions? If you are, take a closer look at Idris.

Idris gives you all the power of UNIX at a fraction of the cost—and they're highly compatible—even pin-for-pin in some cases. Upfront expenses are much lower and you only pay for the parts you ship.

What's more, we wrote Idris ourselves—from the ground up—so you'll have fewer licensing hassles. We wrote it almost entirely in C, for maximum portability across a wide

range of processors. And we kept it small.

Idris can run comfortably where UNIX can't even fit: On an MC68000 with no memory management hardware, for example. On a bank-switched 8080 or Z80. Or on any LSI-11 or PDP-11 with memory management. A very big Idris plus.

Find out how you can put Idris to work in your favorite configuration today. Write Whitesmiths, Ltd., 97 Lowell Road, Concord, Massachusetts, 01742. Or call (617) 369-8499, TLX 951708 SOFTWARE CNCM.

With Idris, you pocket the change.

Whitesmiths, Ltd.

Crafting Software Tools for your Trade.

Distributors: **Australia**, Fawnray Pty. Ltd. P.O.B. 224 Hurstville NSW 2220 (612) 570-6100
Japan, Advanced Data Controls, Corp., Chiyoda-ku, Tokyo (03) 263-0383
United Kingdom, Real Time Systems, Newcastle upon Tyne 0632 733131

CIRCLE 89 ON READER SERVICE CARD

extensions to the language. Both are interactive, which makes for easy debugging, but generate fast, compact machine language code in the manner of a compiler. FORTH11 is in fact Fig-Forth Version 1.1 and ran under the contributor's CP/M 1.43. He emphasizes that you should obtain the Fig model manual and the Fig Assembly Source Listing before attempting to use the program, in case any modifications are needed. STOIC is rather similar to Forth, but may produce more compact code in some applications (see Richard Mospis's article "Stoic versus Forth" in the Sep/Oct 1982 issue of *Microsystems*.)

PISTOL (Portably Implemented Stack Oriented Language, SIG/M Vol. 59) was inspired by and has evolved from Forth and Stoic. Like these, Pistol uses RPN. At present all arithmetic is performed in integer form. The author notes that this language is still "in an

early developmental stage," and it may therefore have bugs. The CP/M implementation was written in C and compiled with the BDS C compiler.

Other languages






ACTOR (CPMUG Vol. 4.) is a TRAC-like string-processing language that comes with a comprehensive manual and some sample programs.

PILOT (Programmed Inquiry and Learning) is an interactive language for use in computer-aided instruction, where easy pattern-matching of responses is required. The complete documentation and listing were published in *Dr. Dobb's Journal*, April and May 1977. The version in CPMUG Vol. 7 is for an Intel MDS but can be processed by ASM except for one statement that contains an 8-bit negative value (ASM insists that negative values have 16 bits). CPMUG Vol. 12 contains source code patched to interface properly with CP/M.

CASUAL (CPMUG Vol. 18) is a language originally described in *Dr. Dobb's Journal* for December 1976. This version has no CP/M I/O, but has standard Intel mnemonics (which the original did not).

SAM76 (CPMUG Vol. 34) is a macro and string processing language that is powerful and, to some degree, extensible. It has been very successfully used in controlling a mobile robot, but has many other possibilities if you can master its subtleties.

PIDGIN, TINCMP (SIG/M Vol. 43). Pidgin is a systems programming language described in the July 1981 issue of *Dr. Dobb's Journal*. TINCMP is a compiler for special purposes, written in Pidgin. The volume contains documentation on how to use Pidgin and how to put together a TINCMP compiler for your own special purpose; all macros and utilities needed are supplied on the disk. 

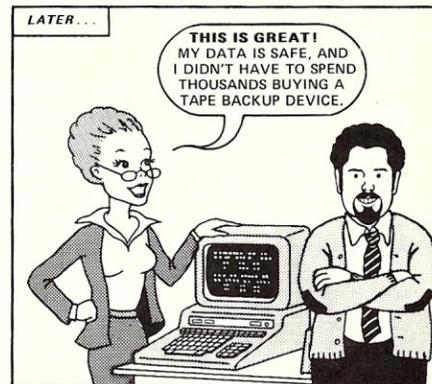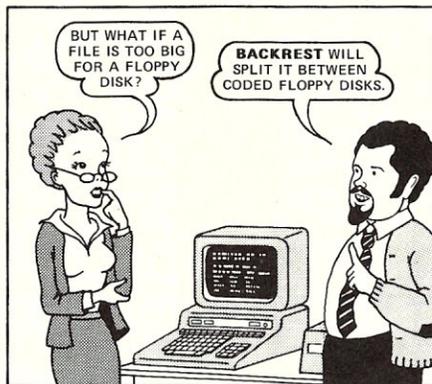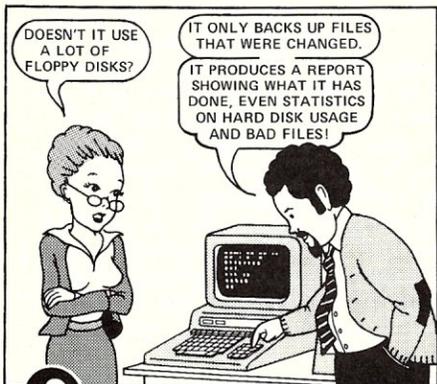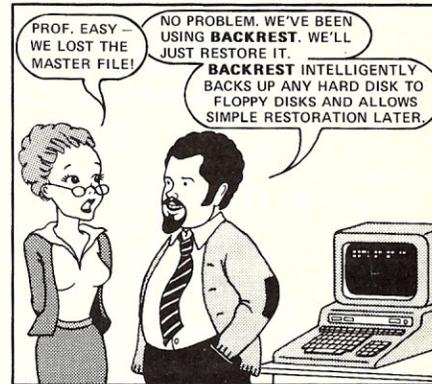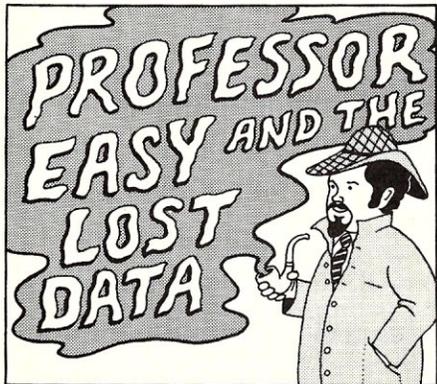

Si Stok Software Inc.
17 West 17th Street
New York, N.Y. 10011
(212) 243-1444

Complete 8 inch CP/M format disk and manual retails for \$99.95. N.Y. residents please add sales tax.

Toll free order line: (800) 431-1953 ext 185
In NY (800) 942-1935 ext 185



Dealer inquiries invited.
CP/M is TM of Digital Research

An IEEE-488 Bus Tutorial

by Richard S. Newrock

One of the most important uses of computers is to control industrial processes and laboratory experiments. To accomplish this it is often necessary to connect the computer to a variety of test and measurement equipment. This article describes the industry standard for interfacing computers to programmable instruments, a standard commonly known as the "488 bus" (IEEE-488/1978) or the "GPIB" (General Purpose Instrument Bus). The bus is known by other names as well, two of which are the "HPIB" (Hewlett-Packard Interface Bus) and the "ASCII bus."

The 488 bus is the first universal computer/instrument interface and is probably the most well designed and consistent of all computer interfaces. The bus has become a worldwide standard primarily because of its ease of use, its well-defined functions, and its well-thought-out handshaking protocol. It is used by more than 175 manufacturers of nearly 1,500 instruments. Most of these are measurement and test instruments, but printers and plotters are also available. A user can select instruments from different manufacturers and be certain that (electronically) they will work together perfectly. No custom interface design will be needed. In addition, all commands and data are coded in ASCII (hence the "ASCII bus"), making bus operation and control particularly simple. So simple, in fact, that bus control can be done with programmable calculators; a computer is not a necessity. With a good software package even a novice can quickly design and construct a very complicated instrumentation system.

State-of-the-art instrument and computer manufacturers always try to use the latest and fastest technology. This resulted in the creation of a wide variety of computer/instrument interfaces during the '60s and early '70s. Unfortunately, most of these were incompatible. Steve Leibson¹ has described the situation as similar to that which existed in railroading during the 1850s and '60s: each railroad used a different track gauge, and interfacing (passing a train of freight cars from one line to another) was impossible. A more modern illustration is the different buses currently used in microcomputers.

During the mid-'60s the Hewlett-Packard Corporation decided it needed a standard computer/calculator interface for all its future instruments. Their design was taken by the International Electrotechnical Commission (IEC) as a starting point for an industry-standard interface. By 1974 a draft of the standard was ready for approval. Shortly thereafter, the Institute of Electronics and Electrical Engineers (IEEE) presented a draft for their own standard, the IEEE-488/1975. These were soon adopted and were followed by the essen-

tially similar American National Standards Institute (ANSI) standard in 1976. The three "standards" are the IEE-488/1978², the IEC-625-1³, and the ANSI-MC1.1⁴. The IEEE standard was revised in 1978 for a variety of reasons. Most important, it was necessary to clarify some of the language and reflect new technology—in particular, Schottky logic. The result, IEEE-488/1978, is the standard of interest to us.

Before describing the "488" standard and its implementation, it is worth making a small digression. Exactly what is meant by a "standard"? What should it specify and what should it *not* specify? How much detail is to be given? A standard is a detailed specification of the important mechanical, electrical, and functional aspects of a device or a system. It must fix as many of the important parameters as possible without hindering the device's applicability or flexibility. If possible, it should not deal with the actual electronic design of the device; if it does, it will make the use of new technology more difficult. It ought to detail the function of the device without forcing the manufacturer into using a particular design or circuit.

The IEEE-488 interface standard addresses all of these concerns. It specifies only those electrical and mechanical parameters of the bus which are necessary to ensure compatibility: the cable, the connectors, the voltage levels, and the current drain. It does not intrude where it is not needed (for example, the circuit design and layout of the interface). It defines a number of bus commands and functions, but does not tell how, or indeed if, they are to be used.

The 488 standard defines the instrument bus, its functions, and the instrument interfaces. It defines the handshaking, the bus commands and the data transfer technique. A schematic of the bus is shown in Figure 1, where the bus, several instruments, and the controller are indicated. The bus is nothing more than a cable, with appropriate connectors daisy-chained to the various devices. Each device (including the controller) connected to the bus consists of two parts: an instrument-independent portion, the interface, defined by the standard, and an instrument-dependent portion, defined by the manufacturer. Only the instrument interface "talks" to the bus; commands and data coming over the bus may be interpreted by the instrument, but are sent and received by the interface. Perhaps the best way to describe these interfaces is that they allow the controller to operate the instrument in place of the instrument's front panel. That is, the interface allows the controller to program the instrument in exactly the same way that a person would from the front panel. Because of this the 488 bus is sometimes called the "interface bus."

An instrument system consists of devices that can play one or more of three different roles: controller, talker, or listener. All devices must act in at least one of these assigned roles; they provide

Richard S. Newrock, Dept. of Physics, Univ. of Cincinnati, Cincinnati, OH 45221

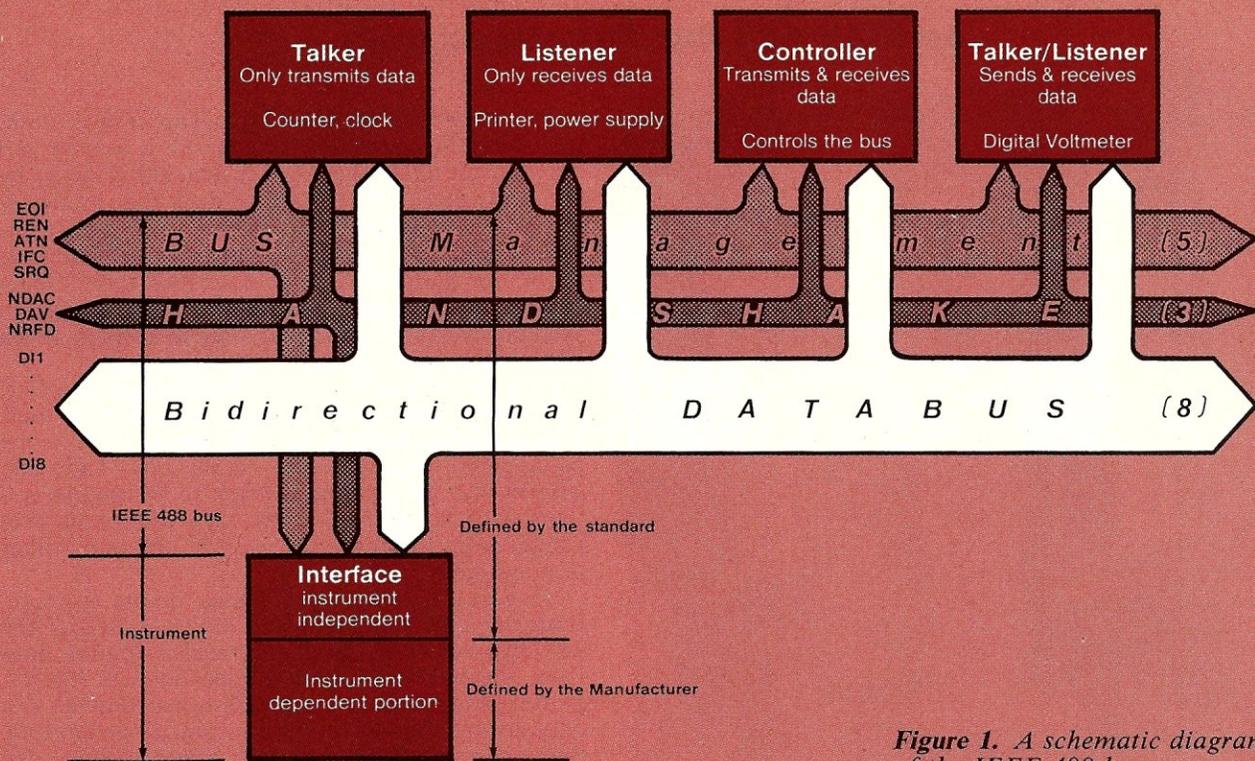


Figure 1. A schematic diagram of the IEEE-488 bus.

the basis for the flow of information over the bus. The controller is a device that can manage the bus, including sending bus commands, and instructing other devices when to transmit (become talkers) or receive (become listeners). This is clearly the role played by the computer. Every device on the bus (including the controller) must follow strict rules assigned to its role. These rules allow orderly operation and data transfer.

The data transfer rates of the various instruments are not overly important; in fact this is one of the unique features of the bus. The handshaking has been designed so that the data transfer rate depends on the speed of the transmitters and receivers and not on a fixed system clock. The ultimate transfer rate is determined by the slowest active instrument on the bus. Thus, a wide variety of instruments can operate together, even if they have very different transfer rates and operating speeds. The communication is completely asynchronous, and it can even be interrupted during the handshake without loss of data.

The standard

The electrical, mechanical, and functional aspects of the bus are described in detail in this section. We begin with the mechanical and electrical specifications, since these are simple and straightforward.

The bus consists of a 24-conductor cable connected to the instruments with ribbon connectors (IEEE-488/1978 and ANSI-MC1.1). Each end of the cable has both male and female connectors, allowing the cables to be stacked (Figure 2). That

is, several cables can be connected to a single point without using "Y's" or "T's". Unfortunately, the IEC-625.1 standard specifies a type-D connector, a DB-25. Use of this connector should be avoided, as it is the same connector used for RS-232 serial ports. RS-232 voltage levels differ substantially from 488 voltage levels, and a misconnection will severely damage the 488 interface. Adapters are available to convert to ribbon connectors; these should be placed on the instrument and left there. There is another problem about which one should be aware. Most instruments use connectors with metric threads (black screws). However, English threads are occasionally used (silver screws); be careful not to mix them up or the threads will be destroyed.

The instruments and the controller can be connected in any order; they are just "device loads" to the bus. As many as 15 devices, including the controller, can be used. They can be connected linearly (daisy-chained), in a "star" (radiating outward from a point), or in any combination of the two. The only limitation is that there be no more than 2 meters of cable per device, up to 20 meters maximum (unless a bus extender is used). This is because the interface electronics must maintain the proper voltage levels and timing and, if the cable is too long, the interface cannot drive the lines. The devices need not be evenly spaced on the cable, but should be no more than 4 meters apart.

The 488 bus uses negative true logic, opposite to that used on the S-100 bus. Zero, or false, is a voltage greater than 2.0V and 1, or true, is 0.8V or less. All lines on the bus are active low (true) and

The 488 bus has become a worldwide standard primarily because of its ease of use, its well-defined functions, and its well-thought-out handshaking protocol.

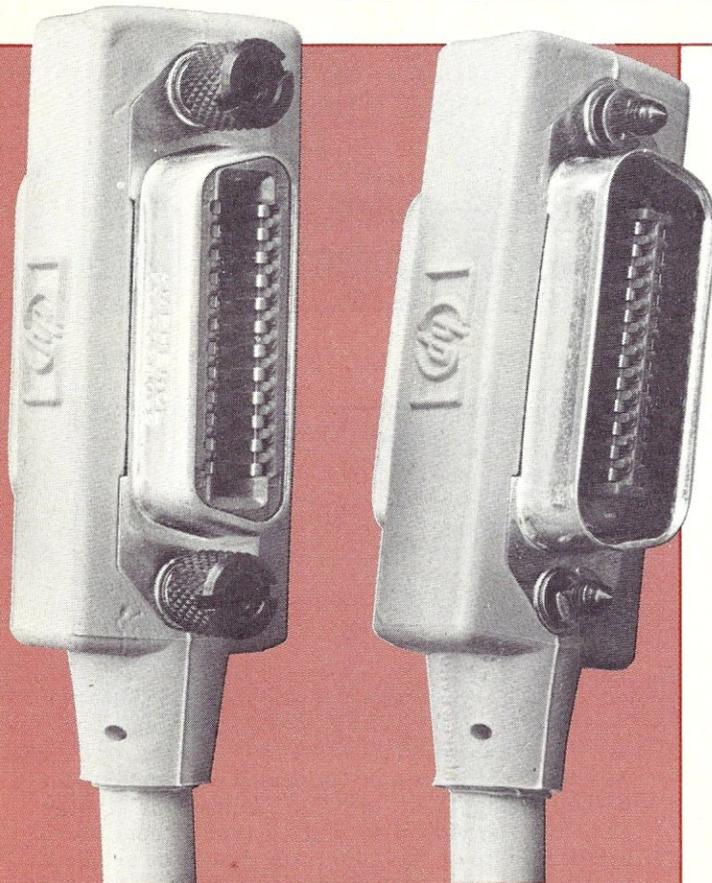


Figure 2. Typical 488 bus cabling and connectors. Note that the cables have male and female connectors on each end. This allows them to be "stacked." The cable has 24 conductors, in 12 twisted pairs, each pair being individually shielded. There is also a common shield around the whole cable. (Photo by J. Helton.)

are pulled passive high (false) at each instrument. Of the 24 bus lines, 8 are grounds, 8 are for data, 5 are for bus management, and 3 are for handshaking. (See Figure 3 for the pin assignments.) Three of the lines, SRQ, NRFD, and NDAC (all defined below) must have open collector drivers. For these three lines, if one or more of the instrument drivers are on, the line will go low. This is a "wired-or" configuration, and it is very important for the handshaking. The rest of the lines can have either tristate or open collector drivers. However, if the instrument supports parallel polls (a way to check if an instrument needs service), the data lines must be open collector as well.

The definitions of the various bus functions are among the most important parts of the standard. They define the roles of the instruments, what the interfaces can do, and the commands they may obey. We begin with the three roles defined for each instrument: listener, talker, and controller.

A *listener* is any device that can receive data, including the controller. In general, a listener can only accept data when it is instructed to do so by the controller. The controller does this by designating ("addressing") the device to be a listener. This is done by placing the instrument's "listen address" on the data bus, as described later. Some devices are listen-only and are meant to be used in systems with no controller. These always listen and cannot be prevented from doing so.

A *talker* is any device, including the controller, that, when addressed, can send data over the bus. The controller designates a device as a talker by placing its "talk address" on the bus. Talk-only devices also exist and are meant to be used in systems with no controller. As they cannot be prevented from talking, they must be the only talker in a system.

In general, talkers get analog inputs (voltage, frequency, etc.) and transmit digital data over the 488 bus, whereas listeners receive digital data from the bus and create analog outputs (pulses, plotter-pen position, etc.). Some instruments can only listen, e.g., printers and signal generators. Some can only talk, e.g., tape readers. Some can perform both roles; e.g., a digital voltmeter can receive programming instructions and send measurements. When a device can be both a listener and a talker, the controller determines which function is active by how it addresses the instrument.

The *controller* can not only transmit and receive data, but can issue commands; it is the only device allowed to manage the bus. The controller can designate listeners and talkers, program them, trigger them, send instrument-dependent messages and interface-dependent messages. It can conduct polls to determine instrument status and handle service request interrupts. In short, it and its programs run the system. There is a provision in the standard to have more than one controller and to pass control between them, but this is seldom done.

Functions, commands, and addressing

The standard defines a number of functions that the instrument interfaces can perform. In addition, it defines the commands that they may recognize. A command tells the instrument interface to perform one of the functions. It is important to note that every instrument does not have to perform every function or obey every command. The manufacturer determines which are necessary for the operation of his instrument.

There are 10 interface functions, each with a set of options. Of these, five may be considered basic: an instrument may be a *talker*, and if so, must be able to decode talker addresses and perform the talker (or source) handshake. The *source hand-*


Bus control is so simple it can be done with programmable calculators. With a good software package, even a novice can quickly design and construct a very complicated instrumentation system.

NO COMPROMISE ON P3*


I/O TECHNOLOGY S-100/IEEE-696 PLUG-INS

DUAL GPIB-488 INTERFACE BOARD

The **Dual GPIB-488**, is a Stand-Alone, independently controlled Dual Channel IEEE-488, 1978 Interface Controller. Interface Activity Modes such as Controller In-charge, Controller Assigned or Terminal Bus Slave and all Interface Functions, their Sub-Functions including Extended Functions, are handled by an On-Board 5MHz Processor and DMA Controller. 500K Byte Data rates are easily achieved with minimum host processor overhead.

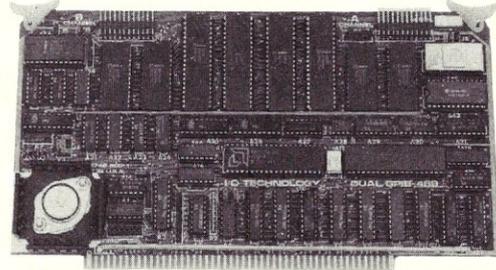

Assembled and tested, P/N 52748-800-100 \$650.00

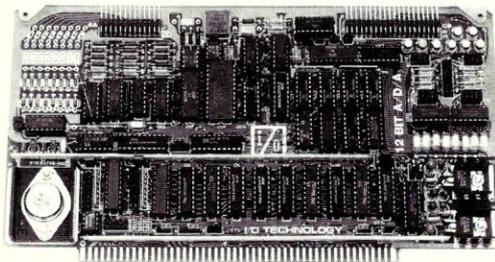

12-BIT A-D-A CONVERTER BOARD


8 Channel A-D: 12 microsec. Conv. time, Programmable gain & Offset Voltage control, Diff./Single Voltage or Current Input.

8 Channel D-A: 2 microsec. Settling time, Bipolar V / Unipolar I Output, Programmable Reference levels, DUAL-PORTED Refresh RAM. 16 or 8-bit Data Transfers via Program I/O or Memory Mapped I/O, Extended Addressing and much more.

Assembled and tested, P/N 52748-900-100 \$430.00

128K x 8 / 64K x 16 CMOS STATIC RAM MODULE

TOP BOARD SUPPORT
LOGIC AND
32K x 8 / 16 x 16 RAM

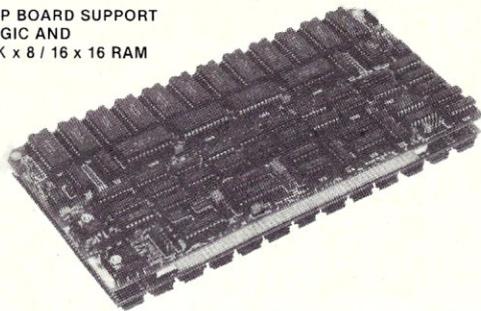


BOTTOM BOARD
96K x 8 / 48K x 16 RAM

150 nsec. Access, 2716 compatible RAM devices, Extended Addressing, Programmable wait cycles, Write protect and Bank select. Battery back-up capability. No wait cycles with fast 16-Bit Processors. The module's "Piggy-back" arrangement provides high density @ low input power yielding an improved MTBF and space utilization.

Assembled and tested, P/N 52748-650-128 \$825.00


MULTI-FUNCTION I/O BOARD

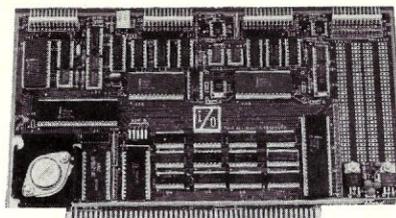

Assembled and tested,
P/N 52748-100-101 \$325.00

Two Serial SYNC/ASYNCRS-232, TTL or Current Loop with XTAL controlled Dual Baud Rate Generator, Four Parallel Ports (Input, Output or Bi.), Three 16-Bit timers, 8-level Interrupt Controller and large Proto area with +5V, ±12V for custom applications.

PROTOTYPING BOARD KIT

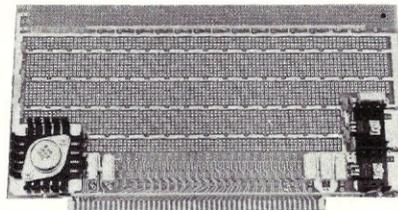

Can be used for wire-wrap or solder prototyping projects. Comes complete with +5, ±12V Regulators, Heat sinks, 2 Bus Bars, Filter Capacitors and Manual.

Kit P/N 52748-400 \$59.95

*PERFORMANCE, POWER, PRICE

New additions to our line of fine products are always on the drawing board. Please watch for the introduction of these new items as they become available.

POST OFFICE BOX 2119
CANYON COUNTRY, CA 91351
(805) 252-7666



CANYON COUNTRY
CALIFORNIA



Calif. residents add 6 1/2 % sales tax.
U.S. Domestic Price, F.O.B. Factory.
Prices and Specifications subject to change without notice.

CIRCLE 39 ON READER SERVICE CARD

An IEEE-488 Bus Tutorial continued . . .

shake is a function that allows the interface to transmit data properly. Similarly, *listeners* must decode listener addresses and perform the listener (or acceptor) handshake (the *acceptor handshake* function allows for proper reception of data), and *controllers* must be able to manage the bus. These five functions obviously determine whether an instrument can send and receive data and whether it can control the bus. These functions and the possible options are shown in Table 1. In addition to the basic functions, there are five others:

REMOTE/LOCAL. *This function determines whether an instrument responds to its front panel or to programming information on the bus.*

SERVICE REQUEST. *This function allows the instrument to request service from the controller at some point in its operation or when an error has occurred. It is used in conjunction with the "serial poll," which is described more fully later.*

PARALLEL POLL. *If this function is implemented, an instrument can identify itself to the controller when it needs service. It does this by setting or clearing a single data bit when polled. A seldom-used function, it is described in detail under polling.*

DEVICE CLEAR. *This function allows the controller to return a device to a manufacturer-determined default state, usually the state at power-up. This function is nearly always implemented.*

TRIGGER. *If this function is implemented, the device's function can be initiated by the controller. For example, a pulse generator can be triggered when a pulse is desired. This function is almost always implemented when the use of the*

instrument warrants it. It is often used to synchronize and trigger groups of instruments.

The controller designates listeners and talkers, and issues commands to perform bus functions over the five bus management and the eight data lines. The 488 bus has two main modes of operation: command mode and data mode. The mode is determined by the attention (ATN) line, one of the five bus management lines. When ATN is true, we are in the command mode: all instruments must listen to the controller, which sends "commands" over the data lines. When ATN is false, we are in the data mode: instruments previously addressed as listeners and talkers send and receive "messages" over the data lines. When in command mode, the instrument interfaces accept and interpret the commands. In the data mode, the interface accepts or transmits the messages, but the instrument itself interprets or provides the messages.

There are two types of commands, UNILINE and MULTILINE, referring to the number of bus lines needed to transmit the command. For example, ATN has a line dedicated to its use and is therefore a uniline command. Uniline commands use the bus management lines. Multiline commands use the first seven data lines, with ATN true (to indicate command mode).

Uniline commands

ATTENTION (ATN). *ATN tells an instrument if the information on the data lines is a command or a message. When true, the byte on the data bus is interpreted as either a talk or listen address or as a universal or addressed command. ATN forces all instruments to stop what they*


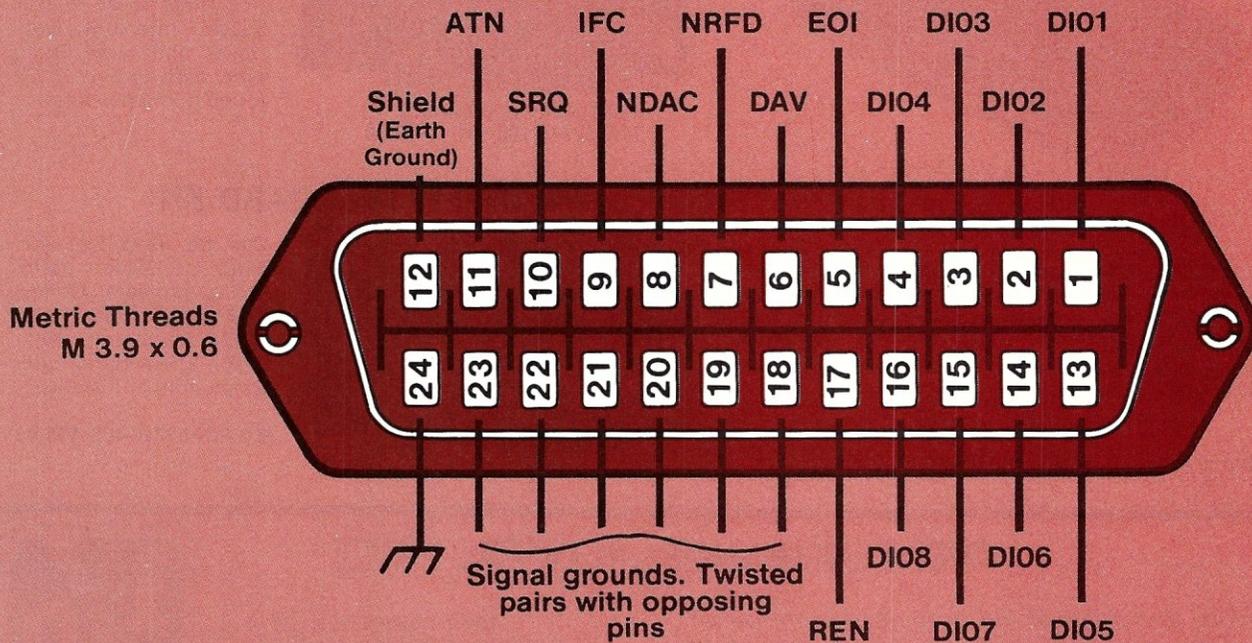


Figure 3. The pin-out of the ribbon connector used in the IEEE and the ANSI standards. This is usually an Amphenol 57-20240-2 or its equivalent.



COMPUTER SYSTEMS

"Quality Throughout"
800-238-3100

Q.T. Products Division
COMPATIBLE COMPUTER CORP.
3330 South Third St. West
Salt Lake City, UT 84115
☎ (801) 974-0999

Q.T. Systems Division
GOLDEN WEST COMPUTERS
60 North 300 West
Provo, UT 84601
☎ (801) 373-1467

NOTICE: CP/M is a trademark of Digital Research, Turbosoft of Software 2000 and INFOWARE of Compatible Computer Corporation. The Q.T. products and systems above are produced and sold under license by Compatible Computer Corporation and Golden West Computers, Inc. The Q.T. trademark and product designs remain the property of the licensor, Q.T. Computer Systems, Inc. of Hawthorne, Calif.

TERMS: Cash prepayment @ 2% discount, COD or net 30 days with prior credit approval. Initial dealer/OEM orders must be COD or prepaid (MC/Visa credit card OK). Purchase orders accepted from D&B rated firms. Shipping and handling charges estimated at \$0.50/lb UPS ground and \$1.00/lb UPS Blue Label or airfreight. Minimum \$3.00. Utah residents add sales tax. Export orders welcomed—telex 426382 ITR UI.

NEW IMPROVED 1983 MODELS


The entire Q.T. product line has been redesigned and improved using computer controlled manufacturing techniques to insure the highest quality. Many new features have been added to every item. The Q.T. 1983 models are among the best S-100 products available on the market today. They are fully compatible with the latest 16/32 bit cpu's.

Call (800) 238-3100 today for the location of your nearest dealer and/or to obtain the 1983 Q.T. catalog. Substantial dealer/OEM discount offered.

Stocking dealers with retail showrooms and mail order facilities include:

- Priority One, Chatsworth, CA** ☎ **800-423-5922**
- Bison Products, Los Angeles, CA** ☎ **213-994-2533**
- Compatible Computer, New York City** ☎ **212-221-7900**

Q.T. DISCOUNT MICRO-SYSTEMS PACKAGES

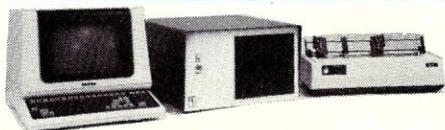

Q.T. MAXI-SYSTEM PACKAGE—Model 800P

\$6,395.00

List \$7,995.00—Save \$1,600.00

- QT 8" Mainframe with 8 slot Motherboard
- Choice of printer: C. Itoh F-10 daisy wheel or Oki data M84P high speed dot matrix (200 cps.)
- Televideo 925 Full Featured CRT

The Q.T. Maxi-System is an industry standard S-100 expandable microcomputer which is ideal for general business computing, word processing and data base management applications. CP/M operating system is standard. MP/M or Turbosoft optional. Unique Infoware™ utilities simplify operation and user training.

- Electronics on Two Cards
 - 4Mz Z80A CPU
 - Filtered Fan
 - 64K RAM Standard
 - Parallel Printer Port
 - Two A.C. Outlets
 - Universal Disk Controller
 - 10-40 MB Hard Disk Option
 - Key Lock Switch
 - 2 Megabytes on line
 - Expandable to 256K RAM
 - Two Serial Ports
- Package Price Includes Cables, Documentation & Utility Programs. Model 800 alone \$4,995

Q.T. MINI-SYSTEM PACKAGE—Model 500P


\$3,995.00

List \$4,995.00—Save \$1,000.00


- Q.T. 5 1/4" MINI-FRAME w/6 slot MB
- Televideo 910 Green CRT
- Dot Matrix printer (M82A)

- CP/M standard. Turbosoft optional.
 - Reliable Single Card Electronics
 - Z80 CPU/Universal DMA controller
 - Dual Double Sided/Density Drives
 - Memory: 64K RAM & 320K Disk Drive
 - Cables, manuals, Infoware™ Utilities
- Model 500 alone \$3,495.00


Q.T. INDUSTRY STANDARD S-100 MAINFRAMES



Q.T. MICRO-FRAME™



Q.T. MINI-FRAME™



Q.T. MAXI-FRAME™

Q.T. MICRO-FRAME™—Series 600

Desk Top—Plain Front Panel

- 6 to 22 slot Motherboard
- Full I/O Cutout Array
- Fused EMI/RFI Filter
- Heavy Duty Power Supply (+8V@16A ±16V@3A)

QTC-MF + 1	No MB	\$499
QTC-MF + 6	6 slot MB	\$599
QTC-MF + 8	8 slot MB	\$649
QTC-MF + 12	12 slot MB	\$699
QTC-MF + 18	18 slot MB	\$799
QTC-MF + 22	22 slot MB	\$899

Q.T. PRO-FRAME™—Series 700

Rack Mount—Constant Voltage

QTC-RM + 12	12 slot MB	\$799
QTC-RM + 18	18 slot MB	\$899
QTC-RM + 22	22 slot MB	\$999

Q.T. MINI-FRAME™—Series 500

Desk Top—Dual Mini Drives

- Holds two 5 1/4" Drives
- Full Cutout Array
- 6, 8, or 12 slot MB.
- Fused EMI/RFI Filter
- Hard Disk Power Supply (+8V@16A, ±16V@3A, ±12V@5A, +5V@5A)

QTC-MF + MD	(No MB)	..	\$699
QTC-MF + MD6	6 slot MB	..	\$799
QTC-MF + MD8	8 slot MB	..	\$849
QTC-MF + MD12	12 slot MB	..	\$899

Q.T. MAXI-FRAME™—Series 800

Desk Top for Dual 8" Drives

- 6, 8, 12 slot Motherboard
- Universal Drive mounts
- Key lock Power Switch
- Heavy Duty Power supply (+8V@16A, ±16V@3A, +5V@5A, -5V@1A, +24V@5A)

QTC-MF + DD1	No MB	\$799
QTC-MF + DD6	w/6 s. MB	..	\$899
QTC-MF + DD8	w/8 s. MB	..	\$949
QTC-MF + DD12	w/12 s. MB	..	\$999

Standard features & Options: All QT mainframes are built on a strong steel chassis with sturdy heavy gauge aluminum covers. Heavy duty power supplies have individually fused outputs and are shielded by an EMI/RFI filter & line surge protector. Standard I/O cutouts include provision for 16 DB 25's, 1DC 37, 2 DA 15's, centronics parallel, 134 pin and 250 pin IDC ribbon cable connectors. Filtered positive pressure cooling fan. Twin AC outlets provide convenient connection for and control over printer and terminal. Standard colors are charcoal/light grey to match Televideo terminals. Optional colors include brown/tan and federal spec. ivory at extra charge. Constant voltage power available on most models—add \$100.00. EIA rack mount rails available on some units—add \$95.00. Complete OEM customization available on orders of 10 or more units. Contact factory for details and pricing.

Q.T. DISK DRIVE CABINETS AND SUBSYSTEMS



Front—Tandon Panel



Front—no panel



Rear view

Q.T.'s All in One™

Universal Disk Drive Cabinet

- Expandable
- Accepts all 8" drives


QT's unique new disk drive cabinet has been designed to accept virtually any 8" drive on the market today from Tandon Thinlines to 40 megabyte Quantums. Features include interchangeable face plates (Qume, Shugart, Tandon, etc.) and "electronics in a drawer" construction to simplify installation and maintenance. Heavy duty power supply will carry any combination of up to four Thinline, two standard, or one hard disk drive with floppy backup. +5V@5A, -5V@1A, +24V@5A.

QTC-DDC8 8V-XX w/one faceplate	\$399.00
Replacement Faceplates (Specify type & number of drives)	\$25.00
Tandon 4-drive power cable	\$15.00
Data Cables available	\$20-50.00



SINGLE 8" VERTICAL CABINET

Size: 11"H 11"W 18"D
Perfect add-on disk drive for any system. Accepts most brands.
QTC-DDC8V \$299



DUAL 8" HORIZONTAL DRIVE CABINET

Dimensions: 5"H 17"W 20"D
Designed to provide basic disk storage capacity for S-100 and other computers. Low profile permits table top stacking.
QTC-DDC + 88H \$349

Q.T. "ALL IN ONE" EXPANDABLE DISK DRIVE SUBSYSTEM SPECIALS

QTC-DDS + 0 with two single sided Siemens Drive (0.5MB)	\$695
QTC-DDS + 1 with one double sided Mitsubishi Drive (1MB)	\$895
QTC-DDS + 2 with two DSDD Mitsubishi Drives (2MB)	\$1,495

CIRCLE 40 ON READER SERVICE CARD

SoftwareBanc

661 MASSACHUSETTS AVENUE, ARLINGTON, MA 02174

THE dBASE II SPECIALISTS

dBASE II™

WE WROTE THE ONLY BOOK

dBASE II™ USER'S GUIDE \$29
FREE WITH dBASE II™!

WE OFFER THE LATEST ACCESSORY PRODUCTS

dUTIL	\$ 69	dBASE II™ UTILITY PACKAGE
QUICKCODE	\$229	dBASE II™ PROGRAM GENERATOR
NEW! ABSTAT	\$379	STATISTICS PACKAGE FOR dBASE II™ FILES

WE STOCK THE WIDEST SELECTION OF dBASE II™

dBASE II™ WITH *FREE* dBASE II™ USERS GUIDE
CALL FOR PRICE

8" SINGLE DENSITY, TRS-80 MODEL II
5¼" APPLE II/III, HP-125, NORTHSTAR, SUPERBRAIN, TELEVIDEO,
VECTOR GRAPHIC, XEROX, ZENITH Z-89
IBM PC DOS 1.1

WE TEACH ALL THE CLASSES

SPONSORED BY SOFTWAREBANC SEMINARS, INC.

DAY 1	INTRODUCTION TO dBASE II™	9AM - 5PM	\$100
DAY 2	ADVANCED dBASE II™ TECHNIQUES	9AM - 5PM	\$100

Atlanta	Boston	Chicago	
April 24, 25	Mar. 4, 5, 7	Mar. 18, 19, 20	
Houston	Los Angeles	Miami	New York
Feb. 4, 5, 6	Jan. 7, 8, 9	Dec. 28, 29	Feb. 25, 26, 28
San Francisco	Washington D.C.		
April 8, 9, 11	Jan. 21, 22, 23		

ORDER **1-800-451-2502**
(617) 641-1241 IN MASS.

TECHNICAL SUPPORT (617) 641-1235

Payment may be made by Mastercard, Visa, check, money order, wire transfers. Mass. residents please add 5% sales tax. Add \$5.00 for shipping and handling.
Overseas orders add additional \$10.00. Prices subject to change without notice. All items subject to availability. ~ - Mfg. Trademark

CIRCLE 82 ON READER SERVICE CARD

An IEEE-488 Bus Tutorial continued . . .

are doing and listen to the controller; it can be asserted only by the controller.

INTERFACE CLEAR (IFC). This line clears the bus and sets all instruments to idle. It is normally asserted at power-up and may be asserted only by the controller. IFC halts all data

transmission, unaddresses all instruments, and stops all polls.

REMOTE ENABLE (REN). Most instruments can be programmed either by the front panel or by information on the bus. When this line is asserted the instrument responds to the bus and

Table 1. The interface functions, their options, and the capability identification codes.

Functions	Capability ID and options									
Controller										
C										
Talker										
T										
Extended talker										
	T0	T1	T2	T3	T4	T5	T6	T7	T8	TE
Basic talker		x	x	x	x	x	x	x	x	x
Serial poll		x	x			x	x			
Talk-only mode ¹		x		x		x		x		
Unaddress if addressed to listen ²						x	x	x	x	
No capability	x									
Listener										
L										
Extended listener										
	L0	L1	L2	L3	L4					
Basic listener		x	x	x	x					
Listen-only mode ³		x		x						
Unaddress if addressed to talk ²				x	x					
No capability	x									
Source handshake										
SH										
No capability	SH0									
Full capability	SH1									
Acceptor handshake										
AH										
No capability	AH0									
Full capability	AH1									
Service request										
SR										
No capability	SR0									
Full capability	SR1									
Remote/local										
RL										
No capability	RL0									
Full capability	RL1									
No local lockout	RL2									
Parallel poll										
PP										
No capability	PP0									
Remote configuration	PP1									
Local configuration	PP2									
Device clear										
DC										
No capability	DC0									
Full capability	DC1									
No selected device clear	DC2									
Driver electronics										
E										
Open collector	E1									
Tristate	E2									

1. Allows an instrument to transmit data without a controller on the bus.
 2. Prevents an instrument from talking and listening at the same time.
 3. Allows an instrument to receive data without a controller on the bus.

An IEEE-488 Bus Tutorial continued . . .

not to the front panel (see also LLO and GTL).

SERVICE REQUEST (SRQ). This line can be asserted only by an instrument. It is used to signal the controller that the instrument needs service. The controller performs a "serial poll" to determine which device has requested service and branches to a service routine. SRQ is not released by the instrument until it is polled.


END OR IDENTIFY (EOI). This uniline command is used in conjunction with ATN. If ATN is false, EOI is set by the talker and indicates that the last byte of a message string is being sent. The controller sets EOI and ATN to perform a parallel poll.

Multiline commands

There are four types of multiline commands: UNIVERSAL, ADDRESSED, UNADDRESS, and ADDRESS commands. A universal command is obeyed by all instruments regardless of whether or not they have been told to listen. An addressed command is obeyed only by those devices which have been designated as listeners. The unaddress commands remove the talker and all listeners from the bus, and the address commands designate the talker and the listeners. An instrument's interface recognizes the type of command transmitted by the state of data bits 5, 6, and 7. A universal command always has lines 6 and 7 false with 5 true (001XXXX). An addressed command always has

Table 2. ASCII codes and 488 code identification

				b4	0	0	0	0	1	1	1	1							
				b6	0	0	1	1	0	0	1	1							
				b5	0	1	0	1	0	1	0	1							
b4	b3	b2	b1	ASCII	COMMAND	ASCII	COMMAND	ASCII	Primary Address	ASCII	Secondary Address	ASCII	Secondary Address						
0	0	0	0	NULL		DLE 1P		SP	0	0	16	@	0	P	16	1	0	p	16
0	0	0	1	SOH 1A	GTL	DC1 1Q	LLO	!	1	1	17	A	1	Q	17	a	1	q	17
0	0	1	0	STX 1B		DC2 1R		"	2	2	18	B	2	R	18	b	2	r	18
0	0	1	1	ETX 1C		DC3 1S		#	3	3	19	C	3	S	19	c	3	s	19
0	1	0	0	EOT 1D	SDC	DC4 1T	DCL	\$	4	4	20	D	4	T	20	d	4	t	20
0	1	0	1	ENQ 1E	PPC	NAK 1U	PPU	%	5	5	21	E	5	U	21	e	5	u	21
0	1	1	0	ACK 1F		SYN 1V		&	6	6	22	F	6	V	22	f	6	v	22
0	1	1	1	BEL 1G		ETB 1W		'	7	7	23	G	7	W	23	g	7	w	23
1	0	0	0	BS 1H	GET	CAN 1X	SPE	(8	8	24	H	8	X	24	h	8	x	24
1	0	0	1	HT 1I	TCT	EM 1Y	SPD)	9	9	25	I	9	Y	25	i	9	y	25
1	0	1	0	LF 1J		SUB 1Z		*	10	:	26	J	10	Z	26	j	10	z	26
1	0	1	1	VT 1K		ESC		+	11	;	27	K	11	[27	k	11	{	27
1	1	0	0	FF 1L		FS		,	12	<	28	L	12	/	28	l	12		28
1	1	0	1	CR 1M		GS		-	13	=	29	M	13	\	29	m	13	}	29
1	1	1	0	SO 1N		RS		.	14	>	30	N	14	^	30	n	14	~	30
1	1	1	1	SI 1O		US		/	15	?	UNL	O	15	_	UNT	o	15	DEL	

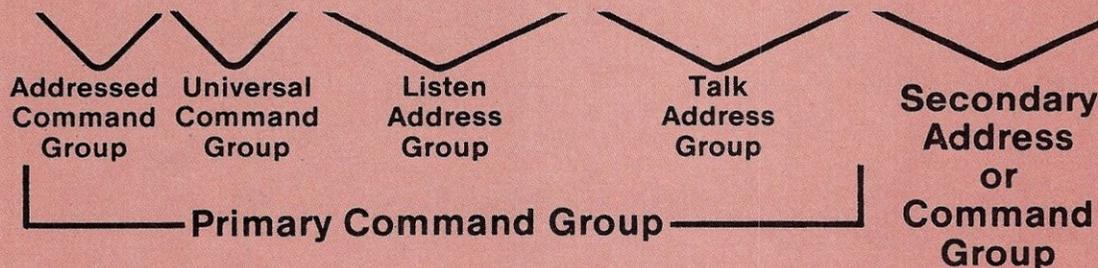


LLO = Local Lockout
 DCL = Device Clear
 PPU = Parallel Poll Unconfigure
 SPE = Serial Poll Enable
 SPD = Serial Poll Disable

GTL = Go to Local
 SDC = Selected Device Clear
 PPC = Parallel Poll Configure (requires secondary command)
 GET = Group Execute Trigger
 TCT = Take Control

THE ULTIMATE IEEE/S-100 MEMORY WOULD...

- **BE NONVOLATILE**, holding data for up to eight years with the power off.
- **RUN AT 6MHZ** without wait states.
- **HAVE EXTENDED 24-BIT ADDRESSING** and bank select.
- **HAVE DYNAMICALLY MOVABLE WRITE PROTECT AREAS** to prevent accidental erasure of programs and critical data.
- **GENERATE POWER-FAIL** interrupts for orderly system shutdown & power failure recovery.

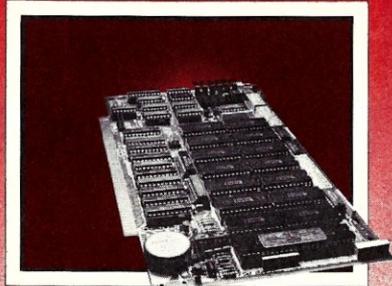

CMEM

AVAILABLE NOW FROM DUAL SYSTEMS, the CMEM memory boards combine high-speed CMOS memories with a new 5-8 year lithium battery. The CMEM offers the nonvolatility of an EPROM board while retaining the instant writability of a high-speed read/write RAM. These industrial grade boards are subjected to a 168-hour burn-in and a 1000-cycle power interruption test to insure data retention and the highest degree of reliability possible.

CMEM-32K, 32K Bytes \$695
 CMEM-16K, 16K Bytes \$595
 CMEM- 8K, 8K Bytes \$495

PRICES SLASHED!


DUAL

DUAL SYSTEMS CORPORATION

2530 San Pablo Avenue • Berkeley
 CA 94702 • (415) 549-3854 • 172029 SPX

board the bus

INDUSTRIAL QUALITY BOARDS FOR THE IEEE-696/S-100 BUS

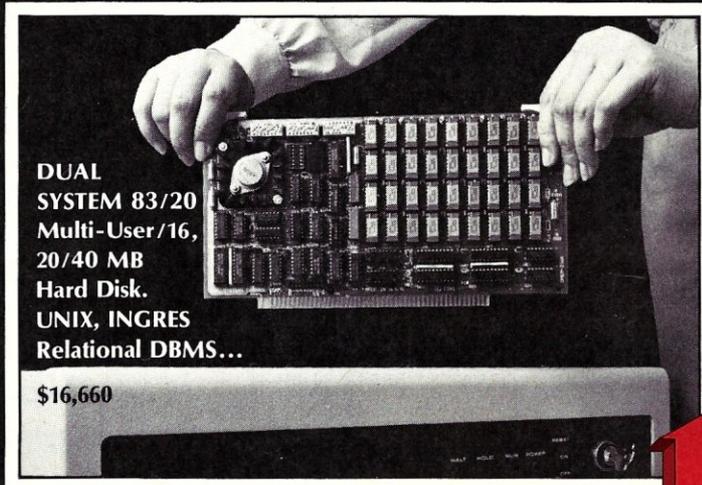

DUAL

Sales representatives in most metropolitan areas.

OEM and Dealer pricing is available.

2530 San Pablo Avenue • Berkeley • CA 94702 • (415) 549-3854 • 172029 SPX

CIRCLE 151 ON READER SERVICE CARD



WE WILL BEAT OR MEET ALL PRICES ON ALL PRODUCTS IN THIS MAGAZINE TO PLACE ORDER CALL (213) 219-0808 NOW!

48K APPLE COMPATIBLE COMPUTER

1 yr. Warranty
Introductory Price \$595
Call for Availability

ALL COMPUTERS

Apple II E	\$	Call
Commodore 64		469
Kaypro		1649
Osborne		Call
Sanyo MBC 1000		1599
Apple Compatible Computer		595
S-100 System	Call for lowest price	
IBM PC	Call	

IBM PC PRODUCTS

Ast Research

Combo Plus 64K w/clock, Par. Port, Serial Port, Software	\$359
Mega Plus 64K Expandable to 512	430

Tandon

TM100-2 Dbl Side Dbl Density	\$ 235
------------------------------	--------

5 1/4" & 8" DISK DRIVES

Shugart

SA400, 40 Track	\$ 145
SA801R, Sgl Side/Dbl Den	369
SA851R, Dbl Side/Dbl Den	479

Tandon

TM 100-1, Sgl Side/Dbl Den	\$ 179
TM 100-2, Dbl Side/Dbl Den	235
TM 848-1, Sgl Side/Dbl Den	369
TM 848-2, Dbl Side/Dbl Den	449

Qume

DT-8 Dbl Side/Dbl Den	\$ 465
-----------------------	--------

Siemens 8"

FDD 100-8, Sgl Side/Dbl Den	\$ 209
-----------------------------	--------

Mitsubishi

8" Dbl Side/Dbl Den	\$ 409
---------------------	--------

FOR FRANKLIN & APPLE

All Apple Products Not Seen in This Ad Are Available-Call For Guaranteed Lowest Price

Grappler + Par. Interface Card & Cable	\$118
TG Joystick	39
16K Memory Card	44
80 Column Card (View Max 80)	169
RH Fan	69
RF Modulator	25

UNBEATABLE PRINTER PRICING

Star Micronics

Gemini 10 (100 cps)	\$ 355
Gemini 15 (15" carriage)	465

C. Ioth

Prowriter 8510AP (120 cps)	\$ 365
Prowriter 8510ACD (Serial)	549
Starwriter F-10 40pu	1249

Okidata

Microline 82A	\$ 375
Microline 83A	649
Microline 84P	940
Microline 84S	1050
Microline 92	509

Nec

Nec 8023 (price reduction)	\$ 449
Spinwriters	Call

Toshiba

P1350	\$1699
-------	--------

SPECIALS OF THE MONTH

5 1/4" Disk Drive

SA400L Shugart

90 Day Warranty

ONLY \$145.00

MODEM

Smart Modem 300

Hayes Top of the Line

ONLY \$195.00

DRIVE FOR APPLE OR FRANKLIN

Micro Sci A-2

Fully Compatible

\$249.00

PRINTER

Gemini 10

Same as Epson MX80FT

\$355.00

MONITOR

Sanyo 2112 Green Screen

• 15MHZ • Composite

ONLY \$79.00

USI Amber 12"

• 1000 Lines

• Horizontal Resolution

\$149.00

All Products Carry at least a 90 Day Warranty

MODEMS

Hayes

Smart Modem 300	\$ 199
Smart Modem 1200	498

Novation

D-Cat	Call
Apple Cat	Call

TERMINALS

Televideo

925C Green Screen	\$ 699
950 Detachable Keyboard	899

Adds

Viewpoint 1A, 2A, 3A	Call
----------------------	------

DISKETTES

All packages of diskettes come with free library case and reinforced hub. Full 1 year warranty. Prices are for Packs of 10.

5 1/4" Disks

Sgl Side/Sgl Density	\$18.50/10
Sgl Side/Dbl Density	20.50/10
Dbl Side/Dbl Density	26.50/10

8" Disks

Sgl Side/Sgl Density	\$25.00/10
Sgl Side/Dbl Den	29.00/10

CABINETS & MAINFRAMES

OT Computer Systems

DDC-8 Cabinet w/pwr. supply & fan
ONLY \$209.00

DDC-88-H Dual Cabinet w/pwr. supply & fan
ONLY \$259.00

Mainframe

6 slot w/2, 8" cutouts, pwr. supply, fan, filter, Connector Cutouts
ONLY \$549.00

5 1/4" Cabinets

Single Cabinet w/pwr. supply	\$ 59
Dual Cabinet w/pwr. supply	89

DISK DRIVES FOR FRANKLIN & APPLE

Rana Systems

Rana Elite I	\$ 285
Rana Elite II	439
Rana Elite III	569
Controller	89

Micro Sci

A-2 (35 Track) Controller	\$ 249
Controller	75
Apple III Drives Available	Call

Quentin Research

Apple Mate Controller	\$ 249
Controller	60

MONITORS

Sanyo

12" Green Screen, 2112 Composite	\$ 79
----------------------------------	-------

BMC

12A (15MHZ) Composite	84
12EUN (20MHZ) Composite	129
9191 Color Composite	309

Taxan

12" Green (18MHZ) Composite	\$ 129
12" Amber (18MHZ) Composite	129
RGB 1 Color	319

Zenith

ZVM 121 12" Green (15MHZ)	\$ 94
---------------------------	-------

USI

9" Green (20MHZ)	\$ 139
12" Green (20MHZ)	139
12" Amber (20MHZ)	149

CABLES

IBM to Printer	\$ 32
Osborne to Printer	32
Kaypro to Printer	32

Call for all cable configurations

DISKETTE STORAGE

Mini Files—Holds 70 Disks	\$16.50
Maxi Files—Holds 70 Disks	24.00
5 1/4" Library Cases	3.00
8" Library Cases	4.00

CIRCLE 133 ON READER SERVICE CARD
No Surcharge for Credit Cards



All merchandise new. We accept MC, Visa, Wire Transfer, COD Call, Certified Check, P.O.'s from qualified firms, APO accepted. Shipping: Minimum \$3.50 first 5 pounds. Tax: California Res. Only add 6 1/2% sales tax.

Mon.-Fri. 8 a.m. to 7 p.m.
Sat. & Sun. 11 a.m. to 4 p.m.

Computer Components Unlimited

NEW RETAIL STORE:
11976 Aviation Blvd.
Inglewood, CA 90304

MAIL ORDER:
P.O. Box 1936
Hawthorne, CA 90250

ORDER DESK:
(213) 219-0808

5, 6, and 7 false (000XXXX). Each command is represented by an ASCII character, as displayed in Table 2. The first 16 ASCII control codes form the addressed command group, and the last 16 control codes form the universal command group. There are currently five defined universal commands and five defined addressed commands.

Universal commands

DEVICE CLEAR (DCL). This command causes all programmable instruments to return to a default state determined by the manufacturer.

LOCAL LOCKOUT (LLO). This command disables the front panel local/remote button, providing security from tampering and protecting instruments from accidental return to local control. Local operation can be restored by setting REN false or by using GTL. LLO is unaffected by an interface clear (IFC).

SERIAL POLL ENABLE (SPE). This command places all talkers in the serial poll mode. When addressed in this mode, an instrument puts its status byte onto the data bus. The status byte, defined by the manufacturer (see polling), provides information about the instrument.

SERIAL POLL DISABLE (SPD). This command terminates a serial poll and returns all devices to their normal state. When addressed to talk, data rather than instrument status is placed on the data bus.

PARALLEL POLL UNCONFIGURE (PPU). This command resets all instruments to the "parallel-poll-idle" state.

Addressed commands

GO TO LOCAL (GTL). GTL returns all addressed listeners to local (front panel) control, causing them to exit the remote state. When addressed again they return to remote. GTL is useful for making operator adjustments on particular instruments without dropping all devices out of remote.

GROUP EXECUTE TRIGGER (GET). This command will trigger all devices addressed to listen, allowing them to initiate their functions. This permits synchronization and simultaneous triggering of all devices.

SELECTED DEVICE CLEAR (SDC). This command resets the addressed instrument to its default state.

TAKE CONTROL (TCT). TCT tells another controller to take over bus management.

PARALLEL POLL CONFIGURE (PPC). This command causes the addressed listener to configure its status bit according to a secondary command, which must follow (see Polling).

Address and unaddress commands

The process of designating an instrument as a talker or a listener is called "addressing." Every talker

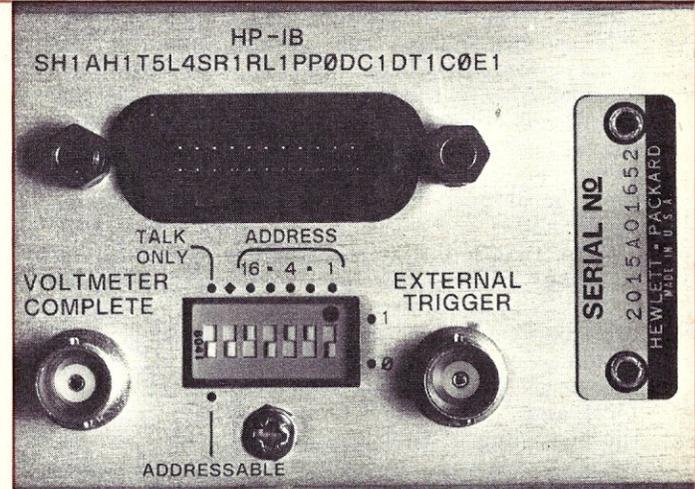


Figure 4. The back panel of a typical 488-compatible instrument, the Hewlett-Packard 3465A digital voltmeter. We see the 488 connector and the address DIP switch below it. Above the connector is the "capability ID" (see text). (Photo by J. Helton.)

or listener has an ASCII identification code called its address. Sometimes (most often with programmable calculators), the controller will have a talk and listen address as well. Most devices have only one address, the primary address, but some have secondary addresses or two primary addresses. When secondary addresses are present, we say the instrument is an extended talker or extended listener. In this case, the primary address designates the instrument (a digital voltmeter for example), while the secondary addresses might designate instrument functions (ohms, amps, etc.), or particular circuit cards or modules.

The controller tells an instrument to listen or talk by putting its address code on the data lines while asserting ATN. Secondary addresses must be placed on the bus immediately following the primary address. Listen addresses have bit 6 true and 7 false (01XXXXX), while talker addresses have bit 6 false and 7 true (10XXXXX). Secondary addresses have both 6 and 7 true (11XXXXX). All 7 bits form the ASCII character that represents the address (Table 2) and the address can be referred to by that character or by the decimal number formed by the lower five bits.

Most instruments have a five-pole dipswitch on the back panel (Figure 4) that is used to set its address (the switch is occasionally found inside, on the interface card). The user sets this switch to a number between 0 and 30. This sets the listen and talk addresses of the device; the instrument interface is responsible for setting the sixth and seventh bits to differentiate between listener and talker.

A standard is a detailed specification of the most important mechanical, electrical, and functional aspects. It should detail the function of a device without forcing the manufacturer into using a particular design or circuit.

An IEEE-488 Bus Tutorial continued . . .

Secondary addresses are set in a similar manner. Not all instruments have switch-selectable addresses; some have fixed addresses that cannot be altered. Also, if there are two primary addresses, the first is determined by the user; the second is the next in sequence. (In that case, a four-pole dip-switch is used.) Finally, all primary addresses must be unique, but secondary addresses can be duplicated.

Note that 31 is not an allowed primary address. It is reserved for the two unaddress commands, untalk (UNT) and unlisten (UNL). (The two unaddress commands are, in a sense, addresses.) UNT unaddresses the current talker and UNL unaddresses all listeners. The ASCII codes are “?” for UNL and “_” for UNT. Unlisten is usually sent at the beginning of each command string when listeners and talkers are designated. Untalk is rarely necessary, as addressing a talker automatically unaddresses the previous one, and using it slows down handshaking. It is useful when it is desirable to remove all talkers from the bus. For example, untalk might be used to suspend data output from a device.

Handshaking

We now come to one of the more important aspects of the 488 bus and one that makes it unique—the three-wire handshake. We need to understand it to know how the sources and acceptors communicate, and how instruments with very different transfer rates can share the bus without loss or duplication of data.

Two of the three handshake lines must have open collector drivers. As mentioned, they can be thought of as being “wired-or”: more than one device can assert these lines, and an asserted line is not released until all instruments release it. As we’ll see, this allows for asynchronous data transfer at a rate that automatically adjusts to the speed of the slowest addressed listener or, for universal commands, to the speed of the slowest in-

strument. Because of this, the transfer rate is extremely device-dependent.

The first of the handshake lines is called DATA VALID (DAV). This line is controlled by the source: the active talker or the controller as talker. It indicates to the listeners when the data on the signal lines are valid.

The second of the handshake lines is NOT READY FOR DATA (NRFD). This line is controlled by the acceptors: the active listeners or the controller as listener. A device releases this line when it is ready to accept data. Since this is an open collector line, all instruments must release the line before it will go false. False means that every acceptor is ready for the next character. The source tests the line and, if it is asserted, no change of data takes place.

The final handshake line is NOT DATA ACCEPTED (NDAC). This line is also controlled by the acceptors. It is released by an instrument when it has accepted the data byte. Again, it is open collector and will not become false until all instruments release it. When false, it means that every acceptor has accepted the current character.

These three lines ensure that no data is lost, that each device gets every byte no matter how slowly it transfers data, and that no device receives a byte more than once. To understand this, and to see how these lines are used in the handshake, we will describe a handshake cycle using the timing diagram in Figure 5 and the flowchart in Figure 6. In the following discussion, the numbers in parentheses these match those in the timing diagram.

We assume at the start that the acceptors have set NRFD and NDAC low (true) and that the source has set DAV high (false). As soon as the slowest acceptor is ready for new data, it releases NRFD; since the faster acceptors have already released it, this line goes high (false) (1). The source sees NRFD high and knows that all the instruments are ready. It puts the new byte on the data lines and sets DAV low (2), telling everyone that

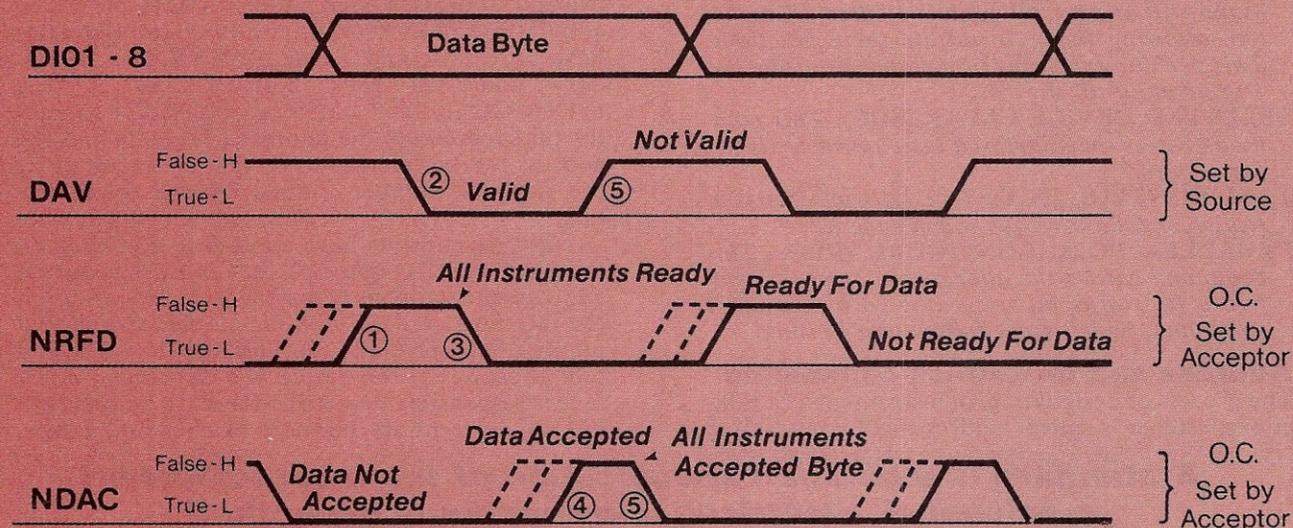



Figure 5. 488 bus handshake timing diagram.

Super Subsystems For Super Micros

Fixed Disk Subsystems

47 MEGABYTE 8" subsystem includes PCE's FDC 4000 hard disk controller, the Fujitsu M2303BE 47 MB, 1.2 MBYTE/SEC, 8" Winchester type fixed disk drive, and an 8" single density diskette (P/M) containing Z-80 source code for the FDC 4000 drivers, format and diagnostic programs. PF47 SUBSYSTEM \$3,995.00


20 MEGABYTE 5.25" subsystem same as above, but includes the Fujitsu M2234B 20 MBYTE 5.25" Winchester type fixed disk drive instead of the M2303BE. PF20 SUBSYSTEM \$2,275.00

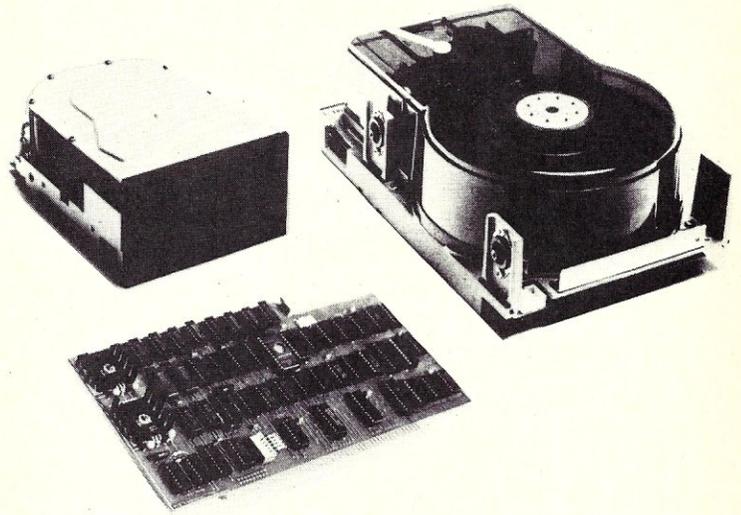

Winchester Fixed Disk Controller

**Completely I/O Mapped—No Wait States—
No CPU Cycle Stealing**

The FDC 4000, an IEEE 696 (S-100) compatible fixed disk controller provides an interface between the host system and any disk drive having a Shugart SA4000 type interface. Manufacturers producing this type drive include Shugart, Fujitsu, 3M, and others. FDC 4000 \$895.00

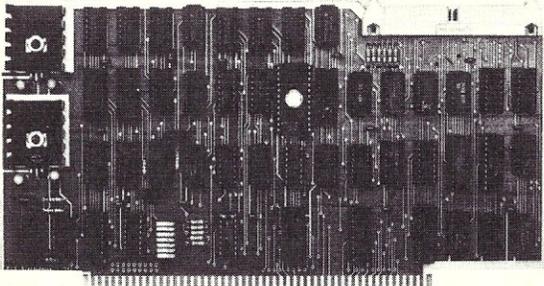

8" Floppy Disk Controller With 16K Track Buffer

**Completely I/O Mapped—No Wait States—
No CPU Cycle Stealing**


The FDC 800, an IEEE 696 (S-100) compatible floppy disk controller, controls up to 4 (16 with encoded drive select) 8" floppy disk drives. Any combination of single or double density, single or double sided drives is accommodated. Any portion of the 16K of on-board static RAM may be used as a sector or track buffer, to hold portions of the operating system, or may be configured as a virtual disk. Features hardware only head load delay and a circuit that watches for disoriented or missing diskette with the drive ready and the door closed. Comes with Z-80 source code for CP/M BIOS. FDC 800 \$480.00

256K RAM In 4K Blocks

The BSR 64/256 is an 8 bit bank selectable dynamic random access memory card designed to operate in Z-80, 8080 and 8085 based S-100 computer systems with a CPU clock frequency of up to 5MHz (A model) or 6MHz (B model).

Individual 64K banks are selected via the IEEE 696 8 bit address bus extension. If the host system is not capable of driving the extended address bus, one of the BSR 64/256 cards in the system may be configured to drive it through an onboard latched output port.

System area is allocated in 4k blocks by writing a system mask out to two latched output ports. Another port allows any one of up to eight cards to be assigned as the current system master. Logically, up to 64 cards may be addressed in a single computer system. BSR 64/256 A @ 5MHz \$895.00

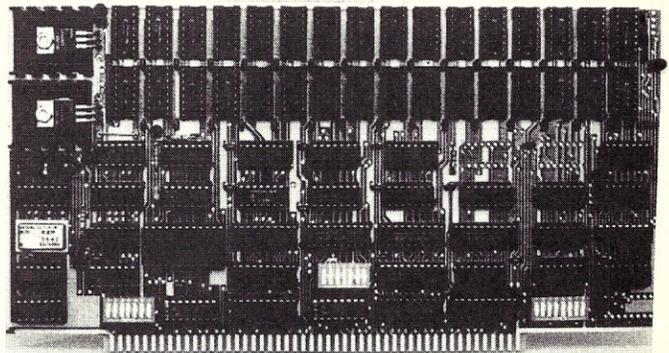

**Attractive OEM and dealer pricing on all of
our products.**

Prices subject to change

**PCE
SYSTEMS**

**4219 S. Market Ct.
Sacramento, CA 95839
(916) 921-5454**

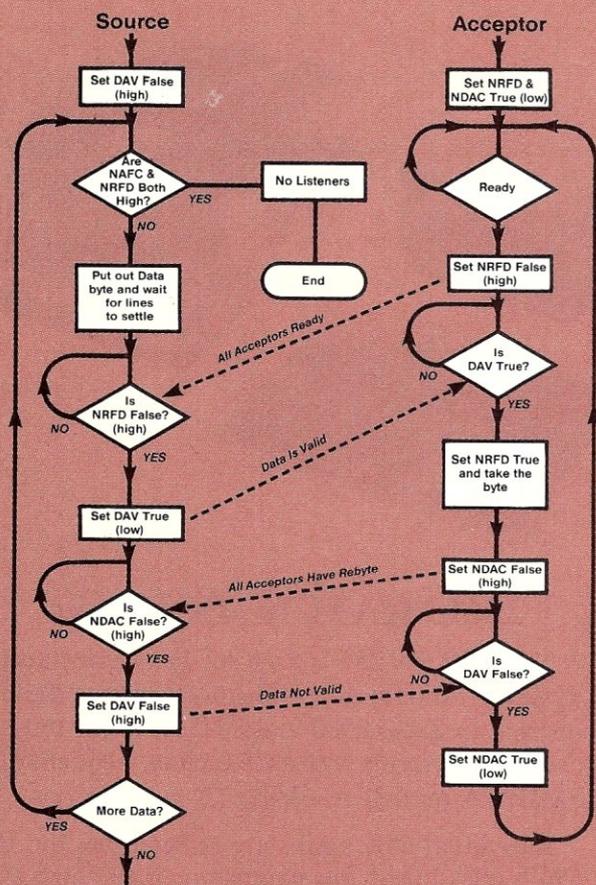


Figure 6. 488 bus handshake flowchart.

the data is valid. The acceptors see DAV true and the fastest acceptor sets its NRFD true; the others follow (3). This prevents the source from attempting a new transfer. The acceptors begin to take the data at their own rates, and, as each acceptor takes the byte, it releases NDAC. When the slowest acceptor has taken the data, NDAC goes false (4). The source sees NDAC high, knows that all the instruments have now accepted the data, and sets DAV high (5), indicating that the byte is no longer valid. The fastest acceptor sets NDAC low in preparation for the next cycle and is followed by the others (6).

The controller, therefore, never puts a new byte onto the bus until the slowest instrument has accepted the old one. An acceptor, once it has taken a byte, cannot take another until it sees DAV switch. This cannot happen until the source sees that all the acceptors have the byte. This prevents an acceptor from receiving the same byte twice.

If a talker tries to send a character and there is no listener, NRFD and NDAC will both be high. This situation, which will never occur if there is an acceptor to perform the handshake, will generate

an error and stop all bus operation. The error occurs when there are no instruments on the bus, when there is no instrument at the designated address, or when a talk-only instrument is on the bus.

Polling

Polling is used to determine a device's status. There are two ways to take a poll. The controller can query each instrument in sequential order (Serial Poll) or in groups (Parallel Poll). The two methods often have an important difference (besides the serial/parallel nature): an instrument that can respond to a serial poll can, at any time, inform the controller that it needs service (via SRQ). An instrument that responds to a parallel poll usually does not have the service request function, and the controller, not the device, must initiate the poll.

Serial polls

Devices request service by asserting SRQ. The controller can periodically check SRQ or it can be used as an interrupt. Because there is only one SRQ line and because several devices can assert SRQ at once (it is an open collector line), the controller must have some way to identify the devices requesting service. It does this with a serial poll, polling all the active instruments in a user-determined sequence. As it polls each instrument, it reads its status byte. Bits 1-6 and 8 of the status byte are set or cleared to indicate specific functions of the instrument, as determined by the manufacturer. Bit 7 is always set when SRQ is asserted. The controller identifies the requestor by checking bit 7. SRQ can only be cleared by polling the requesting device, and therefore a poll is necessary even if only one instrument is on the bus.

To perform a serial poll, the controller first sends serial-poll-enable (SPE), which places all devices into the serial poll mode. It then sends the first device's talk address. This causes the instrument to place its status byte on the bus. The controller reads the byte and determines if this is the device requesting service. If the device is not requesting service, the controller moves to the next specified device. If it is requesting service, the controller can interpret the rest of the status byte to determine what action to take, or it can ignore the instrument and continue. When polled, a device requesting service releases SRQ. Since the line is open collector, it does not become false until all instruments requesting service have been polled. The controller should test SRQ and continue the poll until it has polled and either serviced or ignored all the instruments requesting service. When the poll is finished the controller sends serial-poll-disable (SPD), followed by UNT, to return to the data mode.

This can be a lengthy procedure in a large sys-

**A price is paid for sophistication and ease of use:
It severely slows down bus transactions.
High-level programs often send unnecessary and
repetitive commands to ensure user flexibility.**

FMS

The Software Machine

Powerful Fast Responsive

Performance, speed, control, ease of use. That's what you expect from a finely tuned machine. And that's what your data management software should deliver too. The new FMS-80 Version 3 gives you this and more—a fully integrated Applications Development System that makes even the most complex application easy.

Almost everyone needs to manipulate information. With FMS Version 3 even a beginner can follow the simple menu selections and be off and running in almost no time. Customized screens and user menus are easy to design. Powerful full-screen editing makes entering, modifying, adding or deleting data a snap.

FMS makes getting your information out easy too. Interactive QUERY and comprehensive SELECT can extract the data you need almost instantly. Our powerful Report Generator can produce almost any imaginable report with minimal effort. FMS takes you by the hand each step of the way.

More Than Just a Database Manager.

If you've been around the track a few times already, FMS is for you too. Our enhanced Version 3 EFM programming language gives you total control. Our ISAM-like multi-key data structure, access to 19 open files, full string handling, alphanumeric variable, field and file names, 18 digit FP&BCD math, structured programming constructs and other advanced features make EFM the language of

choice for data management applications. FMS can make you more productive and save you time and money, whether you're developing a simple mailing list or a complex turn-key general accounting system.

The UNIX-inspired FMS Shell brings advanced capabilities like command stream manipulation and dynamic input and output redirection to the CP/M world for unprecedented control of the operating environment.

Don't Run Out of Gas.

FMS's capabilities go way beyond other data manipulation programs. More fields per record, more open files, more variables, more everything.

	FMS	dBASE	Condor
Maximum fields per record	255	32	127
Maximum number of variables	281	64	0
Maximum number of open files in a program	19	2	2
Maximum number of open files in a report	19	1	1
Maximum display pages per record	255	3	1

Don't lock yourself into a system that can't handle the big jobs!

A Proven Winner

FMS-80 has been leading the field since 1978. Now Version 3 sets new standards for the future. Contact your local dealer for a test drive.



DJR Associates, Inc.

303 S. Broadway • Tarrytown, N.Y. 10591
(914) 631-6766 • Telex 646792 DJR NTAR

CIRCLE 194 ON READER SERVICE CARD

tem, but has the advantage that the nature of the request is known at the same time as the identity of the requestor. Proper polling strategy depends on a number of criteria. The most important are how many devices must be polled; how fast, and when, is it necessary to act after SRQ is asserted; and what system speed is wanted. There are two basic strategies:

—*Poll all devices and act after the poll is finished.* This is the simplest method, and it requires storing all the status bytes in an array and evaluating them after the poll. No action is taken until the poll is terminated.

—*Poll each device and take immediate action.* This is the fastest response to a device's service request and is the best method when catastrophic failure might result if immediate action were not taken. The tradeoff for speed is the relative complexity of the programs, because SPE, SPD, and UNT must be sent repeatedly.

Parallel polls

Performing a parallel poll is somewhat more complicated than a serial poll; the instrument must first be configured to respond properly. Instead of a status byte, each instrument has a status bit. Its meaning is determined by the manufacturer, but is usually a service request. The device uses its status bit to set or clear one of the eight data lines. Each device can be assigned its own data line: the devices can all be assigned to one line or any combination of the two. The parallel poll response can be configured with hardware, using switches or jumpers in the instrument, or with software. In the latter case it must be done at the beginning of the command sequence, before the instrument is used.

A parallel poll is configured with software as follows. First, the device to be configured is addressed as a listener, and parallel-poll-configure (PPC) is sent. This causes the addressed device to go to the "parallel-poll-addressed-to-configure" state. In this state the device obeys the secondary commands parallel-poll-enable (PPE) and parallel-poll-disable (PPD). These are part of the secondary command group (Table 2). (Note that when not preceded by a primary command, in this case PPC, these codes are the secondary addresses.) The second step is to send one of the parallel-poll-enable commands (60H-6FH). These commands do three things: They tell the instrument which of the eight data lines to use to report its status bit, what sense the parallel poll response should be, and place the instrument in the "parallel-poll-standby" state wherein it is ready to be polled. The PPE commands can be represented in binary as

X 1 1 0 S P1 P2 P3,

where S is the sense and the binary value of P1 P2 P3 determines the data line. After sending PPE, the controller unaddresses the instrument and re-

peats the procedure for all instruments in the poll.

When the controller decides to take a parallel poll, it asserts ATN and EOI. This causes all devices in the parallel poll standby state to set or clear their lines on the data bus according to the sense bit in the PPE command. If S=0, the instrument sets its assigned data line if its status bit equals zero when it is polled. If S=1, the instrument sets its data line if its status bit equals 1 when it is polled.

This is best seen by example. Consider two instruments, one at address 10 the other at address 20. Assume we configure instrument 10 to report on line 1 with S=0 (SPE=X1100001="a"), and we configure instrument 20 on line 3 with S=1 (SPE=X1101011="k"). When the poll is conducted, the byte received will be 00000Y0X, where

X = 0 if instrument 10's status bit is 1;

X = 1 if instrument 10's status bit is 0;

and

Y = 0 if instrument 20's status bit is 0;

Y = 1 if instrument 20's status bit is 1.

The controller reads the byte and takes appropriate action.

The controller can disable the parallel poll response in two ways. It can address all or some of the previously configured instruments, issue PPC, and then issue parallel-poll-disable (PPD,70H). This command places the addressed instruments in the "parallel-poll-addressed-to-configure" state into the "parallel-poll-idle" state. Or, it can send

Table 3. Subsets of the Pickles & Trout 488 Basic routines, DEC MINC Basic, and RT-11 subroutines and commands

Pickles and Trout:	
CNTL("command")	Enter command mode and send command
TALK("message")	Send a message in data mode
LSTN("message")	Receive a message in data mode
SPOLL("msg","tkrs")	Perform a serial poll
DREN	Disable remote
REN	Enable remote
IFC	Interface clear
MINC BASIC:	
ALL INSTRU CLEAR	
DISABLE REMOTE	
ENABLE REMOTE	
IEEE BUS CLEAR	
LOCAL LOCKOUT	
RECEIVE(message, length, talker, listeners)	
SEND(message, listeners)	
SERIAL_POLL(status,index,talkers)	
SET TERMINATORS(terminators)	
INSTRU TIME LIMIT(New limit, old limit)	
TRIGGER_INSTRU(listeners)	
DEC RT-11 FORTRAN:	
IBIFC	Interface Clear
IBREN	Enable remote
IBLLO	Local lockout
IBDCL	Device clear
IBUNT	Untalk
IBUNL	Unlisten
IBGET(instru)	Trigger
IBSRQ(N)	Service request
IBSEND(msg array, msg length, listeners)	
IBRCV(msg array, length limit, talker, listeners)	

If speed is important, the fastest and most direct method is to write your own assembly language routines and do your own bus management. This is rarely done.

Z-80[®] and 8086 FORTH

PC/FORTH[™] for IBM[®] Personal Computer available now!

FORTH Application Development Systems include interpreter/compiler with virtual memory management, assembler, full screen editor, decompiler, demonstration programs, utilities, and 130 page manual. Standard random access disk files used for screen storage. Extensions provided for access to all operating system functions.

Z-80 FORTH for CP/M [®] 2.2 or MP/M	\$ 50.00
8086 FORTH for CP/M-86	\$100.00
PC/FORTH for IBM Personal Computer	\$100.00

Extension Packages for FORTH systems

Software floating point	\$100.00
Intel 8087 support (PC/FORTH, 8086 FORTH only)	\$100.00
AMD 9511 support (Z-80, 8086 FORTH only)	\$100.00
Color graphics (PC/FORTH only)	\$100.00
Data base management	\$200.00
Symbolic Interactive Debugger (PC/FORTH only)	\$100.00
Cross Reference Utility	\$ 25.00
Curry FORTH Programming Aids	\$150.00
PC/GEN [™] (custom character sets, IBM PC only)	\$ 50.00

Nautilus Cross-Compiler allows you to expand or modify the FORTH nucleus, recompile on a host computer for a different target computer, generate headerless code, and generate ROMable code with initialized variables. Supports forward referencing to any word or label. Produces load map, list of unresolved symbols, and executable image in RAM or disk file. No license fee for applications created with the Cross-Compiler! Prerequisite: one of the application development systems above for your host computer.

Hosts: Z-80 (CP/M 2.2 or MP/M), 8086/88 (CP/M-86), IBM PC (PC/DOS or CP/M-86)
Targets: Z-80, 8080, 8086/88, IBM PC, 6502, LSI-11, 68000, 1802, Z-8

Cross-Compiler for one host and one target	\$300.00
Each additional target	\$100.00

AUGUSTA[™] from Computer Linguistics, for CP/M 2.2

LEARNING FORTH, by Laxen & Harris, for CP/M

Z-80 Machine Tests Memory, disk, console, and printer tests
with all source code in standard Zilog mnemonics

All software distributed on eight inch single density soft sectored diskettes, except PC/FORTH on 5¼ inch soft sectored single sided double density diskettes. Micropolis and North Star disk formats available at \$10.00 additional charge.

Prices include shipping by UPS or first class mail within USA and Canada. Overseas orders add US\$10.00 per package for air mail. California residents add appropriate sales tax. Purchase orders accepted at our discretion. No credit card orders.

Laboratory Microsystems, Inc.

4147 Beethoven Street
Los Angeles, CA 90066
(213) 306-7412

Z-80 is a registered trademark of Zilog, Inc.
CP/M is a registered trademark of Digital Research, Inc.
IBM is a registered trademark of International Business Machines Corp.

Augusta is a trademark of Computer Linguistics
PC/FORTH and PC/GEN are trademarks of Laboratory Microsystems

the universal command parallel-poll-unconfigure (PPU), which directly takes devices in the "parallel-poll-standby" state and puts them into the "parallel-poll-idle" state.

Bus operation

The actual programming and operation of an instrument system is clearly dependent on the instruments used and on the software supplied by the bus manufacturer. The software must be able to address the instruments, send device-dependent and interface-dependent messages and commands, and handle SRQ interrupts. It is also useful to have a simple (preferably numerical) addressing scheme and high-level commands. In our experience, the manufacturer of the controller usually supplies "reasonably good" high-level software support, and often supplies very detailed and sophisticated support.

By "reasonably good" support, we mean simple, callable Basic or Fortran subroutines that allow the user to transmit command strings, and send and receive message strings, by using them as arguments in subroutines that handle all the bus management chores. This is the approach usually taken by manufacturers of S-100/488 converter cards such as Pickles & Trout, and by manufacturers of programmable calculators, such as Hewlett-Packard. A sense of what is available can be obtained from Table 3, which shows a subset of the subroutines provided by Pickles & Trout for its bus.

At the other end of the spectrum, manufacturers of complete computer systems often supply very high-level and sophisticated software. Table 3 also shows a subset of Digital Equipment Corporation's (DEC) MINC Basic commands and its RT-11 Fortran subroutines. The command and subroutine names and variables displayed in the table give one the flavor of what is available.

These three software packages show a gradation of software sophistication. At the lowest level shown—the Pickles & Trout routines—the user must transmit the ASCII code for every bus command he needs and handle all error checking himself. This requires the user to understand the bus fully. Alternatively, in the DEC MINC commands, all the work is done for you. In fact, all the bus commands are essentially self-descriptive. In using these advanced routines, the user doesn't have to supply the ASCII commands to operate the bus, address the devices, etc. He only has to provide the message string and address numbers or, in some cases, he simply has to give the command. A price is paid for all this sophistication and ease of use: it severely slows down bus transactions. High-level programs often send unnecessary and repetitive commands to ensure user flexibility. For example, they may send far too many UNT/s and UNL/s. On the other hand, such software is simple to use for novices and those who wish to get a system up with a minimum of fuss.

It is worth remarking at this point, that if speed is important, the fastest and most direct method is to write your own assembly language routines and do your own bus management. This is rarely done.

The best way to illustrate a typical bus transaction is to discuss the operation of a simple instrument system. The first problem one must discuss is software. No two manufacturers of controllers use the same software routines or commands. For descriptive purposes we will invent six Basic 488-bus commands. We will assume they handle all bus management tasks (setting ATN, etc.). These commands are:

CMD\$(*"command"*) sends the string *"command"* and places the bus in command mode.

SEND\$(*"message"*) transmits a string *"message"*.

RECV\$(*"message"*) receives the string *"message"*.

SRQ(N) tests SRQ and sets N=1 if it is asserted.

REN places all instruments into remote.

IFC clears the interface.

These are not the only Basic commands we could define, but they are adequate to describe a typical bus transaction. Note that we are assuming that SRQ does not interrupt the processor.

The instrument system we will consider is used to measure the current-voltage (I-V) characteristics of a specimen. It consists of a controller (a microcomputer with a 488 interface), a Hewlett-Packard 3465A digital voltmeter (DVM), a Hewlett-Packard 9872A digital plotter and a voltage-programmable current supply. The first two instruments are 488-bus compatible and can talk, listen, and respond to a serial poll. The DVM can be extensively programmed. Table 4 shows the 488-bus functions each device can perform, and Table 5 shows some of the DVM programmable functions and their codes. For simplicity, we will assume that the current source supplies a current directly proportional to a programming voltage and is not 488 compatible. We will assume that a suitable D/A converter exists in the computer and use it to operate the supply.

Suppose we wish to take and plot a series of data points. We will vary the current, measure the induced voltage and plot the point. Assume the la-

Table 4. 488 bus functions supported by the digital voltmeter and plotter

DVM Bus Functions:	Plotter Bus Functions:
Talker	Talker
Listener	Listener
Source Handshake	Source Handshake
Acceptor Handshake	Acceptor Handshake
Service Request	Service Request
Remote/Local	Parallel Poll
Device Clear	Device Clear
Serial Poll	Serial Poll
Trigger	

***In high-level driver routines, the work is done for you—
all the bus commands are essentially self-descriptive.***

T/MAKER III - PERHAPS THE FIRST TRULY UNIVERSAL PROGRAM.

Now you can spreadsheet, bar chart and word process from the same program.

You can adapt it to use all your terminal's special keys. You will be operating with it after 10 minutes. We have called it "universal" because it is hardware independent, flexible, integrated, user friendly and powerful. At only \$275* you save hundreds of dollars. By having one universal program, you save hundreds of hours.

HARDWARE INDEPENDENT

Using T/MAKER III's powerful T/MODIFY you can incorporate all your terminal's and printer's special keys and features into your package. Cursor control, video attributes, insert and delete, printer width, font selection, everything.

T/MODIFY isn't like the INSTALL programs where you hope the terminal and printer you have in 2 years is supported by the software manufacturer. With T/MAKER III you have the power to make the decision, and to make it again and again—anytime your hardware configuration changes.

FLEXIBLE

Sometimes word-wrap is good, but for spreadsheet building or program entry it's disastrous. T/MAKER III lets you decide—even in the middle of a document.

Sometimes a "what you see is what you get" word processor is best; other times you want to enter text using maximum width. T/MAKER III will do either.

If you want to stop printing after each page...print a few pages of the file...combine 2 spreadsheets...rearrange the columns in a list...stack bar charts on each other...use one character for bar charts on the screen and a different one on the printer...issue a RESET command to the operating system...change the drive number for text files...T/MAKER III does it all, and lots, lots more.

INTEGRATED

Usually this means that files created by the word processor can be read by the spreadsheet sold by the same manufacturer, but T/MAKER III takes you into real operational integration.

You can instantly bar chart any row or column of your spreadsheet (on screen or printer) then return to the spreadsheet—without leaving T/MAKER III. You can put spreadsheets or bar charts right in the middle of your word processor report—without leaving T/MAKER III.

You can examine, create, rename or erase files, then return to your word processing—without leaving T/MAKER III.

T/MAKER III gives you complete integrated capabilities in one program, so you don't have to use *three*.

USER FRIENDLY

T/MAKER III's plain English breaks the training and memory barrier. It gives you easy to remember commands: ALIGN does all the justifying and margin setting you have specified. COMPUTE does all the spreadsheet calculations you define. SORT sorts a list alphabetically or numerically. TALLY does 2 dimensional tabulations. Others include PRINT, EDIT, COMBINE, ARRANGE, REPLACE, BAR, FIND, KEEP, and lots more that are all easy to understand and remember. And more.

Suppose you leave the editor portion of the program to examine another file. When you return, the cursor will be exactly where you left it. Have you ever looked at a spreadsheet and forgotten the underlying schema? T/MAKER III will show you the spreadsheet data and the underlying formulae at the same time.

You know how the star of word processors bombs out if there isn't room to save the file at the end of an editing session? T/MAKER III tells you about the problem, then lets you examine the directory and erase files until there's room.

POWERFUL

Universal, flexible, integrated, hardware independent, but has it the power to do the job?

Multi-line page headers and footers. Multiple footnotes automatically placed on the correct page. Control of orphan and widow lines. Linkage of multiple files at print time. Global search and replace. Control of page width and length and numbering. Comment lines in text. And more.

Averages, logs and exponentials, trig functions, min, max and mean and percent change. Projection, increases, growth rate, net present value. Rearrange columns, drop or keep all lines containing specified string, match 2 files line-for-line in both directions, sort list by columns, tally and cross tabulate. And more.

Bar chart any data row or column, keystroke macro up to 150 characters, or delete blocks of text; a unique DO command takes a command line from a file, and carries out those commands, a WAIT command for push-button demos. And still lots more!


WHAT YOU HAVE TO DO TO GET T/MAKER III*

Simply take out your Mastercharge or VISA, and call Nth Dimension: 1-800-457-4177 (California: 408-980-9122).

**If you think \$275 is extremely reasonable for a program that does so much more for you than anything else on the market, what do you think of \$249 as an introductory offer? You can be certain this special low price won't last for long!*

AVAILABLE FORMATS at present are: CPM-80; standard 8" SSSD, Televideo, Apple II and Northstar. CPM-86; standard 8" SSSD. IBM-PC DOS. The number of formats is increasing fast, so call if you don't see yours listed. 1-800-457-4177.

Does Yours Compare with **OMNIDISK?**

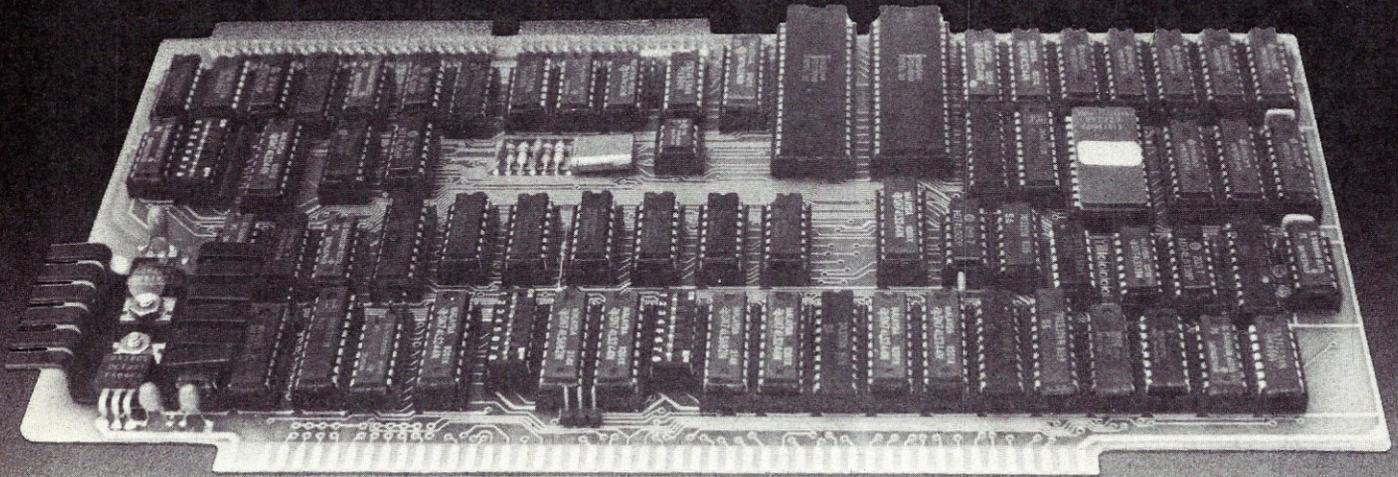

Introducing tomorrow's disk controller . . . OMNIDISK offers S-100 users a unique combination of compatibility and technological innovation that together produce features not found in any conventional disk controllers. See for yourself what tomorrow looks like:

- ✓ Simultaneous support of both 5¼" and 8" floppy disks allows software transfer between disks.
- ✓ 24 bit DMA allows CPU by-pass.
- ✓ Power-on boot PROM gets you up and running in a hurry.
- ✓ On-board de-blocking conserves valuable RAM space above bios.
- ✓ Interfaces with the WD 1001® hard disk controller. No need to buy a host adapter.
- ✓ Full 16 bit port addressing.
- ✓ Full track buffer allows controller to recall entire track, not just sectors. Results in a speed increase 3-to-7-times greater than conventional controllers for both read and write operations.

OMNIDISK'S features reflect our commitment to designing S-100 products with an eye on the future. OMNIDISK'S price reflects our commitment to offer products with an eye on the needs of today's user.

You can begin using tomorrow's disk controller today for only . . .

\$399*

So why wait, order now.

*CP/M configured for OMNIDISK, only \$25 with purchase.



distributed by:
W.W. COMPONENT SUPPLY INC.
1771 Junction Avenue
San Jose, CA 95112
(408) 295-7171

FREE U.P.S. ground shipping on pre-paid orders. Shipping will be added to C.O.D., VISA and M/C orders. CA residents please add sales tax.

Tomorrow's 8 MHZ Z80 CPU coming soon from FULCRUM

CIRCLE 10 ON READER SERVICE CARD

Table 5. Program codes for the digital voltmeter

Name	Function	Program Code
Function	DC volts	F1
	AC volts	F2
	AC+DC	F3
	2 wire K-ohms	F4
	4 wire K-ohms	F5
Range	Auto	R1
	100mV or 0.1K	R2
	1000mV or 1K	R3
	10V or 10K	R4
	100V or 100K	R5
	1000V or 1M	R6
Trigger	Internal	T1
	External	T2
	Single	T3
	Hold	T4
Autozero	On	Z1
	Off	Z0
Math	Off	M0
	Pass/Fail	M1
	Statistics	M2
	Null	M3
EOI	Enable	O1
	Disable	O0

bels and axes are already printed on the plotter paper, with the origin of the axes at the plotter's origin (let's not get too complicated), and assume the scale factor (voltage and current to plotter units) is known.

Before we run the program, we must set up the instruments and learn how to talk to them. We set the rear panel switches to addresses 10 for the DVM and 20 for the plotter. This gives us a listen address of "*" for the DVM and a talk address of "J". The plotter has a listen address of "4" and a talk address of "T". As we will want to perform serial polls, we need to know the instrument's status bytes are defined; these are shown in Figure 7. Each of the instruments allows the user to determine which status functions will result in a service request. The devices have a status mask for this purpose; it is programmed at the beginning of bus operations. Finally, we need to know how to send and receive data from the DVM and the plotter; that is, we need to know the format and syntax of the messages. The DVM data message consists of 14 bytes:

$\pm D.DDDDDDE \pm D$ CR (EOI) LF.

If EOI is used, it is set when LF is sent; in our DVM its use is optional and we will disable it. The DVM programming message consists of ASCII codes as displayed in Table 5. We need five of the plotter graphics messages: "PAX,Y;," "PU;," and "PD;," "IM,X,Y,Z;," and "IN;,". PA means plot absolute: the pen is to go to the platen position represented by the integers X and Y. PU is pen up and PD is pen down. IM sets the status, error, and poll masks to the integer values X, Y, and Z, and IN initializes the plotter. The semicolons are re-

quired by the plotter to indicate the end of a graphics command.

With these messages we can write a short sample program. While the program could not actually be used, it illustrates how one sends messages and commands and controls a system. In the following, the routine CURRENT sets the current supply and the routine SCALE converts the real variables voltage and current (I and V) into the appropriate integer plotter units (I% and P%).

```

10   IFC
20   REN
30   CMD$(14H)
40   CMD$("*")
50   CMD$(11H)
60   SEND$("F1R4T4M0Z0O0SM36";0DH;0AH)
70   CMD$(" ?4")
80   SEND$("IN;IMXX,YY,00;")
90   FOR I=0 TO 100
10  CALL CURRENT(I)
110  CMD$("?*";08H)
120  SRQ(N)
130  IF N=0 THEN 120
140  CMD$(" ?";18H;"J")
150  RECV$(ISB)
160  CMD$(19H;" ")
170  IF ISB $\frac{1}{4}$  $\frac{1}{2}$ 68 THEN CALL ERROR(ISB)
180  CMD$(" ?J")
190  RECV$(V$)
200  V=VAL(V$)
210  CALL SCALE(I%,V%,V,I)
220  CMD$(" ? 4")
230  SEND$("PU;PAI,V;PD;PU;")
240  SRQ(N)
250  IF N=1 CALL ERROR(0)
250  NEXT I


```

As can be seen, programming the system is straightforward. The first two steps clear the bus and put the voltmeter and the plotter into the remote state; they can now be programmed over the bus. The next three commands could have been lumped together into one long string. First we clear the instruments, returning them to their default modes. We then address the DVM as a listener (40) and lock out its front panel (50, 11H=LLO). Next we program the DVM. We send a string of alphanumeric characters, which program it to measure D.C. volts on the 10V full-scale, hold the trigger, turn off all math functions and the auto zero, and disable EOI. The final five bytes set the status mask to determine which of the items in the status byte will set SRQ. In this case we have set it for DATA READY and ERROR (see Figure 7). The next two steps program the plotter's status mask. We have set it so only an ERROR or OUT-OF-RANGE will set SRQ. We ignore the error and poll bytes.

The next step is to set up a loop to take and plot the data. Line 100 programs the current supply (perhaps I is the number of milliamps put out by the power supply). The DVM is then triggered

An effort is now underway to provide standardized guidelines for the preferred syntax, format, and terminators for bus terminals.

DVM Status Byte

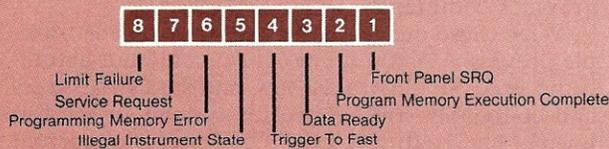

Plotter Status Byte

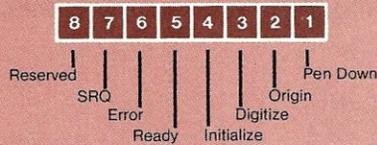


Figure 7. Digital voltmeter and plotter status bytes.

(110) and it starts its conversion. The computer must now check SRQ and loop until the DVM requests service (120-130). This step is critical for our program and illustrates two of the problems one faces. First, compared to the computer, most measurement and test instruments are very slow; in this case, a complete DVM conversion can take several seconds. The computer must wait for it to signal that it has the data. Second, in this case and in other similar situations, there is nothing to be gained by using SRQ as an interrupt: The computer has nothing better to do than wait.

Eventually, the DVM will assert SRQ, N will be returned as 1, and we fall through to line 140. At this point we must perform a serial poll, even though we know the DVM asserted SRQ. This is to get the DVM to release the SRQ line. We issue serial poll enable (140, 18H = SPE) and address the DVM to talk. We then get the status byte (150) and issue serial poll disable (19H = SPD) and untalk. Line 160 checks the status byte: if any but lines 3 and 7 are set, a branch to an error routine occurs. If there is no error, we address the DVM to talk (180) and get the data (190). The program then converts the data to numeric form (remember, the instrument transmits it as an ASCII string) and calls SCALE to convert the voltage and current to plotter units.

The next several steps plot the data. We untalk the DVM and address the plotter to listen (220). The plotter instructions are sent: pen up, move to (I%, V%), pen down (marking the point), and then pen up. We check SRQ to see if a plotter error has occurred, branching to the error routine if it has. Finally, we loop back to repeat the process.

The alert reader will have noticed a number of problems—in particular, problems of syntax and format, and problems of “time.”

Optimizing a 488 system

The 488 standard describes *how* the instruments talk to one another. It says nothing about *what* they say to one another: message syntax and

format are not a part of the standard. This is an important problem, one that actually negates some of the usefulness of the bus and the standard. Different companies can, and do, use different message formats, program codes, and terminators. The codes for data transmission are arbitrary; the only real specification is that the listeners and talkers must agree on the syntax and format. It is very important that the controller software be flexible, or programming can be quite difficult.

There do exist some general guidelines for codes and formats used in programming instruments. In general, instruments are programmed using one or more alpha characters to identify instrument functions, followed by one or more numeric characters which give the parameter value or option. The Hewlett-Packard DVM has such a format (Table 5). Note that even within this guideline, code assignments are still unique to each device. The format for data messages has likewise been somewhat formalized. There is usually a header field of alpha characters, a data field for the measured quality, and a connector or terminator. The header has the information about what has been measured and possible error messages (e.g., overflow). The data field contains the actual measurement. It is generally recommended that the only ASCII characters used for the header and numeric fields be plus, minus, the decimal point, the 10 numerals, and the uppercase alpha characters. Spaces, punctuation, and nonprintable ASCII characters are to be avoided. The separator, used when several readings are to be sent in sequence, is usually a semicolon or comma. Different manufacturers use different terminators, but carriage return and line feed are the most common and usually occur together. Often the terminator in an instrument can be changed with software or hardware jumpers. Of course, EOI can be used if the manufacturer has allowed for it.

An effort is now underway to provide standardized guidelines for the preferred syntax, format, and terminators for bus instruments. (*Note: The IEEE 728/1982 standard has been approved.*)

“Time” is a very important parameter in bus transactions. We are referring to the time it takes an instrument to perform its function and respond to the controller. Many instruments are mechanical and can “hang up.” Others can be mistakenly, but properly (i.e., error free), programmed so that they take much longer than expected to perform their functions. To check for this, most software packages have some form of “timeout” command. This routine allows the user to set a time limit for instrument response; if the time limit is exceeded, the controller will send an error message. DEC’s INSTRU_TIME LIMIT is a typical example.

Bus speed, another aspect of time, is also important. What determines the data transfer rate and how can it be optimized? The ultimate transfer rate on the bus is one megabyte/second, a rate

The 488 standard describes how the instruments talk to one another. Message syntax and format are not part of the standard—an important problem.



Z80 Software



SOFTWARE DESCRIPTIONS

TPM (TPM I) - \$80 A Z80 only operating system which is capable of running CP/M programs. Includes many features not found in CP/M such as independent disk directory partitioning for up to 255 user partitions, space, time and version commands, date and time, create FCB, chain program, direct disk I/O, abbreviated commands and more! Available for North Star (either single or double density), TRS-80 Model I (offset 4200H) or II, Versafloppy I, Tarbell I, or Osborne I.

TPM-II - \$125 An expanded version of TPM which is fully CP/M 2.2 compatible but still retains the extra features our customers have come to depend on. This version is super FAST. Extended density capability allows over 600K per side on an 8" disk. Available preconfigured for Versafloppy II (8" or 5"), Epson QX-10, or TRS-80 Model II.

CONFIGURATOR I

This package provides all the necessary programs for customizing TPM for a floppy controller which we do not support. We suggest ordering this on single density (8SD).

Includes: TPM-II (\$125), Sample BIOS (BIOS) SOURCE (\$FREE), MACRO II (\$100), LINKER (\$80), DEBUG I (\$80), QED (\$150), ZEDIT (\$50), TOP I (\$80), BASIC I (\$50) and BASIC II (\$100)
\$815 Value NOW \$250

CONFIGURATOR II

Includes: TPM-II (\$125), Sample BIOS (BIOS) SOURCE (\$FREE), MACRO II (\$100), MACRO III (\$150), LINKER (\$80), DEBUG I (\$80), DEBUG II (\$100), QSAL (\$200), QED (\$150), ZTEL (\$80), TOP II (\$100), BUSINESS BASIC (\$200) and MODEM SOURCE (\$40) and DISASSEMBLER (\$80)
\$1485 Value NOW \$400

MODEL I PROGRAMMER

This package is only for the TRS-80 Model I. Note: These are the ONLY CDL programs available for the Model I. It includes: TPM I (\$80), BUSINESS BASIC (\$200), MACRO I (\$80), DEBUG I (\$80), ZDDT (\$40), ZTEL (\$80), TOP I (\$80) and MODEM (\$40)
\$680 Value NOW \$680

MODEL II PROGRAMMER

This package is only for the TRS-80 Model II. It includes: TPM-II (\$125), BUSINESS BASIC (\$200), MACRO II (\$100), MACRO III (\$150), LINKER (\$80), DEBUG I (\$80), DEBUG II (\$100), QED (\$150), ZTEL (\$80), TOP II (\$100), ZDDT (\$40), ZAPPLE SOURCE (\$80), MODEM (\$40), MODEM SOURCE (\$40) and DISASSEMBLER (\$80)
\$1445 Value NOW \$375

BASIC I - \$50, a 12K+ basic interpreter with 7 digit precision.

BASIC II - \$100, A 12 digit precision version of Basic I.

BUSINESS BASIC - \$200, A full disk extended basic with random or sequential disk file handling and 12 digit precision (even for TRIG functions). Also includes PRIVACY command to protect source code, fixed and variable record lengths, simultaneous access to multiple disk files, global editing, and more!

ACCOUNTING PACKAGE - \$300, Written in Business Basic. Includes General Ledger, Accounts Receivable/Payable, and Payroll. Set up for Hazeltine 1500 terminal. Minor modifications needed for other terminals. Provided in unprotected source form.

MACRO I - \$80, A Z80/8080 assembler which uses CDL/TDL mnemonics. Handles MACROs and generates relocatable code. Includes 14 conditionals, 16 listing controls, 54 pseudo-ops, 11 arithmetic/logical ops, local and global symbols, linkable module generation, and more!

MACRO II - \$100, An improved version of Macro I with expanded linking capabilities and more listing options. Also internal code has been greatly improved for faster more reliable operation.

MACRO III - \$150, An enhanced version of Macro II. Internal buffers have been increased to achieve a significant improvement in speed of assembly. Additional features include line numbers, cross reference, compressed PRN files, form feeds, page parity, additional pseudo-ops, internal setting of time and date, and expanded assembly-time data entry.

6502X - \$150, A 6502 cross assembler. Runs on the Z80 but assembles 6502 instructions into 6502 object code! Similar features as our Macro assemblers.

DEVELOPER I

Includes: MACRO I (\$80), DEBUG I (\$80), ZEDIT (\$50), TOP I (\$80), BASIC I (\$50) and BASIC II (\$100)
\$440 Value NOW \$150

DEVELOPER II

Includes: MACRO II (\$100), MACRO III (\$150), LINKER (\$80), DEBUG I (\$80), DEBUG II (\$100), BUSINESS BASIC (\$200), QED (\$150), TOP II (\$100), ZDDT (\$40), ZAPPLE SOURCE (\$80), MODEM SOURCE (\$40) and DISASSEMBLER (\$80) ZTEL (\$80)
\$1280 Value NOW \$350

DEVELOPER III

Includes: QSAL (\$200), QED (\$150), BUSINESS BASIC (\$200), ZTEL (\$80) and TOP II (\$100)
\$730 Value NOW \$300

COMBO

Includes: DEVELOPER II (\$1280), ACCOUNTING PACKAGE (\$300), QSAL (\$200) and 6502X (\$150)
\$1930 Value NOW \$500

LINKER - \$80, A linking loader for handling the linkable modules created by the above assemblers.

DEBUG I - \$80, A tool for debugging Z80 or 8080 code. Disassembles to CDL/TDL mnemonics compatible with above assemblers. Traces code even through ROM. Commands include Calculate, Display, Examine, Fill, Goto, List, Mode, Open File, Put, Set Wait, Trace, and Search.

DEBUG II - \$100, A superset of Debug I. Adds Instruction Interpreter, Radix change, Set Trap/Conditional display, Trace options, and Zap FCB.

6502X - \$150, A 6502 cross assembler. Runs on the Z80 but assembles 6502 instructions into 6502 object code! Similar features as our Macro assemblers.

QSAL - \$200, A SUPER FAST Z80 assembler. Up to 10 times faster than conventional assemblers. Directly generates code into memory in one pass but also to offset for execution in its own memory space. Pascal like structures: repeat...until, if...then...else, while...do, begin...end, case...of. Multiple statements per line, special register handling expressions, long symbol names, auto and modular assembly, and more! This one uses ZIL OG Mnemonics.

QED - \$150, A screen editor which is both FAST and easy to learn. Commands include block delete, copy, and move to a named file or within text, repeat previous command, change, locate, find at start of line, and numerous cursor and window movement functions. Works with any CRT having clear screen, addressable cursor, clear to end of line, and clear to end of screen.

DISK FORMATS

When ordering software specify which disk format you would like.

CODE	DESCRIPTION
8SD	8" IBM 3740 Single Density (128 bytes/26 sectors/77 tracks)
8DD	8" Double Density (256 bytes/26 sectors/77 tracks)
8XD	8" CDL Extended Density (1024 bytes/8 sector/77 tracks = 616K)
5SD	5.25" Single Density (TRS80 Model I, Versafloppy I, Tarbell I)
5EP	5.25" Epson Double Density
5PC	5.25" IBM PC Double Density
5XE	5.25" Xerox 820 Single Density
5OS	5.25" Osborne Single Density
5ZA	5.25" Z80 Apple (Softcard compatible)

TPM INFO When ordering TPM I or II, in addition to Disk Format, please specify one of the following codes:

CODE	DESCRIPTION
TPM I:	
NSSD/H	North Star Single Density for Horizon I/O
NSSD/Z	North Star Single Density for Zapple I/O
NSDD/H	North Star Double Density for Horizon I/O
NSDD/Z	North Star Double Density for Zapple I/O
TRS80-I	TRS-80 Model I (4200H Offset)
TRS80-II	TRS-80 Model II
VII8	Versafloppy I 8"
VII5	Versafloppy I 5.25"
TPM-II:	
VII8	Versafloppy II 8" (XD)
VII5	Versafloppy II 5.25"
TRS80-II	TRS-80 Model II (XD)

Prices and Specifications subject to change without notice. TPM, Z80, CP/M, TRS80 are trademarks of CDL, Zilog, DRI and Tandy respectively.

ZTEL - \$80, An extensive text editing language and editor modelled after DEC's TECO.

ZEDIT - \$50, A mini text editor. Character/line oriented. Works well with hardcopy terminals and is easy to use. Includes macro command capability.

TOP I - \$80, A Text Output Processor for formatting manuals, documents, etc. Interprets commands which are entered into the text by an editor. Commands include justify, page number, heading, subheading, centering, and more.

TOP II - \$100, A superset of TOP I. Adds: embedded control characters in the file, page at a time printing, selected portion printing, include/merge files, form feed/CRLF option for paging, instant start up, and final page ejection.

ZDDT - \$40, This is the disk version of our famous Zapple monitor. It will also load hex and relocatable files.

ZAPPLE SOURCE - \$80, This is the source to the SMB ROM version of our famous Zapple monitor. It can be used to create your own custom version or as an example of the features of our assemblers. Must be assembled using one of our assemblers.

MODEM - A communication program for file transfer between systems or using a system as a terminal. Based on the user group version but modified to work with our SMB board or TRS-80 Models I or II. You must specify which version you want.

MODEM SOURCE - \$40, For making your own custom version. Requires one of our Macro Assemblers.

DISASSEMBLER - \$80, Does bulk disassembly of object files creating source files which can be assembled by one of our assemblers.

HARDWARE

S-100 - **SMB II Bare Board \$50**, "System Monitor Board" for S-100 systems. 2 serial ports, 2 parallel ports, cassette interface, 4K memory (ROM, 2708 EPROM, 2114 RAM), and power on jump. When used with Zapple ROM below, it makes putting a S-100 system together a snap.

Zapple ROM \$35, Properly initializes SMB I/II hardware, provides a powerful debug monitor.

IBM PC - **Big Blue Z80 board \$595**, Add Z80 capability to your IBM Personal Computer. Runs CP/M programs but does not require CP/M or TPM. Complete with Z80 CPU, 64K add on memory, serial port, parallel port, time and date clock with battery backup, hard disk interface, and software to attach to PC DOS and transfer programs. Mfr'd by QCS.

50% Discount on all CDL software ordered at the same time as a Big Blue (and for the Big Blue).

APPLE II - **Chairman Z80 board \$425**, Add Z80 capability to your Apple II/II Plus computer. Runs CP/M programs with our more powerful TPM. Includes 64K memory add on (unlike the competition this is also useable by the 6502/DOS as well as the Z80), TPM, QSAL assembler, QED Screen Editor, and Business Basic. Mfr'd by AMT Research.

Apple Special \$175, Buy the Apple Z80 Developer at the same time as the "Chairman" and pay only \$175 instead of \$325.

APPLE Z80 DEVELOPER

Includes: 6502X (\$150), MACRO II (\$100), MACRO III (\$150), QSAL (\$200), QED (\$150), LINKER (\$80), DEBUG I (\$80), DEBUG II (\$100), ZDDT (\$40) and BUSINESS BASIC (\$200)

VALUE: \$1250 \$325
 \$175 when purchased with AMT "Chairman" Board

ORDERING INFORMATION:

VISA/MasterCard/C.O.D.

Call or Write With Ordering Information....



OEMS:

Many CDL products are available for licensing to OEM's. Write to Carl Galletti with your requirements.

Dealer Inquiries Invited.

For Phone Orders ONLY Call Toll Free...

1-(800) 458-3491 (Except Pa.)

Ask For Extension #15

For information and Tech Queries call
(609) 599-2146




Computer Design Labs

342 Columbus Avenue/Trenton, NJ 08629

CIRCLE 84 ON READER SERVICE CARD

\$1590

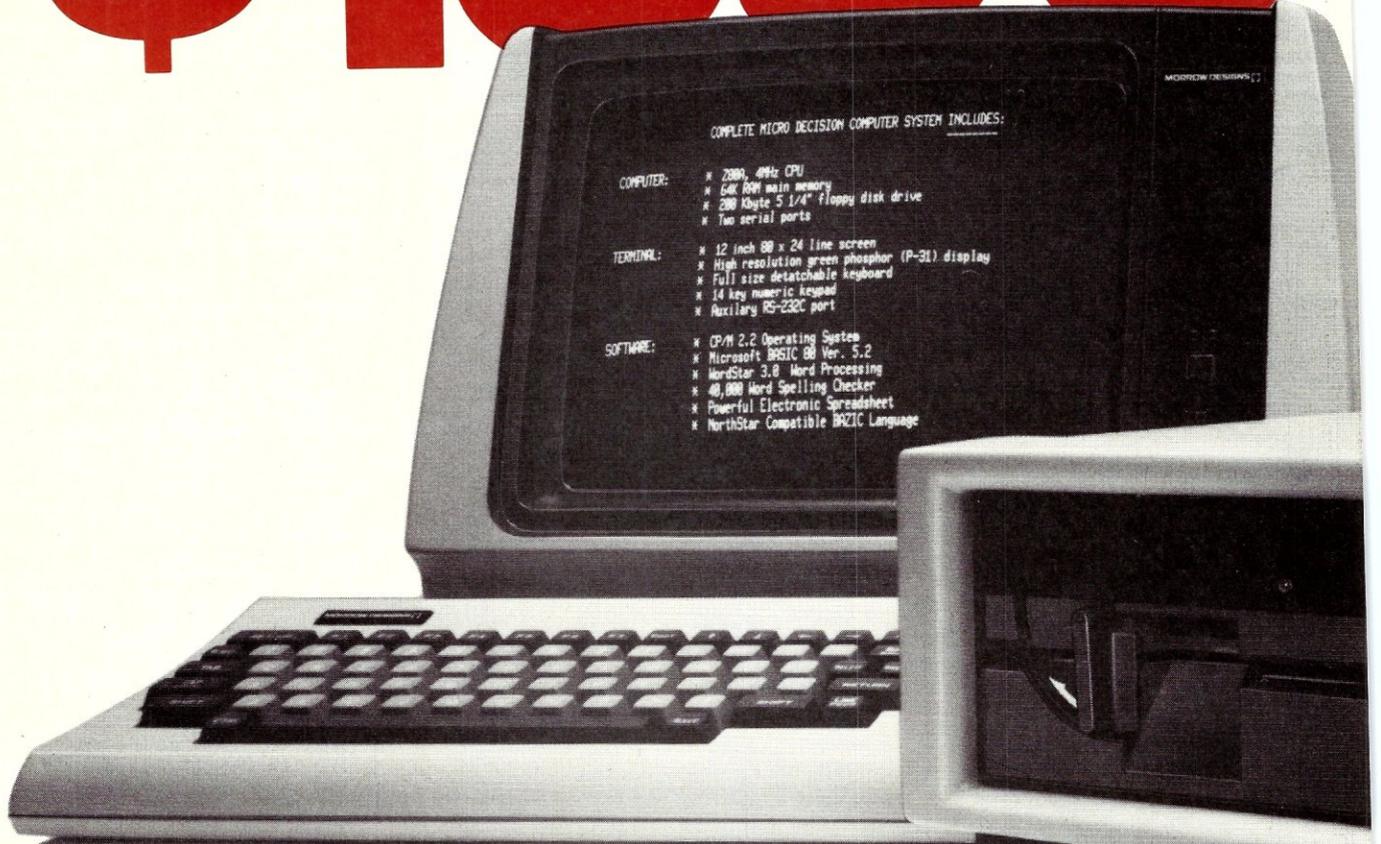


COMPLETE MICRO DECISION COMPUTER SYSTEM INCLUDES:

- COMPUTER:
 - * Z80A, 4MHz CPU
 - * 64K RAM main memory
 - * 200 Kbyte 5 1/4" floppy disk drive
 - * Two serial ports
- TERMINAL:
 - * 12 inch 80 x 24 line screen
 - * High resolution green phosphor (P-31) display
 - * Full size detachable keyboard
 - * 14 key numeric keypad
 - * Auxiliary RS-232C port
- SOFTWARE:
 - * CP/M 2.2 Operating System
 - * Microsoft BASIC 80 Ver. 5.2
 - * WordStar 3.8 Word Processing
 - * 40,000 Word Spelling Checker
 - * Powerful Electronic Spreadsheet
 - * NorthStar Compatible BAZIC Language

Full size smart terminal with detachable keyboard

4MHz Z80A CPU
64K RAM Main Memory
200Kbyte 5 1/4" floppy disk
(Osborn, Xerox, IBM, CP/M-86 formats)
Two serial ports

Complete software package includes:
WordStar word processing
Correct-It spelling checker
LogiCalc electronic spreadsheet
Microsoft BASIC
NorthStar compatible BAZIC
CP/M 2.2 Operating System

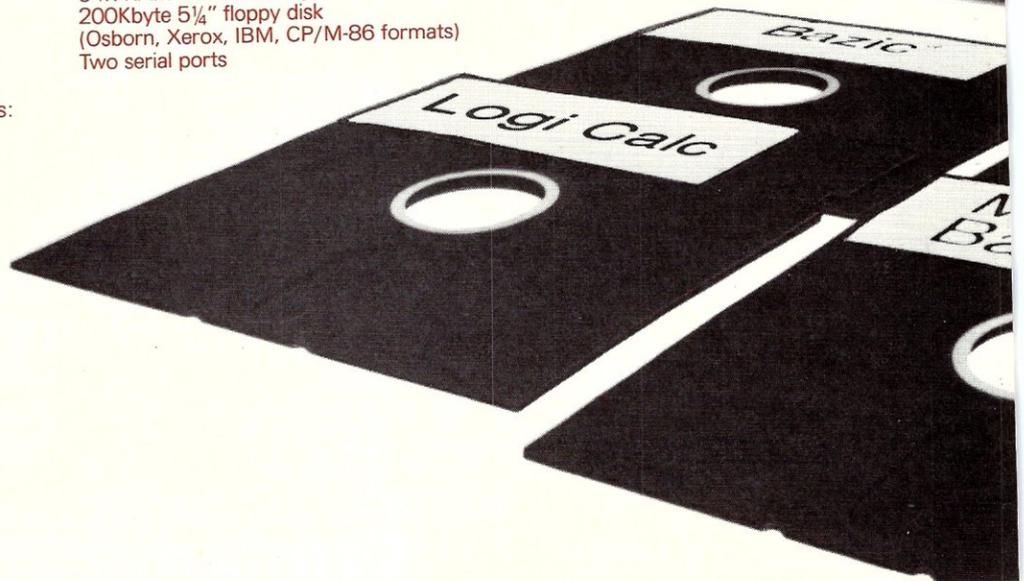

At \$1790, this computer was selling like hotcakes. So we dropped the price.

Crazy? No, not really. You see in order to meet the demand for the Micro Decision™ we increased our production. When we did that, our costs dropped. We're passing our savings on to you, because that's our philosophy.

More for less.

So now it only takes \$1590 to buy a Micro Decision with 64K of memory, a 200K double density floppy drive and a full-size Morrow smart terminal with detachable keyboard. Not bad. But there's more.

The Micro Decision also includes a package of business and professional software worth well over \$2000. The WordStar® word processor. A 36,000 word spelling checker. The LogiCalc™ electronic spreadsheet. And both Microsoft BASIC-80® and NorthStar-compatible BAZIC®. Plus, the CP/M® 2.2 Operating System that gives you access to thousands of other software programs. And, we take the mystery out of CP/M with plain English commands and single-key operation.

If you have your own terminal, you can buy the complete

computer and software package for \$995. That's the Micro Decision MD1™. The MD2™ includes another double-density disk drive, plus Personal PEARL™ the relational data base manager. Price? Only \$1395.


More memory? No problem. The Micro Decision MD3™ gives you two double-sided, double-density disk drives with 768K of storage and Personal PEARL for only \$2290. Without the terminal, \$1695.

Come in for a complete demonstration at your nearest Morrow Designs dealer. If you don't know who that is, call us toll-free at (800) 521-3793. In California, call (415) 430-1970. At \$1790, the Micro Decision sold like hotcakes. At \$1590, we've just sweetened the deal.

More computer, for less.

MORROW DESIGNS

MORROW DESIGNS
600 McCormick Street □ San Leandro, CA 94577
(800) 521-3793 □ (415) 430-1970 In California

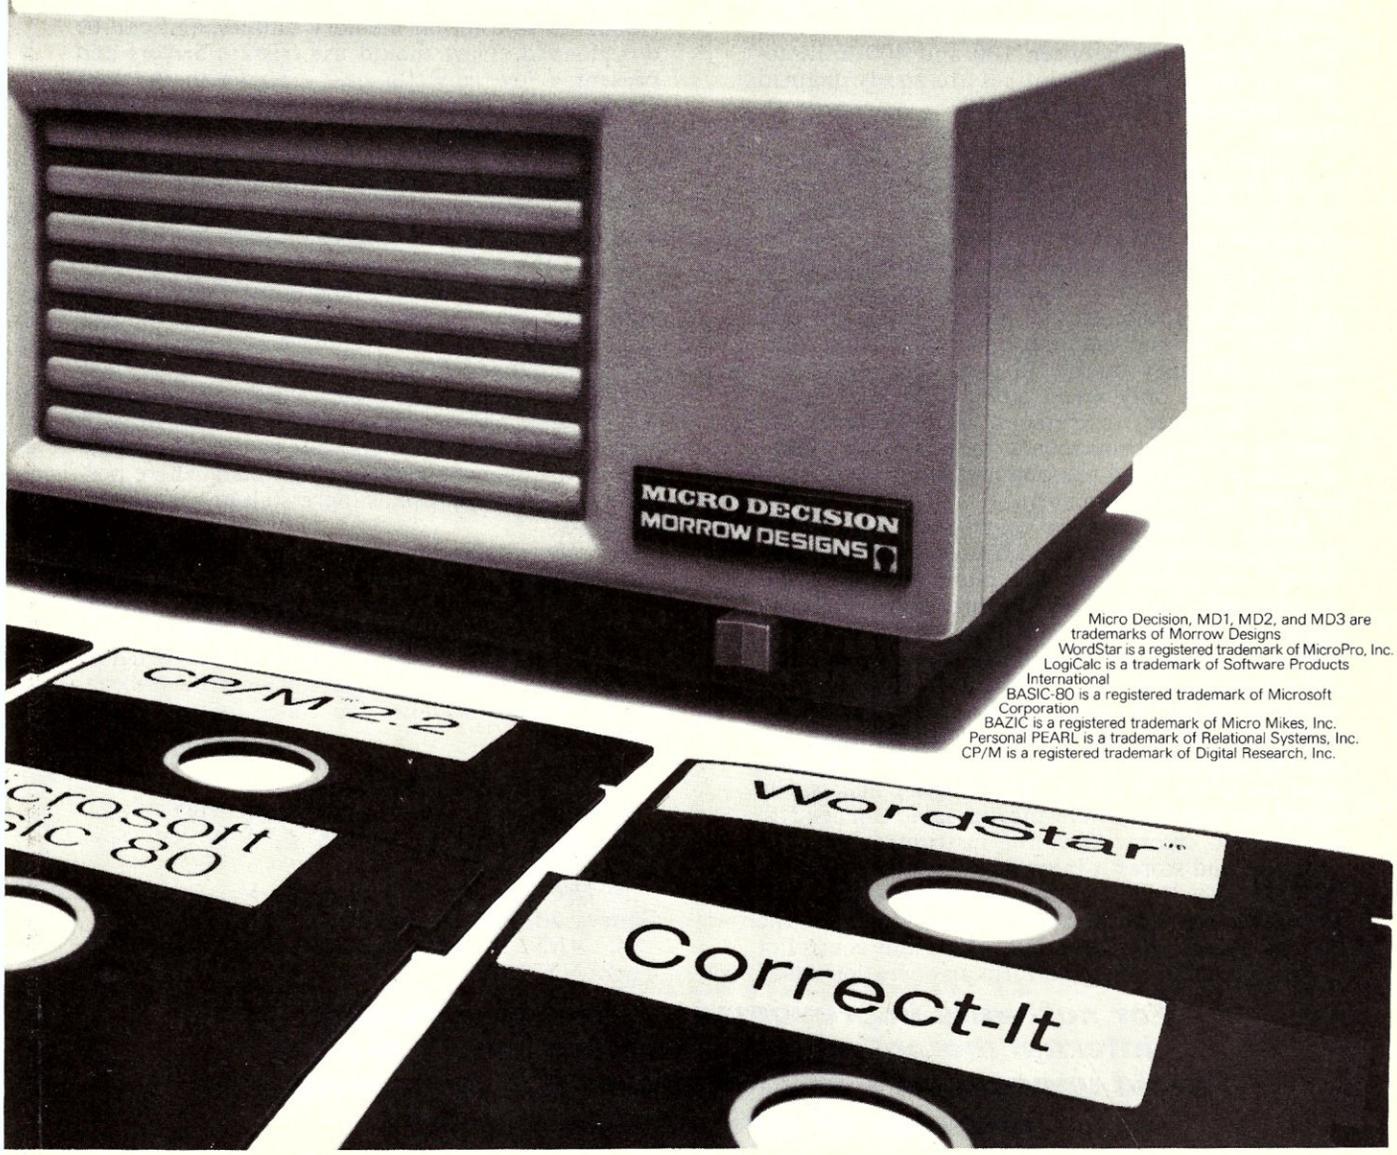

Micro Decision, MD1, MD2, and MD3 are trademarks of Morrow Designs
WordStar is a registered trademark of MicroPro, Inc.
LogiCalc is a trademark of Software Products International
BASIC-80 is a registered trademark of Microsoft Corporation
BAZIC is a registered trademark of Micro Mikes, Inc.
Personal PEARL is a trademark of Relational Systems, Inc.
CP/M is a registered trademark of Digital Research, Inc.

that is very seldom reached in a system of any complexity. More typical rates are 250KB/sec with open collector drivers, and 500KB/sec with tristate drivers. In a given system, the actual speed at which data can be transferred depends on a variety of things, including the controller I/O and processing time, the instrument's speed, and the number of instruments attached to the bus.

Increasing the number of instruments has two effects. The time needed to perform addressing and handshaking increases, and the loading of the bus increases. In the first instance, the handshaking proceeds at the rate of the slowest instrument on the bus. Even if only one or two of the devices are addressed, they all must respond to universal commands. In the second instance each instrument is a capacitive load on the bus, and such loads slow down data transmission. The more instruments, the more serious the problem.

Today's computers have sufficient speed so that they are usually not responsible for slow rates. Nevertheless, a misused computer can severely slow down data transfer. One often overlooked problem is the relative slowness of a disk access, which often takes between 100 and 400 milliseconds. If the 488 driver routines are poorly chained or overlapped, bus operation will be markedly affected.

Ultimately however, the data rate is determined by the instruments themselves. The faster a device can transfer messages and perform the handshake, the faster the job will done. What determines the speed of an instrument? The speed depends on four factors: the time required to set up and acquire the data, the internal process time, the data transfer time, and the interface process time. The user is obviously unable to make many changes here—he can only select sufficiently fast instruments. However, instrument manufacturers are making many improvements. In particular, microprocessor-controlled test and measurement devices are fast becoming the norm.

Many microprocessor-controlled instruments have preprocessors that handle addressed and universal commands, with the more complex commands being handled by the processor. This can speed up handshaking operations by a factor of 100 or so. Such instruments often have small internal memories that allow them to handshake messages at the fastest possible rate and store them in the buffer. When the message is terminated, the instrument acts on the message and the controller goes on to its next task. This doesn't necessarily speed up bus operation and, in fact, can lead to unexpected errors. After the instrument gets the message and stores it in memory, it must evaluate it. This takes time; the message must be read and checked for errors, the operation executed, and the results placed in output buffers. If the controller tells a second device to perform an operation based

on the first device's setup, errors will occur if programming delays are not taken into account. Properly used, however, such instruments are significantly faster.

Microprocessor control has led to one very real improvement in bus operation. Many instruments can be programmed to perform fairly sophisticated data reduction and analysis, relieving the computer of this task. The digital voltmeter discussed above is one such device. It can take a large number of readings and perform many statistical analyses of the data. Other devices have memory areas into which the controller can download instruction sets and analysis programs, again saving the computer this overhead.

The ultimate questions to be answered, however, are "How do I improve the speed in my system?" and "Can I go beyond 500KB/sec?" The answer has two parts: hardware improvements, which are not always accessible, and software improvements, which can always be employed. On the hardware side, one should, if possible, purchase instruments that are microprocessor controlled, have internal memory buffers, and can be downloaded. They should use tristate drivers and present a low capacitance (<50pF) to the bus. Cable lengths should be kept below 15 meters and should never exceed 1 meter per device. The number of devices on the bus should be kept to an absolute minimum, and they all must be on. If it is necessary to use slow devices along with fast ones, consider using two 488 buses on separate ports.

From the software viewpoint, take full advantage of internal memories and download smart devices. Whenever possible, interrupt drive the system. Use as many low-level drivers as possible (assembly language routines) and, when higher level routines are adequate, use a compiled language. Avoid unnecessary and redundant bus commands and UNTs and UNLs. Use bus commands rather than instrument-dependent commands where possible. Last but not least, suppress all unneeded terminators.

Finally, we should comment on a nonmandatory but frequently used aspect of the revised IEEE standard. It provides for "capability ID" on the rear panel of all instruments. The interface function codes (Table 1) for all functions supported by the instrument may be displayed near the 488 connector. Figure 4 shows the codes for the digital voltmeter.

References

1. S. Leibson, *Byte*, Vol. 7, April 1982.
2. *IEEE Standards*, 345 E. 47th St., New York, NY 10017.
3. *IEC Standards*, 1, Rue de Varembe, 1211 Geneva 20, Switzerland.
4. *ANSI Standards*, 1430 Broadway, New York, NY 10018.

For software improvement, take full advantage of internal memories and download smart devices; avoid unnecessary and redundant bus commands; and suppress all unneeded terminators.

IEEE-488 Bus Tutorial continued . . .

Other reading

Tutorial Description on the Hewlett-Packard Interface Bus. Available from the Hewlett-Packard Company, this booklet has an extensive bibliography on HPIB articles and instruments.

"Understanding IEEE-488 Basics Simplifies System Integration." June and August 1982 issues of *EDN*.

Introduction to the GPIB. Available from the Wavetek Corporation.

Interfacing to the Interface: Practical Considerations Beyond the Scope of IEEE Standard 488. T. Coates, Wescon 75 Conference.

Richard S. Newrock is professor of physics and department chairman at the University of Cincinnati. He received a B.S. in physics from Rensselaer and a Ph.D. from Rutgers. After several years of post-doctoral research at Cornell University, he joined the faculty at Cincinnati. An active researcher, he is currently involved in investigations into two-dimensional physics and topological phase transitions in superconducting arrays and granular metals. He uses microcomputers extensively in the laboratory, office, and home for word processing, database handling, scientific calculations and experimental control and data taking. 

Can a Software Package Change the World?



Spread Sheets First... **QUESTEXT™ Next!**

- A Revolutionary New Microcomputer Concept for Systems Developers and End Users Alike
- Buy One General Purpose Package and save buying dozens of Specialized Programs
- **ULTRA FRIENDLY** • 100% Menu Driven
- **LEARNABLE** in one session • No Programming
- **ALLOWS INSTANTANEOUS INNOVATION** • Not a DBMS

QUESTEXT III is a mature general purpose system for organizing and communicating textual information. It organizes text into tree-like menu structures. It is the first electronic WordSheet, a generalized information handler.

Unlimited uses: Dealer Demo; On-line help and documentation; Computer-aided instruction; On-job training; Top-down software documentation; Writer's outlines; Electronic filebox; Speech teleprompting; Classroom blackboarding; Address/phonebook; Public access question answering; Calendar/datebook; Scheduling/planning; Archiving; Library and File cabinet indexing; Observation logging; Personnel aids (locator service, job description, line of command); Customer/New Product support and training; Technical information management; Diagnosis support; Quality control; Price/Product data; Electronic Publishing; Bulletin boarding; Tutorials

and quizzes for textbooks; Personal computing (message/reminder and note/comment management, disk file inventory/annotation, system protocols, procedures, etc.); Home Computing (insurance inventory, Records management, etc.); Survey and experiment control; Much more. Unprecedented potential for contract, consultants and systems developers.

FEATURES: Easy updating; Cursor editing; Error trapping; English prompting; No syntax; Fast machine executable code; Simple commands (Help, Show, Add, Delete, Insert, Move, Edit, Print, Next, Up, Top); Garbage recycling; Easy file control (Create, Delete, Backup, Modify); **REQUIRES IBM PC or 2. x 56K CP/M, ASCII CRT. WHO CAN USE QUESTEXT? ANYONE CAN!** (Systems Developers, Business People, Educators, Consultants, Scientists, Programmers and Nonprogrammers alike).

SEE BELOW FOR ADVANTAGES OF EARLY ORDER. MONEY BACK OFFER ON MINI VERSION. PHONE ORDERS 617.369-5715 • OEM AND DEALER INQUIRIES WELCOME. Available from:



Mail to: iRr, 1538 Main Street, Concord, MA 01742

PLEASE SEND ME QUESTEXT III:

- | | |
|---|----------------------|
| <input type="checkbox"/> Mini Version (6 lines menu, up to 40 screens, 500 records) (Refundable for 14 days if Mini Version is returned in good condition.) | \$ 49.95 |
| <input type="checkbox"/> Full System (99 lines menu, up to 6,000 screens, 32,700 records.) Wholesale to May 30, 1983 (After May 30, 1983, Retail.) | \$179.95 |
| <input type="checkbox"/> Manual Only | \$ 29.95 |
| <input type="checkbox"/> Self teaching disk w/5 applications | \$ 29.95 |
| Add \$3.00 Postage and Handling | TOTAL COST: \$ _____ |

*Features/Prices/Availability subject to change without notice. ©1983 iRr

8" SD Osborne IBM PC (Others from dealers)

Payment enclosed VISA MASTERCARD Card No. _____ Expiration Date _____

Signature _____ Telephone _____

Print Name _____ Address _____

City _____ State _____ Zip _____

CIRCLE 21 ON READER SERVICE CARD

From Plum Hall an Introductory Book on C.

Learning to Program in C

The genius of C language is its grasp of the common features of modern computer architecture. For the full spectrum of processors, micro, mini and mainframe, the "portable assembler" creates the opportunity for small, fast programs which can be run, without change, on all these machines. With or without previous programming experience, you can learn the fundamentals of this powerful language and apply them to real-time programming, signal processing, electronic engineering, application packaging or sophisticated personal computing.

Thomas Plum

NEW!

It has been several years in the making and now it is here. Learning to Program in C, by Thomas Plum, teaches C language from the ground up. With or without previous programming experience, anyone acquainted with computers will find a clear description of how C works.

You will find guidelines for writing portable programs that will run on a wide variety of modern computers — micro, mini, and mainframe, with excellent efficiency in all these environments.

Topic areas include:

- Environmental details - starting C
- Data and variables - using the memory
- Operators and expressions - intuitive reasons for C precedence.
- Control structure - readability rules
- Functions - print and scan made easy
- Case study - full Blackjack source, from design to documentation
- Pointer, struct clarified

PLUM HALL 1 Spruce Ave, Cardiff, NJ 08232
Phone orders: 609-927-3770

- explains C step-by-step
- practical "how to" approach
- describes what happens in the computer

372 pp, 7 1/2 x 10, Price \$25.

CIRCLE 77 ON READER SERVICE CARD

- send information on Plum Hall Seminars on C and UNIX™

- Check
 Mastercard Visa
 American Express

Please send me _____ copies of "Learning to Program in C" at \$25. (plus \$6% for N.J. residents) ea. enclosed find \$ _____

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Expiration Date _____ Card No. _____

Signature _____

CIRCLE 77 ON READER SERVICE CARD

Interfacing Microcomputers with Laboratory Instruments

by Joseph W. Long

Within the last six years, the microcomputer has rapidly developed into a very important laboratory tool, since the cost of microcomputer software and hardware has been steadily dropping while its computing power has increased. Much of the new chemical instrumentation currently entering the market is microcomputer-controlled. Here at Broome Community College, examples of such equipment in our Chemical Technology laboratories run all the way from programmable pH meters to a very sophisticated Perkin-Elmer computerized infrared spectrophotometer.

However, to keep the education of our students abreast with the state of the art, we decided that student involvement with microcomputers beyond the commercially available "off the shelf" equipment was desirable. For this purpose, two microcomputer-controlled laboratory instrumentation systems were constructed for the use of second-year chemical technology students. The first consists of a Gow Mac Gas Chromatograph interfaced to a Processor Technology microcomputer and functions as a "smart" gas chromatographic data analyzer, collecting and processing data in real time. The second system consists of Nucleus scintillation equipment interfaced to a North Star Horizon microcomputer; it functions as an intelligent gamma scintillation spectrometer.

The idea was to interconnect a microcomputer with older instruments already on hand, thus showing students directly how computers can increase the power and versatility of existing equipment. One advantage of using a separate microcomputer connected to a piece of equipment is that students are able to see much more clearly how the computer and instrumentation are interrelated physically, logically, and electronically. Another is that it gives students a chance to study the control programs and modify the software to improve or extend the operation of the system. The control programs in commercially available equipment are often inaccessible to students, due either to their proprietary nature or to the fact that they are frequently written in an assembly language and stored in ROM.

We acquired our first microcomputer during the fall of 1977. The hardware and software were prepared over the summer and fall of 1979, while the first student use of this equipment took place during the 1979-1980 academic year.

Gamma scintillation spectrometer

The microcomputer-controlled gamma scintillation spectrometer, a scheme of which is shown in

Joseph W. Long, Broome Community College, Box 1017, Binghamton, NY 13902

Figure 1, consists of a North Star Horizon II microcomputer interfaced to Nucleus scintillation equipment. (Interface hardware will be discussed later.) The Nucleus equipment includes a sodium iodide detector, pulse height analyzer, ratemeter, and chart recorder. The microcomputer contains 64K of RAM, an eight-channel digital-to-analog/analog-to-digital converter (ADC/DAC), and a high-resolution graphics video terminal.

Spectra may be run completely under control of the microcomputer. Controllable parameters include scan speed, scan energy limits, scan output media, etc. Available output media include the chart recorder and/or low- or high-resolution graphics on the video terminal. Once scanned, spectra may be saved on disk (over 250 spectra per quad-density disk) for subsequent re-examination. Disk spectra consist of 255 data points, where each point is resolved to one part in 2^8 . A typical spectrum replotted from disk is shown in Figure 2.

The Basic program that controls the spectrometer requires about 52K of memory. The control program includes continuous display of prompt lines, making the system very simple to operate. The self-prompting nature of the programs makes it possible for a student to operate the spectrometer under computer control, with perhaps 15 minutes of instruction.

Chromatographic data analyzer

The chromatographic data analyzer (Figure 3) consists of a gas chromatograph interfaced to another microcomputer. The gas chromatograph used is a Gow Mac model GC-2, with a strip chart recorder. The microcomputer is a Processor Technology Sol, with 64K RAM and a Helios II dual floppy disk system. Data analysis capabilities of this system include the ability to calculate the relative areas of each peak in a series of a chromatographic run, together with determination of the retention time of each peak. The results of a run may be printed optionally on a teletype terminal for a permanent record. A full set of continuous prompts appearing during execution makes this equipment as simple to operate as the scintillation system.

The software developed for the data analyzer is rather unsophisticated, requiring that three assumptions be met for good results. These assumptions are that the baseline is drift-free, the peaks symmetric, and the signals noise-free. There are two reasons for this lack of sophistication. First, the software is written in Processor Technology Basic, an interpreted language that is too slow to allow much real-time calculating (the amount of calculation increases rapidly with increasing sophistication of the routines). Second, the amount of time required to develop even the simple software used in this project has been very large, and a

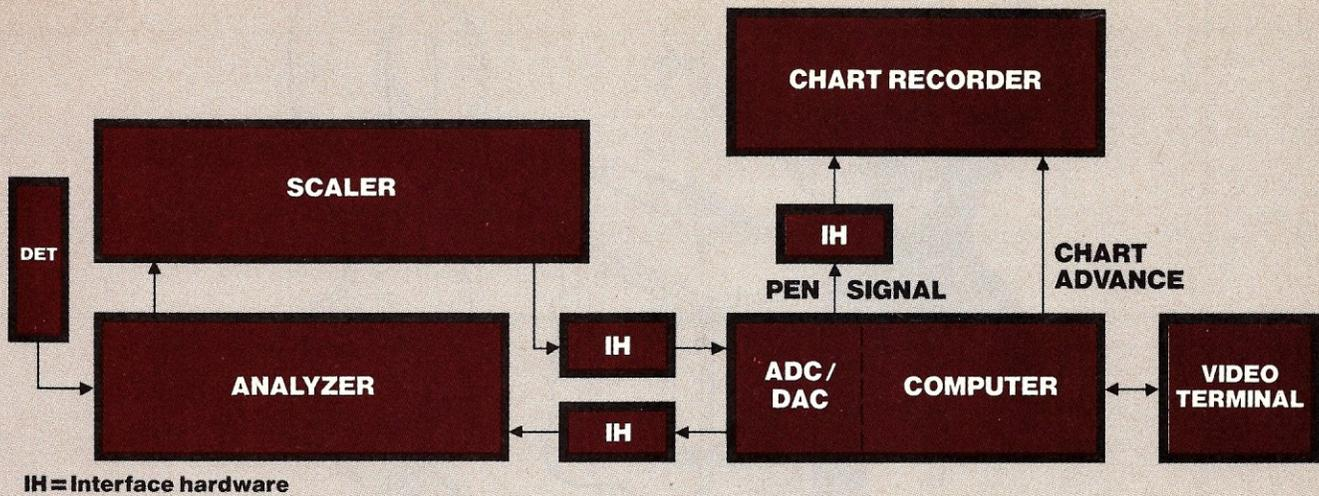


Figure 1. Gamma scintillation spectrometer

great deal more additional time would be required in order to improve the programs significantly.

One interesting aspect of the computers used in this project is their electronic architecture. Both computers consist of a "backplane" into which electronic circuit cards are plugged. Each computer uses the IEEE-696/S-100 bus, for which dozens of manufacturers have produced hundreds of different boards. A computer can be made by plugging into the backplane (also called a "mother-board") the units that comprise a computer: a central processor unit (CPU) board, memory boards, an input/output board, and so on. This approach can produce a custom-built computer having just the specifications a given situation requires. There are a number of advantages to this approach: One is that as technological advances or changing requirements dictate, old boards may be replaced by newer ones, making it impossible for the computer to become obsolete (for a few years anyway!). Another advantage is that troubleshooting is often relatively easy with a modular system of this type, since a board can be swapped from a known good system to one with problems in order to isolate a problem quickly in a given part of the computer.

The alternative approach in terms of architecture is to use one of the "single" board computers, such as the Radio Shack, Heath/Zenith or Apple. In these machines, the entire computer is built onto one or two large circuit boards. One result of this approach is that a computer of this type may be unpacked, plugged in, and run; it is easy to get running. While these are excellent computers and have many good points, from the viewpoint of adaptability, expandability, and ease of repair, they suffer in comparison with a computer using the IEEE-696/S-100 bus. A similar situation exists in buying high-fidelity equipment: One can either buy a package system or opt for "components." The first gives a system ready to operate; the second may want a bit of fiddling to get it going, but has more possibilities.

Design and construction of interface electronics

This phase of the project requires comment in detail because of its critical importance to the project as a whole. "Interface electronics" refers to the circuitry required to interconnect the computer—essentially a digital device—with external items of equipment, most of which are analog devices.

The electronics required to do this comes in two packages. The first is an analog-to-digital/digital-to-analog converter. The converter used in this project, a Cromemco D7A, provides eight channels of analog input to the computer, and eight channels of analog output from the computer—all on a single card that plugs into the computer back-


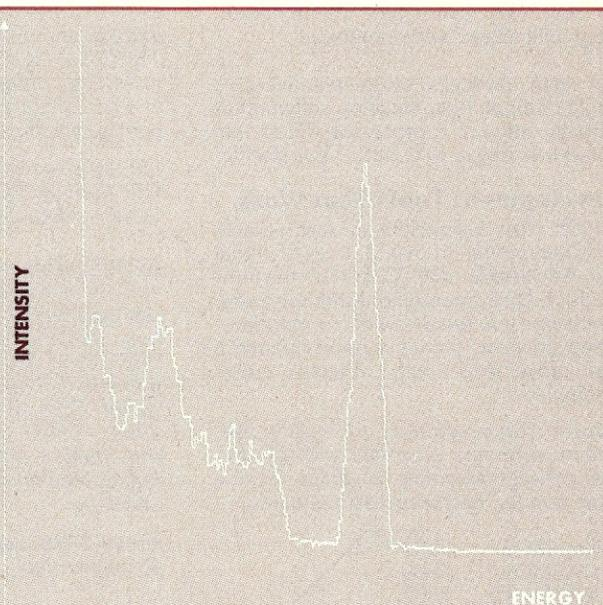


Figure 2. Cs¹³⁷ spectrum replotted from disk. "Steps" are a result of using an 8-bit analog-to-digital converter.

Using a separate microcomputer allows students to see clearly the interrelation between computer and instrument, and gives them a chance to modify the software.

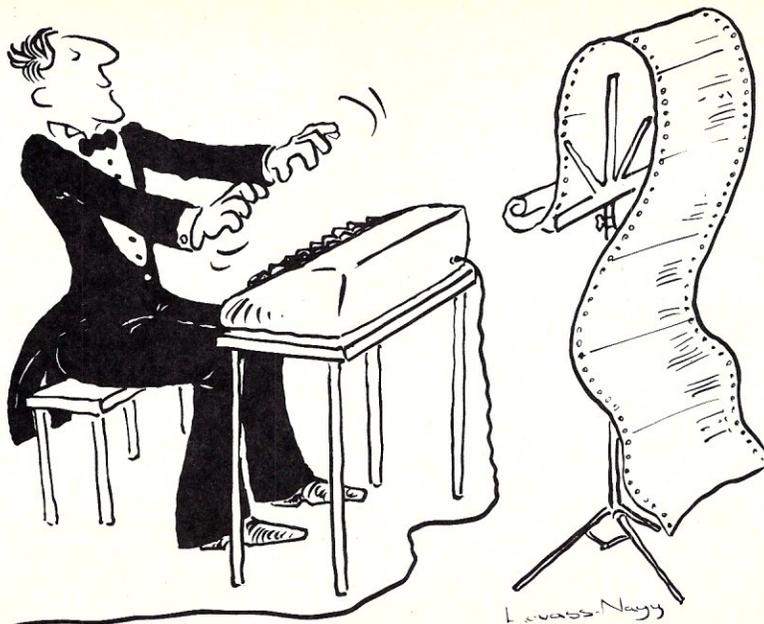

The Well-Tempered Cross-Assembler

Before Johann Sebastian Bach developed a new method of tuning, you had to change instruments practically every time you wanted to change keys. Very difficult.

Before Avocet introduced its family of cross-assemblers, developing micro-processor software was much the same. You needed a separate development system for practically every type of processor. Very difficult and very expensive.

But with Avocet's cross-assemblers, a single computer can develop software for virtually any microprocessor! Does that put us in a league with Bach? You decide.

Development Tools That Work

Avocet cross-assemblers are fast, reliable and user-proven in over 3 years of actual use. Ask NASA, IBM, XEROX or the hundreds of other organizations that use them. Every time you see a new microprocessor-based product, there's a good chance it was developed with Avocet cross-assemblers.

Avocet cross-assemblers are easy to use. They run on any computer with CP/M* and process assembly language for the most popular microprocessor families.

XASMO5	6805	} \$200 each
XASMO9	6809	
XASM18	1802	
XASM48	8048/8041	
XASM51	8051	
XASM65	6502	
XASM68	6800/01	
XASMF8	F8/3870	
XASMZ8	Z8	
XASM400....	COP400	
XASM75	NEC 7500	\$500

(Coming soon: XASM68K 68000)

Turn Your Computer Into A Complete Development System

Of course, there's more. Avocet has the tools you need from start to finish to enter, assemble and test your software and finally cast it in EPROM:

Text Editor VEDIT -- full-screen text editor by CompuView. Makes source code entry a snap. Full-screen text editing, plus TECO-like macro facility for repetitive tasks. Pre-configured for over 40 terminals and personal computers as well as in user-configurable form.

CP/M-80 version \$150
 CP/M-86 or MDOS version \$195
 (when ordered with any Avocet product)

ROM Simulator -- ROMSIM by Inner Access eliminates need to erase and reprogram EPROM. Installed in an S-100 host, ROMSIM substitutes RAM for EPROM in external target system. 16K memory can be configured to simulate the 2708, 2758, 2716, 2516, 2732, 2532, 2764, 2564 in either byte or word organization. Avocet's configurable driver makes loading of HEX or COM files fast and easy.

From \$495 depending on cabling and RAM installed.

EPROM Programmer -- Model 7128 EPROM Programmer by GTek programs most EPROMS without the need for personality modules. Self-contained power supply ... accepts ASCII commands and data from any computer through RS 232 serial interface. Cross-assembler hex object files can be down-loaded directly. Commands include verify and read, as well as partial programming.

PROM types supported: 2508, 2758, 2516, 2716, 2532, 2732, 2732A, 27C32, MCM8766, 2564, 2764, 27C64, 27128, 8748, 8741, 8749, 8742, 8751, 8755, plus Seeq and Xicor EEPROMS.

(Upgrade kits will be available for new PROM types as they are introduced.)

Programmer \$389
 Options include:
 Software Driver Package \$ 30
 RS 232 Cable \$ 30
 8748 family socket adaptor \$ 98
 8751 family socket adaptor \$174

Call Us

If you're thinking about development systems, call us for some straight talk. If we don't have what you need, we'll help you find out who does. If you like, we'll even talk about Bach.

VISA and Mastercard accepted. All popular disc formats now available -- please specify. Prices do not include shipping and handling -- call for exact quotes. OEM INQUIRIES INVITED.

*Trademark of Digital Research.




AVOCET SYSTEMS INC.

DEPT. 483M
 804 SOUTH STATE STREET
 DOVER, DELAWARE 19901
 302-734-0151 TLX 467210

CIRCLE 60 ON READER SERVICE CARD

Interfacing to Instruments continued . . .

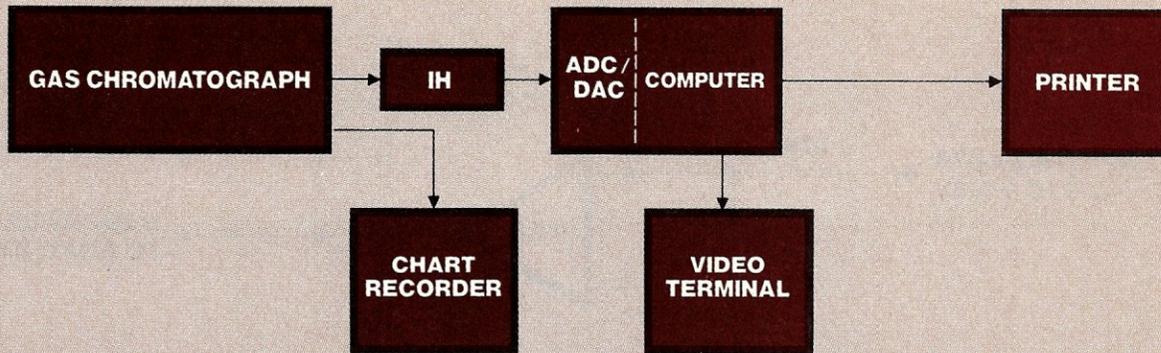

IH = Interface hardware


Figure 3. Chromatographic data analyzer

plane. A limitation inherent in the D7A necessitates the second electronics package. The limitation is this: Both the input and output sections of the D7A are designed to function over the voltage range of -2500 mV to $+2500$ mV. The problem here is that the analog peripherals to be connected to the converter have many different voltage ranges extending, for example, from 0 to 1 mV for output from the gas chromatograph to the computer, to the 0-to-10V range required from the computer to drive the analyzer in the scintillation spectrometer.

Operational amplifier circuits, functioning as inverting amplifiers and/or summing amplifiers

(or both) were used to do the required matching between the computer and the peripherals. These circuits were designed using low-cost, easy-to-use 741 operational amplifier integrated circuits. Four such circuits were required for the work done in this project: three in the scintillation spectrometer, and one in the data analyzer.

Examples of the circuits used in the scintillation spectrometer are shown in Figures 4 and 5. The first circuit matches the 0 to 100 mV output of the ratemeter to a ± 2500 mV input channel on the D7A. The second converts the DAC analyzer ramp output, which ranges from -2.5 V to $+2.5$ V, to 0V to 10 V.

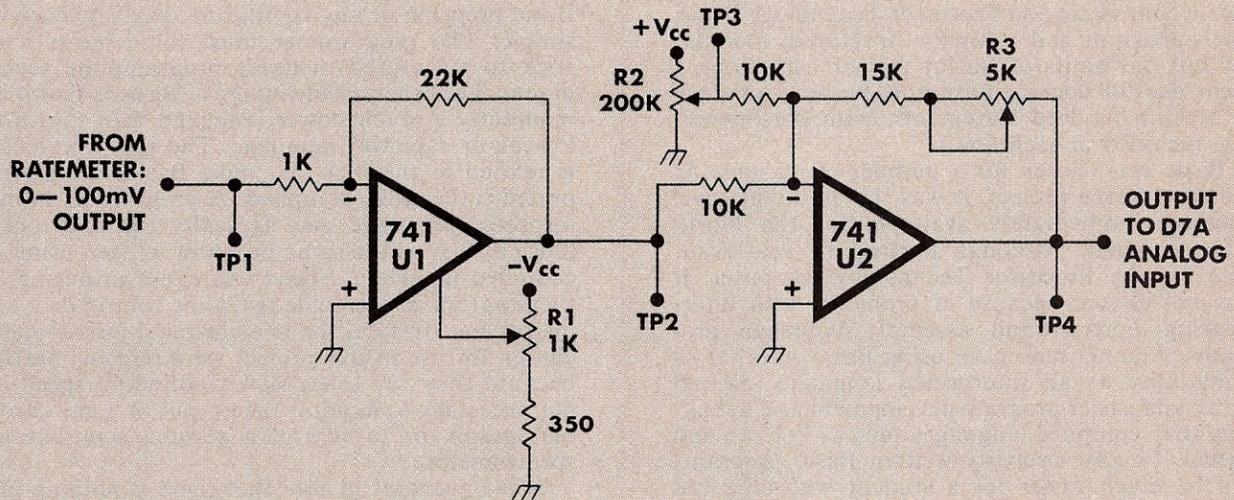

Circuit Theory:

U1 is an inverting amplifier with gain of ~ 22 (TP1 to TP2).

U2 is a summing amplifier with a gain of ~ 2 (TP2 to TP4).

TP voltage swings
 TP1 0 to 100mV
 TP2 0 to -2500 mV
 TP3 1.25V (fixed)
 TP4 -2500 to $+2500$ mV

Adjustments:

1. Adjust R2 to give approximately 1.25V at TP3.
2. With TP1 = 0mV, adjust R1 to give 0mV at TP2.
3. With TP1 = 0mV, adjust R2 to give -2.5 V at TP4.
4. With TP1 = 100mV, adjust R3 for 2.50V at TP4.
5. Repeat 2 and 3 until:
 TP1 = 0mV gives -2.50 V at TP4
 TP1 = 100mV gives $+2.50$ V at TP4.

Figure 4. Ratemeter output amplifier. This circuit converts the ratemeter's 0—100mV output to the -2.5 to $+2.5$ V output needed to drive the D7A analog input. The circuit is built into the ratemeter.

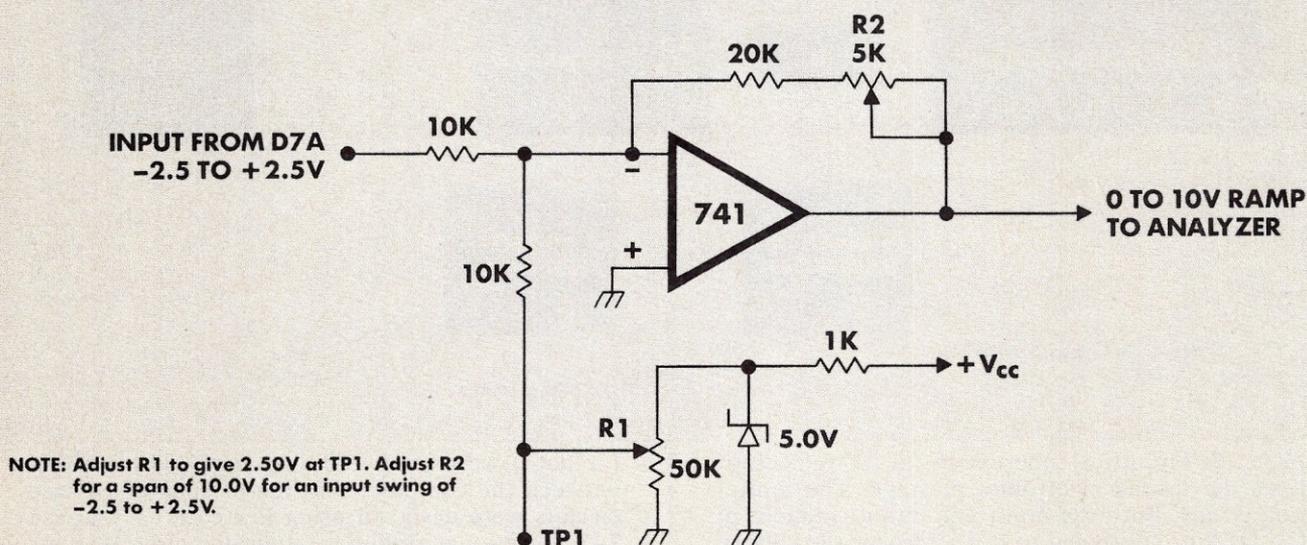


Figure 5. Analyzer ramp interface. This circuit converts a computer-generated ramp signal of -2.5 to +2.5V into a ramp running from 0 to 10V. The circuit was built into the Nucleus Analyzer.

The software

Two main programs were written for this project: one for the spectrometer, and one for the data analyzer. The programs were written respectively in North Star Basic and Processor Technology Basic. Each program had a highly structured, modular (within the limits of Basic) format containing a great deal of documentation. (The programs run to several hundred statements, with documentation included in each line.)

Basic was chosen for a number of reasons. At the start of the project, it was the only high-level language immediately available for the North Star computer. Although Fortran IV was available for the Processor Technology computer, it was not chosen because of problems with interweaving Fortran and assembly language programs. Another reason for using Basic was that its availability as an interpreted language allowed faster and easier program development and debugging than compiled languages such as Fortran and Pascal. Finally, properly written Basic programs can be much easier for a student who does not have much programming experience to read and understand than programs in most other languages. This is important if students are to be able to examine and modify portions of the program within a reasonable period of time.

However, Basic has two disadvantages when used in work of this sort. The first is that Basic has

few rules regarding structure or documentation. It is very easy to write Basic programs that are totally indecipherable not only to a student, but also to the programmer after a few days. This problem can impede the development or modification of a Basic program of any significant size. The cure is simple: The programmer must force himself to stick to structured modular programming techniques. The other disadvantage of Basic is that it is inherently a much slower language than Fortran, Pascal, or assembly language. The speed problem is related to the fact that most Basics are interpreted rather than compiled. A program in an interpreted language may typically run only one-tenth as fast as the same program written using a compiled language. Speed can cause problems if the program is to provide real-time control over an instrument. In fact, the two chemical instruments chosen for use in this project were selected partly because they run quite slowly. Blinding speed is not necessary to monitor the output of a gas chromatograph, or to control a gamma scintillation spectrometer.

It is important to note that there is nothing inherent in Basic that requires it to be interpreted. In fact, at least one company (Microsoft, Bellevue, WA) has identical versions of Basic, one interpreted, the other compiled. A program may be written and debugged using the interpreter, then compiled to produce a much faster version for actual use.

Students benefit in two ways: They learn about the advantages of using laboratory computers and, at the same time, are able to do more chemistry because of increased instrument efficiency.


EXTRA**EXTRA**

S-100 World News

MACROTECH International Corporation

22133 Cohasset Street, Canoga Park, California 91303 • 213-887-5737

Megabyte S-100 Memory Here Now

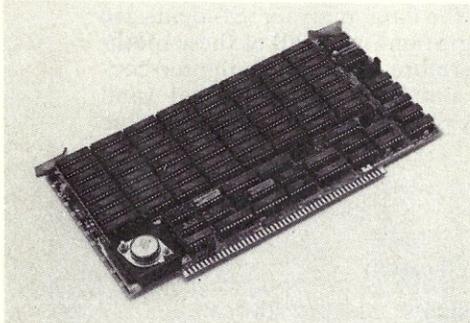

Major breakthrough made by Macrotech International Corporation


CANOGA PARK (MI)-January 20, 1983-Mike Pelkey, president of Macrotech International Corporation, today announced a major technological breakthrough in S-100 dynamic memory board density. A full megabyte of high speed dynamic ram is contained on a single standard size S-100 multilayer P.C. board. The product, dubbed 'Max' meets all IEEE/696 mechanical and electrical specifications and byte parity generation/checking is included as a standard feature. Max supports IEEE/696 24-bit addressing (selectable at any 128K boundary), 8/16 data transfer protocol, phantom line operation, and the same ultra low noise bus signal filtering provided on Macrotech's popular high performance 256K dynamic memory board.

Max is in production now and shipping at the all-time low cost per bit list price of \$1,983 in unit quantity.

Bruce Kimmel, Macrotech's sales manager reports that customers are being served on a "first-in, first-out" basis and warns that due to a high incidence of graphics and similar memory-intensive applications, along with an unwillingness in the trade to pay exorbitant prices for memory, backlogs may occur for Max which could delay shipments against some late orders. With the improbability of second sourcing for some time, interested parties are urged to get orders in as soon as possible. Bruce can be contacted at 22133 Cohasset Street, Canoga Park, California 91303, or reached by telephone at (213) 887-5737.

M³ Family Growing

Another product recently introduced by Macrotech is soaring to the top of the best-seller list. The Multiuser II is a 128 kbyte 70ns CMOS static ram memory board that is unquestionably without peer in the S-100 marketplace. It's a 6-layer board with blazing speed, 8/16 data transfer protocol, and ultra-low power external battery support. The same M³ memory mapped addressing architecture so in demand with system software professionals is now standard in the new Multiuser II. M³ was first developed by Macrotech for the popular Multiuser I 256K dynamic ram board to meet the demanding requirements of today's sophisticated systems.

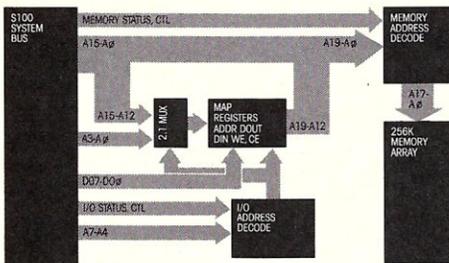

Macrotech's advanced memory mapping scheme allows each 4K block of the 16 bit (64K) logical addresses to be dynamically translated to any 4K block of the physical memory. Global memory can be configured to any size and located anywhere in the logical address space. All remaining memory can be addressed through the remaining logical address space by simply reloading the mapping registers to address the desired physical memory blocks. This scheme permits unlimited use of all on-board physical memory.

Virtual Disk Flexibility Cited


CANOGA PARK-January 20, 1983-Macrotech reports their Multiuser I and Multiuser II S-100 ram memory boards can be used as both system memory and "virtual disk" storage in eight or sixteen-bit applications. Addressing flexibility is the key. The Multiuser M³ memory mapped addressing is guaranteed to allow memory partitioning to fit the exact requirements of your system without ever wasting a single byte.

Today's trend in operating systems appears to include extended memory capabilities to allow for the recent technological advances in semiconductor memory. A close look at Digital Research's new CP/M 3™ for example, would lead you to believe that it was especially created to fit Macrotech's family of Multiuser memory boards. (It wasn't, but try to find one that fits better.)

MACROTECH Announces Distribution Expansion

CANOGA PARK-January 20, 1983-Macrotech is now establishing domestic and international dealer/representative networks. The California based firm is expanding its customer support through these channels and invites inquiries. Volume users and retailers should contact the company for details.

Macrotech's marketing director Bob Ryle states, "IEEE/696 has made S-100 legitimate. It is rapidly gaining acceptance due to its inherently superior speed characteristics." Ryle attributes the growing demand for Macrotech memories to Macrotech's strict adherence to the IEEE standard.

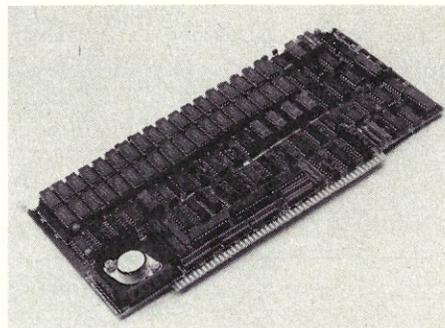

Where it all started: pictured is the popular Multiuser I, Macrotech's first product. This widely used board provides 256 Kbytes of dynamic ram with 4K page memory mapping (called M³), 8/16 bit operation, 24 bit addressing and byte parity checking.

CIRCLE 28 ON READER SERVICE CARD

Interfacing to Instruments continued . . .

Further work

This project is part of a continuing series that we are doing at Broome Community College. Previous projects involving computer control and laboratory interfacing include development of a microcomputer-controlled automatic titrator and a constant-current coulometer. Other projects include several computer programs that students can use in laboratory work. One example is a program that assists in the preparation of samples for liquid scintillation counting (LSC); another is a Sartorius Analytical Balance interfaced to a Hewlett-Packard desktop computer. (The latter is a commercially prepared package.)

Project evaluation

Both systems functioned as intended. The gamma scintillation spectrometer even emerged as a much

more powerful and versatile system than had been planned, in terms of its capabilities and ease of use, while the data analyzer functioned almost exactly as had been projected.

The primary users of the data analyzer are liberal arts students and chemical technology students in their organic chemistry courses. An experiment comparing simple with fractional distillation includes analysis of samples using the gas chromatograph. Students analyzed their results by integrating peaks on their chromatogram via several methods: cutting and weighing, triangulation, and now, by use of the data analyzer. Students are required to do integrations using all of these methods, and they therefore see the computer-controlled integrator simply as an additional (and very powerful) way of analyzing chromatographic data.

Equipment Suppliers

<i>Equipment</i>	<i>Company</i>
Chromatographic data analyzer Processor Technology Sol computer, Helios II disk system	Company out of business. Current source of this equipment: Computer Port 2142 N. Collins Arlington, TX 76011
Model D7A digital-to-analog/analog to digital converter	Cromemco, Inc. 280 Bernardo Ave. Mountain View, CA 94040
LA 36 Decwriter II printing terminal	Digital Equipment Corporation 146 Main St. Maynard, MA 01754
GC-2 Gas chromatograph with chart recorder	Gow Mac Instrument Company P. O. Box 32 Bound Brook, NJ 08805
Scintillation spectrometer Horizon II microcomputer	North Star Computers, Inc. 14440 Catalina St. San Leandro, CA 94577
ADM3A video terminal	Lear-Siegler, Inc. 714 North Brookhurst St. Anaheim, CA 92803
Retrographic high-resolution graphics for ADM3A	Digital Engineering, Inc. 1787-K Tribute Road Sacramento, CA 95815
NaI detector Model 2010 amplifier analyzer Model L scaler	The Nucleus, Inc. Box R Oak Ridge, TN 37830
Model SR255B chart recorder	Heath Company Benton Harbor, MI 49022
Model D7A AD/DA converter	Cromemco, Inc. 280 Bernardo Ave. Mountain View, CA 94040

Interfacing to Instruments continued . . .

Users of the gamma scintillation spectrometer are chemical technology and medical laboratory technology students in their instrumental analysis courses. They operate the scintillation spectrometer both in its original manual mode and in its computer-controlled mode, and are thus able to see the sort of enhancement in instrument performance that is possible when computer control is used. Also important is that the students are able to spend more time on the chemical techniques and applications of gamma scintillation spectroscopy because the equipment is easier to use, and it takes much less fiddling on the part of the student to get it to produce usable results. This is an important point. Students benefit in two ways by using the gamma scintillation system: They learn about the advantages of using laboratory computers, and, at the same time, are able to do more *chemistry* due to the increased efficiency of the computer-controlled equipment. Using each system has become a regular part of the laboratory courses at Broome.

Some final words

Interfacing a microcomputer with external instrumentation requires skill in analog and digital electronics and computer programming in both high-level and assembly language. A sophisticated type of ADC/DAC convertor (California Data Corporation, Newbury Park, CA) now eliminates the need for much of the electronics work (interface hardware) done in this project. These converters

contain built-in software-controlled, programmable-gain operational amplifiers that can eliminate the requirement for interface hardware. Such equipment allows interfacing the analog peripherals by simply running a two-wire pair to each piece of equipment to be connected to the computer. There is, of course, a penalty to be paid for this convenience: The ADC/DAC boards are more expensive than the Cromemco board used in this project. The cost is not prohibitive; thus it should be possible for many more individuals with a knowledge of programming but little hardware experience to do their own interfacing, using this newest type of equipment.

The era of having a computer or two in every laboratory is upon us. Now the newest computer equipment should make it possible for anyone with even a minimal software background to begin working with laboratory computer interfacing.

Information packages for the two projects described are available, each containing additional details of the project hardware and listings of the programs, at a cost of \$5 per package to cover postage and handling. Make checks payable to Joseph W. Long, Chemical Engineering Technology Department, Broome Community College, Box 1017, Binghamton, NY 13902 and specify either the Data Analyzer package or Scintillation Spectrometer package. Copies of the programs, on disk, are also available at no charge (North Star single density). You must supply the disk and include SASE for return of the disk. □

INTERSTELLAR DRIVE™

A SOLID STATE DISK EMULATOR



Save valuable time!
5 to 50 times faster
performance than floppy disks
and Winchester drives

PION'S INTERSTELLAR DRIVE is designed for use with a family of interfaces and software packages. Currently available are interfaces for IBM, S100, TRS80, Apple, SS50, and most Z80 uP, and software for most popular operating systems. Additional interfaces are continually being developed for the most popular computers.

SAVE MONEY!
Increase your
computer's productivity

The INTERSTELLAR DRIVE is a high performance data storage subsystem with independent power supply, battery backup, and error detection. It has 256KB to 1 Megabyte of solid state memory integrated to perform with your operating system.

Basic Price for 256KB unit [includes interface and software]
\$1095. plus tax (where applicable) and shipping

Visa and Master Card accepted.



PION, INC. Tel. (617) 923-8009
101R Walnut St., Watertown, MA 02172

TRS80 trademark of Tandy Corp. Apple trademark of Apple Computers
Interstellar Drive trademark of PION, Inc.

Implementing the Advanced Features of CP/M Plus: Part 2

by Bruce R. Ratoff

In the February issue, I discussed some of the details of bringing up a CP/M Plus system with memory management. Now we will look at some additional routines that may be added to your CP/M Plus BIOS to further enhance system performance. None of these routines is required to get the system running, but each one activates an additional feature or makes the system run faster.

Date and time support

One of the most asked-for features in the new CP/M is the ability to handle date and time. BDOS calls have been provided to read and set the system date and time. For compatibility, these calls use the same function numbers and data format as MP/M. While it's nice to be able to use the date and time from your programs, the most valuable use of date and time is the ability to time-stamp your files. On each of your diskettes or hard disk drives, you may instruct CP/M Plus to record the date and time each of your files was last updated. In addition, you may also elect to record either the date and time of creation or the date and time of last access. Since most CP/M programs update a file by outright replacement, the most useful combination is probably update time and access time.

The BDOS keeps the system date and time in a group of memory locations in the System Control Block. The SCB is a special area of memory containing a number of BDOS variables. These variables may be accessed from the BIOS by declaring them in an EXTERN statement and linking the BIOS with the system module SCB.REL, which is provided on the release disk.

If your system has a clock chip somewhere, implementing the system date and time features becomes extremely easy. One of the new BIOS jump vectors is intended for a routine called TIME. This vector is called whenever the BDOS wants to either read or change the date and time. On entry to your TIME routine, if the C register contains a 0, the BDOS is about to read the date and time. Your routine should read your clock hardware and store the date and time into the appropriate slots in the SCB. If, on entry to the TIME routine, the C register contains an FF (hex), the BDOS has just changed the date and time. In this case, your routine should use the date and time in the SCB to update the clock hardware.

Even if your system does not contain specific timekeeping hardware, you can still have date and time support if your hardware can provide some kind of periodic interrupt. The most common im-

plementation would be to use a counter/timer chip such as the Intel 8253 or Zilog Z80-CTC. Another common method is to pick off the unfiltered 60 Hz from your power supply and derive an interrupt from that. If your system contains video-generation hardware, you may also be able to obtain an interrupt from the vertical sync circuit, which is also usually around 60 Hz.

Whatever the implementation, the object is to generate an interrupt at some regular interval. You then must write an interrupt handler that counts up the interrupts and updates the time and date fields once per second. If your hardware can be programmed for one interrupt per second, this becomes very straightforward. If the only interrupt rates available are somewhat faster (and this is usually the case), you must include an extra counter in your interrupt routine.

The time-of-day routine used in my BIOS is shown at the end of this article.

Multisector disk I/O

One of the new BDOS features of CP/M Plus allows an application program to read or write more than one 128-byte disk record at a time with a single BDOS call. A new BDOS function, "Set Multisector Count," may be used by an application program to set the number of records read or written by each BDOS call to any number between 1 and 128. This means that an entire extent can be transferred in a single operation. The CCP and PIP both make heavy use of this function to speed up program loading and file copying.

Several changes in the BDOS behavior occur when an application uses the Multisector I/O feature. In processing a multisector read or write, the BDOS will attempt to pick out the sections of the file which are contiguous on the disk. Whenever one of these sections encompasses one or more entire physical (nonblocked) sectors, the entire deblocking and buffering scheme is bypassed and the data is transferred from the disk directly into the TPA. This speeds up the transfer by eliminating the time required to copy each sector into or out of a deblocking buffer. This portion of the multisector transfer logic is handled entirely within the BDOS, requiring no special code in the BIOS.

You may provide an additional speed increase in multisector disk I/O by adding code to your BIOS to read and write multiple sectors at a time. Before starting the transfer of each contiguous section of a multisector transfer, the BDOS makes a call to the MULTIO entry point of the BIOS. This new entry point informs the BIOS that the next "n" disk reads or writes are to a logically contiguous area of the disk. The BIOS can make use of this information on the next read or write call to transfer the total number of sectors requested.

There is one major "gotcha" in the MULTIO

Bruce R. Ratoff, 26 Broad St., Cranford, NJ 07016; (201) 272-1793

logic. In making a multisector BIOS call, the BDOS does not take into account your sector translation ("skew") logic. Therefore, you can only do the disk operation correctly on the first call if your BIOS does not use a software skew of the disk sector numbers. How then can you take advantage of MULTIO on a skewed disk? By performing a bit of additional trickery.

It is significant to observe that the BDOS will still make the full set of disk I/O (Set Track, Sector, Set DMA, etc.) for each sector of a multiple transfer. Note also that the BDOS does not really care which of these calls performs the actual disk I/O, as long as all of the sectors have been transferred by the time the "nth" read or write call is completed. If you are on a nonskewed disk, it is probably simplest to do the entire data transfer on the first of these calls, and ignore the next "n-1" read or write calls. If you are on a skewed disk, you can store the track numbers, sector numbers, and DMA addresses in a table, and perform all of the disk I/O on the final call. Various other schemes are possible, and the best advice here is to do the best you can on your particular hardware to take advantage of the added information passed by the MULTIO call.

Nondisk I/O enhancements

You may recall that previous versions of CP/M have often made reference to something called the "I/O byte." This dates back to the original Intel development system for which CP/M was originally created. The I/O byte was a simple means of taking up to four *physical* devices, such as a Teletype, a CRT terminal, paper tape equipment, etc., and selecting which one to use for each of CP/M's five *logical* devices: Console Input, Console Output, Auxiliary Input ("Reader"), Auxiliary Output ("Punch"), and List Output. Under this scheme, there was a one-out-of-four choice for each logical device, although the four physical devices for one logical device did not necessarily have to be the same as for another logical device.

In CP/M Plus, the I/O byte has been replaced by five 16-bit words in the SCB, known as the Redirection Vectors. There is one Redirection Vector for each logical device. The upper 12 bits of each Redirection Vector are used to select up to 12 physical devices. Unlike the previous scheme, it is assumed that the same 12 physical choices will be available for each logical device. The lower four bits of each Redirection Vector are reserved for internal use by the BDOS. Setting any of the upper 12 bits in one of the Redirection Vectors means that the corresponding physical device should be used as that logical device.

This new scheme has several interesting implications. For one thing, a broader range of choices now exists for each logical device assignment, since 12 choices are possible instead of four. Also, it is possible under this new scheme to have more than one physical device associated with a logical device at the same time. This allows you to do such things as sending a listing to more than one printer, or simultaneously to the printer and the console. You might assign more than one device as the console, enabling you to operate your system from more than one location, or to let somebody watch what you're doing on another display. Other possi-

bilities that come to mind are multiplayer games and operating your system via modem.

The Redirection Vectors reside in the System Control Block (SCB), but the code to handle them must be provided in your BIOS. Two new BIOS routines, and some changes to your console, auxiliary input, auxiliary output, and printer routines are required.

The first new routine required is called DEVTBL. This routine must return the address of a table containing the names and attributes of each physical device in your system. Each physical device is given a name of up to six characters. The attributes stored in the device table include whether the device can do input or output, whether the device is serial or parallel, its baud rate, whether the baud rate can be changed, and whether XON/XOFF protocol should be recognized. You must create this table within the resident portion of your BIOS, and fill it with the names and attributes of your hardware.

The other new routine is called DEVINI. This routine is called with a device number, corresponding to the relative position of one of your system's physical devices in the device table described above. DEVINI must re-initialize the indicated device according to the parameters set in the device table. Normally, this routine will be called by the CP/M Plus program DEVICE, to indicate that it has modified the indicated device's attributes. You may also modify the device table and call DEVINI from your applications programs.

Note that DEVICE is the only program provided with the system that uses DEVTBL and DEVINI. The BDOS itself never calls these routines or references the device table. It is therefore entirely up to you whether or not to implement this feature.

Once you have created a device table and provided the DEVTBL and DEVINI routines, you must modify all your character I/O routines to use the Redirection Vectors. The routines for each logical device must pick up the corresponding vector, scan it for all the "1" bits, and call each physical I/O routine whose bit is set. This is not as tedious as it sounds, since most of the code will probably be common to all logical devices. The only differences will be in which Redirection Vector is used, and whether an input or output routine is called.

Goodbye, Control-C

This month's final item is a no-risk way to eliminate the need to type control-C when you change diskettes. This applies if your diskette drives have a way of signaling that the door has been opened. Most 8" and some 5" drives have an optional signal called "Disk change" that performs this function. If you have a way of reading this signal, you may use it to tell the BDOS when to check for a disk change.

There is a new field in the Disk Parameter Headers called the Media Flag. There is also a Media Flag in the System Control Block. If you can detect the Disk Change signal from your drives, you should set the Media Flag in the DPH of the affected drive to FF hex. You also must set the Media Flag in the SCB to FF hex, since this is what tells the BDOS to look at the DPH media flags. In order to be truly useful, you must set the

flags prior to the next disk access. Therefore, the Disk Change logic should be independent of your actual disk I/O routines. It could be made an interrupt routine, or you might test it while waiting for console input.

On the next disk access after the Media Flags have been set, the BDOS will look at the directory of the indicated drive to see if there has been an actual disk change, and will log in the new disk if a change has occurred. While the BDOS would normally have performed this check at the next directory access, the media flag logic protects you against the possibility of any nondirectory I/O prior to the next directory access occurring on the wrong diskette.

Conclusion

Through my personal contact with other CP/M users, I have seen a great deal of interest in CP/M Plus and heard a great number of questions. It is my intention to answer as many of these as I can through *Microsystems*. If you have a comment or question that you would like to see answered in print, please write to me in care of the magazine, and I will do my best to provide an answer.

Erratum

On page 26 of our February 1983 issue, Bruce Ratoff's telephone number had two digits transposed. The correct number is (201) 272-1793. Our sincere apologies for any inconvenience caused by this error. 

```

;
;CP/M Plus BIOS routine to keep time of day from 50 millisecond
;timer interrupt.
;
        EXTERN @SEC,@MIN,@HOUR,@DATE

RTCINT:  OUT      RTCRST      ; Clear clock interrupt request

        SHLD     SAVHL
        POP      H
        CALL    INTSSAVE    ; Save all registers

        LDA     MILSEC      ; Count up milliseconds
        ADI     5           ; (Interrupts are every 50 ms.)
        CPI     100
        JNC     NEWSEC      ; Go do real work if a second's gone by

PUTMIL:  STA     MILSEC      ; Otherwise just save milliseconds
        RET

NEWSEC:  LDA     @SEC       ; Increment seconds
        ADI     1
        DAA
        CPI     60H        ; Check for a full minute
        JZ      NEWMIN

PUTSEC:  STA     @SEC       ; Store new seconds
        SUB     A
        JMP     PUTMIL     ; Clear milliseconds

NEWMIN:  LDA     @MIN       ; Increment minutes
        ADI     1
        DAA
        CPI     60H        ; Check for hour
        JZ      NEWHOUR

PUTMIN:  STA     @MIN       ; Store new minutes
        SUB     A
        JMP     PUTSEC     ; Clear seconds

NEWHOUR: LDA     @HOUR      ; Bump hours
        ADI     1
        DAA
        CPI     24H        ; Check for day crossing
        JZ      PUTHOUR

PUTHOUR: STA     @HOUR      ; Update hour
        SUB     A
        JMP     PUTMIN     ; And clear minutes

NEWDAY:  LHLD    @DATE      ; Bump days
        INX     H
        SHLD   @DATE
        SUB     A
        JMP     PUTHOUR    ; And clear hours

; stack and register save/restore routines
INTSSAVE:
        SHLD   SAVRET      ; interrupt stack saver routine
        POP    H
        SHLD   RETCALL+1   ; store for returning
        PUSH   PSW
        LXI   H,0
        DAD   SP           ; old stack pointer in HL
        LXI   SP,STACK    ; set new stack
        PUSH  B
        PUSH  D
        PUSH  H

```

```

        LXI   H,INT$REST   ; push restore address on stack
        PUSH H
        RETCALL JMP 0      ; return to caller

MILSEC  DB 0              ; millisecond storage
SAVHL   DW 0              ; HL storage
SAVRET  DW 0              ; ret value storage
INTFL   DB 0              ; interrupt flag
        DS 24             ;
STACK   EQU $            ; interrupt stack

INT$REST:
        POP   H
        POP   D
        POP   B
        SPHL ; restore old stack pointer
        MVI  a,7
        OUT  0c4h        ; enable IMSAI PIC-8
        POP   PSW
        LHLD SAVRET
        PUSH  H
        LHLD SAVHL
        EI
        RET

```

FREE

with software purchase —
One CPM Handbook

DISCOUNT SOFTWARE

✓ = New items

ASHTON-TATE
dBASE II... call for price (\$4??)

CP/M®

ARTIFICIAL INTELLIGENCE®
Medical (PAS-3).....\$849
Dental (PAS-3).....\$849

ASYST DESIGN®/FRONTIER
Prof Time Accounting.....\$549
General Subroutine.....\$269
Application Utilities.....\$439

DIGITAL RESEARCH®

CP/M 2.2®
NorthStar.....\$149
TRS-80 Model II (P+T).....\$159
Micropolis.....\$175
CP/M-Intel MDS.....\$135
PL/1-80.....\$449
BT-80.....\$179
MAC.....\$85
RMAC.....\$179
Sid.....\$65
Z-Sid.....\$90
Tex.....\$90
DeSpool.....\$49
CB-80.....\$459
CBasic-2.....\$98
Link-80.....\$90

FOX & GELLER

QuickScreen.....\$135
QuickCode.....\$265
dutil.....\$65

MICRO-AP®

S-Basic.....\$269
Selector IV.....\$295
Selector V.....\$495

MICRO DATA BASE SYSTEMS®

HDBS.....\$269
MDBS.....\$735
DRS or QRS or RTL.....\$269
MDBS PKG.....\$1999

MICROPRO®

WordStar.....\$279
Customization Notes.....\$449
Mail-Merge.....\$99
WordStar/Mail-Merge.....\$369
DataStar.....\$249
WordMaster.....\$119
SuperSort I.....\$199
Spell Star.....\$139
CalcStar.....\$259

MICROSOFT®

Basic-80.....\$199
Basic Compiler.....\$329
Fortran-80.....\$349
Cobol-80.....\$589
M-Sort.....\$175
Macro-80.....\$144
Edit-80.....\$84
MuSimp/MuMath.....\$224
MuLisp-80.....\$174
FPL: Bus. Planner.....\$595

ORGANIC SOFTWARE®

TextWriter III.....\$111
DateBook II.....\$269
Milestone.....\$269

OSBORNE® (McGraw/Hill)

General Ledger.....\$59

SAVE \$255 ON PRODUCTIVITY PAC #3!

Everything you need: a wordprocessor, spreadsheet and database. And a phenomenally low, low price!

	Retail	Regular Discount
Final Word	\$300	\$270
Plannercalc	\$99	\$50
Condor I	\$295	\$275
	<u>\$694</u>	<u>\$595</u>

SPECIAL COMBINATION PRICE: \$439

Offer good to the end of the month of publication of this magazine. Call for our other PAC prices.

Acct Rec/Acct Pay.....\$59
Payroll w/Cost.....\$59
All 3.....\$129
All 3 + CBasic-2.....\$199
Enhanced Osborne (vandatta).....\$269 (Includes CBasic)

PEACHTREE®

General Ledger.....\$399
Acct Receivable.....\$399
Acct Payable.....\$399
Payroll.....\$399
Inventory.....\$399
Surveyor.....\$399
Property Mgt.....\$799
CPA Client Write-up.....\$799
PB Version.....Add \$234
MagiCalc.....\$269
Other.....less 10%

STAR COMPUTER SYSTEMS

G/L, A/R, A/P Pay.....\$349
All 4.....\$1129
Legal Time Billing.....\$849
Property Mngmt.....\$849

STRUCTURED SYSTEMS®

Business Packages, Call for Price

SORCIM®

SuperCalc.....\$249
Trans 86.....\$115
Act.....\$157

SUPERSOFT®

Ada.....\$270
Diagnostic I.....\$49
Diagnostic II.....\$84
Disk Doctor.....\$89
Forth (8080 or Z80).....\$149
Fortran.....\$219
Fortran w/Ratfor.....\$289
C Compiler.....\$225
Star Edit.....\$189
Scratch Pad.....\$266
StatsGraph.....\$174
Analyze II.....\$45
Dataview.....\$174
Disk Edit.....\$89
Encode/Decode II.....\$84
Optimizer.....\$174
Super M List.....68
Term II.....\$179
Zap 2-8000.....\$450
Utilities I.....\$54
Utilities II.....\$54

ACCOUNTING PLUS

1 Module.....\$385

4 Modules.....\$1255
All 8.....\$4500
UNICORN®
Mince.....\$149
Scribble.....\$149
Both.....\$249
The Final Word.....\$270

WHITESMITHS®

"C" Compiler.....\$600
Pascal (incl "C").....\$850

"PASCAL"

Pascal/MT + Pkg.....\$429
Compiler.....\$315
Sp Prog.....\$175
Pascal Z.....\$349
Pascal/UCSD 4.0.....\$670
Pascal/M.....\$355
Tiny Pascal.....\$76

"DATA BASE"

FMS-80.....\$894
dBASE II.....\$595
Condor I.....\$275
Condor II.....\$535
FMS-81.....\$445

"WORD PROCESSING"

WordSearch.....\$179
SpellGuard.....\$199
Peachtext.....\$289
Magic Spell.....\$269
Spell Binder.....\$349
Select.....\$495
The Word.....\$65
The Word Plus.....\$145
Palantier-I (WP).....\$385

"COMMUNICATIONS"

Ascom.....\$149
BSTAM.....\$149
BSTMS.....\$149
Crosstalk.....\$139
Move-it.....\$89

"OTHER GOODIES"

Micro Plan.....\$419
Plan 80.....\$269
Target (Interchange).....\$125
Target (Planner).....\$189
Target (Task).....\$299
Plannercalc.....\$50
Tiny "C".....\$89
Tiny "C" Compiler.....\$229
Nevada Cobol.....\$179
MicroStat.....\$224
Vedit.....\$130
MiniModel.....\$449
StatPak.....\$449
Micro B+.....\$229
Raid.....\$224

String/80.....\$84
String/80 (source).....\$279
ISIS CP/M Utility.....\$199
Lynx.....\$199
Supervyz.....\$95
ATI Power.....\$75
Mathe Magic.....\$95
CIS COBOL.....\$765
ZIP MBASIC, CBasic.....\$129
Real Estate Analysis.....\$116

APPLE II®

BRORDERBUND
G/L (with A/P).....\$444
Payroll.....\$355

INFO UNLIMITED®

EasyWriter (Prof).....\$155
Datadex.....\$129
EasyMailer (Prof).....\$134
Other.....less 15%

MICROSOFT®

Softcard (Z-80 CP/M).....\$239
Fortran.....\$179
Cobol.....\$499
Tasc.....\$139
Premium Package.....\$549
RAM Card.....\$129

MICROPRO®

WordStar.....\$199
MailMerge.....\$99
WordStar/MailMerge.....\$349
SuperSort I.....\$159
SpellStar.....\$129
CalcStar.....\$175
DataStar.....\$265

VISICORP®

Visicalc 3.3.....\$189
Desktop/Plan II.....\$219
Visiterm.....\$90
Visidex.....\$219
Visiplot.....\$180
Visitrend/Visiplot.....\$259
Visifile.....\$219
Visischedule.....\$259

PEACHTREE®

G/L, A/R, A/P Pay or Inventory (each).....\$224
Peach Pack P40.....\$795

SOFTWARE DIMENSIONS, INC.

Accounting Plus II, G/L, AR, AP or Inventory (each).....\$385 (Needs G/L to run)

"OTHER GOODIES"

Super-Text II.....\$127

Data Factory.....\$134
DB Master.....\$184
Versaform VS1.....\$350
VH1.....\$445

16-BIT SOFTWARE

WORD PROCESSING

IBM PC
Wordstar.....\$279
Spellstar.....\$175
Mailmerge.....\$175
Easywriter.....\$314
Easyspeller.....\$159
Select/Superspell.....\$535
Write On.....\$116
Spellguard (also available for 8" 8086 systems).....\$229
SP Law (for Spellguard).....\$115
Textwriter III.....\$189
Spellbinder.....\$349
Final Word.....\$270

LANGUAGE UTILITIES

IBM PC

Crosstalk.....\$174
BSTAM.....\$149
BSTMS.....\$149

8" 16-BIT SYSTEMS

Pascal MT+ /86, SSP.....\$679
CBasic 86.....\$294
Pascal M/86.....\$445
Act 86.....\$157
Trans 86.....\$115
XLT 86.....\$135

16-BIT 8" AND DISPLAYWRITER

CP/M 86.....\$294
MP/M 86.....\$585

OTHERS

IBM PC

SuperCalc.....\$269
VisiCalc.....\$219
Easyfiler.....\$359
Mathmagic.....\$89
CP/M Power.....\$65
Condor 21.....\$265
Condor 22.....\$535
Condor 23.....\$895
Condor 20Q.....\$175
Condor 20R.....\$265
Statpak.....\$449
Optimizer.....\$174
Desktop Plan II.....\$219
Desktop Plan III.....\$259
Visidex.....\$219
Visitrend.....\$259

Many others available for use with the "Baby Blue Board"

8" 16-BIT SOFTWARE

SuperCalc.....\$269
CP/M Power.....\$65

FORMATS AVAILABLE:

8" single density
8" OS
Superbrain
Micropolis/Vector Graphic
NorthStar Horizon
NorthStar Advantage
Osborne
Heath/Zenith
Cromemco
Televideo
Xerox 820
Dynabyte
Hewlett-Packard 125
NEC
Eagle
Apple II/III
Otrona
TRS-80 Model I/II/III
DEC VT-180
Aitos
CP/M-86
IBM PC



LOWER PRICES, COME HELL OR HIGH WATER.

ORDERS ONLY • CALL TOLL FREE • VISA • MASTERCARD

U.S. 1-800-421-4003 • CALIF. 1-800-252-4092

Outside Continental U.S.—add \$10 plus Air Parcel Post • Add \$3.50 postage and handling per each item • California residents add 6% sales tax • Allow 2 weeks on checks. C.O.D. \$3.00 extra • Prices subject to change without notice. All items subject to availability • ®—Mfgs. Trademark. Blue Label \$3.00 additional per item.

CP/M is a registered trademark of DIGITAL RESEARCH, INC.

THE DISCOUNT SOFTWARE GROUP

6520 Selma Ave. Suite 309 • Los Angeles, Ca. 90028 • (213) 837-5141

Int'l TELEX 499-0446 DISCOSOFT LSA • USA TELEX 194-634 (Attn: 499-0446)

TWX 910-321-3597 (Attn: 499-0446)

CIRCLE 48 ON READER SERVICE CARD

The Pickles & Trout IEEE-488/IEEE-696 Bus Converter

by Richard S. Newrock

Microcomputers are rapidly finding their way into the laboratory for numerical analysis, data reduction, experimental control and data taking. For the last two, there are three options: direct I/O via parallel ports (and occasionally, serial ports), analog I/O via the appropriate A/D and D/A converters, and the IEEE-488 instrument bus (GPIB or HPIB). This last is a most important method, as most state-of-the-art test and measurement instruments come with a 488-bus interface. If microcomputers are to be useful in the laboratory, they must be able to control such instruments. When I decided to switch my laboratory from minis to micros, the availability of a good S-100/488 bus converter was an important factor. This article reviews the bus converter I purchased, the Pickles & Trout 488 Bus Interface (P&T-488).

This review discusses the hardware and software aspects of the P&T-488. My conclusions can be summarized briefly: the P&T-488 bus converter is an excellent product. The hardware is well-designed and executed. It is simple to program in high-level languages or in assembler (when bus speed is important), and it comes with a useful and complete software package. The driver software, while slow, is good for most purposes, and adequate information is provided to help you write faster routines. Many good examples of software are displayed. Unfortunately, as is often the case in this field, the manual is poor.

In addition, and of great importance to me, the software driver routines are relocatable; they can be called from high-level languages. In particular, I can call them from Fortran programs, a considerable timesaver since nearly all of my research software is written in Fortran, as are the libraries of scientific subroutines I use.

The board is available for \$450, directly from Pickles & Trout, P.O. Box 1206, Goleta, CA 93116. The price includes the board, software, test plug, and a ribbon cable with a 488 metric connector. The 488 connector is mounted on the rear panel of the computer and the ribbon cable is run between it and the board; a 488-bus cable is not supplied.

The hardware

The P&T-488 board is glass-epoxy and is solder-masked with silk-screened labels. Each component, the jumper area (for interrupts), and the address switch is clearly labeled. The soldering is cleanly done and all components are carefully mounted. Sockets are provided for the ICs. The ribbon cable connector on the board is of good quality; it is keyed and has connector ejectors. The

Richard S. Newrock, Dept. of Physics, Univ. of Cincinnati, Cincinnati, OH 45221

only thing I didn't like was the 488 connector. The one provided looks as if it will not stand up to repeated use. The manufacturer assures me that it will, and that they tested several other types and found them wanting.

The board power supply, which consists of a single five-volt regular, looks to be more than sufficient. There is an adequate number of 0.1 μ F bypass capacitors distributed about the board to suppress switching transients.

The P&T-488 can generate interrupts, and provision has been made (via jumpers) to select NMI, pINT, or one of the vectored interrupt lines. Eight conditions can cause an interrupt: a change on any one of the three handshake lines (DAV, NRFD, and NDAC), four of the bus management lines (IFC, ATN, SRQ, and REN) or POC/RESET on the S-100 bus. They are "or-ed" onto the selected line. Note that it is not necessary to use interrupts to operate the P&T-488.

Pickles & Trout does not make any claims about the compatibility of their board with the IEEE-696 standard; indeed, the pin labels on their schematic are the old S-100 names. To make certain it is compatible with the standard, I checked each pin assignment; there were no conflicts. The board does not use any of the undefined (NDEF) or reserved (RFU) lines, and there are no problems with the new ground lines. The P&T-488 does not support 16-bit data transfers (SIXTN* and SXTRQ* are not implemented), but that is unimportant for a device that uses ASCII codes. It is only addressable at the first 256 I/O ports, and, in that respect, does not meet the IEEE standard, but that is not critical.


Insofar as the IEEE-488 standard is concerned, extensive checks weren't necessary. The P&T-488 works at the data transfer rates for which it was designed, so we can assume that the bus timing, pin assignments, etc., are correct. I did check the line drivers; they are open collector, as they should be for a fully operational controller.

Registers. The user accesses the bus through four 8-bit registers that appear at four consecutive I/O addresses. The port is addressed, via a DIP switch, to any location which is an integral multiple of four (0,4,8, . . .). The board comes addressed at 7C and the software provided expects that address. A special routine allows you to use the software with a different board address. The use of these registers is straightforward, and they make the P&T-488 easy to use. They are worth further discussion.

Register 3, a write-only register, stores the parallel poll response byte. The CPU inserts a byte into this register to be placed on the data lines in response to such a poll.

Register 2 is the data line register; it is a read/write register connected to the 488-bus data lines. To read the data lines, the CPU reads the byte in

megabytes



The MARK SERIES WINCHESTER DISK DRIVE SUBSYSTEM

- CAPACITY - 20, 33 and 46 megabytes.
- SIZE - 5 1/4 floppy size (6x4x2).
- SPEED - Twice as fast as the competition (30 milliseconds).
- COMPATABILITY - Hardware and Software interfaces for TRS-80[®], Apple II[®], IBM-PC[®], CP/M[®], Turbodos[®], S-100, 8 bit parallel port, any Z-80[®] computer such as Osborne[®], Xerox[®], Televideo[®], Northstar Advantage[®].
- EXCEPTIONAL WARRANTY - Comprehensive 1 year parts and labor.
- NOTHING ELSE TO BUY - Subsystems include disk, chassis with power supply, controller, cables, hardware adapter and software package.



8720 Old Courthouse Road, Vienna, Virginia 22180
703-281-5762

CIRCLE 227 ON READER SERVICE CARD

The **ACTION** Solution

For Expanding Businesses...

From single-user workstations to multiuser **Systems & Networks**, our DISCOVERY MULTIPROCESSOR is designed to grow by leaps and bounds. No more obsolete hardware or software.

As your business expands...

DISCOVERY expands with you!



The DISCOVERY 500, a fully integrated desktop computer with 5 1/4" hard and floppy disks, supports up to 7 users. It is the ideal, low cost turnkey business system. The full size DISCOVERY supports up to 16 users with a wide variety of disk and tape subsystems. And remember, all DISCOVERY users have their own dedicated memory and 8-bit or 16-bit CPU, running CP/M-80* or CP/M-86*. Action's own multiuser multiprocessor operating system, the **dpc/os** † makes it easy.

The **dpc/net**™ low-cost local area networks of multiple DISCOVERYS provide the ultimate in performance. Up to 150 users in 10 DISCOVERY systems can be on-line simultaneously with full resource sharing. **For the first time**, mainframe capability at micro prices.

*CP/M is a reg. TM of DIGITAL RESEARCH CORP.
† dpc/os is a reg TM of ACTION COMPUTER ENTERPRISE, INC.

Dealer, Distributor & OEM inquiries are invited.

Take ACTION! Call us NOW...at (213) 793-2440



Action Computer Enterprise, Inc.
55 West Del Mar Blvd. Pasadena CA 91105 USA
TWX 910-588-1201 ACTION PSD ○ (213) 793-2440

On the East Coast: MicroSystems International ○ (617) 655-9595

In Canada: CESCO Electronique LTEE ○ Montreal, Canada ○ (514) 735-5511

In Asia: Pacific Trading & Agency Ltd. Hong Kong TWX 75332 PACIC HX Tel. 5-440071

CIRCLE 183 ON READER SERVICE CARD

THEY SAY IT ALL... WE DO IT ALL!



ANNOUNCING THE C86™ C COMPILER — THE COMPILER THAT SPEAKS THE LANGUAGE OF THE FUTURE!

Kernighan and Ritchie's book, *The C-Programming Language*, is the key source for C. Just as fundamental is the C86™ C Compiler.

The C86™ C Compiler is especially designed for the IBM[®] Personal, IBM[®] Display Writer, CP/M-86[®] and MS-DOS[®].

For further information on the C-programming language and the C86™ C Compiler, please contact:

C86 is a trademark of Computer Innovations, Inc. CP/M-86 is a trademark of Digital Research. IBM and MS-DOS are registered trademarks of International Business Machines, Inc.



Computer Innovations, Inc.
75 Pine Street
Lincroft, New Jersey 07738
Telephone: (201) 530-0995

CIRCLE 68 ON READER SERVICE CARD

this register. It can also write a byte to this register to be transferred to the data lines. Whenever an external controller takes over the bus, or when POC/RESET occurs on the S-100 bus, flags are set that disable the P&T-488's output buffers. If so, whatever is contained in register 2 cannot be output.

Register 1, the command line register, is a read/write register that allows the user to set or sense the bus management and handshake lines. Again, if an external controller is active, the interface is inhibited. If an external interface clear (XIFC) is sensed, the P&T-488 will not set any bus management or handshake lines. If external attention (XATN) is set, no lines except "not-ready-for-data" (NRFD) and "service request" (SRQ) can be set. NRFD is made true to prevent an external controller from sending commands to the P&T-488 until its host CPU is ready. SRQ is set if the SRQ bit in register 2 is low; it permits the host CPU to signal the external controller that it wants service.

The read section of register 0 is the interrupt status register. The bits in this register change in response to changes in the state of the bus management and handshake lines, and to POC. This byte is used by the CPU to monitor bus status. In particular, since the board uses only one interrupt line, the CPU must read this register to determine the cause of the interrupt. Two of the status bits are the flags XATN and XIFC. The first of these flags, mentioned above, is set whenever an external controller takes over the bus; the second whenever an external controller issues an IFC.

The write section of register 0 is for interrupt reset. The upper six bits of this register are used to reset the status bits. Bit 1 is used to instruct the controller to be a listener or a talker. Bit zero enables or disables the interrupt.

To someone familiar with 488-bus operation, it should be clear that these registers are all that is needed to control the bus: register three is to respond to parallel polls; register two is to send or receive data; register one is to assert the handshake and bus management lines; and register zero is for status. Pickles & Trout provides examples of assembly language routines for source handshaking, acceptor handshaking, initialization, etc. The best way to understand the operation of the bus and the use of the registers is to examine these routines carefully. In addition, they are an excellent starting place for writing your own drivers.

Since Pickles & Trout supplies driver subroutines as part of the P&T-488 package, why would you want to write your own drivers? The answer is simple: speed. Pickles & Trout note that their software, with an 8080 CPU running at 2MHz with no memory wait states, will transfer data at 3KB/sec. This is rather slow. One reason is that the software continually checks for things that may be

nonexistent (or unnecessary) in your system. For example, the software checks for the presence of another controller, for POC on the S-100 bus, for time limits on the handshake cycle, etc. Eliminating these checks (and others) by writing your own software will speed up the data transfer rate considerably. I have not measured the increase, but, according to the manufacturer, the maximum transfer rate should be about 9KB/sec with a 2MHz 8080 (and, perhaps, 22-23KB/sec with a 5Mz 8085).

The software

The software provided by Pickles & Trout can be divided into four parts. The package includes a routine to test bus operation; MSOFT, a package of Basic subroutines to operate the bus; three utility programs; and the aforementioned assembler source and acceptor handshake routines. I found all of it useful, if only for informational purposes.

Test program. The function-test program is a nice touch; I wish more manufacturers would supply such a routine. The program performs seven tests of the board and cable, which allow the purchaser to check the P&T-488 when it is received and at any time thereafter. When planning a new experiment, I often need to order new equipment; naturally, deliveries aren't simultaneous. I have often been in the position of having an instrument's warranty period elapse while waiting for something necessary to test it. The self-test program alleviates this for the P&T-488.

The first four tests are performed with nothing connected to the bus; with the last three a special test plug is used. The first four are simple and check the registers. They consist of writing a byte to the appropriate register and checking the P&T-488's response. If any of these tests fail, it is reported on the system console. Upon (successful) completion of these the operator is prompted to connect the test plug, which connects the data lines to the bus management and handshake lines. This allows the cable to be tested for shorts and continuity, and allows the P&T-488 to talk to itself to test the response to external IFC and ATN.

The tests are simple to use and take little time; my P&T-488 passed with no problems. Two versions of the test are supplied, because of recent revisions to the board. Be sure to check the board serial number and use the correct test routine. The test routine assumes the factory standard address; I found it simplest to test the P&T-488 there and make address changes later.

Utilities. Three utility programs are supplied: BUSMON, 488TODSK, and DSKTO488. The latter two send data from the bus to a disk file or send a disk file over the bus. I generally analyze data as it comes in and create files in my control

The Pickles & Trout 488 is an excellent product, well designed and executed. It comes with a useful and complete software package.

MICROSTAT® - Release 3.0

MICROSTAT® + baZic® = PERFORMANCE

The best just got better! MICROSTAT has been the leader in the statistics field for microcomputers since 1979, and the new release 3.0 outperforms and is noticeably faster than previous versions. Just a few of the features include:

GREATER ACCURACY

BCD with up to 14 digit precision;

PROGRAM ENHANCEMENTS

Missing data capabilities and many more;

FASTER EXECUTION

Calculation time greatly reduced;

DYNAMIC FILE ALLOCATION

Data can be inserted, added, or deleted;

SPECIAL PRICE:

For a limited time get MICROSTAT plus baZic complete with program disk and documentation for each for \$395.00, save \$50.00!

The MICROSTAT - baZic version requires: a Z80 CPU, CP/M™ and 48K of memory. Available formats: 8" SD disk or 5¼" North Star only. Check with your dealer for other formats. Also available for: Microsoft's Basic-80™, North Star DOS and IBM. For more information, call or write:

ECOSOFT INC.

P.O. Box 68602
Indianapolis, IN 46268-0602
(317) 255-6476



MICROSTAT is a registered trademark of ECOSOFT, INC.
baZic is a registered trademark of MICROMIKES, INC.
CP/M is a registered trademark of DIGITAL RESEARCH
Basic-80 is a registered trademark of MICROSOFT

CIRCLE 45 ON READER SERVICE CARD



can
become



IMPOSSIBLE? NOT WITH SMARTKEY!

SMARTKEY™ is a unique utility that can redefine any ASCII character or function key to become anything you want. For example, "@" becomes "pip b:=a:.pas[v]". With a single stroke, a key can represent a chosen character or string at the system level or within a program. Instantly. Without rewiring or soldering.

SMARTKEY™ is completely transparent to the user. It resides on the top of memory and intercepts calls to the BIOS, translating system input to whatever you desire. You can even change a key definition while another program, such as WordStar™, is in operation... without interruption! It's perfect for programming, data entry or word processing.

"EXCELLENT" InfoWorld

"VERSATILE AND RELIABLE" Lifelines

"WORKS LIKE A CHARM" Microsystems

Think of the acceleration in productivity. Think of the versatility in keyboard layouts. Think of the possibilities. And, best of all, SMARTKEY™ is only \$60.

Ask about SMARTPRINT™, SMARTSCREEN™, SPOOL™ and other programs.

To order or obtain more information, call or write to:

HERITAGE SOFTWARE, INC.

2130 S. Vermont Ave., Los Angeles, CA 90007/(213) 737-7252

SMARTKEY™ is compatible with all standard versions of CP/M.™
Programs copyrighted by FBN Software.

WordStar™ is a registered trademark of MicroPro, Inc.
CP/M™ is a trademark of Digital Research.



CIRCLE 189 ON READER SERVICE CARD

Now You Can Afford Another 64K...

Especially when it's less than
a half cent per bit!

Specifications:


- Fully Static Operation
- Supports S-100 IEEE-696 Standards
- Uses Popular 2716 Pinout Type Static RAM's
- Board Access Time Under 200nS
- 150nS RAMS Standard
- No Wait States Needed at 6.000MHz
- High Quality FR-4 Type PC Board
- Switch Selectable Phantom Line
- All Data, Status and Address Lines Fully Buffered
- Gold Plated Contact Fingers for Low Contact Resistance and Long Life
- Switch Selectable Extended Address Lines For Up To 16 M-bytes
- Extreme Low Power Dissipation (<500mA Typical)
- Top 8K May Be Switched Disabled and/or Interchangeable with 2716 Type EPROM's

COEX 64K S-100 CMOS

STATIC RAM BOARD

only **\$299⁰⁰**

Assembled & Tested



"Have You Kissed Your Computer Lately?"

Components Express, Inc.

1380 E. Edinger • Santa Ana, Calif. 92705 • 714/558-3972

Terms of Sale: Cash, Checks, Credit Cards, M.O., C.O.D. Calif. residents add 6% sales tax.



CIRCLE 226 ON READER SERVICE CARD

Pickles & Trout continued . . .

and analysis routines. As such, I don't need these utilities and did not test them. They should be particularly useful for sending data directly to a printer or plotter, for communication between computers, and collecting large amounts of data rapidly.

BUSMON monitors and reports all bus transactions. It reports in two forms: with no special character handling and with all control codes replaced by printable characters. BUSMON stops the processing on three conditions: the occurrence of LF, CR, or on every byte. When the processing stops, the user can enter bus commands from the keyboard, restart, and observe the results of the command. All instructions sent to the controller, and all data sent or received, are displayed on the console. Messages which indicate the occurrence of XIFC, XATN, etc., changes in SRQ, POC and REN, as well as identifiers for the various addressed and universal commands, are also displayed.

I found BUSMON to be useful for troubleshooting instrumentation systems, for learning about newly purchased instruments, and for general error checking. It probably is a useful learning tool for someone new to 488-bus operation.

MSOFT. I have two software packages for the P&T-488: MSOFT, and a set of routines called "CP/M-488." The CP/M-488 package came with the bus when I ordered it. When used, it alters CP/M's I/O routines to allow the P&T-488 to substitute directly for the console keyboard and display. A software switch allows the user to determine where the I/O goes: to the normal console or to the P&T-488. I found these routines clumsy, and the instructions unclear. When I called Pickles & Trout to get some assistance, they told me about the new MSOFT routines; they can be purchased for about \$50. You now have a choice when you purchase the package; make sure you get MSOFT, as it is significantly better and easier to use than CP/M-488.

MSOFT is an interface program between P&T-488 and Microsoft Basic. It consists of two parts: MSOFT.COM and MSOFT.REL. The .COM file is used with interpreter basic; the .REL file, a library of relocatable subroutines, is meant to be used with compiled languages. A typical applications program has two parts: a Basic (or other high level language) program plus MSOFT. In a compiled language, the MSOFT routines are inserted at link-time; in interpreter Basic they are called before MBasic (i.e., at the prompt, one enters MSOFT MBASIC MYPROG.BAS).

The MSOFT package defines 11 communications variables and 13 communication functions, four set-up functions and one configuration function.

The variables are for communication to and from MSOFT. The user can choose any names he wishes, but he must tell MSOFT what they are.

Several of these variables have obvious uses: the INPUT and the OUTPUT strings; the string LENGTH, POLL RESPONSE and BUS STATUS integers; and the input and output ECHO bytes.

The user should be aware of an important point concerning MSOFT's output. MSOFT always writes data into the same buffer. If the user wishes to save the data in that buffer he must move it before asking MSOFT to get more. This is a subtle point. The MSOFT routine LSTN(A\$) tells the P&T-488 to become a listener. Data is read from the bus and stored in the buffer; the string A\$ points to that buffer. That is, the string descriptor (described below) of A\$ contains the address of MSOFT's buffer. If you now tell MSOFT to get more data, perhaps with LSTN(B\$), the string descriptor for B\$ will also contain the address of MSOFT's buffer, i.e., both string descriptors now point to the same buffer and therefore both strings contain the same data; whatever was contained in the buffer after the first LSTN command has been lost. To save the data you must move the string between calls to LSTN. For example, between calls to LSTN, use the Basic statement S\$=A\$. It will store the contents of MSOFT's buffer (pointed to by A\$'s string descriptor) in a new buffer, pointed to by S\$'s string descriptor.

Three of the variables have special uses:

ERROR CODE. This integer variable indicates if errors occurred during a bus operation. Each bit represents a different type of error.

TIMEOUT. This is the amount of time within which a handshake must occur, or an error will result. TIMEOUT can take any value between 0 and 255; if it equals 255, no check is made. It is important that a 488-bus operating system have a time limit, particularly in systems where the controlled instruments can be many meters away, and under local control. According to Pickles & Trout, with a 2MHz system clock, TIMEOUT=254 corresponds to about 6.5 seconds. This (maximum) time is much too short, more so with a 5MHz processor. Initializing some digital plotters, for example, can take 8-10 seconds.

EOT and EOS. These variables allow the user to set string terminators and other string parameters. This is a necessary feature; many older instruments do not follow the new standard for communications over the 488-bus, IEEE 728-1982.

The communications functions are used to operate the bus. There are three main communication routines which allow the user to control the bus, to listen and to talk. Two routines are provided for each of these functions. The first clears the error byte, performs the function, and then updates the

The CP/M-488 routines are clumsy and the instructions unclear. The MSOFT interface package, now available, is significantly better and easier to use.

MicroScript™

Are you wasting valuable time trying to format complex documents with a word processor or obsolete text formatter?

MicroScript™ is a state of the art text formatter specifically designed for the production of technical manuals, specifications, and other complex documents. This powerful tool pays for itself the first time you use it. Featuring:

- generalized markup
- left alignment
- center alignment
- right alignment
- justification
- left indention
- right indention
- bold text
- underscored text
- proportional spacing
- fully definable page
- multiple columns
- headers and footers
- floating text blocks
- footnotes
- variable line spacing
- widow suppression
- section numbering
- imbedded documents
- automatic lists
- macro processing
- symbol processing
- table of contents
- direct printer control
- initialization profile
- page numbering

\$99 postpaid within U.S., outside U.S. add \$10. CA residents add 6%. Specify CP/M-80*, CP/M-86*, MS-DOS*, or PC-DOS*; printer type; disk format.

Software Technique™

6531 Crown Blvd., Suite 3A
San Jose, CA 95120
(408) 997-5026

* CP/M-80, CP/M-86 trademarks of Digital Research, MS-DOS trademark of Microsoft, PC-DOS trademark of IBM Corporation.

CIRCLE 1 ON READER SERVICE CARD

Don't Re-Invent the Wheel - Use Ours!

Blaze/lib™

A solid, time-tested core of linkable modules providing buffer manipulation, string/number conversions, directory search, character I/O, and screen formatting functions in Pascal/MT+™. The Terminal Dependent Library provides full screen control for Lear-Siegler, Soroc, Xerox 820, TRS-80 II, Televideo, and Heath terminals.

.ERL \$75

Source \$200

Phonedex I™

\$49.95

Personal phone/mailling list data base. Prints mail labels 1-4 up, address book pages. Data can be queried on any field and extract files created. Phone numbers can be dialed through D.C. Hayes Smartmodem™. Dumb terminal function allows communication with CBBS/timesharing systems.

Blaze/IO™

All Pascal/MT+ file I/O and UTILMOD functions, completely rewritten in optimized 8080 assembly code. Typically 40% faster and 50% smaller than the original MT+™ routines written in Pascal. Blaze/IO™ can lop 5-7K off a 25K .COM file! Also includes APPEND(F) function for text files, and TAB(X) and COLUMN(X) functions for formatting text output.

.ERL \$75

Source \$2500

ANOVA/Plus™

\$69.95

Step up from two-level "T" tests to full 5-factor ANOVA, with an option for comparison of individual mean levels through Scheffé's Contrasts. Data files may be created and edited from within the program. In machine code Pascal for lightning speed beside versions in BASIC.



STARSLIDE ENGINEERING

PO Box 18306 • Rochester NY 14618 • (716) 461-1027



Please add \$3 shipping/handling for all orders. NYS add 7% tax.

CIRCLE 31 ON READER SERVICE CARD

DEVELOPING SOFTWARE UNDER CP/M? LIFT YOUR OUTPUT WITH MICROSHELL®

When you're into heavyweight software development you need more operating system power than CP/M can offer. MICROSHELL builds up CP/M with UNIX features that really help you put out software. Just for starters: MICROSHELL crunches long CP/M dialogs into one-line commands. Puts muscle and flexibility into SUBMIT commands. Captures CRT output and redirects it to CP/M files without retyping. Pulls programs from another disk drive or user number automatically (makes hard disk handling a snap). And it's ready for more work with no time-consuming warm-start after a program runs. MICROSHELL fits your system — uses just 8K of memory in any CP/M computer from Apple to Zenith. Check out MICROSHELL today and find out what a powerful partner it makes — at only \$150.

™CP/M, Digital Research; UNIX, Bell Laboratories; Apple, Apple Computer, Inc.

Order Toll Free: 800-368-3359
VISA, MasterCard accepted.
Overseas add \$20.00 for air mail.
Manual only: \$25.

CIRCLE 225 ON READER SERVICE CARD



NEW GENERATION SYSTEMS, inc.

2153 Golf Course Drive
Reston, VA 22091
(703) 476-9143

error byte. The second performs the function and updates the error byte. The difference is quite important as it gives the user the option of calling a series of subroutines and checking for errors after the series is complete. This speeds up bus transactions considerably. The other communication functions are simpler. Some of them allow the user to reset the bus, clear the interface, enable or disable remote, and update the bus status variable. Others are for parallel and serial polls.

There are four set-up functions used to initialize MSOFT; they tell it the variable and function names. One, SETUP, is only used with interpreter Basic, where you must inform MSOFT.COM of the names of each of the communication functions. This is not necessary in compiled languages, where the linker inserts relocatable subroutines where they are needed. The other set-up routines pass variable names to MSOFT, are needed by both MSOFT versions, and must be called at the beginning of all application programs.

The two most important set-up functions are IOSET and PROTCL. IOSET tells MSOFT the name you've chosen for the error code, the timeout value, the poll response byte and the bus status byte. PROTCL sets up the data transfer protocol, including the string lengths and string terminators. These variables may have to be initialized, depending on the language used. (Remember, Basic initializes all variables to zero; other languages may not.) In any case, IOSET and PROTC ini-

tialize time limit and string length to 254.

The last set-up function, ECHO, tells MSOFT the name of the byte which determines if bus I/O is echoed on the console. It defaults to no echo.

The last routine is the configuration function. It is called at the beginning of each program if MSOFT has to be informed of a change in the P&T-488's address (from 7C).

Sample programs. Pickles & Trout provides several sample programs. Four of these programs (BISAMPL.BAS, BCSAMPL.BAS, MTSAMPLE.PAS and FSAMPLE.FOR) allow the user to connect any 488-controllable instrument to the bus and play with it. They are menu driven: the user is asked what bus function he would like to perform and is prompted for the necessary parameters. I found these programs to be very useful. If you are unfamiliar with the 488-bus and its commands, these routines will allow you to play with the system, controlling one or more instruments, sending commands and collecting data, until you gain familiarity with the operation of the bus. The programs allow you to try a new instrument, testing it and learning about its programming quirks. Finally, and perhaps most important, the programs present many examples of the software necessary to operate the P&T-488. Unfortunately, the only place much of this information is presented is in these programs.

In addition to the four sample programs, Pickles & Trout provides examples of application pro-


PROGRAMMER'S GUIDE TO CP/M

Edited by
Sol Libes

Here's an important collection of CP/M insights that you'll never find in any CP/M manual. CP/M is the most popular microcomputer DOS in use today, and this widespread use has generated many innovative techniques and enhancements of CP/M. *Programmer's Guide to CP/M* tells you what these enhancements are and how to put them to use, how to get around apparent limitations of a CP/M system and why CP/M is far more versatile than you might have imagined. Every article in *Programmer's Guide to CP/M* originally

appeared in MICROSYSTEMS between January 1980 and February 1982. Except for this collection, these articles are now unavailable! *Programmer's Guide to CP/M* gives you an in-depth look at CP/M from the viewpoint of the programmer—the individual who creates the software that interfaces directly with CP/M, or who is installing CP/M on systems for which configurations do not already exist.

Contents include "An Introduction to CP/M," "The CP/M Connection," "CP/M Software Reviews," "CP/M Utilities & Enhancement," "CP/M 86" and "CP/M Software Directories." \$12.95.

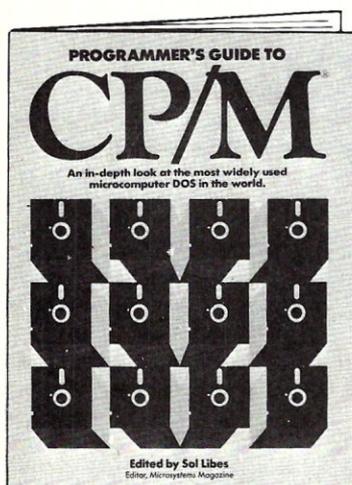

MICROSYSTEMS PRESS

Dept. NB3H • 39 East Hanover Avenue
Morris Plains, NJ 07950

Please send me _____ *Programmer's Guide to CP/M* at \$12.95* plus \$2.00 postage and handling each. Outside USA add \$3.00 per order. # 14C

PAYMENT ENCLOSED \$ _____
*Residents of CA, NJ and NY State add applicable sales tax.

CHARGE MY:
(Charge and phone orders \$10 minimum.)
 American Express MasterCard Visa

Card No. _____

Exp. Date _____

Signature _____

Mr./Mrs./Ms. _____
(please print full name)

Address _____ Apt. _____

City _____

State _____ Zip _____

Send me a FREE *Creative Computing* Catalog.

Also available at your
local bookstore or computer store.

For Faster Service,
PHONE TOLL FREE: 800-631-8112
(In NJ only: 201-540-0445)

Pickles & Trout continued . . .

grams written in interpreter and compiler Basic, Fortran, assembler, Pascal and C. These programs, which control a Hewlett-Packard 59309 digital clock, also contain many valuable examples of the use of MSOFT's functions. Although they were very informative, I think they would be even more useful if they referred to a more commonly available 488 instrument, such as a digital voltmeter.

Parameter conversion. The MSOFT communication functions are relocatable subroutines. Since MSOFT is designed to interface to Microsoft Basic, it passes parameters to such subroutines in the same manner as Basic: CALL SUBPROG(P1,P2,.....Pn) passes the parameters P1.....Pn. However, Basic passes parameters differently from other high-level languages. This means that an assembler program is necessary to convert from Basic's parameter passing convention to whatever convention your language requires.

One important difficulty occurs with strings. Basic stores strings in two parts, the string itself and the string descriptor. This last, a three-byte block, contains the number of characters in the string in the first byte and the address of the first character in the string in the second and last bytes. When Basic passes a string, it passes the memory address of the string descriptor. The called subprogram must look into that descriptor block to find the string address.

MSOFT works the same way. When a non-Basic program wants to pass a string to MSOFT, it must first convert the string to Basic's format; i.e., a string descriptor must be created. Similarly, when MSOFT returns a string (e.g., data) it must be converted to the form required by the calling program. The manufacturer provides several routines to perform and illustrate these conversions.

For assembly language programmers, Pickles & Trout wrote CLOCK.MAC. It illustrates how the addresses of passed parameters (strings and integers) are to be placed in the various registers and tables for MSOFT's use. For users of PASCAL/MT+, MT488.MAC is supplied to perform the parameter passing conversion. PASCAL passes addresses on the stack and expects the called routine to remove them from the stack. MT488 does this and places the addresses into the appropriate registers and tables for MSOFT. Several assembly language programs are provided for users of Fortran: STRIN.MAC, STRXFR.FOR and STRSET.FOR. STRIN collects strings from the keyboard and creates the string descriptor for BASIC. STRXFR copies strings from MSOFT's input buffer into a Fortran array. STRSET generates a string descriptor block for a Fortran array. For C a routine is provided to create a string descriptor.

I did not attempt to test all of the sample programs, but looked only at the ones in interpreter and compiler Basic, assembler, and Fortran. All of

**SPECIAL
30 DAY TRIAL
OFFER!**

"MR EDIT"™

VIDEO TEXT EDITOR

The INTELLIGENT Workhorse of CP/M & MP/M



MR EDIT Demo is now available on a 30 day trial and money back guarantee.

If not completely satisfied, you will be refunded the purchase price less \$20.00 handling charge.

FEATURING:

- User Configurable to ANY non-memory mapped VDT with at least 12 lines of 64 columns.
- Fully screen oriented with comprehensive status information line.
- User defined mix of commands and function keys.
- Function keys are LIVE and screen of text stays in place and in view EVEN IN COMMAND MODE.
- Cursor is maintained in proper text location EVEN IN COMMAND MODE.
- English language commands: can be abbreviated as desired.
- Insert, Overwrite, and Command modes.
- Can be used Standalone or with a Text Processor for Word Processing.
- Handles MBASIC Line continuation.
- MR EDIT supports 129 commands.
- 189 page comprehensive user manual.
- Demo Disk • Sealed MR EDIT Disk.

PARTIAL COMMAND SUMMARY:

- Cursor Control: up, down, left, right, by character, line, word, paragraph, screen, buffer; user defined tab stops. User definable visible Tab and Carriage Return characters.
- Delete character, word, line (all bidirectional), to EOL/BOL; area or paragraph.
- Automatic word wrapping at any column; automatic paragraph alignment.
- List on Line Printer by line or area.
- Extensive search/replace capabilities; supports up to 10 simultaneous search/replace arguments. Local or Global search capability.
- Disk Directory and File Deletion, both selective by user, drive, and file, with wildcards allowed. Selective Disk Reset.
- HORIZONTAL window control for easy editing of material wider than the screen.
- Primary and secondary files for both input and out, if needed.
- UNSURPASSED edit command files and iteration macros.
- Indent level control for structured programming.
- On-the-fly definition of a function key as any combination of commands.

ONLY \$149.00 with complete documentation and installation instructions. Manual is available separately for \$25.00 which is refundable with purchase of software (Tn residents add 6.75% sales tax). VISA and MasterCard welcome: send account number and expiration date. Order today by letting us know your computer model, terminal and disk format desired. (8" and 5 1/4" soft sector only) Free technical summary available on request.

Add \$3.00 shipping U.S., \$10.00 foreign order.



Micro Resources Corporation

6922 Harding Road, Suite 117-A
Nashville, Tennessee 37221
615-352-4605

Dealer inquires welcome
CP/M and MP/M are trademarks of Digital Research, Inc.
MR EDIT is a trademark of Micro Resources Corporation.

Pickles & Trout continued . . .

the routines worked well. (In Fortran, I did not use STRIN.MAC, preferring to use a canned string-handling program The STRING BIT.) I wrote several application programs to control various instruments in my laboratory and found it to be a straightforward process. The software provided by Pickles & Trout works, and it works well.

The manual

Finally, a few comments about the manual. It is poorly written and extracting information from it is difficult. There are four major problems.

First, it is "schizophrenic." The authors obviously cannot decide on their audience. Very detailed explanations, suitable for the experienced user, are intermixed with material clearly of value only to the novice. While there is nothing wrong with writing a manual for both audiences, it must be done carefully; the advanced material must be well separated from the elementary and clearly identified, or the novice will get lost quickly.

I think that some of the simple material is just plain silly: for example, an entire page is devoted to a table showing all possible settings of the address switches. I would imagine that if a user is unable to address the P&T-488 without this table, he is probably unable to use it at all. However, Pickles & Trout tell me that they received many telephone calls regarding addressing before they included that table; now they receive none. They conclude that such "silly" details are of great help


to many users. Perhaps they are correct; after all, experience is the best teacher. But such details belong in an appendix.

Second, the authors have difficulty in going between the general and the specific. They often start a general discussion of some aspect of the bus only to get bogged down in specific, nonilluminating details. For instance, in the middle of a description of uniline and multiline commands, using serial and parallel polls as examples, they go off on a tangent describing parallel poll instrument assignments. While this is important, it is completely out of place, and the reader quickly loses his train of thought about uniline and multiline commands.

Third, many of the important features and functions of the IEEE-488 bus are either inadequately described or not described at all. Important instructions and comments about a particular function are often located in three or four different places in the manual. One has to search to get a complete description of a function or to get a "recipe" for its use. Sometimes the information is in the text and sometimes it is buried in programs. This is exacerbated by the lack of an index. Surely, if you are going to scatter important information about in the text, an index should be provided to help you find it. I spent an inordinate amount of time searching for remarks I recalled reading, but couldn't locate. It would be best if each and every 488-bus command and function were individually

CUSTOM PRODUCTS

DESIGN • LAYOUT
MANUFACTURING

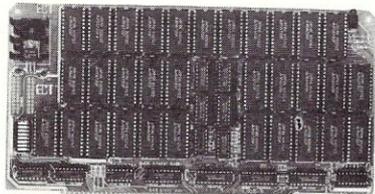


64K STATIC RAM
FULLY STATIC MEMORY

\$399

SPECIALIZING IN
QUALITY
MICRO COMPUTER
HARDWARE


ECT™



**BUILDING BLOCKS
FOR
MICROCOMPUTER SYSTEMS,
DEDICATED CONTROLLERS
AND TEST EQUIPMENT**

CARD CAGES, POWER SUPPLIES
MAINFRAMES, CPU'S, MEMORY
I/O, OEM VARIATIONS

S-100 PRODUCTS

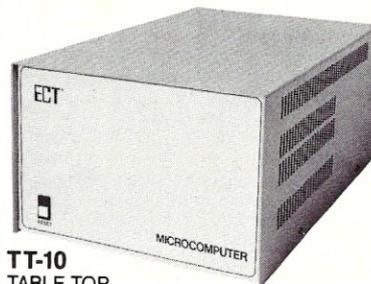

TT-10
TABLE TOP
MAINFRAMES

MULTIBUS® PRODUCTS

MULTIBUS IS A TRADEMARK OF INTEL CORP.

ELECTRONIC CONTROL TECHNOLOGY, INC.

763 Ramsey Ave. Dept. MS Hillside, NJ 07205 (201) 686-8080 Ext. 100

CIRCLE 56 ON READER SERVICE CARD

Pickles & Trout continued . . .

described with notations as to how to best implement the operation in software.

Fourth, and of less importance, the P&T-488 is meant to be used by microcomputer owners, a group that (probably) has little previous 488 experience. Therefore, a (reasonably) complete description of the bus should be given. An attempt to do so is made, but more care and detail are needed. A glossary of bus terms (taken from the IEEE standards document) is provided, but it is terse to the point where an inexperienced user will find it worthless.

Miscellaneous

Finally, there are two miscellaneous items:

—An interesting section of the manual contains a discussion of various “quirks, oddities and gotcha’s.” You should be aware of these when programming. Look here when your “bugfree” software crashes.

—I contacted the Pickles & Trout people several times while trying to get their software running; they were unfailingly polite and always helpful.


For more information contact:

Pickles & Trout
P.O. Box 1206
Goleta, CA 93116
(805) 685-4641



TAKE CONTROL

of your Application!

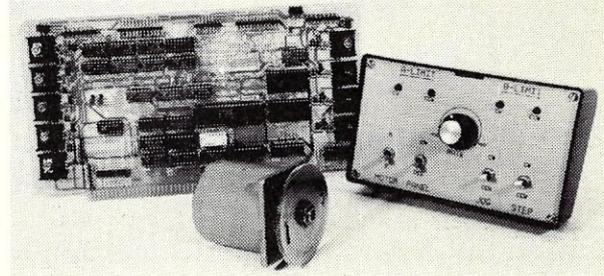

MC100 Dual Stepper Motor Controller

- Independent operation of two four phase motors.
- On board translators directly drive motors up to 20 w/coil.
- Universal translator interface to external high power translators.
- Programmable step rates and step counter.
- Automatic limit response with limit display LED.
- Full software motor ramping control.
- Dual 4 bit parallel ports which can be a single 8 bit port.
- Optional manual control panel (shown above).
- Optional CP/M and CDOS compatible driver software.

CP/M is trademark of Digital Research; CDOS is trademark of CROMEMCO

MC100 controller board with documentation	\$350.00
MC102 manual control panel with 6 ft. cable	\$135.00
MC104 driver software with documentation	\$ 35.00
MC110 includes MC100, MC102, MC104.	\$499.00



**SNOW MICRO
SYSTEMS, INC.**

P.O. Box 2201 Fairfax, VA 22031 (703) 378-7257

CIRCLE 70 ON READER SERVICE CARD

The Multi-User Data Base DATAFLEX™ WHEN WE SAY MULTI-USER, WE MEAN IT!

Running software on a multi-user operating system is different than running it multi-user!

With DataFlex, multi-user operation means that several users on a system or network can enter data in the same file or files at the same time with complete data protection. Multi-user DataFlex is available for:

- MSDOS Networks
- CP/M Networks
- Novell ShareNet
- DMS Hi-Net
- MP/M-86
- PC-Net
- TurboDOS Multi-User
- IBM "PC" w/ Corvus
- Televideo Mmmost
- Molecular N-star
- Action DPC/OS
- OSM Muse

Single user DataFlex runs on CP/M 80 and 86, MSDOS, and IBM "PC" DOS. Applications can be created on these operating systems and moved to multi-user systems without change. That's transportability!

DataFlex is the most efficient software system available for application development on microcomputer systems. All versions give you the essential features that applications need like fast on-line multi-key ISAM (to eliminate time consuming sorts); on-line processing of multiple files; 255 fields per record; formatted data entry screens (for operator efficiency); powerful report generation; and exceptional performance, even with very large data bases.

To create the best applications, start with the best application development system, DataFlex. It will get you running fast single or multi-user . . . and we mean it!

DATAACCESS

CORPORATION

4221 Ponce De Leon Blvd., Coral Gables, FL 33146
(305) 446-0669
TLX 469021 Data Access CI

CP/M is a registered trademark of Digital Research, MSDOS is a registered trademark of Microsoft

CIRCLE 221 ON READER SERVICE CARD

The "Standard" CP/M-86 Hardware System in the Lab

Bringing up CP/M-86 on an Intel single-board computer system interfaced to a Summagraphics Digitizer

by Ralph L. Place and Kirk A. Bailey

CP/M-86, as distributed by Digital Research, Inc., comes with a bootstrap program and BIOS specifically written for a hardware system consisting of the following components:

- Intel iSBC 86/12A single-board computer
- Intel iSBC 204 single-density floppy disk controller
- dual Shugart 800/801 disk drives
- a National BLC 8538 I/O board
- a CRT terminal
- a TI 810 printer
- at least 64K of RAM.

This is a system which operates on an Intel Multibus and offers considerable potential and expansion capability. Several years ago, shortly after Intel first announced the availability of the 86/12 board (the first version didn't have the "A" designation), we decided to build a system around this board for use as a data acquisition computer in the department's particle physics laboratory. At that time there was essentially no software available for an 8086-based system outside some Intel development software, so we expected to have to write everything—including a rudimentary operating system. Fortunately for us, by the time all the hardware actually was delivered, Digital Research had announced that CP/M-86 was available for this system, and Microsoft announced the availability of Basic-86. We concentrated our efforts on getting the system up and going.

Bringing up the system

Bringing the system up was, in principle, not difficult. However, a number of hardware problems complicated the process, especially since we were working with (to us) new and unfamiliar hardware on an unfamiliar bus. We had experience with 8-bit machines on the S-100 bus, but had had no previous experience with 16-bit machines of any kind, nor were we familiar with the Multibus. Additionally, a power supply problem zapped several ICs, and as a result considerable time was spent examining the system with a logic analyzer.

Leaving these "minor" problems aside, let's take a closer look at the hardware itself—specifically, the 86/12A board, since it is the heart of the system.

The 86/12A board is a single-board computer

that plugs into one Multibus slot. The Multibus furnishes power to the board (+5V, -5V, and +12V, all regulated) and provides a 16-bit-wide data bus over which data is transferred to/from off-board memory and ports. A 20-bit-wide address path allows direct access to the entire 1MB address space of the 8086. Depending on the particular instructions being executed, an entire 16-bit word can be transferred in a single access. Single-byte transfers are also supported. Additionally, there are signals for bus requests, priority signal and interrupts, among others. In all, there are 86 pins on the Multibus. The 86/12A board itself is based on a 5MHz 8086 and includes 32K of on-board RAM, a serial RS-232C port, sockets for up to 16K of ROM, an interrupt controller that can handle up to eight interrupt sources, a programmable interval timer, and 24 programmable parallel I/O lines. For operation with CP/M-86, these on-board capabilities must be augmented with the other hardware previously listed.

In order to get CP/M-86 up on the system, we first took steps to burn-in the boot program into 2716 EPROMS. At the time we ordered the board, we also ordered a Monitor program from Intel that came in four 2716 EPROMS mounted in the ROM sockets on the 86/12A board. The monitor gave us some rudimentary capabilities for program development. This monitor program allows the user to perform some elemental functions such as examine and alter memory locations, display regions of memory, execute or single-step through programs, examine registers, and perform data I/O via ports. Additional commands allow the user to communicate with an Intel development system. Since ours was a stand-alone system, we were not interested in these latter monitor capabilities. This monitor goes by the name of the "iSBC 86/12 Interface and Execution Package," a somewhat extensive title for a small monitor program. At any rate, it was and continues to be a very valuable part of the system and has proved to be very useful in debugging.

The monitor uses up 6143 bytes of the 8K of ROM space, leaving plenty of free space for the boot program. The ROM address space on the 86/12A is located in the topmost part of the 1MB address space of the 8086, from FE000H to FFFFFH. Upon a RESET, the 8086 jumps to memory location FFFF0H in the ROM space where a jump instruction sends the CPU to the beginning of the monitor itself. The procedure expected by the monitor is for the user to press "U" twice after a RESET, setting the baud. The monitor then prompts the user for a command.

Ralph L. Place and Kirk A. Bailey, Dept. of Physics and Astronomy, Ball State University, Muncie, IN 47306

We situated the CP/M-86 boot in the lower 2K of the EPROM's space with starting address (absolute) FE00H. To execute the boot, we use the monitor to set the CS (Code Segment) register to FE00H, then enter the command G to commence execution at the desired point.

Loading CP/M-86 for this system is a two-step process with the boot program loading LOADER off the first two tracks of the disk and then jumping to it. LOADER then loads CPM.SYS into memory, starting at absolute location 0400H (1K), which is just above the reserved interrupt space in RAM. The system occupies space up to an offset of 29E4H, or a total of 10,724 bytes. This resides entirely in the 32K of on-board RAM. This on-board RAM may be accessed by the 8086 at any time; i.e., on-board accesses by the CPU do not use the Multibus. Thus, whether or not another bus master other than the 8086 has control of the Multibus, this does not prevent the 8086 from accessing the on-board RAM. This RAM is of the dual-port variety and may be accessed through the Multibus by other bus masters on other boards (e.g., DMA devices) independently of the 8086. By means of user-selectable jumpers, it is possible, if so desired, to configure this on-board RAM to be accessible only by the 8086 so that it has exclusive access rights.

Although the early documentation received from Digital Research stated that CP/M-86 would run with only a total of 64K of RAM, it failed to mention that although the operating system would in fact boot up, you couldn't do anything with it; i.e., ED or PIP wouldn't work. After considerable head-scratching (we didn't know whether or not we still had hardware problems, since we had not gotten the system completely going at one time) as well as sending several communications to Digital Research (from which we received no reply about the problem), we obtained a 128K byte board, slid it into the system, and *voilà!*, the problem was solved.

With regard to the I/O features of the 86/12A board, it has one RS-232C port (an Intel 8251 USART) that is initially configured by the monitor so that CP/M-86 really doesn't have to do further initialization. Connection to the port is via a 26-pin PC edge connector. Parallel I/O is controlled by an 8255 Programmable Peripheral Interface that has three 8-bit ports. As delivered, one of the ports is configured as a bidirectional port buffered using 8226 bidirectional buffers (actually the factory configuration is set by a jumper so that the port in question is by default an output port only). The other two ports of the 8255 are brought out to an array of jumper posts and four empty 14-pin IC sockets that can be user-configured. All the parallel lines are accessed by a 50-pin PC edge connector.

The rate generator/interval timer (an 8253) provides the clock signal that is input into the USART to control baud rate. Two other outputs

are available that can provide real-time interrupts to the 8259A interrupt controller.

Turning our attention to the other boards of the system, the floppy disk controller board (an iSBC 204) is based on the Intel 8271 controller chip and the Intel 8257 DMA controller. There is circuitry on the board for two 8271 chips which would enable the board to control up to four drives (single sided) but the standard board comes with only one 8271 installed. The board operates in the usual way whereby the DMA controller is first loaded with the necessary information by the CPU; the CPU then sends an appropriate command or string of commands to the controller and stands aside to let the DMA process work.

Interfacing the digitizer

As an application of this system, we can look at the way we have it connected to a 36" x 48" Summagraphics digitizer (Summagrid). This system is used in the laboratory to analyze photographic material ranging from bubble-chamber photographs of high-energy particle collisions to geological maps for research on archeoastronomy.

The Summagrid converts x - y positions on its surface to two binary numbers, one proportional to the x -position, the other proportional to the y -position. This binary data is output from the Summagrid through its controller in either a serial or parallel form. We chose to accept the data in parallel form and input it into the 86/12A through the 50-pin edge connector parallel I/O port. In detail, the parallel I/O is controlled on the 86/12A board by the 8255 which has three 8-bit ports, labelled A, B, and C in the Intel documentation for the 8255A and addressed at port addresses C8H, CAH, and CCH, respectively, on the 86/12A. As mentioned previously, Port A is factory-configured as an output port that we changed to an input port by changing the jumper to tie the DIEN pin to +5V instead of ground. This port accepted the 8-bit parallel data from the Summagrid. Port B has no buffers in the sockets provided as it comes from the factory, so we installed 7408s as buffer/drivers to let this port serve as an output port to send 8-bit commands to the Summagrid controller. Although the 8255A can be set up in a mode where it automatically furnishes handshaking signals, one of the signals (IBF from the 8255A) would have required an inverter to provide an active-low signal. Because of this and because this was also partly a student project, we decided to use an 8255A mode where we supplied the handshaking through software so that we could become more familiar with the details of the handshaking process. For handshaking, we used Port C, which is divided into two 4-bit sub-ports called Port C(upper) and Port C(lower) that are individually configurable as input or outputs. We configured Port C(lower) as input and Port C(upper) as output (from the computer's view). Four signals are involved in the handshaking process:

**Bringing up CP/M-86 was, in principle,
not difficult. However, a number
of hardware problems complicated the process.**

STBO—output strobe from the 86/12A to the Summagrid controller. When low, this signals the controller that a data byte is to be read by the controller.

STBI—input strobe from controller to the 86/12A. When this goes low, it signals that a data byte is ready for input to the 86/12A from the grid.

ACKO—acknowledge signal from the controller, telling the 86/12A that the data byte has been read by the controller.

ACKI—acknowledge signal from the 86/12A to the grid controller, telling it that the data byte has been read.

These signals are connected to the upper and lower nibbles of Port C as shown below.

To set up the 8255A in the appropriate mode, we consulted the Intel Component Data Catalog and examined the various operating modes for the device. We found that Mode 0 sets Port A and Port C (upper) as inputs and Port B, Port C (lower) as outputs; control word #9 (91H) was the one

to be used. Since the particular applications for the system do not require maximum speed but do require arithmetical manipulation, we use Basic-86 (Microsoft) rather than the 8086 assembler language for our programming. The piece of code that does the elemental setup of the 8255A and subsequent data input and conversion of the raw data into x-y distances in centimeters is shown in the listing at the end of this article.

Summary

In summary, we have found that this computer system, based on the Intel 86/12A single-board computer, has performed very well and has been operating in the lab for over a year with only minor problems. In the meantime, we have assembled a second computer, also using an 86/12A, but with an Intel 208 disk-controller board that allows both single- and double-density disk storage. Additionally, we have installed a modified track-buffered BIOS written along the lines of an article distributed by Digital Research. We hope in the near future to obtain a hard disk system and go to MP/M-86 to allow multiple users on the system. □



Listing 1


```

10 ' Set 8255 to mode 0, port A and port C(lower)=input
20 ' port B and port C(upper)=output
30 ' Control word #9. See Intel Component Data Catalog
40 '
50 ' Input from the SUMMAGRAPHS controller is signalled
60 ' by a 'LO' on port C, bit 0. The I/O address for
70 ' port C is &HCC
80 '
90 ' First send the control word (&H91) to the command
100 ' port (&HCE)
110 OUT &HCE,&H91
120 '
130 ' Now set bit 4 of port C 'Hi'
140 OUT &HCE,&H91
150 '
160 ' Now read the button colors into an array
170 FOR I = 1 TO 5
180 READ BUTTON$(I)
190 '
200 DATA RED,WHITE,BLUE,GREEN,YELLOW
210 '
220 '**** INITIALIZATION IS COMPLETED ****
230 '*****
240 ' Code to communicate with the pad
250 '*****
260 '
270 '
280 '
290 '
300 '
310 FOR I = 1 TO 7
320 IF (INP(&HCC) AND 1)=1 THEN 320 : ' Wait till button pushed
330 IF I=1 THEN PRINT CHR$(7) : ' Beep on first byte
340 OUT &HCE,8 : ' Request data byte
350 ' Read a data byte and erase garbage
360 D(I)=(NOT IMP(&HC8)) AND &H3F
370 OUT 7HCE,9
380 NEXT I
390 ' Confirm byte read
400 ' Repeat for all 7 bytes
410 J=D(1) AND &HF
420 IF BUTTON$(J)="RED" THEN STOP
430 ' Get button color code
440 ' Red => end of data
450 '
460 ' The counts for X and Y are 16 bits long. From low
470 ' order to high order bits these are as follows:
480 ' X: 1st 6 bits of 2nd byte, 1st 6 bits of 3rd byte,
490 ' low nibble of 4th byte
500 ' Y: 1st 6 bits of 5th byte, 1st 6 bits of 6th byte,
510 ' low nibble of 7th byte
520 ' Compute the number of counts:
530 X = 4096 * (D(4) AND &HF) + 64 * D(3) + D(2)
540 Y = 4096 * (D(7) AND &HF) + 64 * D(6) + D(5)
550 ' Convert the number of counts to centimeters and print
560 PRINT "X = ";X*25.4/1016,"Y = ";Y*25.4/1016
570 '
580 GOTO 310
590 ' Go get the next data bytes
600

```

HARD DISKS

For
Systems
Integrators

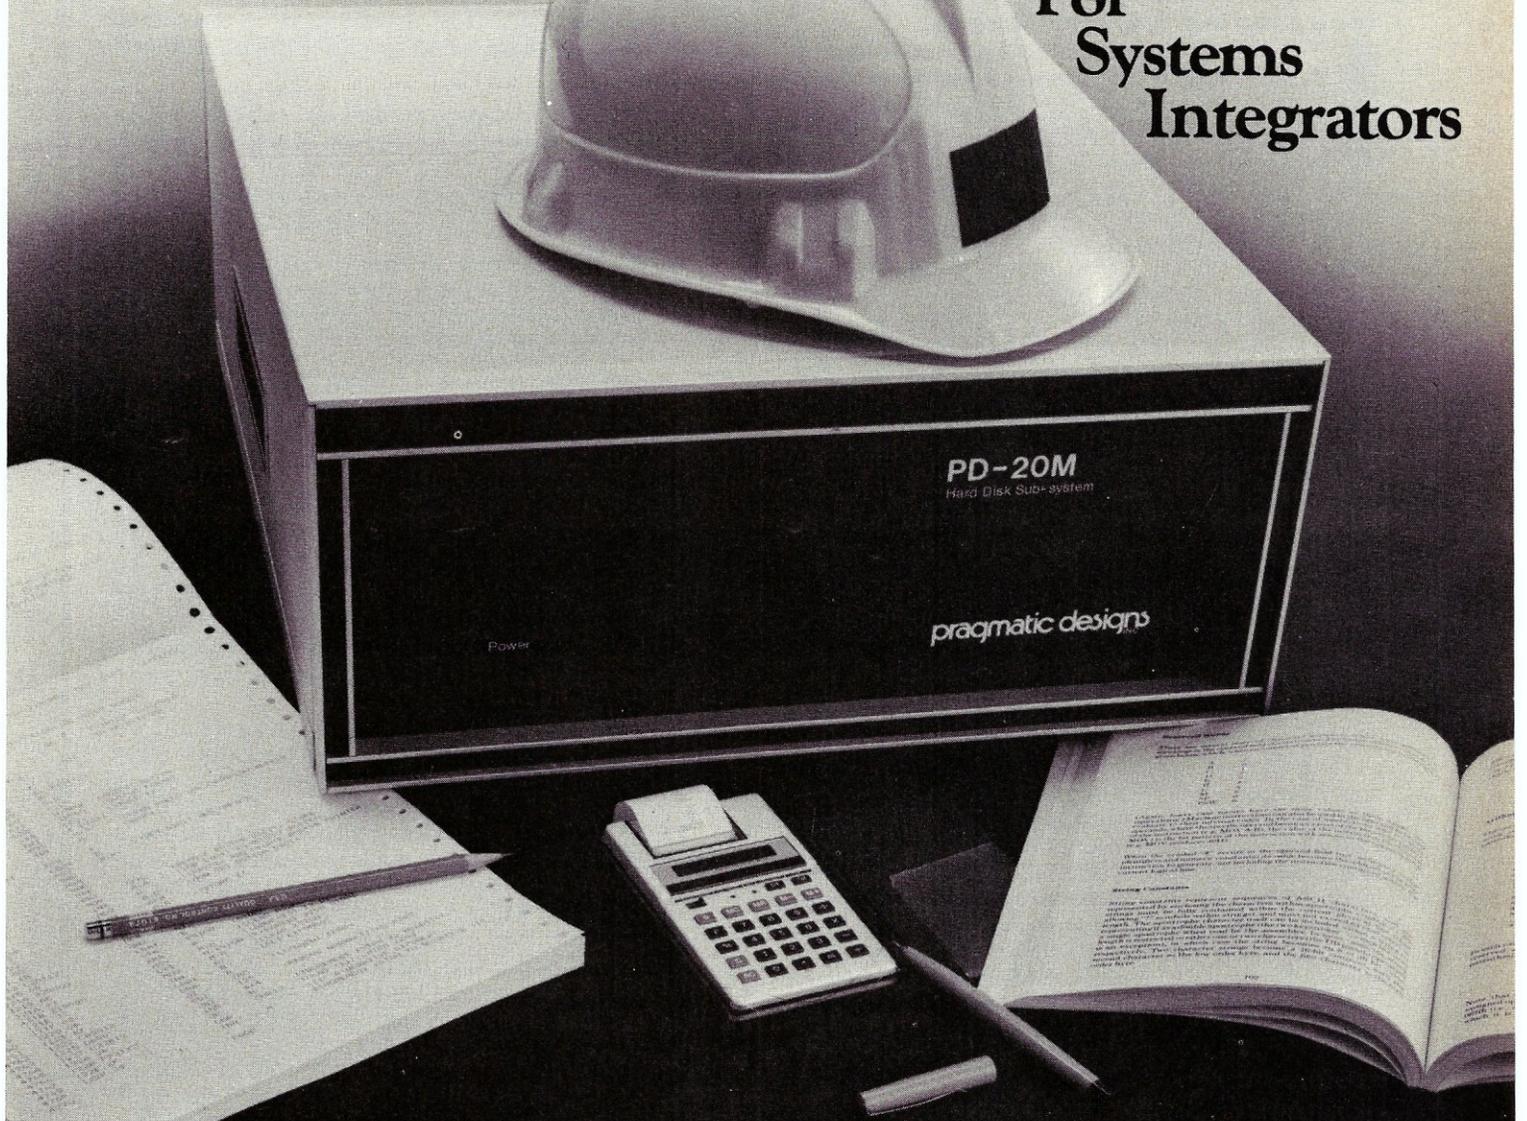

Whether you're an OEM, system integrator, or end user, when the time comes to add a hard disk unit to your computer you want a building block that offers high performance, quality, and cost effectiveness. The Pragmatic Designs PD-10M, PD-20M, and PD-40M all provide these features and more.

All Pragmatic Designs hard disk sub-systems are designed for use in systems equipped with the CompuPro® Disk II hard disk controller. They can also be used with other OEM controllers which support the popular SA-4000 hard disk interface. Standard features include:

- 10, 20, and 40 Megabyte formatted storage
- 11.7, 23.4, or 47.5 Megabyte unformatted storage
- Fully compatible with CompuPro Disk II controller
- Heavy duty power supply with 110/220V capability
- 19" rack mount configuration available
- 1 Year limited warranty
- Full hard disk system including controller, cables, and software available

Hard disks . . . easy solution. If you're ready to add a full capability industrial grade hard disk sub-system to your computer system then call Jerry Hall at Pragmatic today.

pragmatic designs
INC.

Pragmatic Designs, Inc., 950 Benicia Ave., Sunnyvale, CA 94086 408/736-8670 TLX: 171627

™ CompuPro is a registered trademark of Godbout Electronics

CIRCLE 186 ON READER SERVICE CARD

A Garland of Utilities

by Chris Terry

Rearranging your keyboard

If you have an exotic keyboard with lots of function keys that you cannot use because the codes generated by them send your editor up the wall, or if you have a French or German daisy wheel but no corresponding keyboard, or if you want to use a DSK (Dvorak Simplified Keyboard) layout, do not despair! Help is on the way from Heritage Software. They have come up with SMARTKEY, a neat program that tucks itself away just below the CCP and allows you to redefine the codes generated by all the keys on your keyboard. It intercepts all calls to the CBIOS keyboard input routines and translates received characters into codes that you have set up in a table with the aid of the FIXKEY program.

The really nice thing is that your translation is not restricted to one character per key—when trying it out, I defined the tilde (~) as a 15-character string containing my logon and password, dialed the Xerox CP-V time-sharing system at my place of work, pressed the tilde, and Presto! I was signed on with that single keystroke. In the same way, if you have function keys that generate codes with bit 7 high, you can bypass the CP/M input routine (which forces that bit low) and use them to initiate Escape sequences such as those used by the MINCE editor.

The 18-page manual contains full, easy-to-follow instructions for defining your translation table and installing and running SMARTKEY. It is not difficult to make up several versions of SMARTKEY, each having a different translation table, and store them on the disks containing different editors so that you always strike the control keys that you are used to but generate the codes required by the editor in use. SMARTKEY reduces the size of your TPA by 1.75K, but this is a small price to pay for the convenience of not having to learn a whole new set of control codes for each editor you try out.

There's really no more to say about this one. The manual is clear and has all the information you need, and the program works like a charm. If you are trying out different keyboard hardware or layouts, or editors with differing control codes, SMARTKEY will save you a lot of time and frustration.

SMARTKEY: \$60.

From: **Heritage Software,**
2130 S. Vermont Ave.
Los Angeles, CA 90007
(213) 737-7252.

CP/M disk utilities from Norway

Contents of the package

- DDUMP: disk review and patching utility.
- DDUP: copy utility with the capability of ignoring bad sectors encountered on the source disk and continuing to read instead of aborting.

Chris Terry, 324 E. 35th St., New York, NY 10016

noring bad sectors encountered on the source disk and continuing to read instead of aborting.

- DTEST: two-option disk test. Option 1 is a Read-Only test for use on newly formatted disks. Option 2 writes E5 to all sectors and then performs the read test. Bad blocks found are collected into a garbage file.
- DUSER copies directory entries from one user area to another, thereby allowing several users to access the same files without the need to duplicate the files.
- UNERA restores the directory entry of a file previously erased by the ERA command.

\$29.95 each program, or \$125 for the set of 5.

The general picture

Programs similar to DDUMP, DDUP, and DTEST are available in the CPMUG or SIG/M public domain libraries for a total cost of \$12 (\$4 each for three diskettes full of other goodies). One must therefore ask what special features make the Elektroconsult utilities worth the extra money. The answer will depend upon your experience with CP/M and your needs.

If you are a newcomer to CP/M, or running a business system with nontechnical operators, some of these utilities will soon earn their keep because of their transportability and ease of use. Only .COM files are supplied, since customization is considered unnecessary and undesirable. No installation at all is necessary, and it is claimed that the programs will run on most CP/M version 2.x systems. This is particularly valuable because some of the public-domain utilities will not run on 5¼" disk formats or on many double-density 8" formats. I can confirm that DDUMP and DDUP run on the following systems with no trouble and consistent results: Tarbell 8" SD, North Star 5" DD/SD with Morrow hard disk, and Teletek 8" DD/SD. The programs were developed on a Zenith/Heath system running under HDOS.

These programs have what I consider to be very well-designed and friendly human interfaces. A prompt is issued for every item of data needed by the program, and in the case of commands, all of the applicable command letters are listed as a reminder. Entering H at any stage gets a Help menu showing what each command does. When numeric values are needed, you are told whether they should be decimal, hexadecimal, or ASCII (or given a choice). Warnings are issued when a command is potentially destructive. Error messages are explicit and helpful (e.g., "Error: Non-existent source disk drive!")

Documentation is well organized, clear, and includes a "First Time Through" tutorial section for each program. This is followed by a detailed description of each command, a list of the error messages, and comments on possible causes of each

"EASI-PATH"

Project Management Program

\$300.00

for TRS-80, IBM and CP/M micros

FEATURES:

- Program Complies w/ Corp. of Engineers ER1-1-11
- 500 Activity Capacity
- Data Base w/ Editor
- Compiled BASIC w/ Source
- Easy Input project description, starting date, length of week, holidays deleted, activity description, etc.
- Concise Output project pert report, Bar chart, project cost report, etc.

Customized Versions Available For Reasonable Fee

CALL OR WRITE:

EASI Software, Inc.

2 Windsor Court
Jackson, N.J. 08527
(201) 367-5735, 1-7 pm EST

Demo Diskette with Manual \$30.00
Complete Line of Engineering Programs Available

CIRCLE 147 ON READER SERVICE CARD

A> INFORMATION MANAGEMENT PACKAGE (indexing, sort & search, tabulation, address labels, word processor interfaces, and lots more!

A> COMMUNICATION SOFTWARE

A> For CP/M-based Systems

CP/M is a trademark of Digital Research

Configured for a wide variety of systems.
Disk formats include 8-inch, Osborne, Xerox ...

Call or write for information

COMPU-DRAW
1227 Goler House
Rochester, NY 14620
Phone: (716)-454-3188

Dealer inquiries invited

MasterCard, Visa & American Express cards welcome.
Separately ordered documentation may be returned for full refund within 10 days!

It's the writing on the wall

CIRCLE 73 ON READER SERVICE CARD

Now
tiny Soars!



...with tiny-c two — the compiler

Tiny-c two is ten times faster than tiny-c one, with many features, including long (32 bit) integers, lots of new operators, and re-directable and direct access input/output. Viable for professional work, either systems programming or business applications.

It comes with a UNIX™ style command interpreter called the "tiny-shell"™. Every compiled tiny-c program becomes a new shell command. Commands can have arguments, and dash (-) options, just as real UNIX shell commands do. The < and > input/output redirection operators are supported.

Fifty standard library functions, and readily extended. The input/output functions are UNIX styles, including fopen, fprintf, etc. Both ascii and raw (binary) input/output are supported. Package is portable. Bringing it up on a new processor or new operating system should take just days. And as usual with tiny-c products, all the source code is included.

Tiny-c two is available now on standard 8" CP/M.

\$250.00 - Includes Owners Manual and Disk
Manual Only \$50.00
(20% Discount to tiny-c one owners)

The original tiny-c ONE is still available on a wide variety of cassettes and diskettes. This version is an interpreter, complete with a Program Preparation System. Disk or cassette versions \$100 (this price includes the Owners Manual, available separately at \$50). CP/M. Apple DOS 3.2, 3.3 H8/89 HOS. PDP-11. Flex 2.0 Northstar. CP/M.

tiny
C

Call or write tiny-c associates, P.O. Box 269, Holmdel, N.J. 07733
(201) 671-2296. You'll discover tiny-c is flying higher and faster.

New Jersey residents include 6% sales tax Visa or Master Card accepted include charge plate number with order.

UNIX is a trademark of Bell Laboratories, Inc.
tiny-c and tiny-shell are trademarks of tiny c assoc.

CIRCLE 216 ON READER SERVICE CARD

A Garland of Utilities continued . . .

error. I found no information gaps, and (as is usual with documents from Scandinavia and Holland), the English is excellent. There are no ambiguities, and the style is neither stiff nor overly colloquial. In addition to instructions on use, the DDUMP and DDUP manuals contain some background information on disk formats and how CP/M constructs files. Given the helpful operating prompts and warnings, supplemented by the information in the manuals, it would take an extremely stupid operator to do anything disastrous to the files that are being processed!

Comments on the individual programs

DDUMP. I happen to like this one very much, because it is so easy to use. An address "ruler" over the main sector display allows one to pinpoint an address, either in the hex portion or the ASCII portion, without laboriously counting across the row (see Figure 1). Current Drive, Tack, Sector, and Block numbers are also displayed. Logical sector numbers are used—because the program can handle so many different formats, these are more informative than the physical sector numbers found on the disk.

I have only one gripe: the ASCII portion of the display does not recognize codes with bit 7 set. Thus system or R/O .COM files show up with a file type of C.M or ..M. (See the vendor's response in the box.)

Ward Christensen's DU (SIG/M Volume 16) is without doubt a far more powerful utility than DDUMP. DU allows you, for example, both to advance and back up one sector (DDUMP only advances); you can dump the allocation bit map to the printer, or search for an ASCII string starting at the current sector, print the disk parameters, see what file is allocated to Block "n", save a sector in a temporary buffer and get it back or move it to another place, and do several other things that DDUMP does not allow. However, I find the DU command set somewhat arbitrary and difficult to remember. I use it (with much poring over the documentation) when I want to do something complex or difficult. For day-to-day usage, I find DDUMP quick, easy, and friendly.

DDUP. This utility copies an entire disk from one drive to another. It has one outstanding advantage, which I have not found in any other copy utility: You may choose whether to abort or to continue if an unreadable sector is found. If you select the "continue" option on entry, the program ignores a bad sector on the source disk, writes a few lines of asterisks (*) to the corresponding sector of the Destination disk, and then goes happily on to the next sector. Since most copy programs

are forcibly aborted by a bad sector, this file recovery aid alone makes it worth the price. On the other hand, DDUP is an all-or-nothing program, and for day-to-day usage I prefer the Tarbell program and its variants, also in the public domain (CPMUG Volume 25). These give you the choice of copying system tracks only, file tracks only, or both, and also permit copying to terminate when a track containing nothing but E5 is found on the source disk.


DTEST. I am not at all impressed with this program. Like FINDBAD (SIG/M Volume 16), DTEST isolates bad blocks into a garbage file and sets the file to system status so that it does not show up in the directory and will not be picked up by a PIP *.* command. Unlike FINDBAD, which nondestructively examines and checks sectors regardless of their content, DTEST absolutely requires a newly formatted disk to work on. It can be argued that this is the time to find out if the disk is bad—that is certainly true for hard errors. But soft errors are occasionally introduced by application programs, line surges, or noise, and make part of a file unreadable—and *that* is the time when FINDBAD is most valuable. I usually need to isolate the bad block immediately and continue working on the current file—I don't in the least want to swap disks around in the drives while I DDUP all the files to another disk.

A less serious (but to me extremely irritating) defect is that the Read-Only test falsely reports (and isolates) a bad block if a single byte on the disk is not E5, even if the sector itself is perfectly readable. (See the vendor's response in the box.) I see this as a design defect—at formatting time I want to know about hard errors, not stray data bytes that don't impair the readability of the disk. This defect should not occur if you opt for a Write/Read test, because the Write portion writes E5 into all sectors before the read check is performed. In my view, DTEST is neither flexible enough for superficial testing, nor thorough enough to give a real workout to an intermittently troublesome disk. It is, however, useful for quick testing of new disks containing no data.

For detailed testing, DISKTES1 (CPMUG Volume 8) is far superior. This program first fills the data areas with 00 and then does a seek from the home position to each track in turn. Then it fills the data areas successively with FF, 55, AA, and E5, checking the result of each operation, after which it does a second (and final) seek to each track. On several occasions this test has found sectors with what I can only call "sticky bits" that slipped through the cracks of FINDBAD because they were set by E5 but would not go back to 0 under normal writing conditions. It takes 6 min 47

The Elektrokonsult programs have very well-designed and friendly human interfaces . . . warnings are issued when a command is potentially destructive . . . DDUP is a copy utility that does not abort when a bad sector is encountered in the source.

THE BURNER I/O FOR THE S-100 BUS

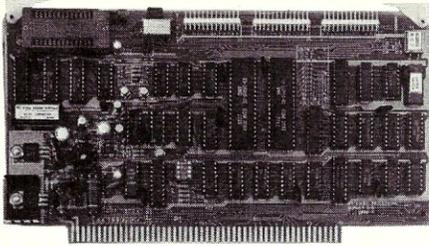

Our BURNER I/O has a complete EPROM programmer, two serial ports, one parallel I/O port with handshaking and memory management.

Programmer features:

- Programs EPROM types 2704 thru 2764 and TMS2508, 2516, 2716
- Does NOT require programming modules.
- Extensive, easy to use menu driven CP/M compatible programming software supplied in a 4K EPROM. Is easily written on diskette as .COM file.

- Programming socket is zero insertion force type.
- Programming voltages generated on board.
- Programmer is totally I/O mapped.

I/O Features: (serial)

- 2 fully independent RS-232 serial ports.
- RS-232 data ready supported.
- Each serial port has independent baud rate generators that are software programmable from 50 to 19,200 baud.
- Serial ports may be polled and/or interrupt driven.

I/O features: (parallel)

- Independent 8 bit output, input and status flags.
- All I/O including flags are latched.
- In addition, there are 4 direct sense lines.

Memory management features:

- Controls the S-100 address lines from A16-A23.
- Uses output instruction to load the address.

Quality construction including silk screen, solder mask, sockets and card ejectors.

We are offering this board with all options, or just the portions that are needed. All combinations are assembled and tested.

Option A: Complete board with programmer, I/O and memory management. \$354.95

Option B: Programmer only. \$219.95

Option C: I/O only. (2s + P) \$219.95

Option D: Option B and C. \$329.95

Option E: Memory management only \$109.95

Memory management may be added to options B or C for \$25.00.


Shipping, UPS: \$3.00 surface, \$5.00 air

Extended Processing

3861 Woodcreek Lane
San Jose, CA 95117
(408) 249-8248

CIRCLE 142 ON READER SERVICE CARD

WE GAVE YOUR DRIVES THE FIRST BREAK THEY EVER HAD AND NOW WE GIVE YOU TIME TO BURN...

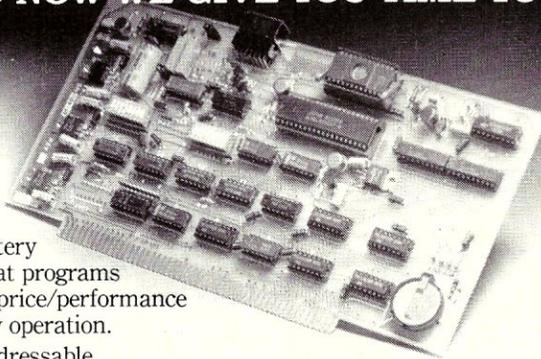

TimeEPROMmer, the S-100 CP/M* compatible programmer that's useful every second of every day. A real time calendar/clock with lithium battery and an EPROM programmer that programs all popular eproms. Unbeatable price/performance ratio. Features designed for easy operation.

Eprom Programmer: Port addressable.

Read, Verify, Program, and Disk transfer. Handles up to 28 pins. Power generated and controlled on board. All software and documentation included. Assembled units tested with burn in.


Real Time Calendar/Clock: Complete time counting functions with CMOS LSI. Allows up to 6 months power down use. Independently port addressable.

- TimEPROMmer BB & software & manual \$75
- TimEPROMmer Kit & software & manual \$195
- TimEPROMmer A & T software & manual . . . \$295
- Our DISK CONTROL UNIT that turns 8" drives off when not being accessed. State drive.
- DCU, kit & manual \$29.95
- DCU, A & T & manual \$49.95
- P & H \$2. NYS add tax.
- CP/M is T.M. of Digital Research



OPTRONICS TECHNOLOGY

P.O. Box 81 Pittsford, NY 14534 (716) 377-0369

CIRCLE 188 ON READER SERVICE CARD

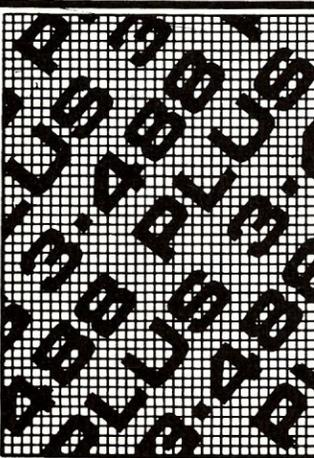

THE 488+3 IEEE 488 TO S-100 INTERFACE



S-100

- Handles all IEEE-488 1975/78 functions
- IEEE 696 (S-100) compatible
- MBASIC subroutines supplied; no BIOS mods required
- 3 parallel ports (8255A-5)
- Industrial quality; burned in and tested
- \$375

(Dealer inquiries invited)

D&W DIGITAL

1524 REDWOOD DRIVE
LOS ALTOS, CA 94022 (415) 966-1460

CIRCLE 66 ON READER SERVICE CARD

A Garland of Utilities continued . . .

sec to run (contrasted with the 1 min 40 sec of DTEST Read-Only, 3 min 28 sec for DTEST Write/Read, and 1 min 28 sec of FINDBAD), but it does a good job. In justice, however, I must admit that it may be hardware-dependent: I have used it on Tarbell and Thinker Toy single-density systems, under CP/M 1.4 and 2.2, but not on double-density or 5¼" systems. The Elektrokonsult DTEST will definitely cope with any density or format.

DUSER. I can verify that this program works as stated, and I can see that it allows multiple users to make more efficient and convenient use of available disk space. However, because I have no experience with multiuser systems, I can't offer any practical comments. (See vendor's response in the box.)

UNERA. This is convenient if you are a non-technical user who has just typed A>ERA FOOBAR.*, forgetting that FOOBAR.DAT contains test data that would be useful on other occasions. Just type A>UNERA FOOBAR.DAT and, as if by magic, the file is back in your directory—always supposing you have not written anything to that disk since the ERA command. But if you are fluent in the use of DDUMP or DU, why pay \$30 to save two or three seconds in the process of changing an E5 back to a 00?

Conclusions

Elektrokonsult has come up with human interfaces that are worth study by anyone who wishes to market a program or circulate one for general use in the CPMUG and SIG/M libraries. They have (in DDUP) created a valuable file recovery aid that is not already in the public domain. It looks as though they have also been successful in creating system-independent utilities, which is a distinct advantage—a number of the public domain utilities do have unfortunate hardware or software dependencies. However, these successes in themselves do not necessarily justify the selling price. In performance I feel that DDUMP and especially DDUP are well worth anyone's consideration; DUSER and UNERA may or may not have something for you, depending on your system needs. DTEST (in my view) compares poorly with existing public domain disk tests. However, if these will not run on your system because of format incompatibilities, try DTEST; it will run on almost any format and will at least allow you to check your newly formatted disks.

From: Elektrokonsult AS
Konnerudgaten 3
3000 Drammen
NORWAY

Elektrokonsult replies:

Our disk utilities were designed to:

- be user-friendly
- work with most diskette formats and some hard disks
- be relatively well-documented so that the user may also learn something about the "inner works" of CP/M from the manuals and application notes.

In DDUMP, we deliberately did *not* zero the 8th bit so that System or R/O files would declare themselves by the period in the filetype. We see this as an advantage, not as a defect.

DTEST tests ALL tracks of the diskette, including the system tracks. We have found that some of the public domain utilities do not test the system tracks. The test for all data bytes being E5 was designed in as a check that all bytes have been correctly written by the formatter, rather than merely testing for readability. The check for E5 may be removed in a future version, allowing DTEST to be used also on diskettes containing data.

You do not have to be in a multiuser environment to take advantage of DUSER. In a single-user system, the USER partitioning can be used to group files by topic and so help to organize your work. DUSER may not be of much use for diskettes with limited storage capacity, but for storage capacities of 500K or more, it can be very useful indeed.

The one that does everything

If you want to give away your PROM monitor and use the extra space, or to defenestrate DDT, forget FINDBAD, pitch PIP out the door, and stomp on STAT—POWER is exactly what you need. It's a steal at that modest price!

POWER is, to my way of thinking, the most versatile, friendly, convenient, and protective utility ever to hit the market. It performs most of the functions of PIP, STAT, DDT, REN, SAVE, DIR, TYPE, DUMP, FINDBAD, CKSUM and a system monitor much more conveniently than the originals do. It is a transient program executing at 100H, and occupies 12K (to 2FFFH). There are 45 different commands, including four different flavors of DUMP and TYPE and four user-definable commands for each of which an 8-byte patch area is provided. The user interface is outstandingly friendly and protective, and many of the creatures are unique to this program. Four special features make POWER easy for even completely nontechnical persons to use:

- Once loaded and running, POWER does not

**POWER is one of the most versatile,
friendly, convenient, and protective utilities
ever to hit the market.
Don't even try to get on without it.**

BRIDGE GRAPHICS

PLOTPAK™ is a complete plotting library that runs under FORTRAN-80 and performs a variety of functions:

windowing, linear print arrays, automatic polygon drawing, annotations, plotting symbol/line selection, labeling, coordinate conversions.

PLOTPAK can drive a screen and plotter simultaneously and includes your choice of the following drivers:

SCREENS

- MicroAngelo MA 512
- ADM + Retrographics
- TEK 4010 Compatible Terminals

PLOTTERS

- Houston Instruments DMP-4
- H.P. Plotters 7225B & 7470
- Radio Shack Printer/Plotter

PLOTPAK (.REL file) two drivers \$275

PLOTPAK (source code) two drivers \$365

BRIDGE™
Computer Company
DIVISION OF SEA DATA CORPORATION
ONE BRIDGE ST., NEWTON, MA 02158
PHONE (617) 244-8190

CIRCLE 52 ON READER SERVICE CARD

Speaking of Computers

THE SOUNDING BOARD

- S-100/IEEE 696
- unlimited vocabulary
- CP/M software included
- numerous applications (talking terminals, morse code training, electronic music...)

For more information, call or write:

Cygnus Systems
(303) 393-6526

1245 Columbine #402
Denver, CO 80206

WE LISTEN!

CIRCLE 190 ON READER SERVICE CARD

We're no longer the best kept secret in the universe. The Martians have landed in La Mesa, Ca. with a complete line of CP/M software. Let us know your computing problems, maybe we've solved them already.



Timin FORTH RELEASE 3.1 \$99.95
Supplied with a visual editor, CP/M utility package, floating point, and 8080/2-80 assembler.

Timin ROMable FORTH \$199.95
Produces applications in ROM. Contains all vocabulary of Release 3.1 Stand alone applications as small as 5K.

Timin DUAL-TASKING FORTH \$239.95
Simultaneous execution of two programs. Plus all the features of Release 3.1.

"The Last NAD" \$99.95
Client/mail list management system. Source code and documentation provided (requires dBase II).

CP/M USER'S GROUP INDEX GUIDE \$19.95
Abstracts and documentation from volumes 1-78 of public domain software.

Martian Technologies
8348 Center Dr. Ste. F La Mesa Ca. 92041

VISA 619-464-2924


CIRCLE 153 ON READER SERVICE CARD

Main/Frames

Main/Frames

from
\$200


- 30 Models of Enclosures
- Assembled and tested
- Quasi-Coax Motherboards
- Power Supply
- Card cage and guides
- Fan, line, cord, fuse, power & reset switches

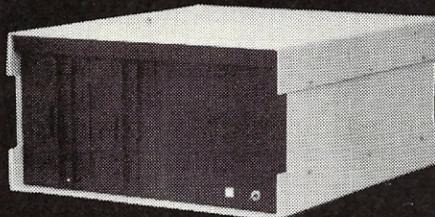

8" Floppy Main/Frame
\$482



8" Disc Enclosure
\$250

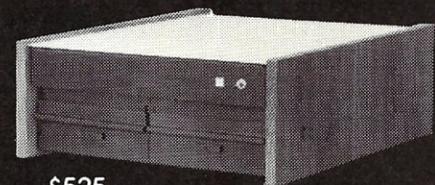

\$525
Phase/80 8" Floppy Mainframe



\$900
Phase/80 Desk + Mainframe

Write or call for our brochure which includes our application note:
"Building Computers — A Recipe"

INTEGRAND

8620 Roosevelt Ave. • Visalia, CA 93291
209/651-1203

We accept BankAmericard/Visa and MasterCharge

CIRCLE 49 ON READER SERVICE CARD

NEW!
ATTENTION

S-100 PRODUCTS

Z80
CP/M & NorthStar
APC BASIC
The ROLLS ROYCE of Basics

2-5 times faster performance
Accurate arithmetic
Reduces program development time up to 25%
More programming flexibility
Better memory utilization
Easier testing and debugging
Simple to Use
NorthStar compatible (Microsoft basic translator available)
Supports NorthStar floating point processor board under CP/M

FEATURES:

Trace/conditional trace
Global edit
Multiple buffer files
Dynamic code merging
Dynamic array dimensioning
Bit functions
Local variables
Cross reference program
Expanded assembly language interface
Multiline user functions
Flexible output formatting
Subscription phone support
Source code protection

APCBASIC pays for itself quickly
ORDER NOW!

Dealer inquiries welcome

Includes APCBASIC, editor, cross reference program, library modules, configuration and compaction programs and manual

APCBASIC:
NorthStar Dos, Gdos, CP/M \$400
Z80 CP/M 8" SS SD \$400
8068/8088 (avail. NOV.) CP/M86 .. \$400
(avail. DEC.) MSDOS .. \$400
Manual only \$48

Check VISA or MasterCard accepted

American Planning Corp.
Suite 423, 4600 Duke Street
Alexandria, Va. 22304
703-751-2574

CP/M, CP/M86 are trademarks of Digital Research, Inc.
MSDOS is a trademark of Microsoft Corp.
Z80 is a trademark of Zilog, Inc.

CIRCLE 41 ON READER SERVICE CARD

A Garland of Utilities continued . . .

require the system disk. Hitting ^C does *not* attempt to reboot the system; it merely updates the directory information for the current or specified drive so that you can change diskettes at any time. If you change diskettes but forget to hit ^C, POWER detects the error and prompts you for ^C before allowing you to continue the operation. Thus, you will never again get those annoying "BDOS Error: R/O" error messages. You can copy and rename and erase files to your heart's content, secure that you cannot accidentally overwrite or destroy files. Any operation that involves a disk write automatically asks for reconfirmation before performing the operation, though reconfirmation requests can, if you wish, be suppressed.

- COPY, ERA, REN, and other file operations display a directory in which a decimal number is assigned to each file. You select the files to be operated on by typing in single numbers (e.g., 5 15 31) or a range of numbers (e.g., 1-4 8-9 34-). This eliminates many, many keystrokes and greatly reduces the chances of making a mistake. No more repetitious typing of filenames and filetypes!
- As each file in a series comes up for processing, the operation and filename are displayed and the program asks for reconfirmation (Y or N) that this file is to be processed. Thus, if

you do make a mistake in your entry line, the reconfirmation request allows you to correct it. Just type N, and that file is skipped. The LOG command allows you not only to select or reject reconfirmation requests, but also to show or suppress system and R/O files in the directory display, and to choose how many columns wide the directory should be.

- The documentation is excellent. The first three pages of the manual contain a command index showing command name, page number for the full description, a 2-3 line brief description, and the syntax of the command. The index is followed by a four-page section on "Getting Started with POWER," containing good examples. The rest of the manual consists of a full description of each command in name alphabetic order, with copious and helpful examples of command variants and the displays that result.

There just is not space to discuss all of the goodies in detail—You have to read the 60-page manual to grasp all the details of the power you get in this package. But I will give you the highlights, and say that after using POWER daily for three weeks I wouldn't be without it for all the tea in China!

Disk medium and file commands

- DISK reports the parameters and formatting of the diskette in the current drive.

THE SIMPLEST WAY TO MIND YOUR MONEY




A Simplified Computer Bookkeeping System
Print complete checks, pay bills, keep checking and payable accounts, get reports on income, expenses, profit, pay and tax records.

Chuck Atkinson Programs
Rt. 5, Box 277-C
Benbrook, Texas 76126
(817) 249-0166



CIRCLE 110 ON READER SERVICE CARD

5-INCH HARD DISK SUBSYSTEMS WITH LOW COST PER MEGABYTE.

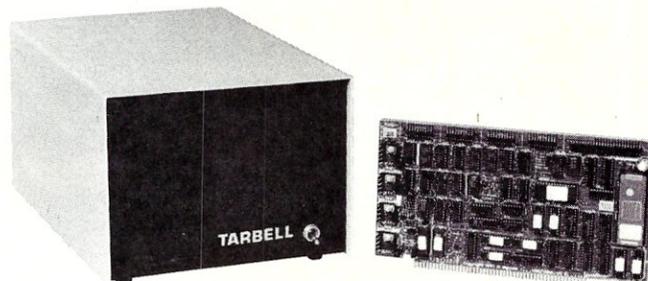

Tarbell 5-inch hard disk subsystems with amazingly low cost per megabyte are available in 5, 10 or 16 megabyte formatted configurations.

Subsystem includes 5-inch hard disk drive, 8-inch metal frame with 5-volt and 12-volt regulators or optional cabinet with power supply, hard disk controller and cable, CP/M 2.2 for Tarbell floppy and hard disk, and documentation.

Data transfer rate is 5 megabits per second and average seek time 120 milliseconds.

LESS COST PER MBYTE

5 Mbyte	\$2095
10 Mbyte	\$2265
16 Mbyte	\$2375
Cabinet with power supply	\$200

Tarbell
Electronics

950 Dovlen Place, Suite B
Carson, California 90746
(213) 538-4251

CP/M is a trademark of Digital Research

CIRCLE 223 ON READER SERVICE CARD

A Garland of Utilities continued . . .

- **STAT** reports free and used space on diskettes in all currently active drives.
- **SIZE** reports size in kilobytes, sectors used, and sectors unused, for each file selected from the numbered directory.
- **SETxxx** set files selected by number to SYS, R/O, R/W, or DIR status.
- **CHECK** computes and reports a unique checksum for each file selected by number. (A checksum for the entire diskette is handled by **TEST**.)
- **USER** and **XUSER** select source and destination user areas for a **COPY** operation on files selected by number.
- **TEST** nondestructively tests all sectors on the disk, segregates bad blocks into a file that is set to **SYStem** status, and computes a checksum for the disk.
- **REN** renames files selected by number from the directory. The program displays the old name and prompts you for the new name.
- **ERA** erases files selected by number from the directory and reports each file as it is being erased.
- **RECLAIM** restores files previously deleted from the current drive, after asking for reconfirmation. It will not create two files of the

same name in the directory. Note that reclaimed files are automatically set to R/O status, although this fact is not mentioned in the manual. The idea is that a file that is valuable enough to reclaim should be protected against further accidental deletion. If you want to modify a reclaimed file, you must first use the **SETWR** command to give it Read/Write status.

- **COPY** copies files selected by number from any drive to any other drive, verifying the copy.
- **TYPE** displays an ASCII file, selected by number, exactly as entered. **TYPEA** displays the ASCII hex codes, 16 bytes to a line. **TYPEH** displays the hex code of a .COM or other file, 16 bytes to a line. **TYPEX** is like **TYPEA** but adds the printable ASCII equivalents (same format as **DDT**).

Monitor commands

The monitor commands are fairly standard, except that they include commands to read a disk data into memory at any address and write the data back to the disk. However, the performance of even standard commands is superior.

- **DS** (Display/Substitute) automatically displays the current address and the hex, decimal, binary and ASCII forms of the data

INTRODUCING

uniforth

One of the finest implementations of the FORTH language. Field tested and reliable, **UNIFORTH** is available for Z-80 and most 16-bit systems using 8" disk drives.

As a task, **UNIFORTH** is compatible with and supports all features and file types of the CP/M, CDOS, MS-DOS and DEC operating systems. As an operating system, **UNIFORTH** will function "stand-alone" on most commercial microcomputers.

The FORTH-79 Standard language has been extended with over 500 new words that provide full-screen and line-oriented editors, array and string handling, enhanced disk and terminal I/O, and an excellent assembler. Detailed reference manuals supply complete documentation for programming and system operation, in an easy-to-understand, conversational style using numerous examples.

Optional features include an excellent floating-point package with all transcendental functions (logs, tangents, etc.), the MetaFORTH cross-compiler, printer plotting and CP/M file transfer utilities, astronomical and amateur radio applications, etc.

Compare these features with any other FORTH on the market:

- Speed and efficiency
- Variety of options
- Ease of use
- Quality of documentation

You'll find **UNIFORTH** is superior.

Prices start at \$35. Call or write for our free brochure.

Unified Software Systems

P.O. Box 2644, New Carrollton, MD 20784, (301) 552-1295

CIRCLE 158 ON READER SERVICE CARD

CP/M SUMMARY GUIDE

Tired of fanning through your CP/M® manuals or writing notes that remind you of the commands, functions and error codes? Well it's about time you ordered our CP/M® Summary Guide! Spiral bound and handy to hold, our guide is a 60 page booklet summarizing the features of CP/M® (Ver. 1.4 & 2.X) and 2 totally alphabetical listings of the commands, functions, statements and error codes of MICROSOFT BASIC-80 Ver. 5.0 and CBASIC® -2. Areas summarized are in table form and include all direct and transient commands plus MAC™, DESPOOL™ and TEX™. Our booklet is a much needed supplement to any of the literature currently available on CP/M® and has been recommended by Digital Research.

P.S. Over 15,000 users can't be wrong!

Ask your local computer store for our guide or send \$6.95 plus \$1.00 (postage and handling) to:


THE ROSETTA STONE, P.O. BOX 35, GLASTONBURY, CT 06025 (203/633-8490)

Name _____

Street _____

City _____ State _____ Zip _____

CP/M®, DESPOOL™, MAC™, TEX™ are registered trademarks of Digital Research. CBASIC® is a registered trademark of Digital Research.

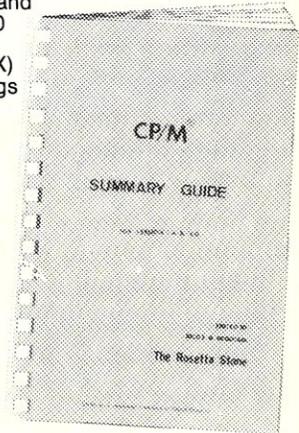

CIRCLE 72 ON READER SERVICE CARD

A Garland of Utilities continued . . .

there. The default entry mode is hex, but it can at any time be changed to any of the other forms, even in mid-line.

- DUMP has the same variants as TYPE and produces similar displays.
- MOVE moves a block of data from one place to another in memory. However, the move can be in either direction, and the target address range can overlap the source address range.
- SEARCH searches a specified address range for a byte sequence. The target bytes may be ASCII, hex, or mixed, and the wild card“?” may be used to fill in an unknown portion. A target sequence may be up to 128 bytes long.
- READ and READGR bring in disk data specified by Track/Sector or by Block to any specified starting address in memory. LOAD brings in a whole file, provided there is sufficient free memory to hold it. The corresponding write commands are WRITE, WRITEGR, and SAVE.

There are other monitor commands which allow execution of a program in memory with return to POWER or to CP/M upon completion, filling a memory block with a byte, etc.

Parameter selection

The LOG command allows you to change the way

certain commands work. For example, you can set the directory width, select or suppress reconfirmation requests, select or suppress read-after-write verification of disk writes, and show or suppress system files in the directory. For disk writes, if the target filename already exists, you can opt for overlaying of the previous file, creation of a backup, a reconfirmation request, or an automatic skip to the next file in the series. The options you select remain in force for your current session with POWER (unless you change them again with LOG). If you don't like the defaults selected by the vendor, you merely use LOG to set up the defaults you prefer, and then SAVE that version of POWER. Next time you use the program, your own defaults will be in effect until you change them with LOG. The LOG command tells you the last address used by POWER, so you can use POWER itself to do the save.

I could go on for hours about this utility. It's much more than a "utility" (something useful)—it becomes a necessity or an addiction, and you wonder how you ever got on without it. My heartfelt advice is: Don't even *try* to get on without it!

POWER, \$149.

From: **Computing! San Francisco**
2519 Greenwich St.
San Francisco, CA 94123
(415) 553-0204



EPROM PROGRAMMERS



HARDWARE CAPABILITY

The EP-2A-87 with RS-232 and EP-2A-79 with parallel interfaces program the following devices: 2704, 2708, 2716, TMS2716, 2732, 2732A, 2532, 2764, 27128, 2564, MCM68764, 27C16, 27C32, 27C64 EPROMS, and 2816 EEPROM; And microprocessors 8751, 38E70.

CP/M SOFTWARE

The program which includes source code provides for extensive file management for large files including 15 commands for programming, reading, and verifying the devices listed above. Easy to use, the program is menu driven with an expert mode which eliminates many of the prompts once the user is familiar with the program.

PRICE AND DELIVERY

Available from stock to 2 weeks, the EP-2A-87 is \$650 which includes an 8K buffer, stand alone copy, edit. The EP-2A-79 is \$169. Personality modules \$17 to \$36 depending on device. Software \$40. S-100 parallel interface (S-100-3P) is \$105.

OPTIMAL TECHNOLOGY, INC
EARLYSVILLE, VA. 22936
804-973-5482

CIRCLE 65 ON READER SERVICE CARD

COMPARE COMPILERS

New C/80 2.0 gives you all three: features, performance and price.

Compiler	Compiled Program Size (Bytes)	Loaded Size (with runtime support)	Compile and Load Time (secs)	Execute Time (secs)	Price
C/80 2.0¹	313	3181	90	24.8	\$ 49.95
Aztec C ¹	378	4657	139	33.0	\$135
BDS C 1.44 ¹	305	3696	54	44.0	\$150
Supersoft C ³	300	2500	92	26.0	\$200
Tiny-c 2 Compiler ²	(4)	(4)	96	930	\$250
Whitesmith C ²	290	7384	242	15.6	\$750

Performance Comparison Using Benchmark Program
Published in BYTE, September 1981

¹Our results on 4 MHz Zenith Z89 with 8" disks
²Results reprinted by permission from September 1981 BYTE. © BYTE Publications Inc
³From information sheet provided by manufacturer
⁴Figures not available

The new C/80 compiler, Version 2.0, supports all C language features except float, long, typedef, bit fields, and arguments to macros.

C/80 2.0 is available in disk formats for Heath/Zenith (HDOS & CP/M*), Osborne 1* and 8" standard CP/M systems. Price is \$49.95; add \$3 shipping (\$2 for 5" disks); in CA add tax. Phone orders welcome.

*CP/M is a registered trademark of Digital Research. Osborne 1 is a registered trademark of Osborne Computer Company.

The Software Toolworks™



14478 Glorietta Drive
Sherman Oaks, CA 91423
(213) 986-4885



Call or write for our catalog of over 20 software products.
Dealer inquiries invited.

CIRCLE 200 ON READER SERVICE CARD

Heath/Zenith Users— Get the Information You Need:

Read the only independent magazine with a specific focus on *your* system: **Sextant, the Independent Magazine for the Entire Zenith Computer Community.**

Whether you use a Z/H100 with S100 bus expansion, an H/Z89, Z90, H88, H11, or H8—you'll find articles in every issue which apply to your system.

Explore CP/M, HDOS, and ZDOS capabilities through *Sextant's* articles. Applications programs, compatible hardware and software, and the latest developments in the Heath/Zenith community are among the topics included in *Sextant* on a regular basis.

Sextant is a quarterly magazine, carefully edited to provide wide coverage of the Heath/Zenith community for the benefit of the Heath/Zenith user. Below are some of the topics we'll be addressing this spring, and in future issues of *Sextant*.

- A broad range of "how-to" articles which will help you implement system enhancements as you need them.
- Reviews of products from Zenith and its independent suppliers to help you sort out the questions you have about hardware and software options you might consider.
- Short program listings, including both utility programs and games.
- For your system needs, you'll find over 50 advertisements of compatible products in each issue of *Sextant*. Many advertisers find the independent magazine for the entire Zenith

computer community the most direct medium to market their Heath/Zenith-specific products—you'll find independent suppliers with products you wouldn't see advertised elsewhere.

- And, so that you'll be informed of the latest progress and innovations in *your* Heath/Zenith community, *Sextant* provides extensive coverage of community affairs. Read about major events in the Heath/Zenith community, as Heath/Zenith users meet to discuss regular developments and future projections. Specific companies and individuals are highlighted as they make significant contributions to the state of the Heath/Zenith community.



A Whole World of Information About Your System!

Start your *Sextant* subscription today!

CALL TOLL FREE: DATATEL™ 800/341-1522
(M-F 8 a.m. - 9 p.m. EST. For orders only.)

Or send in the postage-paid card provided here (facing page).

Start your subscription for 8 issues for \$19.94 (\$23.00 to Canada); or 4 issues for \$9.97 (\$11.50 to Canada; \$14.00 overseas via surface mail, \$35.00 via air mail). Subscriptions are payable by: check (checks must be in U.S. dollars, payable on a U.S. bank); Visa/Mastercard; or we'll bill you later. Please allow 6 to 8 weeks for delivery of your first issue.

Your satisfaction with *Sextant* is guaranteed. If at any time you're not satisfied, just let us know and your money will be returned—in full.

**Sextant Subscriptions, 716 E Street S.E., Washington DC 20003
202/544-0900**



Decisions on the Decision 1

by Ernest E. Mau

Five years ago, when I went looking for a computer system to function as a word processor and general-purpose "number cruncher" in my business, there were few machines available at anything approaching an affordable price. Last summer, when I had to replace my original system—which had become obsolete and could no longer be supported or repaired—I found a variety of systems to choose from, all at affordable prices and all offering features undreamed of in my earlier computer.

Finally, I happened on a system that seemed just right—an expandable IEEE-696/S-100 bus, 4MHz Z80 CPU, 64K memory, two 8" floppy disk drives, multiple serial and parallel input/output ports, a single-user CP/M-80 operating system, and the capability of being modified or changed to meet the ongoing needs of my enterprises. That machine was a Morrow Designs' *Decision 1*¹. I cannot go into all the reasons I wanted an S-100 bus rather than a single-board computer, why I prefer dual floppy drives to a single floppy and a hard disk, or the rationale behind other selection criteria. It's sufficient to say that the *Decision 1* met my requirements, and that I purchased it as the new primary system for my entire consulting and writing business.

What I am going to do is report on things I encountered and the overall performance. First, however, I need to define the system in more detail. The unit I've tested, used, and generally given a thorough shakedown is the rack-mounted *Decision 1*, model R1B, which cost \$4,995. That price included CP/M-80 2.2, Microsoft BASIC-80², and WordStar revision 3.0³.

The standard R1B is equipped with two double-sided double-density 8" disk drives (Shugart 850) with Morrow Designs' Disk Jockey⁴ DMA Floppy Controller. It has a 64K high-speed static RAM board (Morrow calls it 65K), and a Morrow MULT I/O board with three RS-232C serial ports, one 50-pin parallel port, a real-time clock, and a programmable interrupt controller.

It's equipped with a 150-watt switching supply to power the S-100 bus and a separate linear supply to power the disk drives. The linear drive supplies are factory selected to match the drive configuration, with different supplies used for systems with one 8" floppy, two 8" floppies, or one floppy and one 8" Winchester hard disk. A line filter is built into the unit for noise and surge suppression, though no specifications are published on the performance of that filter.

The system provides for expandability and growth, with the 12-slot S-100 motherboard having eight spare slots after the standard plug-in boards have been installed. It should be easy to add an external hard disk system or other peripherals later. A memory larger than 64K is possible

for multiuser or multitasking applications, since the system incorporates direct extended addressing to 2 megabytes. Morrow Designs also can provide their Micronix Operating System⁴ (a UNIX⁵ derivative) for multiuser environments. There even are provisions for installing a 6MHz Z80 processor or a future 16-bit processor.

All in all, the system has been designed to avoid early obsolescence, unlike many others that are limited to initial configurations or make future expansions impossible. Other systems often are obsolete within months, but the *Decision 1* is likely to be around for a long time because it can and does grow as the user's needs grow.

I've mentioned that my unit is a rack-mount configuration. That means it's a plain black box hanging from rails under my desk surface. And I do mean it's plain—there's no brand or manufacturer identification whatsoever on the front panel. However, the system is available in other configurations, with desktop units being more stylish and possibly more visually appealing. Desktop units range from \$2,395 for a unit without disk drives, to \$5,400 for one with a 5¼" floppy disk plus a 16MB 5¼" hard disk. For rack-mount unit prices, contact Morrow Designs.

I must cite at least one functional difference between the rack-mount unit I use and the desktop configurations. The rack-mount system controls are on the front panel, consisting of a red rocker-switch master power control and an illuminating red pushbutton switch that serves as the system reset and doubles as the power-on indicator. The desktop units have only the system reset pushbutton on the front, with the master power switch on the rear panel. The only reason I make a point of this is that the dealership has commented on some desktop users not liking the rear-panel power control. The *Decision 1* is just large enough to make it somewhat inconvenient to reach behind the system for power switching, but it certainly doesn't interfere with the overall operation.

In the first 25 weeks of running the system an average of 15 hours per day, seven days per week, there were no malfunctions. I saw a few BDOS errors, but only a half dozen or so were not due to operator error. Even those were "soft" in that a second try at reading the disk was successful. In all likelihood, the BDOS errors were caused by careless disk insertion, where the disks weren't properly seated and centered on the drive hubs. By comparison, the system the *Decision 1* replaced had some 35 service calls during its first eight weeks of operation, and continued at nearly that rate for most of its first six months. It's obvious that the *Decision 1* has much higher reliability.

Morrow Designs calls the *Decision 1* Rack Mount an "industrial grade computer package," a designation that should and usually does indicate a high-reliability unit. I did ask the factory representative for a "mean time between failures" (MTBF) figure since there wasn't one in their lit-

Ernest E. Mau, 3108 South Granby Way, Aurora, CO 80114



Desktop version of the Decision 1 with its terminal, overall view.

erature, but they indicated that sufficient statistical data had not yet been accumulated to determine an accurate MTBF. However, the representative said they anticipated achieving an MTBF exceeding 5,000 power-on hours. That's not bad if they make it!

From a user's view, the *Decision 1* is close to ideal. The dual double-sided 8" floppies provide up to 2.2 megabytes of storage on line at any one time; the CPU and memory speeds are adequate for most applications; and disk accesses are surprisingly fast. Morrow Designs eliminated sector buffering by transferring data directly to memory via the DMA channel, so the CPU is free to proceed with other processing tasks during the disk transfers. Compared with my old computer, based on an 8080 CPU and comparatively slow access to 32-sector drives, there is an apparent increase in overall operating speed and throughput of about 6-to-1 for programs not requiring operator intervention during a run.

The physical construction is beautiful! Having grown accustomed to an older system packed with jumper wires, jury-rigged bypass circuits, sloppily soldered boards, and much general clutter, I was particularly impressed with the *Decision 1*. In the entire unit, I've found only one jumper wire (on the back of the MULT I/O board), indicating that the boards have been thoroughly tested and proven before being released to the market. I've been told that the systems were held off the market and shipment delayed for some months because there was a problem with one of the boards and the company didn't want to release units until the problem had been resolved.

There is no clutter. Interfacing ribbon cables to the four MULT I/O board connectors route cleanly from the top of the card to rear-panel connectors where the interface cables to the peripherals are attached—without interfering with other circuitry or boards. The boards themselves are works of art—clean design and clean soldering—ob-

viously designed and manufactured with a good degree of pride.

Throughout, I've found the *Decision 1* a delight to own and operate. While I don't want to get carried away singing its praises, it certainly deserves them. To illustrate, there are many seemingly minor provisions that make life a lot easier for the user. Among these are:

- Software selection of the baud rates can be done independently for each of the three serial ports. The selection may be built into system or utility software like the CBIOS or a communication program, or performed individually with a BAUD program provided.
- Independently strappable signal assignments for all three serial ports are provided on the MULT I/O board. Depending on the CBIOS and other system requirements, changes from "data set" to "data terminal" operation, modem to non-modem communication, or for the individual RS-232C signal line assignments are easily implemented in the hardware.
- A special disk-formatting program called (FORMTDJ.COM) allows a choice of densities and sector sizes and also verifies the sectors of each formatted disk. On an 8" system, disks can be formatted for either single or double density and then for 256, 512, or 1024 bytes per sector.
- The disk controller automatically adjusts to single-sided, double-sided, single-density, double-density, and sector size parameters of the inserted disk on booting the system. And it does so without the operator having to input any disk parameters from the keyboard. This allows a single-sided single-density CP/M

The Decision 1 is a thrill to use. It does everything I'd ever ask of a hard-working computer system, and has provisions for many more things than I ever expect to need.

Decision 1 continued . . .

distribution disk to be copied from Drive B to a double-sided, double-density disk in Drive A. It also allows writing single-density disks for distributing software in a standard format.

- A special SINGLE.COM program allows users having only a single drive to copy CP/M files from one disk to another. The program converts the one drive to a "logical" two-drive system and prompts for disk swaps as necessary to accomplish copying that otherwise could not be done with PIP.COM.

Documentation


All these features and many more are included in the system. However, like any other computer, peripheral, or software product, the *Decision 1* does have some shortcomings that prospective users should recognize. The first and most easily recognized is that the hardware documentation is not oriented to the end user. The system comes with Morrow Designs' own reprints of the CP/M, BASIC-80, and WordStar manuals, plus a binder full of technical information on the system.

The latter item is exactly that, a technical manual, and it takes a technician to make much sense of it. It contains information that might be needed by a service technician, an advanced programmer, or a system designer integrating the unit into other OEM equipment. It does contain things like system schematics that would be invaluable for arranging "third-party" service or for modifying the system. However, it doesn't tell the end user how to get the system up and running. It briefly describes programs available on the system disk furnished, but it describes a disk with a different set of programs from the one I received.

The documentation does lack information about the switching power supply, linear power supply, and line filter. That could be a problem later, but I suppose the philosophy is that anyone needing such detailed information could obtain it from the original manufacturers of the power supplies.

Getting the system operational

The lack of effective user documentation gives rise to the most serious difficulty I've encountered—getting the system operational the first time through. The first problem I hit was formatting diskettes and recording the CP/M operating system on them. Running the Morrow formatting program had me facing a menu for selecting disk type (8" obviously), single- or double-density (double looked good), the drive number, and then the bytes per sector. Coming from a single-format system and finding a choice of 256, 512, or 1024 bytes per sector sent me scrambling to find some information in the manual—it wasn't there. My first evening with the machine, I spent six hours trying to get a copy of the CP/M operating system onto a new disk formatted for 256 bytes per sector—unsuccessfully. I tried every combination of

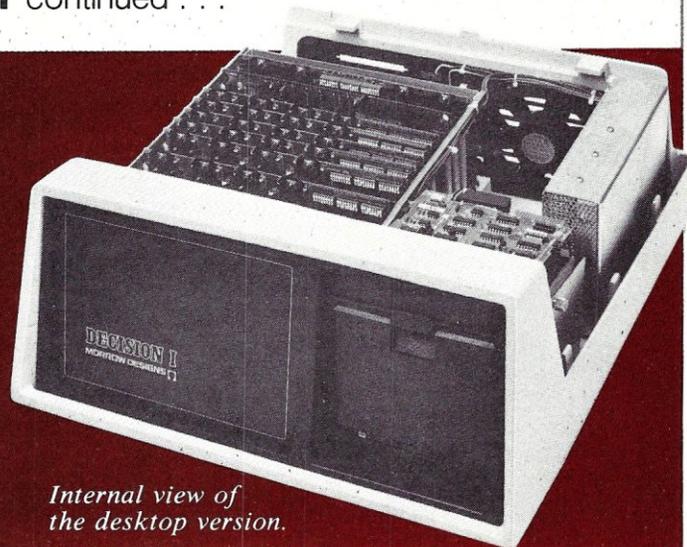

Internal view of the desktop version.


MOVCPM, SYSGEN, DDT, and SAVE, and any other operations I could imagine, all with no luck. I then spent another two hours trying the same with a 512-byte disk. Finally, I got around to trying a 1024-byte disk, and it was the only format that worked.

Four weeks later, I happened to find two sentences in an on-disk information file I would never have read until after I had made a backup system disk. The statements explained that added features and functions increased the size of the Morrow CP/M system to exceed the capacity of the first two tracks of any disk formatted for other than 1024 bytes per sector. Therefore, CP/M can only be put on 1024-byte disks. Since that format is the most efficient data storage for the system (1.1 megabytes per disk), it's not particularly troublesome unless there's some special reason for wanting to use another format. Even then, about the only thing you can't do with other sector sizes is put on the CP/M operating system, so you can work with the others. I just wish the manual would have made a point of it and kept me from wasting hours.

Still, I didn't anticipate all the ramifications of an "oversize" CP/M. When I later tried to recompile some Basic programs transferred over from my older system, the Microsoft version 5.24 BASICOM² compiler and LINK-80² loader would run out of memory just a few seconds before completing the linking. The COM files from compilations done on the other machine could be run without difficulty; only the linking process was troublesome. As a result, I could not recompile and relink programs I had been using for years.

With BASIC-80 and some other tools as a check of free memory, I found the *Decision 1* was providing 3900 fewer memory bytes for program use than was my old system. That doesn't sound like a big deal, but my programs use maximum available memory for large data arrays and can't be shortened easily, so the loss of 6% of usable memory space did prove a problem. Finally, I had

Unlike many other systems limited to their initial configuration, the *Decision 1* is designed to avoid early obsolescence.

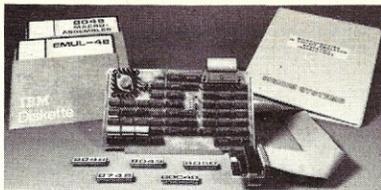

8048 IN-CIRCUIT EMULATOR

- IEEE-696 (S-100), CP/M compatible
 - Emulates 8035, 8039, 8048, 8049, 8748, 8040, 8050, and 80C48 CMOS.
 - Hardware Breakpoints allow Real Time Emulation up to 11 MHz
 - Trace includes disassembled code
 - Display/Modify Program & Data Memory, Registers, I/O Ports & Flags
 - Scope trigger from breakpoint locations
- Emulator comes on one S-100 board with a 3 ft. cable and buffer assy. that plugs into the user's uP socket. The board with all supporting software is \$995. For 8048 MACRO Assembler add \$150.

A portable development system with CRT, two disc drives and emulator is \$3200 (213) 4515382

SIGNUM SYSTEMS
726 Santa Monica Blvd.
SANTA MONICA, CA. 90401

CIRCLE 112 ON READER SERVICE CARD

MICROANGELO Hardware



MicroAngelo Graphics Board (MA-512) with Screenware Pak II. \$795.00
MicroAngelo Graphics Board (MA-520) with 64K memory. \$995.00


GRAPH-PAK Fortran Plotting Software for MicroAngelo and pen-plotters. . . . \$270.00
Complete systems available - call for prices.

Laboratory Computer Systems, Inc.
139 Main Street, Cambridge, MA 02142
(617) 547-4738

*Trademark of SCION Corp.

CIRCLE 106 ON READER SERVICE CARD

80 CHARACTER VIDEO BOARD - S-100



All This on ONE BOARD:

- Keyboard port with TYPE-AHEAD buffer
- 8275 CRT controller with light pen port
- Two 2716's - program & character rom's
- Optional 2716 for CHARACTER GRAPHICS
- All screen & keyboard ram
- SIMULTANEOUS I/O or Memory mapped
- Z-80 MPU - 2 or 4 Mhz system clock
- Easy to adapt Software
- Uses only EASY-TO-GET parts
- Use in any S-100 system
- 696 Bus Compliance: D8 M16 I8 T200
- Build for less than \$200
- Now includes Crystal and Heat Sink, \$9.85 value.


Introducing The VDB-A
Bare board with Documentation \$49.50
+ \$2.50 s&h (Ill.res. add 6% tax)
Add 3% for MC & Visa

Simpliway PRODUCTS CO.

P.O. Box 601, Hoffman Estates, IL 60195
Dealer Inquiries Invited
312/359-7337

CIRCLE 67 ON READER SERVICE CARD

FREE BASIC Z-80 BOARD COMPUTER

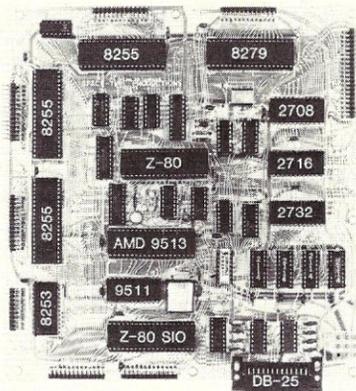

The MASTER CONTROLLER BOARD contains:

- Z-80 Microprocessor
- 72-Parallel I/O lines; three 8255s
- Keyboard controller: 8279
- 12K-EPROM: three sockets for 2708, 2716, 2732
- 2K-RAM: 2114s
- 8-Sixteen bit counter timer channels: one 8253 and one AMD 9513
- 2-Serial I/O ports; one Z-80 SIO chip. One port is RS-232 W/DB-25
- 1-High speed arithmetic processor: AMD 9511

A bus expansion connector is provided

All this on one board less than nine inches on a side

Bare Controller Board with Doc. \$49.95

Free Controller Basic is a public domain Tiny Basic that can IN and OUT ports, PEAK and POKE RAM, CALL assembly language programs, and use either DECIMAL OR HEXIDECIMAL numbers. In a 2716. Requires 2k RAM, SIO, 8253 (baud gen.) With the BARE BOARD \$14.95 Alone \$19.95

TDL monitor program allows a CRT or TTY to control the MASTER CONTROLLER BOARD. Requires 2k RAM, SIO, 8253 (baud gen.), 4Mhz XTAL. Includes Complete Listing on a 2732 \$69.95

Assembled TINY BASIC CONTROLLER BOARD has 2k RAM, SIO, 8253 (baud gen.), 8255. This arrangement gives 24 I/O lines, 2 spare counter timer channels, and a serial channel available after using one counter timer channel as a baud gen. and one serial channel to talk to a terminal or computer. Functions can be expanded by adding additional RAM/ROM, I/O and processing chips. EXPANDABLE SPECIAL \$299.99

OEM & Dealer Inquiries Welcome
USA & CANADA include \$4.95 postage & handling. We ship World Round. Please include 20% for shipping plus \$5 handling we refund the excess.

SPACE-TIME PRODUCTIONS
2053 N. Sheffield
Chicago, Illinois 60614
(312) 327-0391

CIRCLE 157 ON READER SERVICE CARD

\$100

Div. of 696 Corp



Est. 1977

COMPUTERS:

COMPUPRO 8/16 Systems CALL
COLUMBIA (LIKE IBM-PC)

128K RAM/2 Drives \$2546.00

EAGLE II w/software 2339.00

MICRODECISION w/2 Drives
& 8 S.W. Pkgs. 1185.00

SD SYSTEMS

DISK-LESS COMPUTER CALL

BOARDS:

ADV. DIGITAL

Superquad & Slave CALL

CALIF COMP SYSTEMS

Z80 CPU 259.00

COMPUPRO 64K

STATIC RAM 374.00

CROMEMCO DPU

68000/Z80 839.00

SCION'S Microangelo Graphics

MA520 986.00

SD SYSTEMS 3 BD SET

w/1 yr warranty:

SBC 200 W/MONITOR PROM

VERSAFLOPPY II w/CP/M 3.0 & BIOS

256 K EXPANDORAM III 1295.00

SEATTLE IBM-PC 64K

RAM + w/serial 359.00

SSM (2 para/2 serial) I/O 4 232.00

TARBELL DD FD Controller 396.00

MONITORS/TERMINALS:

ADDS VIEWPOINT A3 475.00

LIBERTY FREEDOM 100

(emulates Tele. 925) 535.00

TELEVIDEO 950 915.00

PERIPHERALS - ETC.

EPSON'S NEW FX80 CALL

CROMEMCO Z2X Box w/o

ZPU BDS 845.00

HARD DISK SUBSYSTEMS CALL

HAYES Smartmodem 1200 519.00

INTEGRAND 800 DB/2F

w/options 497.00

MORROW Floppy Subsystems CALL

OPEN SYSTEMS S/W 500.00 ea.

PARA DYNAMICS

2018R Mainframe 675.00

NEW PRONTO 1225.00

TECMAR 5 MEG Cartridge for

IBM-PC 1525.00

VOTRAX Speech Synth. 275.00

TANDON 100-2 DS/DD Drives

for IBM-PC 245.00

QUME 8" Drives D.S./DD

Thinline 242 445.00

Standard 842 445.00

FULL DEALER SUPPORT VISIT OUR SHOWROOM

Hrs. 9:00 A.M.-5:30 P.M. M-F

Subject to Available Quantities

Prices Quoted Include Cash Discounts

Shipping & Insurance Extra

S-100

14425 North 79th Street, Suite B
Scottsdale, Arizona 85260

SALES 800-528-3138

TECHNICAL 602-991-7870

TELEX 165025

CIRCLE 184 ON READER SERVICE CARD

to update the BASCOM/LINK-80 package to version 5.3 and use the "runtime" feature to arrive at a recompilation that would link the large files within the smaller memory. Ultimately that proved a real advantage because the runtime COM files are only half the size of the older COM files and allow much more efficient disk storage.

Disk drive considerations

The disk drives require some special consideration. I've stated that they can work with single-density disks or ones formatted as double density in 256-, 512-, or 1024-byte sectors, recognizing and automatically adjusting for the formatting of the disk in a drive at the time the system is cold or warm booted. They can read standard single-sided single-density (SSSD) disks and copy those to double-sided double-density (DSDD). They can even write data to an SSSD disk. However, in my system there was no provision for formatting SSSD media, and the single-density function of the FORMTDJ.COM program turned out to be double sided on double-sided drives. This meant that writing SSSD disks for distribution required having single-sided drives or using disks preformatted on some other machine's drives. According to Morrow, the failure to format SSSD disks resulted from an outdated PROM on the disk controller. When I installed a replacement PROM, formatting SSSD disks could be done normally.

I also had to grow accustomed to a delay between the completion of a disk operation and the time when I can remove the disk. It's a characteristic of the controller, the drives, or both that there's a 7- to 10-second delay between the end of a disk operation and the "in use" light going off. During that time, the drive doors are locked. The first time it caught me, I had just received the CP/M prompt back on the screen after a PIP copy, reached over and pressed the drive release, and nothing happened. Panic! I first thought the drive door had jammed. It hadn't! It's a normal feature, keeping the user from possibly damaging a disk while the drive is in use. Yet after four years on a system without such protection, I still get caught trying to remove a disk before it's allowed.

I've tested the *Decision 1* with a variety of commercial and custom software. As part of a series of book projects I've been preparing under contract to publishers, I've used 35 CP/M-based word processors and related programs, about a dozen disk and general system maintenance programs, and numerous other packages. All but two commercial packages ran successfully, and both "failures" were disk diagnostic or recovery programs that involved special disk handling. In both cases, I suspected a flaw in the software instead of the computer system—the programs didn't seem to read the disk-format information properly and subsequently malfunctioned when accessing the DSDD formats.


One problem program is Advanced Micro Techniques' DPatch⁶, a useful utility providing direct disk alteration, direct file alteration, I/O ERROR file recovery, erased file recovery, and surface analysis. Only that last function fails. I like to do my own surface analysis or "certification" on every disk to minimize data losses. Even the sector verification function built into the Morrow formatting program doesn't satisfy me—I've had two bad sectors sneak past it and "trash" files on top-of-the-line premium-grade disks. I had hoped DPatch would prove a useful certification check; however, running the surface analysis registers hundreds of sector errors on a perfectly good disk. In fact, the function has never run to completion, eventually detecting what it "thinks" is a bad directory track and aborting because there's no way to store the bad-sector information.

The other program that fails is SuperSoft's Disk Doctor⁷, a program designed to recover disk crashes or accidental file erasures. This one can't even be "installed" for the system. Any disk parameters fed into the installation routine generate errors at one point or another. I've talked to SuperSoft personnel, and they indicated they've been having trouble with other DSDD systems, and their new magazine advertisements specifically state that the program is not designed for double-sided disks. So once again, it's a software problem rather than the fault of the *Decision 1*. I must point out, however, that I've experienced no problems with SuperSoft's Disk-Edit⁷ or Diagnostics II⁷ programs; both appear to operate properly with any disk format available on the system, and the Diagnostics II software gives me good assurance that the system is indeed functioning properly at all times.

One final observation concerns uninterruptible or standby power supplies. Since residential power in my locale is subject to frequent interruptions and brownouts, I want to equip the system with a suitable unit that would allow time for an orderly shutdown. So far, I've not found a workable, affordable unit. The ones I've tried either aren't powerful enough or generate an unusable output. The *Decision 1* is rated at 5.0 amps (about 550W) according to the back-panel label, with my complete system totalling 9.7 amps (about 1070W). Typical 200- or 400-watt (200VA or 400VA) supplies aren't enough. Even a 600W unit would support only the computer and drives, leaving me "blind" and helpless with no keyboard or display. Ideally, I need a 1200W (1.2KVA) or larger supply—an expensive proposition at best.

The situation is complicated by needing a sine-wave output from the uninterruptible or standby power supply. Several units on the market provide a square-wave output, but the ones I've tried have caused the internal regulated switching power supply of the *Decision 1* to oscillate and "buzz" loudly. A call to Morrow Designs' customer support

There is no clutter . . . The boards themselves are works of art—clean design and clean soldering—obviously designed and manufactured with a good degree of pride.

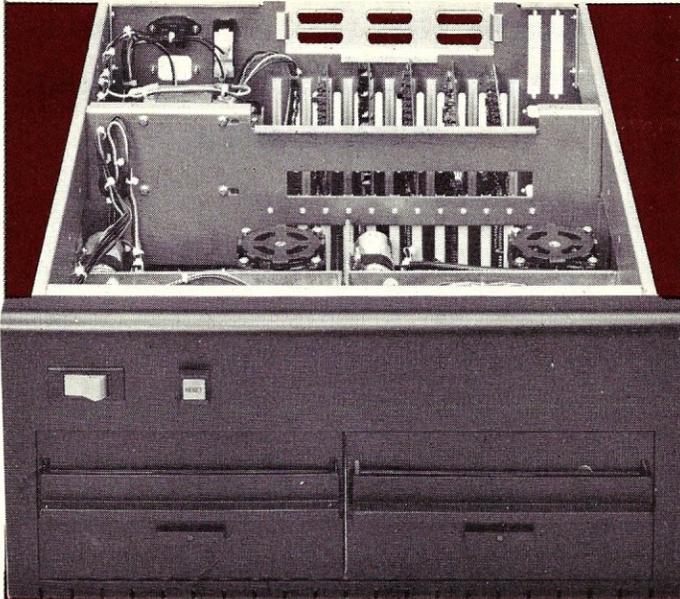

Rack-mount version of the Decision 1, internal view. Controls are on the front panel.

has informed me that the system "probably" can't tolerate a square-wave input and that attempts to use such could prove destructive. However, that has not been confirmed by the system engineers, so I can only advise extreme caution in installing power backups.


Even with these few difficulties, the *Decision 1* has been a thrill to use. It does everything I'd ever ask of a hard-working computer system and has provisions for many more things than I ever expect to need. I don't anticipate any situation where the system will be unable to accommodate my business operations.

In short, anyone in the market for an expandable, reliable, state-of-the-art computer system would be well advised to look at the *Decision 1*. Additional information and lists of local dealers are readily available from Morrow Designs, 600 McCormick St., San Leandro, CA 94577; (415) 430-1970.

Notes

1. The Decision 1 is a trademark of Morrow Designs.
- BASIC-80, BASCOM, and LINK-80 are trademarks of Microsoft.
3. WordStar is a registered trademark of MicroPro International.
4. Disk Jockey and Micronix Operating System are registered trademarks of Morrow Designs.
5. UNIX is a registered trademark of Bell Laboratories.
6. DPatch is a trademark of Advanced Micro Techniques.
7. Disk Doctor, Disk-Edit, and Diagnostics II are trademarks of SuperSoft, Inc. 

UNIPROM

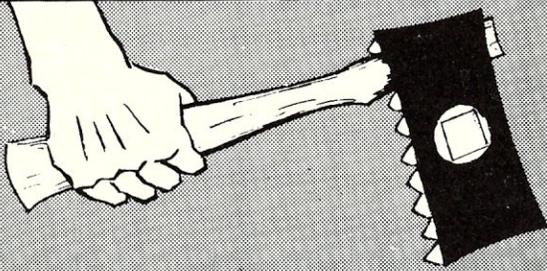

THE VERSATILE EPROM HANDLER

- Reads programs 2704, 2708, 2758, 2508, 2516, 2716 (1supply) 2532, 2732, INTEL'S 2732A and the 8755A (INTEL/NEC).
 - Reads/erases/programs Hitachi 48016 EEPROM'S
 - No personality modules required.
 - All signals are S-100 compatible (can adapt to most other buses)
 - Port mapping occupies NO memory space.
 - Bus clock rates exceeding 6mhz.
 - All software is 8080/8085/Z80 compatible.
 - Software "user" friendly.
 - All software is fully CP/M® & CDOS compatible.
- Board (A&T) with extensive documentation . . \$199.00
 Disk software (8" or NORTHSTAR 5.25") \$38.00
 EPROM-based software with source listing . . \$55.00
 Expansion console, 24 pin \$50.00

CDOS is a registered trademark of CROMENCO
 CP/M® is a registered trademark of DIGITAL RESEARCH, INC
 NORTHSTAR is a registered trademark of NORTHSTAR COMPUTER, INC

Featured in July, August '82 *Microsystems*



6020 Doniphan (915) 581-6697 El Paso, TX 79932
ELECTRONICS MANUFACTURING SINCE 1975

CIRCLE 15 ON READER SERVICE CARD

BACK ISSUES OF Microsystems

Add to your *Microsystems* collection today, while copies are still available. The more complete your library of back issues, the more authoritative and useful it will be to you. The earliest available issue is January/February 1980. Order any issues you wish, being sure to specify the month and year for each. If a particular issue is out of stock, your payment will be refunded promptly. Back issues of *Microsystems* are priced at \$4.00 each, postpaid. Outside the U.S.A., \$5.00 each.

Microsystems

Dept. NA9Q, 39 East Hanover Avenue, Morris Plains, NJ 07950

Please send volumes of *Microsystems* listed below:

Month & Year	Quantity	Unit Price	Total Price


PAYMENT ENCLOSED \$ _____ (NJ residents add 5% sales tax.)

Mr./Mrs./Ms. _____ (please print full name)

Address _____

City/State/Zip _____

BDOS ERROR ON B:BAD SECTOR

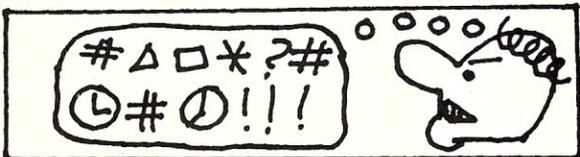

Before disk errors ruin your work again order BADLIM.

- BADLIM assures the reliability of your CP/M computer.
- You can use your disks 10 times longer without losing your data AND your time.
- BADLIM checks thoroughly your disk marking all the blocks which have defective sectors. The operating system will know that those sectors should be skipped.
- BADLIM is the only program that gives protection for soft and hard errors.
- The first time BADLIM will list which files in your disk are on bad sectors, so you can take action to correct it.
- But thereafter the bad areas in your disk will be automatically by-passed.
- For CP/M 1.4 single density and for CP/M 2.xx of any format and density. It is a must for Winchester as the media cannot be replaced.

BADLIM cost only \$73. Whatever the reason you have to use a computer you need BADLIM. Contact your dealer or call us today:

BLAT R&D Corp., 8016 188th. St SW, Edmonds
WA 98020. Phone: [206] 771-1408

DEALER INQUIRIES INVITED.

BADLIM

CIRCLE 57 ON READER SERVICE CARD

EXPAND YOUR CP/M OPERATING SYSTEM WITH SCP/80 SCP/80 IS AN ENHANCEMENT OF THE CP/M 2.2 OPERATING SYSTEM

BUILT IN FEATURES INCLUDE

- WORKS WITH MOST ANY TERMINAL
- EASY INSTALLATION
- OVER 50 COMMANDS AND AIDS
- DISPLAYS CURRENT MEMORY MAP
- HEX MATH CALCULATOR
- DISPLAY MAP OF INPUT PORTS
- MEMORY BLOCK MOVE
- MEMORY BLOCK SEARCH ASCII
- MEMORY TEST
- MEMORY ENTER ASCII
- MODIFY MEMORY
- SAVE FILE OF ANY MEMORY BLOCK
- PRINT ASCII FILES W/TITLE
- DIR W/ORDERED LIST W/PARAMETERS
- CRT TEST PATTERN
- CONVERT ABSOLUTE TO HEX FILE
- CONVERT HEX TO ABSOLUTE FILE
- USER COMMANDS MAY BE ADDED
- NO TPA LOSS FOR APPLICATION USE
- NO CBIOS CHANGES ARE REQUIRED
- MOST COMMANDS CAN BE BATCHED
- CP/M FILE COMPATIBLE
- BUILT IN CP/M "HELP" AIDS
- OPTIONAL BELL WITH PROMPT
- BUILT IN DIS-ASSEMBLER
- LOG TERMINAL TO A FILE
- PRINT NOTES ON PRINTER
- MEMORY BLOCK COMPARE
- MEMORY BLOCK SEARCH HEX
- MEMORY FILL WITH CONSTANT
- MEMORY ENTER HEX
- DUMP DISK TO CRT HEX/ASCII
- LOAD FILE ANY WHERE IN TPA
- TYPE ASCII FILES
- CONVERT ASCII/HEX ON CRT
- PRINTER TEST PATTERN
- ERASE CRT SCREEN
- CHANGE DISK
- AUTO COMMAND
- PIP MENU
- CLEAR TPA FEATURE
- BATCH (SUBMIT) OPERATION

SCP/80 IS SUPPLIED ON 8" CP/M DISK WITH MANUAL

A.B. HUTCHISON ENGINEERING

1354 SW 12th AVENUE

POMPAN0 BEACH, FL 33060

ALLOW 20 DAYS

PRICE ONLY \$100.00

CP/M IS TM OF DIGITAL RESEARCH

(305) 943-1530

CIRCLE 47 ON READER SERVICE CARD

Bring the flavor of Unix to your Z80 CP/M system with Unica

"Unicum: a thing unique in its kind, especially an example of writing.
Unica: the plural of unicum."

The Unica: a unique collection of programs supporting many features of the Unix operating system never before available under CP/M. The Unica are more than software tools; they are finely crafted instruments of surgical quality. Some of the Unica are:

- bc - binary file compare, display differences in hex
- cat - catenate files (vertically)
- cp - copy one or more files, even between users
- dm - disk mapper, reports free blocks and directory space
- fid - file identification by unique numbers (CRC's)
- hc - horizontal file catenation and column permutation
- ln - create file links (multiple names for one file)
- ls - intelligent directory lister, optional multi-columns
- mv - move (rename) files, even between users
- rm - remove (delete) files, with optional verification
- sc - source file compare, with resynchronization
- sfa - set reset file attributes, optional verification
- sp - spelling error corrector, with 80,000 word dictionary
- sr - search multiple files for a pattern
- srt - in-memory file sorter, optional duplicate line omission
- tee - pipe fitting (copy input stream to multiple outputs)
- tr - transliterate (translate character codes)
- wc - word counter, counts characters, words, and lines
- wx - word extractor, copies each word to a separate line

Each Unicum understands several flags ("options" or "switches") which control program alternatives. No special "shell" is needed; Unica commands are typed to the standard CP/M command interpreter. The Unica package supports several Unix-like facilities, such as filename user numbers:

```
sc data.bas:2 data.bas:3
```

(compares files belonging to user 2 and user 3):

Wildcard patterns:

```
rm -v *tmp*
```

(types each filename containing the letters TMP and asks whether to delete the file):

I/O redirection:

```
ls -a >proj.dir
```

(writes a directory listing of all files to file "proj.dir"):

Pipes:

```
dm b: | sr free >|st:
```

(creates a map of disk B; extracts those lines in the map which contain the word "free", and prints them on the listing device).

The Unica are written in XM-80, a low level language which combines rigorously checked procedure definition and invocation with the versatility of Z80 assembly language. XM-80 includes a language translator which turns XM-80 programs into source code for MACRO-80, the industry standard assembler from Microsoft. It also includes a MACRO-80 object library with over forty "software components", subroutine packages which are called to perform services such as piping, wildcard matching, output formatting, and device-independent I/O with buffers of any size from 1 to 64k bytes.

The source code for each Unicum main program (but not for the software component library) is provided. With the Unica and XM-80, you can customize each utility to your installation, and write your own applications quickly and efficiently. Programs which you write using XM-80 components are not subject to any licensing fee.

Extensive documentation includes tutorials, reference manuals, individual spec sheets for each component, and thorough descriptions of each Unicum.

Update policy: each Unica owner is informed when new Unica or components become available. At any time, and as often as you like, you can return the distribution disk with a \$10 handling fee and get the current versions of the Unica and XM-80, with documentation for all new or changed software.

The Unica and XM-80 (which requires MACRO-80) are priced at \$195, or \$25 for the documentation. The Unica alone are supplied as *.COM executable files and are priced at \$95 for the set, or \$15 for the documentation. Software is distributed only on 8" floppy disks for Z80 CP/M version 2 systems. All orders must be paid in advance; no COD's or purchase orders, please. Quantity discounts are available. Shipment outside of the US or Canada costs an additional \$20. Bank checks must be in US funds drawn on a US bank.

Knowlogy

P.O. Box 283-A

Wilsonville, Oregon 97070

Visa/Mastercard customers call (503) 639-3420 for next day shipment.

CP/M is a trademark of Digital Research. Unicum and Unica are trademarks of Knowlogy. Unix is a trademark of Bell Telephone Labs. XM-80 is a trademark of Scientific Enterprises. Z80 is a trademark of Zilog Inc.


Hooking Made Easy

An inexpensive S-100 circuit card extractor

by Kenneth M. Piggott

If you're the owner of an S-100 system or any system with a circuit card cage and motherboard arrangement, you have probably encountered difficulties when one of your system's circuit cards had to be removed. Very few of the S-100 circuit cards have ejection ears to aid in their removal from the card cage. Unfortunately, even fewer card cages have provisions for using the ejector ears. To complicate matters even further, the S-100 card cage is based on $\frac{3}{4}$ " spacing between circuit cards, resulting in a difficult time for fingers as they try to grasp the circuit cards. To remedy the situation, I devised a pair of simple card extractors.

Each card extractor is made by bending an 18" length of $\frac{1}{8} \times \frac{3}{16}$ aluminum welding rod into a "T" with a hook (see Figure 1). I purchased a 36" aluminum welding rod at a hobby shop for 30¢. When constructing the card extractors, make a 90° bend at (A). Then slide an 8" piece of heat-shrink tubing down the long portion and work it around the

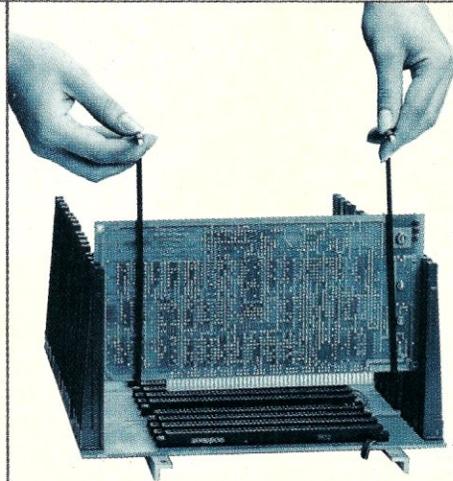

hook. When the entire hook is covered, shrink the tubing. Then make a 90° bend at (B) and a 180° bend at (C) and (D). To finish the card extractor, slide a 2" piece of heat-shrink over each half of the Tee-handle and shrink the tubing.

To use, simply slide a card extractor down the rear side of each end of the circuit card, hook under the circuit card and apply a gentle rocking, upward pull. The circuit card will slide out easily for user access. If the card extractors are to be used with cards other than the S-100 type, the $7\frac{1}{2}$ " dimension should be adjusted for the particular cards used. □

Kenneth M. Piggott, 16166 Chesterfield, East Detroit, MI 48021

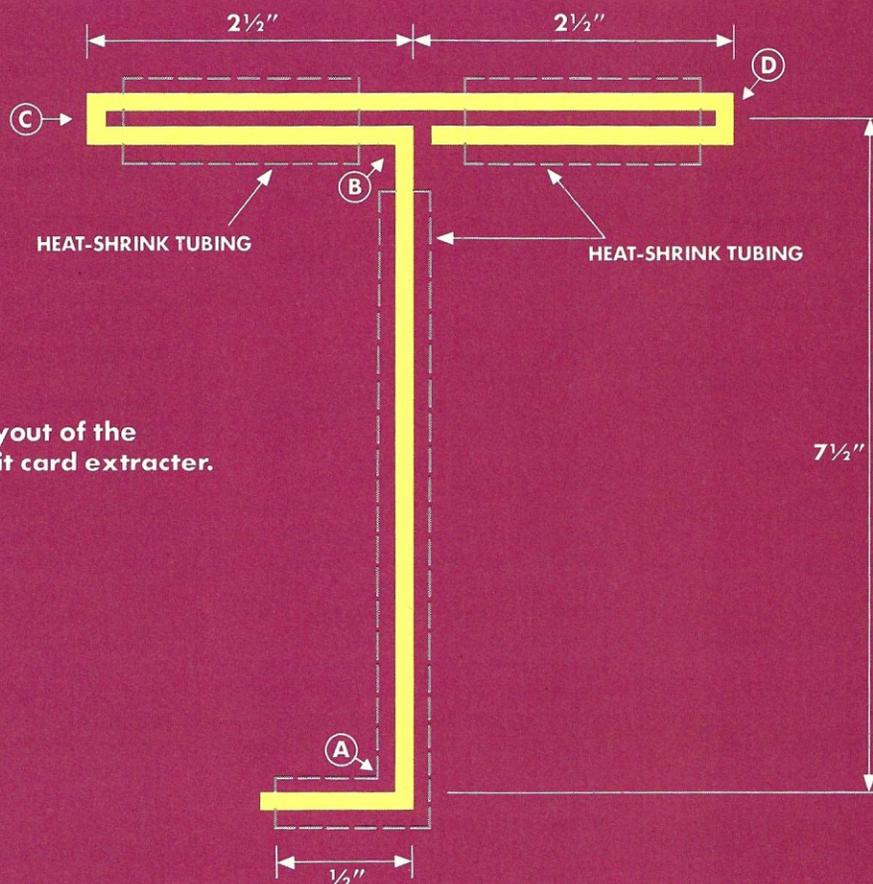


Figure 1.
Physical layout of the
S-100 circuit card extractor.

Software Directory

Program name: Multi/NET
Hardware system: Z80, 8080, 8085

Minimum memory size: 32K

Language: Assembly

Description: Multi/NET is a logical extension to Multi/OS, UNI/OS, and I/OS. Multi/NET broadens InfoSoft's line of functions from single-user through single-CPU multiuser to complete network containing any mix of single-user and multiuser CPUs.

The basic structure of Multi/NET follows the ISO open system interconnect structure, with the interunit message structure allowing flexible protocols. Some features of the system architecture are: Network nodes can be either single user with disk, single user without disk, or multiuser with disk. Shared resources, such as disks and printers, operate as a server for the network nodes. Multiple servers and users can be set up at the same location using Multi/OS.

Standard facilities include: Directory, subdirectory, remote task, password protection, interunit file transfer, multiple printers (both local and remote), file sharing, record/file lock, remote disk, directory assigning, and remote spooler control.

When released: August 1982

Price: \$300; OEM prices available on request.

Included with price: No. of stations (1-255) depends on hardware configuration.

Where to purchase it:

InfoSoft Systems, Inc.
80 Washington St.
Norwalk, CT 06854
(213) 866-8833

CIRCLE #159 ON READER
SERVICE CARD


Program name: Tarbell Database System

Hardware system: CP/M, MP/M

Minimum memory size: 48K

Language: CBasic (source and .COM files provided).

Description: The Tarbell Database System consists of a series of programs that use a common

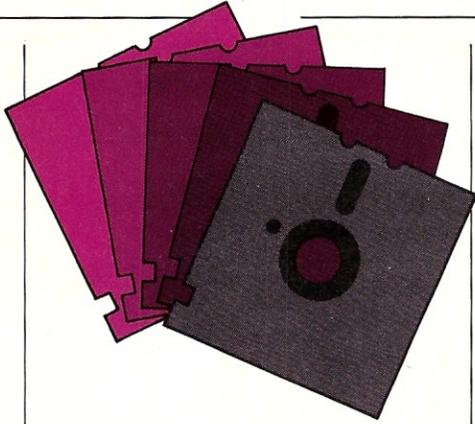

file format for random and sequential files with optional index files. The main menu program chains to other programs and to HELP files. Nineteen files may be open with no limit on record length or number of records. Field names may be any length.

A QUERY language that may be used interactively or written in command files allows the user to define search area and scope or search, as well as conditions to be met. It includes a report writer that uses most of the QUERY commands, a file copy program, sort, mail label, and personalized letter programs.

When released: December 1982

Price: \$100 plus \$1.50 S&H; CA residents add tax.

Included with price: Disk (8" SD or North Star SD/DD) and manual.

Where to purchase it:

Elliam Associates
24000 Bessemer St.
Woodland Hills, CA 91367
(213) 348-4278

CIRCLE #160 ON READER
SERVICE CARD

Program name: CPMGREP

Hardware system: CP/M-80, CP/M-86, Cromemco 5", SuperBrain, IMB-PC, Apple

Language: Object code.

Description: A pattern-matching utility similar to the "grep" command of UNIX. Recognizes patterns and can use regular expressions. Includes a free dictionary file.

When released: 1980

Price: \$29.95

Included with price: Disk

Where to purchase it:

AGS

Box 366

Englishtown, NJ 07726

CIRCLE #161 ON READER
SERVICE CARD

Program name: HexPrintR

Hardware system: CP/M with WordStar 2.26 or 3.0

Minimum memory size: 48K

Language: Assembly

Description: HexPrintR is a modifier to WordStar which allows the user to send any codes at all (even 8-bit codes) to his printer. It does this by modifying the printer control code ^R. For example, ""R1B, OR" would send an Escape followed by a null. HexPrintR is available in Osborne, Attacker, NEC, and IBM 3740 formats.

When released: April 1982

Price: \$39 delivered.

Included with price: Installation disk, 40-page manual, and demo files.

Where to purchase it:

CI Software & Computer Products

1380 Garnet Ave., E149
San Diego, CA 92109
(619) 483-6384

CIRCLE #162 ON READER
SERVICE CARD

Program name: DES-Crypt

Hardware system: CP/M-80, CP/M-86

Minimum memory size: 36K or user memory

Language: 8080 and 8086 assembly

Description: Des-Crypt is a software implementation of the NBS data encryption standard (DES) algorithm. DES-Crypt protects the privacy and integrity of information contained in any file. It includes functions for encryption, decryption, verifying encryption, data authentication, destroying plaintext, creating hex keys, comparing and listing files. DES-Crypt is menu-oriented with extensive error checking and on-line help. It accepts either hex or ASCII keys. Data authentication function is based on cryptographic checksums and can be used independently of encryption to

Software Directory continued . . .

protect files against undetected accidental changes or deliberate tampering. It encrypts/decrypts at 40-60KB/min. Convenience/safety features include: default file names, ambiguous file names, automatic maintenance test, optional checksums on hex keys, redundant key entry (with or without screen echo); first block of all ciphertext files automatically verified.

When released: December 1982

Price: \$149

Included with price: Disk, documentation, support

Where to purchase it:

Trigram Systems
3 Bayard Rd. #66
Pittsburgh, PA 15213
(412) 682-2192

CIRCLE #163 ON READER
SERVICE CARD

Program: BOBCAT

Hardware system: CP/M Z80, 8080

Minimum memory: 48K

Language: Object code

Description: BOBCAT is a very user-friendly disk catalog program that takes all the work out of keeping track of disk contents. It creates, adds, deletes, and updates catalog entries. It provides four report formats sorted either alphabetically or numerically. It has three date format options of MM/DD/YY, DD/MM/YY or YY/MM/DD, and a selectable reminder date for updating. The program automatically numbers disks and provides for disk titles in the catalog. BOBCAT is written in PL/I.

When released: Sept. 1982

Price: U.S. residents, \$25

USD; Canadian residents, \$25

CDN; other countries, \$30

USD; all postpaid.

What is included with price: 8" standard CP/M SSSD disk and 21-page documentation.

Where to purchase it:

R & L Micro Consulting Services

6 Lipstan Ave
Nepean, Ontario
Canada K2E 5Z3
(613) 225-7904

CIRCLE #164 ON READER
SERVICE CARD

International Software Directory

A reference source giving extensive details of over 10,000 packaged software products from major software houses throughout the world. Two volumes are available: Vol. 1 for microcomputer software, Vol. 2 for minicomputer software. Each is fully indexed for Computer Model, Application (Subject), Operating System, Language, Program Name, and Software House. The database

is also accessible on-line internationally through the Lockheed Dialog Information Service. An annual update subscription service is available.

Vol. 1, \$59.95; Vol. 2, \$69.95.

Add \$2.95 shipping in U.S.A.

Where to purchase it:

Imprint Software
1520 South College Ave.
Fort Collins, CO 80524
(800) 525-4955;

CIRCLE #165 ON READER
SERVICE CARD



AWESOME POTENTIAL . . . FOR THE DEMANDING CUSTOMER

Columbia Data Products 'MPC' (IBM-PC clone) . . . from \$2595

IBM "PC" - BUS MEMORY BOARDS

512K RAM with parity	only \$879
256K RAM with dual RS232 & parallel I/O	only \$669
256K RAM with parity (expands to 512K)	only \$549
192K RAM with parity (non-expandable)	only \$359
64K RAM with parity (non-expandable)	only \$189
Disk emulator and print spooler software	w/purchase \$39

WE BEAT EVERYONE'S PC-BUS BOARD PRICES!

AVL Eagle II, III, 1600 SERIES	CALL!
Convergent Technologies/Burroughs B20 systems	CALL!
Corona PC Desk-Top & Portable Models	from \$2395
Dynabyte 'Monarch' 6600 & 6900 systems	from \$9990
Morrow Designs 'MicroDecision'	from \$1195
Morrow/LSI ADM-20 CRT terminal	only \$595
Morrow 'Decision 1' S100 systems	CALL!
Molecular 'Super 8' & 'Super 32' systems	from \$6990
NEC HO-2 'Advanced Personal Computer'	from \$3295
Parallel Computer 'CPU' fault tolerant 8-32 user	
UNIX systems with up to 2MB RAM and 400MB disk	CALL!
VECTOR 4/20	CALL!
VECTOR 4/30 (with 5MB rigid disk drive)	CALL!

ADDS Viewpoint series terminals	from \$549
IDS MicroPrism 480 printer	\$599
IDS Prism 132 with sprint & color options	\$1799
NEC letter quality printers	from \$1799
TEC (Itoh) F10-40 letter quality printer	\$1499
TEC (Itoh) F10-55 letter quality printer	\$1699
TeleVideo 970 terminals	\$1395
UDS modems (all models) 10-15% savings	CALL!
Visual 50 CRT terminals	CALL!
Wyse Technology WY-100 CRT terminals	from \$899

Call for details other popular product lines

INTERNATIONAL MICROCOMPUTER BROKERS

607 NE Highway Ten
Blaine, MN 55434

(612) 786-5545 -or- 780-5361

CIRCLE 94 ON READER SERVICE CARD

New Products


Portable computer

ACCESS is a complete portable computer system with all the peripherals integrated into a single compact unit. Designed for business, education, professional and home use, ACCESS has the features, capabilities, and versatility to handle every application.

ACCESS contains a high-speed dot matrix printer, a direct-connect modular telephone jack and acoustical coupler, a 7" amber monitor, two high-performance double-density 5¼" disk drives, a low-profile detachable keyboard, 64K of user memory, a Z80Z central microprocessor, a comprehensive software package, multiple I/O ports, a storage compartment for 10 diskettes, and a leather carrying case. All are standard features.

The ACCESS built-in printer delivers quality hard copy at a rate of 80 characters per second. Users can print up to 132 characters per line on standard 8½" paper. In addition to the 96 ASCII character set, there are graphic capabilities as well. A program included in the software package allows various type styles to be printed.

The internal modem, adjustable for 0-300 baud, gives the utmost in telecommunications capabilities and flexibility. There is a direct line modular telephone jack as well as an

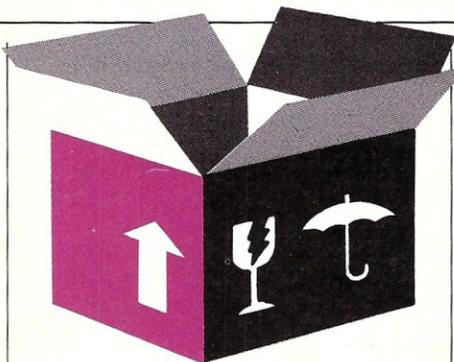

acoustical coupler. There are four operating modes: manual originate, manual answer, automatic dialing, and directory support. The 7" amber screen displays 80 characters per line on 24 lines. An extra 25th line has been included as a status line. Data and time information are available on the status line. The screen has several user-selectable attributes: inverse, blink blank, underline, double underline, half intensity and normal intensity.

ACCESS has one parallel port that is Centronics compatible or bidirectional, one fully implemented IEEE 488 port, and two RS-232C serial ports with software-selectable baud rates up to 9600.

The two 5¼" single-sided double-density disk drives provide 184KB of data storage per disk. Offered as an option are double-sided double-density disk drives for a total of 736KB of disk storage. ACCESS also supports two external 8" disk drives.

Included in ACCESS' software package are CP/M 2.2., Perfect Writer, Speller, Filer, and Calc. Fancy Font by Softcraft provides various type style selections. MBasic from Microsoft, CB-80 from Digital Research, and a communications package are also included.

Price: \$2495.


Access Matrix Corporation,
2159 Bering Drive, San Jose,
CA 95131; (408) 263-3660.
CIRCLE #166 ON READER
SERVICE CARD

S-100 stepper controller

The MC100 motor controller

system consists of an S-100 controller card, a manual control panel, and CP/M driver software. Of the many options available to the system designer for controlling digital motors, the MC100 is the only one designed specifically for S-100 computers. This fact allows reduction of the total system cost because the motor control function is integrated within the computer chassis and does not require a separate stand-alone unit.

The MC100 will directly drive two moderate-power four-phase motors. The universal translator interface allows higher power motors to be controlled by the system. Other

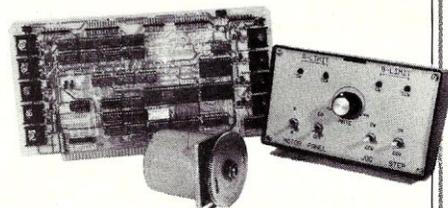

significant features of the system include motor ramping, automatic limit sensing, and internal or external step pulse count functions.


The controller is a 5" x 10" card and is fully compliant with the IEEE-696 standard for interfact to the S-100 bus. The manual control panel measures 6" x 4" and gives the user control of motor step and variable jog rates in either direction.

The CP/M-compatible software package for the MC100 allows complete control of all system features with a simple software interface which may be accessed from Basic, Fortran, or assembly language programs.

Prices: controller (A&T), \$350; manual control panel (optional), \$135; CP/M driver software, \$35; MC103 (combination of above), \$449.

Snow Micro Systems, Inc.,
P.O. Box 2201, Fairfax, VA
22033; (703) 378-7257.
CIRCLE #167 ON READER
SERVICE CARD

**BATTERY BACKUP 32K
CMOS RAM/EPROM
S-100 MEMORY BOARD
8 or 16 BIT DATA PATH
\$199 KIT, \$279 A&T**



- * 6MHz
- * phantom option
- * IEEE 696 (S-100) compatible
- * extended addressing switch selectable
- * all address and data lines are buffered
- * window selection at 2K boundary
- * EPROM can be mixed with RAM
- * bank select
- * activity indicator

Yang Electronic Systems, Inc.

307 Compton Avenue, Laurel, MD 20707

(301) 776-0076

CIRCLE 232 ON READER SERVICE CARD

WORD PROCESSING — PLUS SPELLBINDER

A Word Processor for CP/M and MS-DOS Systems, with built-in mail list, sorts by zips, alpha and cues, forms generator, column addition and more.

LIST	PLAN-A	PLAN-B	PLAN-C
\$495	\$356	\$321	\$285

Other CP/M, MS-DOS and Apple software available with same terms. Write or call for full spec sheets or further information.

PLANS:

- A - Phone support, exchange privilege, 90 days
- B - Phone support, exchange privilege, 30 days
- C - Support limited to supplied documentation, no exchange except for bad disk replacement.

Additional support available at \$20/hour.

TERMS:

Prices include cash discount. Add 4% for charge or COD orders. Add \$5 shipping and handling.

Suite 14-03
3322 Mem.
Pkwy., S.W.



(205) 883-8113
Huntsville,
AL 35801

CIRCLE 228 ON READER SERVICE CARD

PRO TALKER

High Quality Voice Digitizer/Synthesizer
At A Great Price!

- Crisp, clear voice reproduction - even music, sound effects
- S100 compatible board with jacks for microphone, speaker
- Unlimited vocabulary - record and store any words or messages
- Switch selectable data rates 15.2, 225.3, 4k bytes/second
- Complete manual with software source code listings

ONLY \$149.50

PRO TALKER model PT-S1 \$149.50
Manual only (credit on first order) \$115.00

add any applicable sales tax, add \$30 ship/handling on PT-S1 orders send check or money order to

ZENCOM, INC.

2885 Homestead Road
Santa Clara CA 95050

for VISA or MC orders, or for more information, call
(408)244-8552

Another ZENCOM First!

CIRCLE 233 ON READER SERVICE CARD

GET FULL VALUE FROM YOUR VICTOR 9000™

with the
UCSD p-SYSTEM™ IV.1

Get the most from your VICTOR 9000 as well as from your software development efforts. The power and portability of the UCSD p-System is available for the VICTOR 9000 from TDI.

The Standard Development System Includes:

- Full Screen Editor, Filer, Assembler and other Utilities
- The UCSD Pascal Compiler
- Native Code Generator
- Ram Disk Support Above 128K
- Turtlegraphics - full use of VICTOR screen (800 x 400)
- Complete documentation

Options:

- Fortran 77 and Basic compilers
- Hard disk support




TDI SYSTEMS, INC
620 HUNGERFORD DR.
ROCKVILLE, MD 20850
(301) 340-8700

TDI LIMITED
29 ALMA VALE RD.
BRISTOL, U.K. BS8 2HL
0272 742 796

VICTOR 9000 is a trademark of VICTOR TECHNOLOGIES, INC.

UCSD p-SYSTEM and UCSD PASCAL are trademarks of the Regents of the University of California

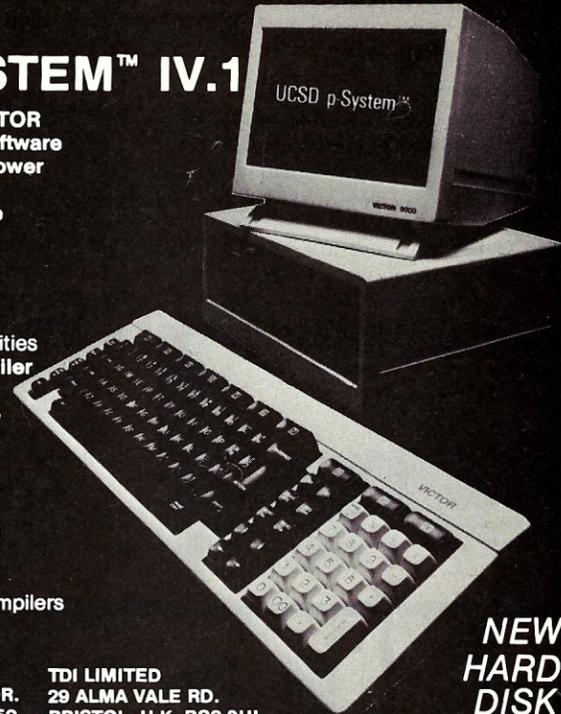

**NEW
HARD
DISK
SUPPORT**

CIRCLE 219 ON READER SERVICE CARD

MIDWEST MICRO WAREHOUSE

3437 Holmes • Kansas City, MO 64109 • Phone (816) 753-1304

	LIST	MMW		LIST	MMW
IEEE-696 S-100 (PURE!) SYSTEMS:			8" MS-DOS SOFTWARE:		
COMPUPRO SYSTEM A	5495.	4295	MS-DOS 1.2X IQ.ASM FOR COMPUPRO		
COMPUPRO SYSTEM B	7995.	4995	DISK I & SCP CARDS (MMW/COMPUIVIEW PRODUCTS)	150.	135.
COMPUPRO SYSTEM C	8995.	7195	ASCOM (DMA-THE ULTIMATE MODEM PROGRAM)	195.	160.
SEATTLE GAZELLE	5995.	4395.	ASHTON-TATE DBASE II-86	700.	420.
			MICROSOFT MULTIPLAN	500.	345.
			MICROSOFT BASCOM 86	400.	270.
			MICROSOFT FORTRAN77	400.	270.
			MICROSOFT PASCAL	400.	270.
			EM-86 (LIFEBOAT)	75.	70.
			SUPERCALC 86 (RUNS W/EMULATOR-86!!!)	295.	165.
			SORCIM SUPERWRITER (BETTER THAN WORD*!)	395.	247.
PRINTERS:			COMPUIVIEW VEDIT-86	195.	175.
DIABLO 620	1595.	1175.	PERFECT WRITER (PERFECT SOFTWARE)	395.	280.
NEC 3510, 3515	1995.	1385.	WATFIV FORTRAN '66 (SUPERSOFT)	425.	325.
OKIDATA 83-A	995.	707			
OKIDATA 84-A	1395.	995.	S-100 EQUIPMENT:		
			COMPUPRO 256-K (STATIC) MDRIVE)	1595.	1445.
TERMINALS:			PARADYNAMICS PRONTO	1595.	1355.
HAZELTINE ESPRIT I	595.	489.	HAYES SMARTMODEM (1200 BAUD)	695.	549.
TVI 925	995.	725.	TEI DFD-0 (DEMO)	595.	445.
TVI 950	1195.	925.	COMPUPRO APPROVED 20 MB HD SUBSYSTEM	3695.	3295.
VISUAL 200	1295.	975.			
VISUAL 300	1195.	975.			
VISUAL 50	745.	675.			

TAPE DRIVES, SEATTLE & COMPUPRO CARDS, NORTH STAR ADVANTAGE, MS-DOS FOR COMPUPRO 8/16 SYSTEMS, ETC. **IT'S HERE! CALL!!!**
TERMS: COD CERTIFIED CHECK OR CORPORATE PURCHASE ORDER W/BANK REFERENCE

CIRCLE 85 ON READER SERVICE CARD

New Products continued . . .

Compact S-100 computer

California Computer Systems, Inc., has announced the Slimline 3000, an 8-bit general-purpose microcomputer with 16-bit upgrade capability. Contained in a single 19" cabinet, it can be desktop or rack-mounted.

The Slimline 3000 includes



S-100 bus compatibility, Z80 CPU, high-density 5¼" Winchester disk, dual floppy disk capability, expansion to 1024 K RAM, 27 MB hard disk, and 20MB streaming tape cartridge drive. It comes with CP/M; Oasis and MP/M are available for multiuser support and may be upgraded for 8 users.

Price: 16 configurations available: \$4,295-\$10,995.

California Computer Systems, Inc., 250 Caribbean Dr., Sunnyvale, CA 94086; (408) 734-5811.

CIRCLE #168 ON READER SERVICE CARD

OSBAUD

The OSBAUD baud rate generator allows the Osborne 1 user the versatility of baud rates from 50 to 19,200 (1200 baud is the maximum available from the standard Osborne 1). The 16 different baud rates are switch-selectable via a dip-switch accessible through the front panel of the Osborne 1.

OSBAUD is a small auxiliary circuit board attached via four terminals that solder directly to four corresponding points on the main circuit board of the Osborne 1 computer. One circuit trace must

MITTE vs Crosstalk

MITTE - An intelligent terminal and file transfer utility, includes all capabilities of CROSSTALK, plus:

Crosstalk - An intelligent terminal and file transfer utility

Binary Protocols: CLINK, XMODEM (with opt. CRC and BATCH), HAYES terminal program, IBMPC (text files only)

Macro Strings: 10 of up to 64 characters, fully interactive, able to tie into function keys, supports fully auto logon

Command Style: Menu OR Command

Parameter Control: Full control on ALL hardware implementations (over 20 systems)

Text File Upload Features: XON/XOFF support, programmable turnaround character, programmable intercharacter delay

Text File Download Features: Programmable flow control characters

System Commands: Disk directory, display remaining disk space, display size of any file(s), type file to console, list file to printer, erase file(s) with opt. query, rename file, login new diskette for read/write, set file attributes, set user number

Utilities: Text file compression/expansion, TRSDOS to CP/M text file conversion, Line Numbered Text Editor, MFT for single drive systems

Installation: Simple to use INSTALL program

Price: \$150.00

Binary Protocols: CLINK

Macro Strings: 4 of up to 40 characters

Command Style: Command only

Parameter Control: (baud rate, parity, data bits, etc.) Only on 3 implementations (Hayes S100/PMMI S100/ IBMPC)

Text File Upload Features: None

Text File Download Features: None

System Commands: Disk directory

Utilities: None

Installation: Requires DDT

Price: \$190.00

A product of
MYCROFT LABS INC
Post Office Box 6045
Tallahassee, FL 32301
Telephone (904) 385-2708
Dealer and distributor inquiries welcome.

Crosstalk is a trademark of Microstuf

CIRCLE 53 ON READER SERVICE CARD

Unlock the Door to Progress.


Move up to the speed and power of a true 16 bit Key Micro System S-100 Computer. Unlock the door to your future now with a Key Micro System.

KEY SYSTEM 16

Assembled and unit tested using CompuPro boards

- CPU 8086 (10 Mhz)
- 128k memory (16 bit wide)
- 3 serial 2 parallel I/O ports
- DMA Floppy Controller
- 2 DD DS 8" Floppy Drives in enclosure with power supply and cables
- 20 slot S-100 Enclosure
- CP/M 86

\$5195⁰⁰



1606 Nooseneck Rd., Coventry, RI 02816 • 401/828-7270
822 Boylston St., Suite 201, Chestnut Hill, MA • 617/738-7305

KEY SYSTEM 16H10

The same as KEY System 16 but includes one 8" DD DS Floppy and one 10 Mb 8" Hard Disk instead of two Floppies.

\$7595⁰⁰

We Specialize in Single and Multi-user Systems Based on CompuPro S-100 Products

Your Authorized
CompuPro
SYSTEMS CENTER

CIRCLE 51 ON READER SERVICE CARD

Professionals Prefer Q/C.

For only \$95, Q/C is a professional, fully-supported C compiler for CP/M. Q/C supports a large subset of C, and is upward compatible with the UNIX Version 7 C compiler from Bell Labs. The Q/C library includes over 50 input/output and other support functions, all written in C.

When you buy Q/C, you get a working compiler that generates assembly language. You also receive the complete source code for the Q/C compiler and the function library. The Q/C compiler is written in C, with a few functions hand-coded in assembler to enhance performance. Most compiler options can be customized to suit your taste by using the configuration program we supply.

What really sets Q/C off from the competition is our 138-page *User's Manual*. The tone of the manual is informal and personal. Jim Colvin (the author of Q/C) tells you how to use the compiler, and clearly describes each library function. There's even a chapter that explains in detail the "internals" of Q/C.

Q/C is a fully-supported professional product. We continue to develop and enhance Q/C, and provide updates at a nominal cost. Write or call for details of Q/C Version 2.0.

THE CODE WORKS

5266 Hollister
Suite 224
Santa Barbara, CA 93111
(805) 683-1585

CP/M is a trademark of Digital Research.
UNIX is a trademark of Bell Laboratories.

CIRCLE 78 ON READER SERVICE CARD

HAWKEYE GRAFIX

Contact Your Local Dealer or Call or Write For Free Brochure
23914 Mobile, Canoga Park, Ca. 91307 U.S.A. • 213 348-7909

the FRIENDLY COMMUNICATIONS SOFTWARE that has been EASY TO USE since 1978


- Auto Dial + Answer Turkey package with BBS
- COMMX Smart Terminal and File Transfer w/ Mainframe Protocols, CRC16 BtSync + Batch
- CONSOLX Remote System Access Controller
- Electronic Mail
- CPU License \$150 Object or \$900 Source
- Bulletin Board System w/ Data File Manager
- Utilities included for KeyMacros + Sort Dir
- Fortran available for Mainframe BtSync
- Detailed User Manual Available For \$20



CIRCLE 69 ON READER SERVICE CARD

S-100 COLOR GRAPHICS!

MICROSPRITE

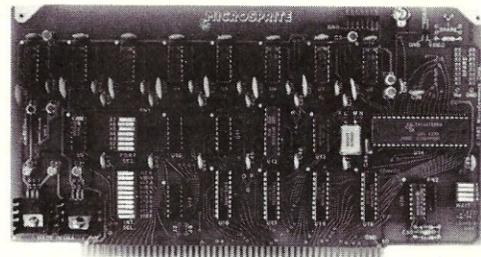

- Display consists of backdrop and pattern planes plus 32 sprite planes; each pixel in a plane can be colored or transparent to reveal the underlying plane(s); 16 colors (including transparent) are available.
- Four display modes:
 - 1) TEXT — twenty-four 40-character rows in two colors.
 - 2) MULTICOLOR — 64h x 48v pixels; each pixel can be one of 16 colors.
 - 3) GRAPHICS I — 256h x 192v pixels; each 8 x 8 group of pixels can contain two different colors; all 16 colors can be on screen simultaneously.
 - 4) GRAPHICS II — 256h x 192v pixels; each horizontal group of 8 pixels can contain two different colors; all 16 colors can be on screen simultaneously.
- Composite video output connects directly to color monitor or RF modulator.
- On-board 16K RAM occupies no system memory space; board uses only two I/O ports.
- Uses powerful Texas Instruments TMS9918A Video Display Processor; DIP switch selection of 0-4 wait states, I/O port numbers and vertical retrace interrupt options.
- Comprehensive documentation includes user's manual with listings of demonstration software and TI's manual for the TMS9918A video display processor.

MicroDynamics
Corporation

P.O. Box 17577 2233 Cornwall St.
Memphis, TN 38117 Germantown, TN 38138
(901) 755-0619

DEALER AND OEM INQUIRIES INVITED

SPECIAL
INTRODUCTORY PRICE!
\$249.95


(assembled & tested)

We pay UPS ground shipping in the continental U.S. UPS air add \$2.00. COD add \$1.50. Outside U.S. add \$15.00. TN residents add 6% sales tax. VISA and MASTERCARD welcome.

CIRCLE 62 ON READER SERVICE CARD

New Products continued . . .

be cut to disable the standard Osborne 1 baud rate generator. The installer has the option of making a small opening in the front panel of the Osborne 1 if repeated access to the dip-switches is desired, or replacing the front panel unaltered. Time required for installation is ap-

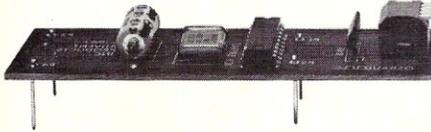

proximately 30 minutes.

Price: \$59.95; includes installation instructions and 1-year warrantee.


Advent Products, Inc., 965 N. Main St., Orange, CA 92667; (714) 997-0800. **CIRCLE #169 ON READER SERVICE CARD**

68000 S-100 CPU board

CompuPro has introduced a 10MHz CPU board based on

the 68000 microprocessor, designated CPU 68K, that accesses a full 16MB of nonsegmented memory available on the IEEE 696-S-100 bus. The CPU 68K handles both 8- and 16-bit memory and permits mixing of both types in the same system. The board can change from full speed to half-speed operation with a simple jumper change.

It includes a socket for the 68451 Memory Management Unit, and sockets for up to 16KB of EPROM (8K x 16), and accept 2716, 2732, or 2764-type EPROMS. There is a provision for power-on jump using EPROMS.

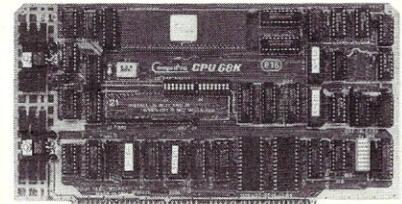

An on-board wait state generator accommodates all types of machine operations, and as many as five waits can be added to any cycle.

An on-board interrupt structure works with either the internal vector-generation circuitry or an external source.

Fully compatible with CompuPro's entire IEEE-696/S-100 bus product line, CPU 68K is capable of sharing the bus with CompuPro slave processors in order to run 8-bit or 16-bit

DATA COMMUNICATION WITHOUT A TERMINAL

With the MM-VT1, all you need to access data from any location, any time, is a phone. Enter requests via the Touch-Tone® pad. Receive answers in synthesized speech.

FCC-REGISTERED FOR DIRECT CONNECTION

UNLIMITED VOCABULARY SPEECH SYNTHESIS*

SENDS & RECEIVES ALL 16 TOUCH-TONES

AUTO DIAL (TOUCH-TONE OR PULSE DIAL)

AUTO ANSWER (CALL ANY TIME)


8 BIT PARALLEL I/O ON-BOARD

IEEE 696/S-100 COMPATIBLE

FIVE YEAR LIMITED WARRANTY

* Phoneme dictionary provided. English text to phoneme software available for unlimited vocabulary.

Touch-Tone is a registered trademark of AT&T



For further information, including numerous suggestions for use, call or write for free MM-VT1 brochure:



COMMUNICATIONS (703) 379-9660
(Potomac Micro-Magic, Inc.)


5201 Leesburg Pike, Suite 604 Falls Church, VA 22041

DON'T LET LACK OF A TERMINAL TIE YOU DOWN!

CIRCLE 174 ON READER SERVICE CARD

PRINT BUFFER

8085 BASED PRINT BUFFER



\$85.00

System consists of:
Bare board, software in rom and complete documentation.

- Uses popular 2K or 8K byte wide rams for expansion to 14K or 56K bytes.
- Automatic adjustment for ram size.
- Diagnostics and status indicators supported.
- Parallel interface (Centronics and Epson compatible).
- Clear, copy and pause switches supported.
- Only 7 non ram IC's required.
- Small 6"x6" size.

ADCOM SYSTEMS

P.O. BOX 245
MILFORD, OHIO 45150
(513) 831-1581



Ohio Residents Add 5.5% - Add \$3.00 For C.O.D. Orders

CIRCLE 30 ON READER SERVICE CARD

the friendliest cat around
BOBCAT
only \$25.00

the **MASTER DISK CATALOG** program for CP/M file names

- creates, adds, updates, and deletes a filename catalog
- provides four report formats and three search routines
- numbers disks and provides titling in catalog
- prints disk contents for disk jacket
- 24 (22 OSBORNE) page MICROGUIDE[™] documentation
- 8" CP/M SSSD
- OSBORNE for single or double density
- 94K (78K OSBORNE) of really friendly compiled PL/I

REQUIREMENTS - CP/M 1.4 and up
-56K and up memory
-two or more drives

U.S. residents \$25.00 U.S.
Canadian residents \$25.00 Can. (Ont. residents add \$1.75 pst)
Other countries \$30.00 U.S.
all post paid



NAME, NUMBER, EXP DATE
(MC FOUR EXTRA DIGITS)
Bank drafts, cert. checks, money orders, no personal checks please

R&L Micro Consulting Services

6 Lipstan Ave.
Nepean, Ont.



K2E 5Z3 (613) 225-7904 THE HOME OF THE BOBCAT

[™]MICROGUIDE is a tm of R&L Micro Consult Svcs. CP/M is a tm of Digital Research. OSBORNE is a tm of Osborne Computer Corp.

CIRCLE 32 ON READER SERVICE CARD

C SCREEN EDITOR

CSE: A full-screen text editor written in C

- Powerful command set includes cursor control, find/replace, block move, file inclusion, and nested macro commands
- Installation program allows easy customization for most popular terminals
- Available for CP/M-86[™], MP/M-86[™], CP/M 2.2[™], MS-DOS[™], and IBM PC[™]
- Requires 64K CP/M-86 or equivalent MP/M-86; 56K CP/M 2.2; 64K MS-DOS; 64K IBM PC
- Includes object code, C source code, and manual
- Available in 8" SSSD format for CP/M-86, MP/M-86, CP/M 2.2, MS-DOS
- \$60.00, including UPS; additional versions \$20.00 each

8080 SIMULATOR

- **SIM80: An 8080 simulator for the 8086/8088**
- Run CP/M object code (.COM files) on any CP/M-86 or MP/M-86 system: ASM, DDT, dBase II[™], C/80, MBASIC, etc.
- Retain applications software when upgrading from CP/M to CP/M-86
- Develop and debug CP/M software on CP/M-86
- 8K overhead, TPA can be 61K
- 1/3 to 1/70 as fast as a 5 Mhz 8085 (not recommended for highly interactive programs such as WordStar[™], or for very large, slow interpreted BASIC programs)
- Includes object code, ASM-86 source code, and manual
- Available in 8" SSSD format for CP/M-86, MP/M-86
- \$50.00, including UPS

Both CSE and SIM80 for \$90.00

NMD Northwest Microsystem Design
P.O. Box 10853 • Eugene, OR 97401 • (503) 689-7010
[™]tm, Digital Research; [™]tm, Microsoft; [™]tm, IBM; [™]tm, Ashton-Tate; [™]tm, Micropro

CIRCLE 38 ON READER SERVICE CARD

CP/M ↔ IBM
CP/M ↔ DEC
Compatibility with
REFORMATTER™

Exchange data files with most IBM and DEC equipment through **REFORMATTER** disk utilities. With **REFORMATTER**, you can read and write IBM 3740 and DEC RT-11 formatted diskettes on your CP/M system. Programs feature bi-directional data transfer and full directory manipulation. ASCII/EBCDIC conversion provided with CP/M ↔ IBM.

Each program \$249.00 from stock. Specify CP/M ↔ IBM or CP/M ↔ DEC when ordering.

Program Data Sheets and Application Guide available from MicroTech Exports, Inc., 467 Hamilton Ave., Suite 2, Palo Alto, CA 94301 □ Tel: 415/324-9114 □ TWX: 910-370-7457 MUH-ALTOS □ Dealer & OEM discounts available.

CP/M[®] is a registered trademark of Digital Research.

CIRCLE 43 ON READER SERVICE CARD

NORTH STAR USERS UNITE!

- ★ Get the information you need from the user's point of view
- ★ Over 150 pages of members newsletter articles last year
- ★ DOs and cp/m disk library for members
- ★ Solve problems
- ★ Get assistance
- Membership dues \$20

International North Star Users Association
P.O. Box 2789 m. Fairfield, CA 94533

CIRCLE 26 ON READER SERVICE CARD

EPROMS **CP/M**

EPROM PROGRAMMING SYSTEM RUNS UNDER CP/M

COMMAND SUMMARY

- PROGRAM EPROM(S) FROM DISK FILE
- PROGRAM EPROM FROM RAM
- READ DISK FILE INTO RAM
- COMPARE EPROM W/RAM
- READ EPROM INTO RAM
- DISPLAY/MODIFY RAM
- VERIFY EPROM IS ERASED
- COPY EPROM

FEATURES

- STAND ALONE SINGLE BOARD (6X7.5) PROGRAMS 2708, 2758, 2716, 2732, 2732A and 2764 EPROMS.
- NO PERSONALITY MODULES OR DIP SWITCHES TO CHANGE - 100% ELECTRONIC SWITCHING OF EPROM TYPES.
- INTERFACES THROUGH ONE 8 BIT INPUT PORT AND ONE 8 BIT OUTPUT PORT. 16 WIRES - NO SPECIAL HANDSHAKE LINES.
- ALL SOFTWARE IS PROVIDED - YOU WRITE NOTHING!
- SIMPLE CONFIGURATION TO YOUR COMPUTER USING DDT.
- DESIGNED WITH LOW COST EASY TO GET PARTS.
- OPERATES WITH ANY COMPUTER THAT RUNS CP/M
- HAS A PARALLEL PORT.
- COMPLETE ON BOARD SUPPLY - NO BACKPLANE CONNECTIONS.
- SUPPLIED WITH 25 PAGE USER/ASSEMBLY MANUAL.

Now you can afford to build a professional EPROM programmer.

BARE P.C. BOARD WITH COMPLETE DOCUMENTATION AND SOFTWARE ON AN 8" SINGLE DENSITY DISKETTE-\$75.00


TO ORDER SEND CHECK, MONEY ORDER OR CALL

WRITE OR CALL FOR MORE INFO. 513/752-7218

Add \$3.00 for C.O.D.	VISA OR M.C. ACCEPTED	AndraTech
Ohio res add 5.5% tax		1235 VILLAGE GLEN
		BATAVIA, OHIO 45103

*CP/M is a trademark of Digital Research

CIRCLE 59 ON READER SERVICE CARD

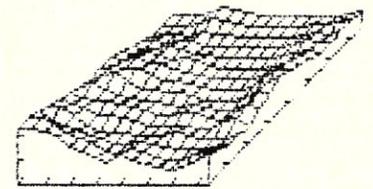

Graphics software from
quadric systems

mp1 (mesh-plot) is a versatile surface plotting package for Anadex 9000/9500 series printers. mp1 includes an easy-to-use data editor, plot generator, plot dump utility, and printer control utility. mp1 requires CP/M[™] and is available only in 8 inch ss-sd format.

\$59⁹⁵ postpaid within U.S.
\$5.00 extra outside U.S.

quadric systems
p.o. box 1547 eugene, oregon 97440

[™]tm, Digital Research, Inc.

CIRCLE 192 ON READER SERVICE CARD



CP/M & MP/M COMMUNICATIONS

It's love at first byte with LOGON, full-feature communications software that's really simple to use.

With LOGON, you can dial the call yourself, or you can store in a file everything you need to know about systems with which you communicate. Your computer will dial for you and set the baud rate and other parameters. It can enter your ID and password for timesharing systems, and it can even execute commands on the remote system. You can override the standard parameters when you sign on, or change them in mid-session.

For CP/M[®] or MP/M[®] systems using PMMI's MM-103 Modem Board, LOGON offers unparalleled convenience and reliability. Under MP/M, LOGON can be interrupt driven, so that you don't lose data when another program is executed. Fully documented, only \$69.95.

UTILITIES

Pamper your processor with our CP/M or MP/M utilities disk.


Use **UTILITY** to execute standard CP/M and MP/M utilities from a menu, and **DCAT** to keep track of the files on all your floppy disks. Use **IDS** to send control codes to your IDS printer, and **SETPF** to program your TeleVideo[®] 950's function keys. SETPF can also put your personal logo on the screen, and it comes ready to use with WordStar[®] functions.

You get **ZAP**, a file-level dump and modification utility that works with MP/M too; **FILES**, which places a group of filenames into a SUB file, with submit file tokens if you wish; and **USERLIB**, a group of handy assembler routines.

Our CP/M disk brings you background printing with **SPOOL**, a print despooler, and **ERAQ**, which asks you to confirm which files should be erased.

Our MP/M disk includes **TODSET**, to set the time and date at startup, and **MSG**, a terminal-to-terminal message program. Whatever your logged disk and user number, **AUTO** lets you execute a program which can be on a different disk and user number, and then returns you to your starting position. You also get performance enhancements for WordStar, VEDIT[™], and SuperCalc[®].

There's much, much more on our utilities disks. Specify CP/M or MP/M. Either disk is an exceptional value at only \$29.95.



Redford Microcomputer Services
9535 Woodbine
Redford, Mich. 48239
(313) 537-0109

Check, VISA, or MasterCard.

CP/M and MP/M are registered trademarks of Digital Research, WordStar of MicroPro International, SuperCalc of SORCIM, TeleVideo of TeleVideo Systems. VEDIT is a trademark of CompuView Products.

CIRCLE 9 ON READER SERVICE CARD

New Products continued . . .

software programs. CompuPro's software support includes CP/M-68K and an advanced FORTH operating system (the latter includes a complete macro-assembler and a full set of utilities that allows users to read and write CP/M files). Users can also employ existing CP/M-80 or CP/M-86 files to create programming tools.

Price: CPU 68K, \$695 (8MHz); \$850 (10MHz CSC).
Optional FORTH OS: \$200.

CompuPro, Oakland Air-

port, CA 94614; (415) 562-0638.


CIRCLE #170 ON READER SERVICE CARD

Self-reset power line interrupter

Electronic Specialists, Inc., expands their AC power line interrupter series to include automatic reset models. Should AC line voltage be disrupted or exceed preset safety limits, the power interrupter disconnects

AC power from controlled apparatus. A 4-min time delay, followed by automatic self-reset, helps avoid wide voltage fluctuations associated with power line malfunctions. An optional line voltage monitor is available.

Intended for installations operating unattended for long periods, the self-reset power interrupter provides safety and protection for equipment and personnel.

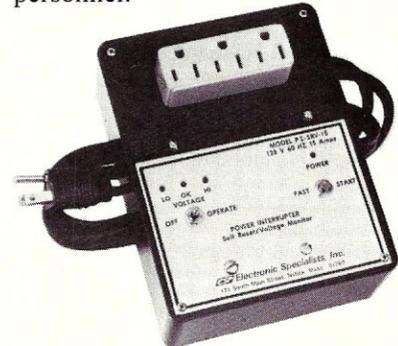

Connecting to the AC line with a standard 3-prong plug, the self-reset power interrupter can accommodate a 15-amp resistive load or a 10-amp inductive load.

Price: Model PI-SR-15 self-reset interrupter, \$204.95. Model PI-SRV-15 self-reset & voltage monitor interrupter, \$226.96.

Electronic Specialists, Inc.,
171 South Main St., P.O. Box 389, Natick, MA 01760; (617) 655-1532.

CIRCLE #171 ON READER SERVICE CARD

CO-POWER-88: THE EXTRAORDINARY 8088 COPROCESSOR FOR Z80/8080 COMPUTERS USING CP/M 2.2

CO-POWER-88 is a powerful 16-bit, 8088 coprocessor for Z80 and 8080 computers using CP/M 2.2. It is available in three RAM sizes: 64k, 128k and 256k. CO-POWER-88 runs CP/M-86 or MSDOS, the operating system of the IBM-PC. Simple commands move the user between the Z80-8080 CP/M 2.2 system and the Z88 CP/M-86, MSDOS system. While running CP/M 2.2., the RAM of CO-POWER-88 can be used as a "memory" drive ("M"). When programs are compiled or run in M, disk access time is eliminated, making job operation time faster. Currently available for the Xerox 820 and 820-II, the Bigboard and the ATR8000.

PRICING:

*64k CO-POWER-88	699.95	256k CO-POWER-88 with	
*128k CO-POWER-88	799.95	CP/M-86	1250.00
256k CO-POWER-88	1049.95	MSDOS for	
CP/M-86 for		CO-POWER-88	-CALL-
CO-POWER-88	250.00	*Add-on RAM units are available.	

OTHER PRODUCTS:

Dual Density for the Xerox 820 is still available. 5 1/4" disks have up to 185k of user storage per side. 8" disks have up to 674k of user storage per side. Software includes a parallel and several serial printer drivers, as well as double density CP/M disk utility programs. Available for single or double-sided drives. **\$199.95**

Dual Density for the Bigboard is available in 2.5 MHz and 4 MHz versions. Manual includes instructions for using 5 1/4" drives with the Bigboard. 5 1/4" disks have up to 185k of user storage per side. 8" disks have up to 674k of user storage per side. Printer drivers are included. Available for 5 1/4" or 8" drives (SS or DS). **SPECIAL OFFER: \$149.95 \$199.95**

Extended Dual Density for the Xerox 820-II is available for systems with 8" drives. This increases user storage from 486k to 674k (per side). **\$100.00**

The ATR8000. This 4 MHz, Z80, 64k RAM, double density processor interfaces to the ATARI 800/400 or to a RS-232 terminal. The FLOPPY DISK port runs up to four 5 1/4" or 8" drives of mixed definition. It has a parallel PRINTER port and a RS-232 port. CP/M 2.2 and several double density CP/M disk utility programs are included. The ATR8000 and the ATARI 800/400 also run ATARI DOS and OS/A+. **\$750.00**
(Other related products also available.)

CONTACT:


SOFTWARE PUBLISHERS, INC.

2500 E. Randol Mill Rd., Suite 125 Arlington, TX 76011
(817) 469-1181

CP/M 2.2 and CP/M-86 are trademarks of Digital Research, Inc. MSDOS is a trademark of Microsoft. IBM-PC is a trademark of IBM. Xerox 820 and 820-II are trademarks of Xerox Corp. ATARI 800 & 400 are trademarks of ATARI, Inc.

CIRCLE 191 ON READER SERVICE CARD

Now... You Can Monitor 7 Most Important RS-232 Interface Lines

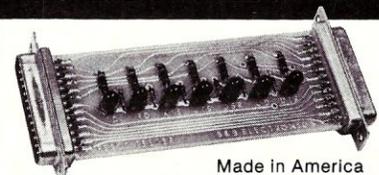

RS-232-INTERFACE TESTER

connects in series with any RS-232 interface. LED's clearly display status of 7 functions: transmit data, receive data, request to send, clear to send, data set ready, carrier detect, data terminal ready. Requires no power, may be left in permanently. Satisfaction guaranteed. **ORDER NOW! Only \$39.95**, plus \$1.75 for postage & handling. Illinois residents add 5% sales tax. We accept MC and Visa. Purchase Orders from rated Corps accepted. FREE, illustrated catalog of problem detecting equipment.

B&B electronics
Box 475 T, MENDOTA, IL 61342

CIRCLE 149 ON READER SERVICE CARD

Microsystems Mart

PROGRAM EPROMS FROM CP/M OR MP/M† USING EPM

EPM IS A SOFTWARE MONITOR THAT INTERFACES HOMEBREW OR COMMERCIAL EPROM PROGRAMMERS TO CP/M OR MP/M. BINARY OR HEX FORMAT, MEMORY OR I/O MAPPED EPROM PROGRAMMING HARDWARE INTERFACED THROUGH SIMPLE I/O ROUTINES. SKELETAL I/O ROUTINES ARE PROVIDED IN SOURCE FORM FOR BINARY AND HEX FORMAT PROGRAMMERS.

FEATURES OF EPM:

- EPROM programming from CP/M or MP/M disk files
- EPROMS can be read to a disk file for archiving
- Programming without address or EPROM length calculations
- Menu operation and extensive operator messages for ease of use
- Blank EPROM verification before programming
- Verification of EPROM after programming
- User written I/O routines can be installed for varying hardware
- Virtually any EPROM type can be programmed using EPM
- EPROM editor option permits byte level modifications
- HEXROM utility can convert a hex file ORG'd anywhere in memory
- Runs under CP/M version 2.x or MP/M II with at least 24 K of RAM

EPM ON 8 INCH 5.25 DISK WITH COMPLETE DOCUMENTATION - \$75
 EPROM EDITOR OPTION - \$45
 SHIPPING - \$2.50
 C.O.D. - \$2.50

For More Information Contact:

DANTEK
 SOFTWARE, INC.
 4550 SCHOOLHOUSE ROAD
 BATAVIA, OHIO 45103
 (513) 752-1921

† CP/M and MP/M are trademarks of Digital Research

Electronic Circuit Analysis

- DC and AC analysis
- Very fast, machine language
- Infinite circuits on multiple passes
- Worst case, sensitivity analysis
- Dynamic modification
- 64 Nodes, 127 branches
- Compare circuits
- Log or linear sweep
- Full file handling
- Frequency response, magnitude and phase
- Complete manual with examples
- CP/M \$150.00

Tatum Labs
P.O. Box 722
Hawleyville, CT
06440
(203) 426-2184

ISIS ↔ CP/M®

Full bi-directional file transfer capabilities are provided in the ISIS-CP/M utilities package. Written in machine language and running under CP/M, these utilities permit the CP/M user to read or write files direct to/from an ISIS Diskette. They will run under any version of CP/M without regard to diskette density. The complete package is \$250.00 including user's manual. Write for free brochure on other CP/M software.

CP/M is a registered trademark of Digital Research
 ISIS is a trademark of Intel Corporation



SOUTHERN COMPUTER SYSTEMS, INC.
 P.O. Box 3373A
 Birmingham, AL 35255
 (205) 933-1659



COMPONENTS!

Disk 1	\$365.00
Disk 2	\$589.00
RAM 16	\$449.00
D Base II	\$465.00
Interfacer 4	\$264.00
Enclosure 2(Desk)	\$625.00
Dual Processor (8085/8088)	\$320.00
CPU 8086/87(8 MGHZ)	\$510.00

WRITE OR CALL FOR COMPLETE PRICE LIST
(415) 453-0865

Authorized CompuPro Systems Center

COMPUTER HOUSE



501 "B" ST.
 SAN RAFAEL
 CA 94901

SAVE 90%

YES you can save up to 90% on a computer system by ROLLING—YOUR—OWN TECHNOLOGY!

68000 Microsystems (8MHz) with 128KB & three RS-232C ports, \$252.00

8086 microcomputer with 128KB & three RS-232C ports, \$204.00

Z80A 4MHz micro with 64KB & two RS-232C ports, \$110.00

Floppy Interface as little as \$60.00

FREE BROCHURE TODAY

DIGATEK CORPORATION
 Suite 10
 2723 West Butler Drive
 Phoenix, AZ 85021

350 Computer Book Titles,
 List \$1.00

I WILL BEAT ANY COMPETITOR'S PRICE PROVIDED IT IS NOT BELOW MY COST. TRY TO BEAT THESE IC PRICES:

DYNAMIC RAM		
64K	200 ns	\$4.85
64K	150 ns	5.10
16K	200 ns	1.25
EPROM		
2764	300 ns	\$8.00
2732	450 ns	4.15
2716	450 ns	3.33
2532	450 ns	4.70
STATIC RAM		
6116P-3	150 ns	\$4.40
2016	100 ns	4.00
2114	200 ns	1.60
Z80A FAMILY		
CPU, CTC, or PIO		\$3.39
DART		8.25
DMA or SIO/0		12.50

MasterCard VISA or UPS CASH COD
 Factory New, Prime Parts

MICROPROCESSORS UNLIMITED
 24,000 South Peoria Ave.
 BEGGS, OK. 74421
(918) 267-4961

Prices subject to change. Call for volume prices. Subject to available quantities. Shipping & Insurance extra. Cash discount prices shown.

Jan. 20, 1983

MORROW DESIGNS MICRO DECISION

Includes Wordstar, Logicalc, Spelling corrector, CP/M 2.2, MBasic, N/Star, Basic & Pilot programs plus smart terminal. *Includes personal pearl. Data Base value to \$295.00.



See February Microsystems

1 drive [200K]	\$1,590.
2 drive [400K]	\$1,990.
2 dr. D/sided [768K]	\$2,290.
Extra drive	\$ 350.

Specify Morrow or Liberty Terminals

11 Mb Winchester	\$2,200.
22Mb Winchester	\$2,750.
Okidata 82A	\$ 450.
Okidata 83A	\$ 650.

COMPUTER MARKETPLACE
1708 Yankee Trader Plaza
Stuart, Florida 33494
(305) 692-2455, V, MC, AE
We export worldwide!

S-100 COLOR GRAPHICS MUSIC SYNTHESIS DUAL I/O PORTS

SINGLE BOARD DESIGN USES ONLY 22 IC'S

COLOR GRAPHICS

- TMS 9918A Video Display Processor -On board RF Modulator
- 256 x 192 pixel resolution
- 16 unique colors
- 16K of display RAM (4116's)
- NTSC composite video connector
- 1 text and 3 graphic modes
- 32 sprites for 3D simulation

COMPLEX SOUND GENERATION

- AY-3-8910 Prog. Sound Generator
- 3 programmable channels
- Produces 3-note chords
- Tones from 33.5Hz to 125KHz
- 16 level amplitude control
- Noise generator
- Envelops shape/cycle control
- Special sound effects

The AMUSIGRAF system is offered as an affordable package which includes the following:

- Bare S-100 P.C. Board
- TMS 9918A data manual
- CP/M compatible 8" disk with test and demo software
- AY-3-8910 data manual
- Complete user's documentation

ORDER by mail through:
FORESIGHT TECHNOLOGY
 Write or call for more information

ORDER by phone through:
ADCOM MKTG. SERVICES
 (513) 831-1561

AMUSIGRAF SYSTEM
 Introductory offer
 Visa \$95⁰⁰ Master Card

Add \$3.00 for C.O.D.
 Ohio res. add 5.5% sales tax
 Send certified check or money order for immediate delivery
 Personal checks allow 2 wks.



1016 Huffman Ct.
 Cincinnati, Ohio 45231

* CP/M is a trademark of Digital Research

ADVERTISE!

Microsystems Mart ads really generates sales \$205 each, 6x \$185 each, 12x \$170 each. Send ad and payment to:

microsystems

CLASSIFIED AD DEPT.
 ONE PARK AVENUE
 NEW YORK, NY 10016

OR CALL COLLECT:
LOIS PRICE (212) 725-4215

**RESET AND RUN
COMPLETE S-100 SYSTEMS**

FEATURING:

**Integrand Enclosures
Mitsubishi 8" Drives
Ampex H.D. Options
CP/M © Installed**

**Teletek Systemaster
Choice of Terminal
2 Serial Ports
2 Parallel Ports**

**ACCESS I 10 slot mainframe \$2995
ACCESS II 7 slot, with wood sides \$3050
ACCESS III 4 slot, 1/2 high drives \$2950
ACCESS IV 5 slot rackmount \$2950**

For hard disk option, add to above prices
5M-\$995 10M-\$1150 15M-\$1295 25M-\$1650
Multi-user/processor options available with Turbodos ©

COLOR GRAPHICS PACKAGES (S-100)

512 x 480 res. Plot-10 Calls
CAD Packages Business Graphics
Complete subsystem with Amdek II and 4 color plotter
(includes business graphics)-\$3000
Optional CAD Drafting Package \$900
Bit pads and other plotters available
Daisywriter 2000 48k buffer \$1100
Many other items available - all discounted
Call or write for a catalog.

**TOTAL ACCESS, Suite 202, 2054 University Ave.
Berkeley, California 94704
415-540-8066**

CIRCLE 7 ON READER SERVICE CARD

W & A

**Workman & Associates
112 Marion Avenue, Suite 2A
Pasadena, CA 91106**

(213) 796-4401

Marry A Port Today!!!

with the **Transporter**

Now your CP/M machines can have one-sided conversations! One copy of the Transporter (on the sending machine) will transfer any file from one computer to another. It requires matching ports (serial or some parallel) or modems. Detailed manual included. The Transporter \$69.50.

Pascal Made Easy

"A Primer on Pascal for CP/M Systems"

Full of examples and suggestions to make learning Pascal easier. Contains both a disk and a detailed manual with a glossary and an error-correcting guide. Pascal Primer-5-1/4" \$89.50 -8" \$79.50
The Pascal Primer is for either Pascal/M or MT+. The programs are from Grogono's "Programming in Pascal" and Kernighan & Plauger's "Software Tools in Pascal", \$20.00 each (not included).


Disk formats include: 8", Apple CP/M, NorthStar, Osborne, KayPro, and Otrona.

All U.S. orders are postpaid. Catalog on request.

CIRCLE 180 ON READER SERVICE CARD

ADVERTISERS INDEX

Reader Service	Advertiser	Page	Reader Service	Advertiser	Page	Reader Service	Advertiser	Page
47	A. B. Hutchinson	104	189	Heritage	77	227	PH Associates	75
183	Action Computer Enterprises	75				222	PCE	47
30	Adcom Systems	112	217	Information Reduction Re-		61	Pickles and Trout	21
148	Advanced Digital	9		search	61	17	Pion	69
41	American Planning	93	96	Infosoft	12	77	Plum Hall	61
59	AndraTech	113	19	Intercontinental Microsys-	Cov-	174	PMMI	112
34	Ashton-Tate	2		tems	er 3	186	Pragmatic	87
110	Atkinson Programs	94	39	IO Technology	37			
60	Avocet Systems, Inc.	64	49	Integrand	93	40	QT/Compatible Computer	39
			94	International Microcomputer				
149	B & B Electronics	114		Brokers	107	192	Quadric	113
57	Blat R&D	104	26	International North Star Users				
175	BMI	22		Association	113	32	R&L Micro Consulting Ser-	113
52	Bridge Computer Company	93				9	vice	
			12	JTS	20		Redford Microcomputer Ser-	113
29	Center Computer Consul-	25	16	Jade Computer Products	28,29	72	vice	95
	tants		114	JRT Systems	3		Rosetta Stone	
16	Cer-Tek	103				184	S-100, Inc.	101
78	Code Works, The	111	51	Key Microsystems	111	229	Scion	25
75	Colonial Data Services	10	36	Kiai	6	112	Signum Systems	101
125	Colorado On-Line	21		Knowlogy	104	67	Simpliway	101
211	Computer Potential	53				70	Snow Micro Systems, Inc.	83
226	Components Express	77	107	L-Com	22	65	Software Toolworks	96
81	CompuPro Systems/God-	Cov-	106	Laboratory Computer Sys-		82	Software Banc	40
	about Electronics	er 4		tems, Inc.	101	191	Software Publishers	114
73	Compu-Draw	89	13	Laboratory Microsystems	51	1	Software Technique	79
133	Computer Components	44	193	Lexisoft	13	157	Space Time Productions	101
84	Computer Design Labs	57				31	Starside Engineering	79
68	Computer Innovations, Inc.	75	28	Macrotech International Sys-		54	Stok Software, Inc.	33
6	Computing!	19		tems	67			
190	Cvanus Systems	93	153	Martian Technology	93	223	Tarbell Electronics	94
				Master Computing	27	210	Tiny C Associates	89
221	Data Access	83	98	Memory Merchant	31	219	TDI	109
194	DJR Associates	49	62	Micro Dynamics	111	24,22	Teletek	1, 4
228	Daman	109	91	Microhouse	11	7	Total Access	116
66	D & W Digital	91	22	Micro Resources	81			
48	Discount Software Group	73	145	Microsystems International	23	158	Unified Software	95
151	Dual Systems	43	43	MicroTech Exports, Inc.	113	230	United Computer Corpora-	7
			85	Midwest Microwarehouse	109		tion	
147	Easi Software	89	140		58,			
45	Ecosoft, Inc.	77		Morrow Design	59	15	Vectrix	Cov-
58	Electralogics	14	53	Mycroft Labs	110	63	Wave Mate	er 2
56	Electronic Control Technol-							27
	ogy, Inc.	82						
142	Extended Processing	91	225	New Generations	79	89	WhiteSmiths, Ltd.	32
152	E-Z Tax	26	38	Northwest Microsystems De-		180	Workmen and Associates	116
				sign	113	10	WW Component Supply, Inc.	54
155	Gifford Computer Systems	15	200	Optimal Technology	96	232	Yang Computer	109
	Company		188	Optronics	91			
173	Genesis Computer Corp.	24		Owens, J.D.	16	233	Zencom	109
69	Hawkeye Grafix	111						

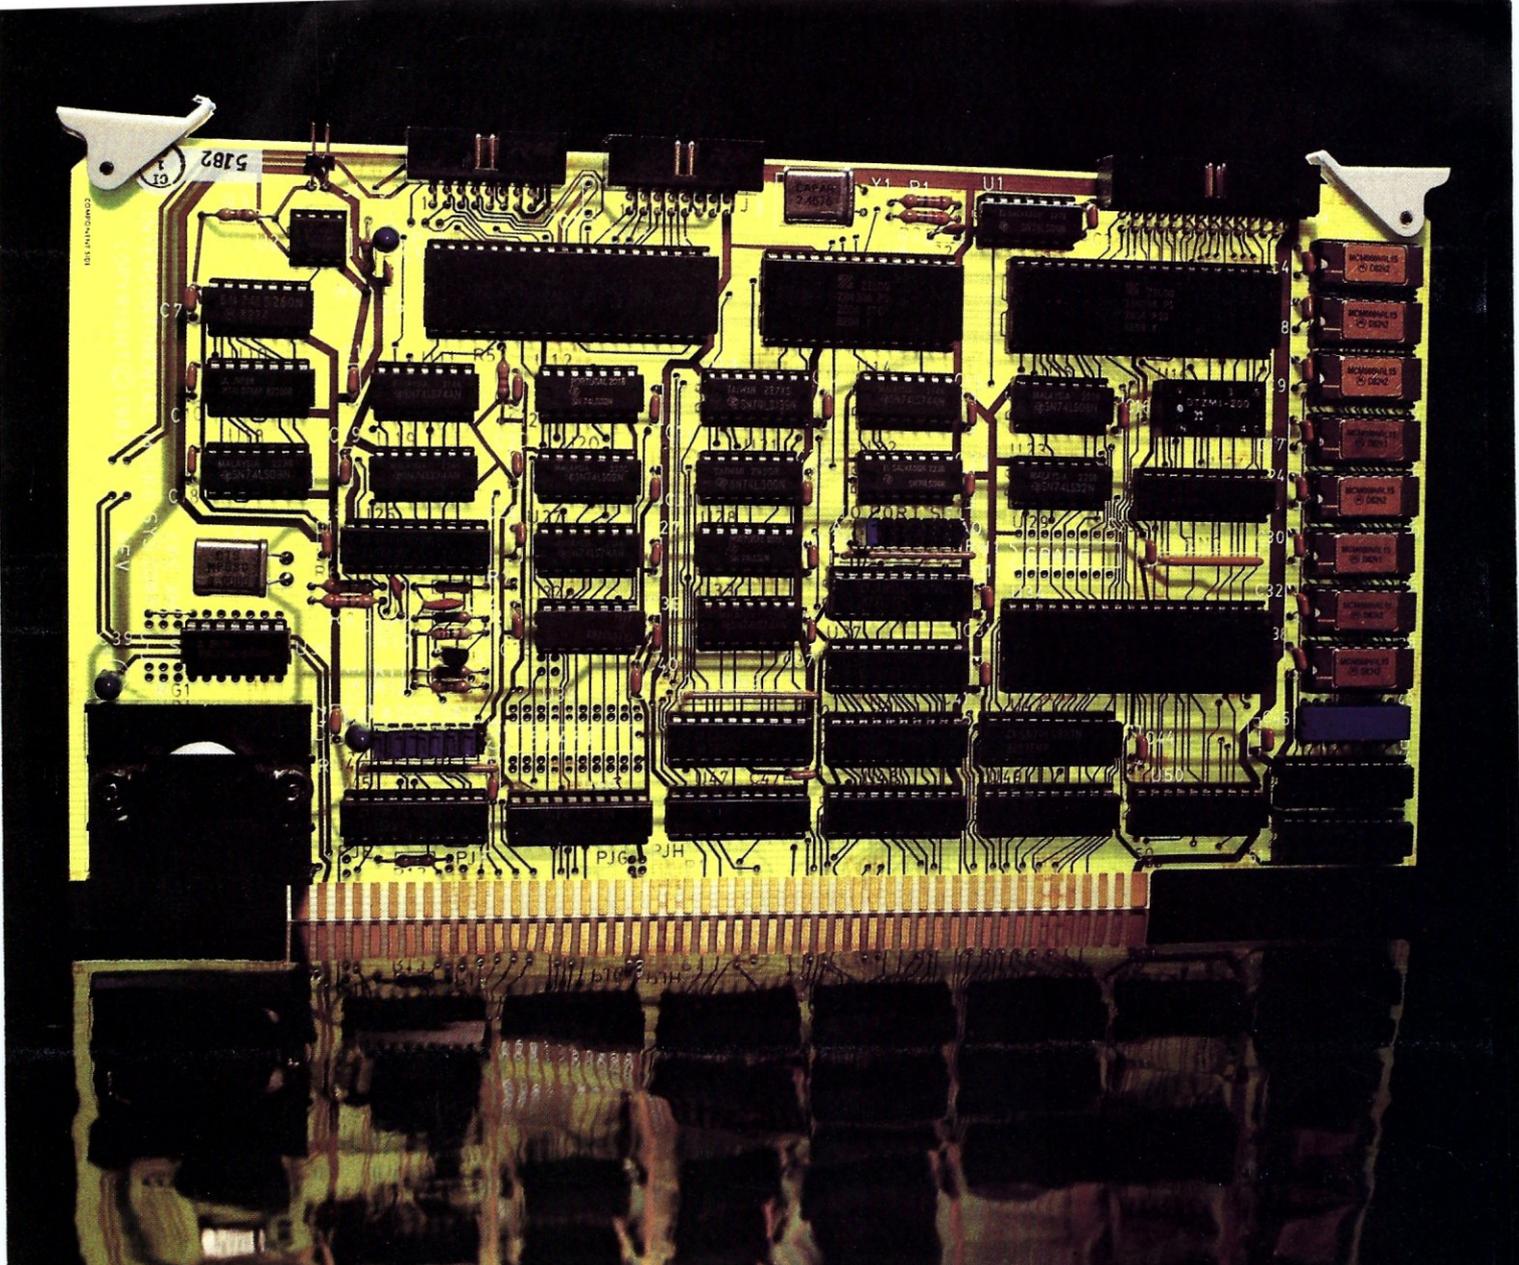

Leading Edge Z-80, S100 Distributed Processing.

\$475.00

Memory transfer rates of 517Kbytes/second, direct memory access, memory mapping and host to slave requests via interrupt control make the CPS-MX fast. And easy to integrate. Fully compatible with TURBOdos™, Intercontinental Micro System's slaves are available in four versions: synchronous or asynchronous serial port, 4Mhz or 6Mhz. The choice is yours. The CPS-MX also allows the bus master to utilize slave memory at the user's discretion. The slave then acts as a 64K RAM card.


The CPS-MX is also easy to integrate with Intercontinental's full line of S100 products: CPZ-48000 SBC single board computer with

64K on board RAM, 4 I/O channels, memory management, on board floppy controller, DMA and vectored priority interrupts; and 256K bank selectable or contiguous memory. A complete line of personality boards allow easy interface to anything from a floppy to a winchester, including modems and printers, and

don't take up any S-100 bus space.

Best of all is the price. The CPS-MX starts at \$475.00. That's right, up to 65% less than what you have been paying for products that may not measure up.

Call Intercontinental Micro Systems today. We'd like to send you information on the S-100 slave alternative.

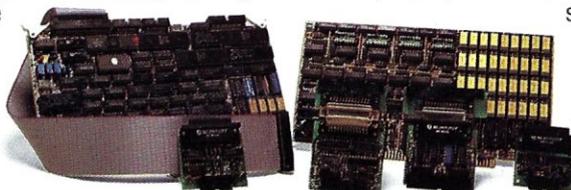

1733 South Douglass Road, Suite E, Anaheim, California 92806 (714) 978-9758 Telex: 678401-TAB-IRIN

TURBOdos is a trademark of Software 2000, Inc.

CIRCLE 19 ON READER SERVICE CARD

Who Uses CompuPro?

The H. S. Dakin Company specializes in word processing, mailing services, mailing list maintenance, and computerized typesetting. This kind of workload demands reliability and performance not found in "personal" computers . . . so Henry Dakin chose **CompuPro**.

His systems work long and hard: they run 8 and 16 bit word processors, mailing list programs, spreadsheets, and custom software. However, reliability wasn't the only reason for choosing **CompuPro** equipment—cost-effectiveness was equally important. Mr. Dakin estimates his **CompuPro** systems cost $\frac{2}{3}$ less than equivalent dedicated systems capable of performing similar tasks.

Henry Dakin, owner of H. S. Dakin Company, San Francisco, California, with associate Lynne Burwell of Lexis Press.



CompuPro systems work hard for the H. S. Dakin Company, and they'll work hard for you. For business, scientific, and industrial computing solutions, visit your **Authorized CompuPro Systems Center**.

H. S. Dakin's systems were integrated by Gifford Computer Systems, an **Authorized CompuPro Systems Center**. Call (415) 562-0636 for the location of the Systems Center nearest you.

CIRCLE 81 ON READER SERVICE CARD

CompuPro®

CompuPro division, Godbout Electronics,
Box 2355, Oakland Airport, CA 94614