

Systems

**IBM 4300 Processors
Summary and
Input/Output &
Data Communications
Configurator**



IBM 4300 Processors Summary and Input/Output & Data Communications Configurator

Second Edition, May 1980

This major revision of IBM 4300 Processors Summary and Input/Output & Data Communications Configurator makes the previous edition, GA33-1523-0, obsolete. Information is added on the 4331 Processor Model Group 2. The Configurator, Chapter 5, is brought up to date.

Information contained in this manual is subject to change. Any such change will be reported in subsequent revisions or through the System Library Subscription Service.

Requests for copies of IBM publications should be made to your IBM representative or to the IBM branch office serving your locality.

It is possible that this material may contain reference to, or information about, IBM products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that IBM intends to announce such IBM products, programming, or services in your country.

A form for reader's comments is provided at the back of the publication. If the form has been removed, comments may be addressed to IBM Product Publications, Department 3179, Schoenaicher Strasse 220, 7030 Boeblingen/Wuertt., Federal Republic of Germany. IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation whatever. You may, of course, continue to use the information you supply.

© Copyright International Business Machines Corporation 1979, 1980

Preface

This publication is intended to give a general understanding of the IBM 4300 Processors. It is divided into five sections:

- Sections 1 to 3 explain the concepts of the processors and give an overview of their structure and most important features.
- Section 4 describes the individual 4300 Processors.
- Section 5 presents the input/output and data communications configurator for the 4300 Processors.

Because each section is built on information presented in preceding sections, it is preferable to read the sections in the order of presentation. A basic knowledge of data processing systems, such as given in the Introduction to IBM Processing Systems, GC20-1684, is assumed.

The Processor Summary deals only with the components that make up the basic 4300 Processors. For information about appropriate programming systems, please refer to the following IBM publications:

IBM Introduction to the VSE System, GC33-6108
IBM Virtual Machine Facility/370: Introduction, GC20-1800
IBM OS/VS1 Planning and Use Guide, GC24-5090

More detailed information about 4300 Processors is given in the IBM 4300 Processors Principles of Operation for ECPS: VSE Mode, GA22-7070, and IBM 4331 Processor Functional Characteristics and Processor Complex Configurator, GA33-1526, and IBM 4341 Processor Functional Characteristics and Processor Complex Configurator, GA24-3672.

For information related to the System/370 mode of operation selectable on 4300 Processors, see IBM System/370 Principles of Operation, GA22-7000.

A list of abbreviations and a glossary of terms that do not appear in the IBM Data Processing Glossary, GC20-1699, is included.

Contents

Abbreviations	8
Instruction Formats	8
Operating Systems, Subsystems	8
Glossary	9

SECTION 1

Introduction to IBM 4300 Processors	15
Processor Concepts	15
Modes of Operation	16

SECTION 2

Basic Structure of 4300 Processors	17
Machine Control	18
Program Control	18
Operator's Control Panel	18
Data Formats	19
Data Representation	19
Processor Storage	19
Addressing	20
Data Positioning	21
Performance Factors	22
Instruction Processing Functions	22
Arithmetic and Logical Operations	23
Instruction Execution Sequence	26
Instruction Formats	26
Input/Output	28
Channels	28
I/O Adapters	29
Byte Multiplexer Channels	29
Block Multiplexer Channels	29
I/O Devices	30
Control Unit Function	30
Standard I/O Interface	31
Interruption System	31
Storage Concepts	33
Processor Storage	33
One-Level Addressing	33
Dynamic Address Translation	33

SECTION 3

Functions and Features of 4300 Processors	35
Processor Storage Functions	35
Processor Storage Capacities	35
Storage Protection	35
Processor Functions	36
Instruction Sets	36
Time-of-Day Clock and Clock Comparator	37
CPU Timer	37
Interval Timer	38
Byte-Oriented Operand	38
Extended Control Program Support:	
VSE Mode (ECPS:VSE Mode)	38
System/370 Mode	38
Program Reset	39
Store Status	39
Machine Save	39
Basic Control Mode	39
Extended Control Mode	39
Program Event Recording	40
Conditional Swapping	40
PSW Key Handling	40
Clear I/O	40
External Signals	40
Channel Features	41
Channel-to-Channel Adapter	41
Channel Command Retry	41
Processor Features	41
Compatibility Features for other IBM Devices	41

SECTION 4

4300 Processors	43
4331 Processor, Model Groups 1 and 2	43
Standard Functions	44
Optional Features	44
Prerequisite	45
Processor Components	45
Programming Support	50
4341 Processor	51
Standard Features	51
Optional Features	52
Prerequisite	52
Processor Components	52
Compatibility	54
Programming Support	54

SECTION 5

Input/Output and Data Communications Configurator . . .	55
Introduction	55
Local Input/Output Equipment	55
Attachment Data for Local I/O Devices and Control Units	60
Remote Input/Output Equipment	69
Remote I/O Equipment Categories	69
Attachment Data for Remote I/O Devices and	
Terminal Systems	72
Index	77

Illustrations

Figure	Title	Page No.
1-1	IBM 4331 Processor with Input/Output Devices	14
1-2	IBM 4341 Processor with Input/Output Devices	14
2-1	Organization of a Typical Installation with 4300 Processor	17
2-2	Basic Fixed-Length Data Formats (EBCDIC-Coded Data)	18
2-3	EBCDIC Character Codes (Excluding Control Characters)	20
2-4	Principle of Integral Boundaries in Processor Storage	21
2-5	Zoned Decimal Number Format	24
2-6	Packed Decimal Number Format	24
2-7	Binary Number Formats (with Signed Binary Data)	24
2-8	Short Floating Point Number Format	25
2-9	Long Floating Point Number Format	25
2-10	Extended Floating Point Number Format	25
2-11	Fixed Length Logical Format	26
2-12	Variable Length Logical Format	26
2-13	Basic Instruction Formats	27
3-1	Storage Key and Access Key, Showing Matching Keys	36
3-2	Instruction Sets of 4300 Processors	37
4-1	4331 Processor	43
4-2	4341 Processor	51

Abbreviations

Terms not included here are defined in the IBM Data Processing Glossary, GC20-1699.

CA	communications adapter
ECC	error checking and correction
I/O	input/output
op code	operation code

Instruction Formats

RR	register to register
RS	register and storage
RX	register and indexed storage
S	implied operand and storage
SI	storage and immediate operand
SS	storage to storage

Operating Systems, Subsystems

DOS/VS	disk operating system/virtual storage
VSE	virtual storage extended
ECPS	extended control program support
OS/VS1	operating system/virtual storage 1

Glossary

alter/display: A function that allows data in certain storage areas to be displayed and altered at the operator console.

block multiplexing: The transmission of data to multiple I/O devices by the real-time interleaving of records in block form.

buffer storage: An area of storage set aside for temporary use to compensate for differences in the rate or time of data transmission.

byte multiplex mode: The transmission of data to multiple I/O devices by the real-time interleaving of bytes.

byte-oriented operand: A feature that allows certain operands to reside on any byte boundary.

clock comparator: A hardware feature that causes an interruption when the time-of-day clock has equaled or exceeded a specified value.

command retry: A channel and control-unit procedure that causes a command to be retried without requiring an I/O interruption.

commercial instruction set: A combination of instructions of the standard instruction set and the decimal instructions.

compatibility feature: A feature, also called an emulator, that allows an IBM system to execute programs written for another IBM system or device.

CPU timer: A hardware feature that measures elapsed processor time and causes an interruption when a previously specified amount of time has passed.

data acquisition and control: The process of identifying, isolating, and gathering source data and providing the correct facility for its transmission.

data transfer rate: The number of bytes (or packed decimal digits and signs) transferred per second.

decimal arithmetic: Arithmetic operations performed on decimal numbers.

error checking and correction (ECC): The detection, in the processor, and correction of all single-bit errors, plus the detection of double-bit and some multiple-bit errors.

extended control program support:DOS/VSE mode (ECPS:VSE mode): An implementation of the virtual storage concept that uses an internal table to map locations in virtual storage to the underlying processor storage.

extended floating-point number: A floating-point number with a 112-bit fraction. This is approximately 34-decimal-place precision.

extended-precision floating point: A facility that provides operations on extended floating-point numbers.

field length: The length of a specified area in a record used for a particular category of data.

fixed-length data format: format in which data is present in units of equal and unvarying length.

floating-point facility: A processor feature that has at its disposal four 64-bit floating-point registers and the instructions to perform floating-point arithmetic.

high-speed buffer storage: Storage that provides fast access to a block of instructions and operands fetched from processor storage.

interruption: The re-direction of processing of a program through an external or internal event, for example, because of the completion of data transfer from an I/O device.

interruption, classes of: The six classes of interruption are: program, supervisor call, external, restart, machine check, and I/O.

interruptions, disallowing of: The delaying or prevention of an interruption.

interval timer: A timer that reduces the contents of the fullword at location 80 (processor storage) at regular intervals. The interval timer causes a request for an external interruption when it steps from positive to negative.

I/O adapter: A part of some machines that allows specific I/O devices to be attached to the processor directly instead of by a separate channel and control unit.

I/O interface: The physical and the logical connection between the channel and the I/O control unit.

model-dependent: Relates to a program or procedure that is not fully defined by architecture and is, therefore, implemented in a unique way in a given model.

nonshared subchannel: A control facility, associated with a channel data path, that can control only one I/O device.

operator's control panel: A panel, mounted on the console or processor, that provides the operator with manual control of the processor.

packed format: A data format in which a byte may contain either two decimal digits or one decimal digit and a sign.

processor storage: The storage where data and instructions actually reside when they are accessed by the processor and channel programs.

reloadable control storage: Storage used for microcode that controls the processor, plus channel functions and features. The microcode is loaded into the reloadable control storage from the diskette as an initial microcode load procedure.

selector mode: One of two modes in which a block multiplexer channel can operate, the other being multiplex mode.

shared subchannel: A control facility, associated with a channel data path, that can control one or more I/O devices.

storage access width: The number of bytes fetched each time processor storage is accessed.

storage cycle time: The time required to process a reference to processor storage.

subchannel: The channel facility required for sustaining a single I/O operation.

system diskette facility: A diskette I/O facility used to load microcode.

time-of-day clock: A clock in the machine that is used to indicate the date and time of day.

universal instruction set: A combination of instructions of the commercial instruction set and the floating point instructions.

unprivileged instruction: An instruction that is valid in

both the problem and the supervisor states, as contrasted to a privileged instruction that is valid only in the supervisor state.

virtual address: An address that refers to virtual storage and must, therefore, be mapped to a location in processor storage when the address is used.

virtual storage: Addressable space that appears to the user as processor storage, from which instructions and data are mapped into processor storage locations. The size of virtual storage is limited by the addressing scheme of the computing system and by the amount of auxiliary storage available, rather than by the actual number of processor storage locations.

zoned decimal format: A data format in which a zone accompanies each decimal digit, except in the low-order byte position which is occupied by a sign and decimal digit.

--- This page has been left blank. ---

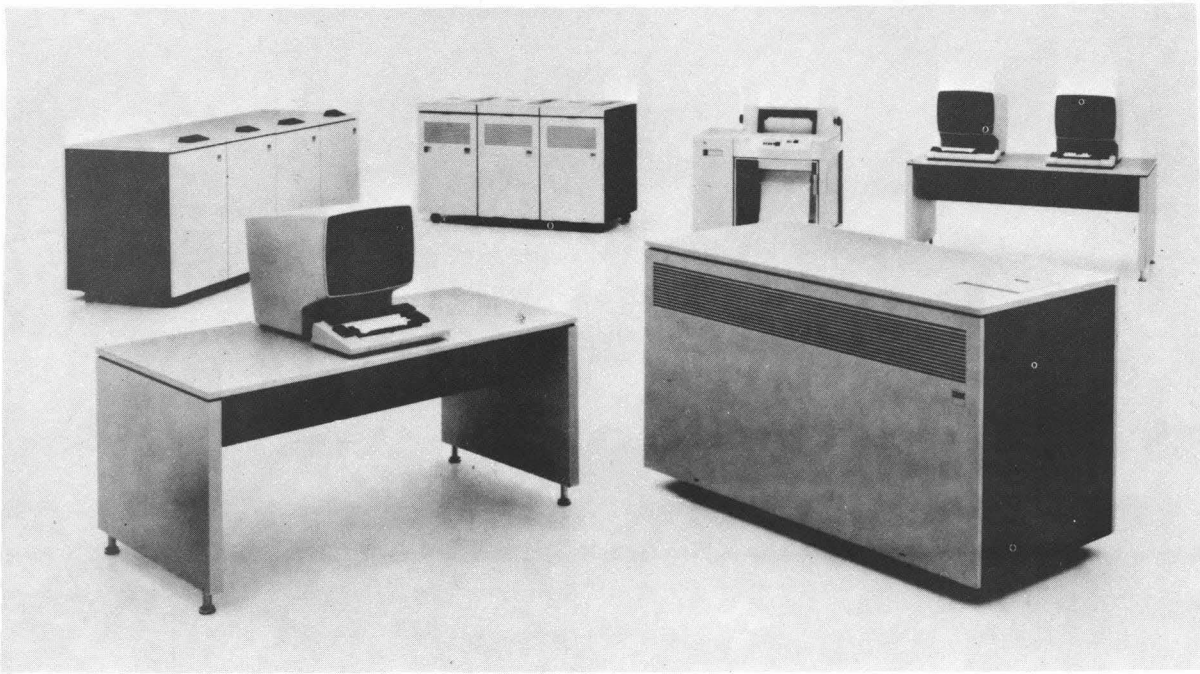


Figure 1-1 IBM 4331 Processor with Input/Output Devices

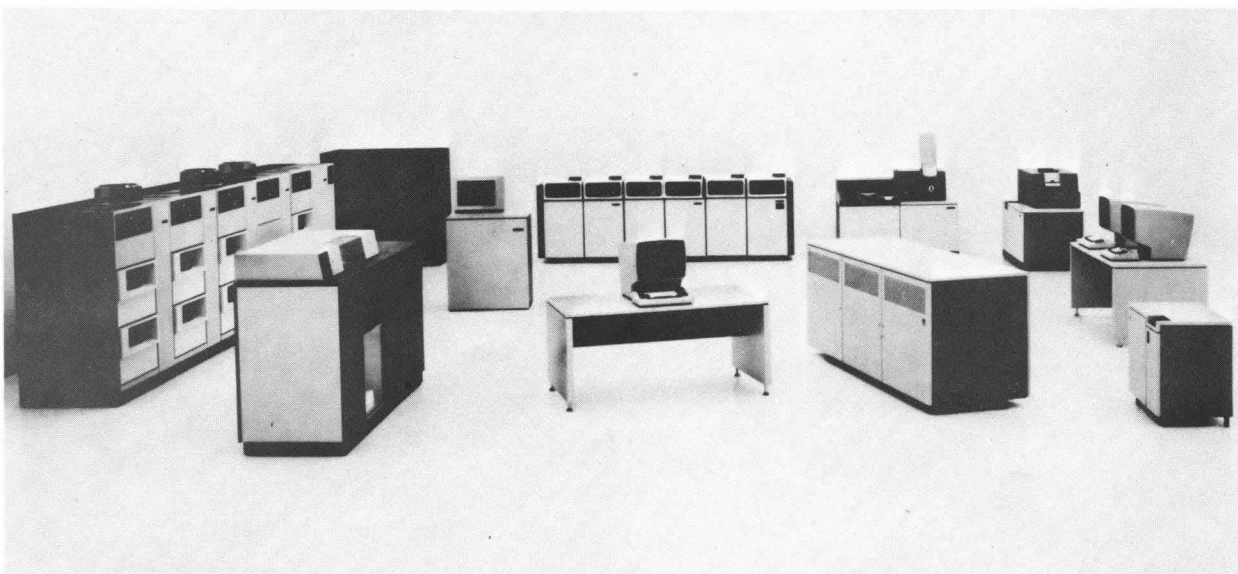


Figure 1-2 IBM 4341 Processor with Input/Output Devices.

Introduction to IBM 4300 Processors

The IBM 4300 Processors (Figures 1-1 and 1-2) are compact, general-purpose data processors for users who require a small to medium-sized installation. The 4300 Processors are compatible, which allows users freedom in varying the size and configuration of their installations to meet changing needs. Improved performance, ease of operation, and increased flexibility are available through a variety of advanced features.

The 4300 Processors have the following advantages compared with the System/370:

- Faster internal performance
- Increased processor storage
- Simpler storage mapping for VSE users
- Faster addressing of virtual storage by channels when VSE is used
- More economical use of floor space
- Lower power consumption

Processor Concepts

The 4300 Processors present a new facility for controlling storage available when the VSE System is used. This facility creates a single virtual storage of up to 16,777,216 bytes, which the processor and the channels address directly by one uniform set of virtual addresses. In contrast to the storage concept of the System/370, the virtual storage is mapped onto the actual storage of the machine by the hardware.

The storage-controlling facility of the 4300 Processors is associated with new instructions and interruptions by which the control program determines which parts of virtual storage have been made addressable. These instructions, interruptions, and internal machine procedures are available as an alternative to the dynamic address translation and channel indirect data addressing of System/370 (which are also available on the 4300 Processors).

The 4300 Processors also present a new status-saving function (machine save) which preserves the processor state

and the first 2,048 bytes of storage. Machine save replaces the store status function of the System/370. If multiple virtual storages are not required, the 4300 Processors have the following improvements over the System/370:

- Simpler storage-mapping, with more of the function performed automatically.
- Improved control-program performance because the virtual addresses of channel programs are translated by hardware.

The programming of the 4300 Processors has been simplified in comparison to the System/370 by omitting a number of model dependencies and the following functions:

- Multiprocessing and associated instructions
- Machine-check logout and full channel logout

These model-dependent logouts are replaced by internal facilities for error diagnosis.

Modes of Operation

The two modes of operation available are ECPS:VSE and System/370 mode. The mode is selected at initial program load (IPL) time.

ECPS:VSE Mode allows operation of an appropriately generated VSE System.

System/370 Mode allows operation of any program written for System/370 and System/360 that follows the rules described in the section "Compatibility" of IBM System/370 Principles of Operation, GA22-7000. In System/370 mode, two mutually-exclusive performance options are available.

ECPS:VS1 Assist, available on some 4300 Processors, is a hardware assist that reduces the processor time needed to execute certain frequently used supervisor functions in VS1.

ECPS:VM/370 Assist is a hardware assist that reduces the processor time needed to execute certain frequently used supervisor functions in VM/370.

Basic Structure of 4300 Processors

The 4300 Processors are processors with storage, an operator console and input/output (I/O) devices. These I/O devices are attached to the processor either by channels (through control units and the standard I/O interface) or, on some processors, by I/O adapters. Whether local or remote, the I/O units operate under program control.

Figure 2-1 shows the organization of a typical installation with 4300 Processor.

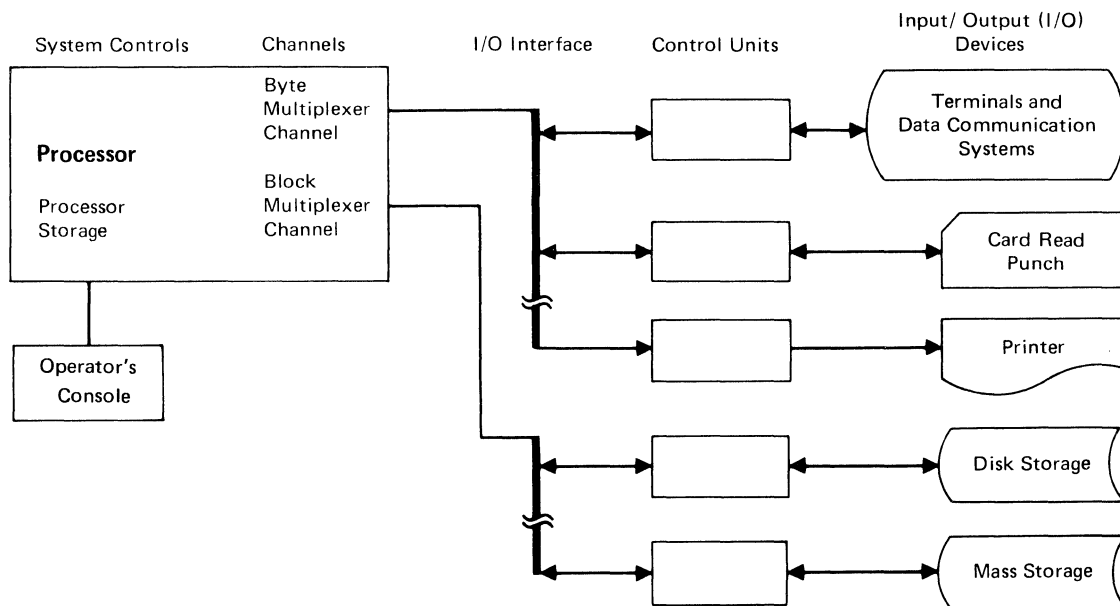


Figure 2 - 1. Organization of a Typical Installation with 4300 Processor

Machine Control

Operation is controlled by programs residing in storage, and by an operator console with control panel and keyboard/display that allows normal intervention by the operator.

Program Control

The information determining the state and controlling the operation of the processor resides in a program-status word and in control registers. Additional status and control information appears in permanently-assigned processor-storage locations.

Operator's Control Panel

The control panel gives the operator manual control of certain processor functions that cannot conveniently be handled by the regular keys on the keyboard/display. These controls include indicator lights and buttons.

Byte

A							
1	1	0	0	0	0	0	1
0							7

Halfword

J								K								
1	1	0	1	0	0	0	1	1	1	0	1	0	0	1	0	
0								7	8							15

Word

I								B								M								3											
1	1	0	0	1	0	0	1	1	1	0	0	0	1	0	1	1	0	1	0	1	0	0	1	1	1	1	1	0	0	1	1				
0								7	8								15	16								23	24								31

Doubleword

1								2								3								4								5								6								7								8							
1 1 1 1 0 0 0 1								1 1 1 1 0 0 1 0								1 1 1 1 0 0 1 1								1 1 1 1 0 1 0 0								1 1 1 1 0 1 0 1								1 1 1 1 0 1 1 0								1 1 1 1 0 1 1 1								1 1 1 1 1 0 0 0							
0 7 8								15 16								23 24								31 32								39 40								47 48								55 56								63							

Figure 2 - 2. Basic Fixed - Length Data Formats (with EBCDIC - Coded Data)

Data Formats

The machine processes data in multiples of eight bits. Each eight-bit unit of data is called a byte, the basic building block of all formats in 4300 Processors.

A field is composed of one or more bytes. The halfword, word and doubleword are fields of consecutive bytes; a halfword has two bytes, a word has four bytes, and a doubleword has eight bytes. These fields make up the basic fixed-length data formats (Figure 2-2).

Data formats are either fixed-length or variable-length. During processing, the field length is either implied by the operation to be performed, or it is stated explicitly as part of the instruction.

Data Representation

In 4300 Processors, data (whether numeric, alphabetic, or alphanumeric) is processed in multiples of an eight-bit byte. The data may be in binary form (as numeric data for most scientific computations) or it may be in a binary code. Coding permits data to be represented by characters (for example, 1, 2, A, B and *) on devices such as card readers, visual display units, and printers. These devices are code-dependent; that is, their operation depends on the code used to represent the characters.

The eight-bit byte provides coding for as many as 256 characters, which allows for future code expansion and permits 4300 Processors to accept most current and future codes. The character code used internally and transmitted to and from I/O devices is the extended binary-coded-decimal interchange code (EBCDIC). The bit positions in EBCDIC (Figure 2-3) are numbered the same as those of bytes (left to right, 0-7).

Processor Storage

Processor storage provides the processor with fast-access data storage. Both data and programs must be loaded into processor storage (from input devices) before they can be processed. Processor storage is volatile, that is, the

contents are lost during the power-down sequence.

Note: The term processor storage refers to the physical packaging of the storage. Some locations of processor storage are, however, reserved for special purposes and are not available to the program. When it is important to refer to the accessible storage, the term main storage is used.

Addressing

All byte locations in storage that are accessible to the program are consecutively numbered starting with 0; each number is the address of a different byte location. A group of bytes in storage is addressed by the lowest-numbered byte location of the group. The number of bytes in the group is either implied by the instruction format or explicitly defined by the instruction itself. The addressing arrangement uses a 24-bit binary address, which gives 4300 Processors the capability of addressing up to 16,777,216 bytes of storage.

EBCDIC Bit Order		Bit Positions															
0 1 2 3 4 5 6 7		0123								4567							
		0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
		0000															
		0001															
		0010															
		0011															
		0100	Blank									¢	.	<	(+	
		0101	&									!	\$	*)	;	¬
		0110	-	/									,	%	_	>	?
		0111										:	#	@	'	=	"
		1000		a	b	c	d	e	f	g	h	i					
		1001		j	k	l	m	n	o	p	q	r					
		1010			s	t	u	v	w	x	y	z					
		1011															
		1100		A	B	C	D	E	F	G	H	I					
		1101		J	K	L	M	N	O	P	Q	R					
		1110			S	T	U	V	W	X	Y	Z					
		1111		0	1	2	3	4	5	6	7	8	9				

Figure 2-3. EBCDIC Character Codes (Excluding Control Characters)

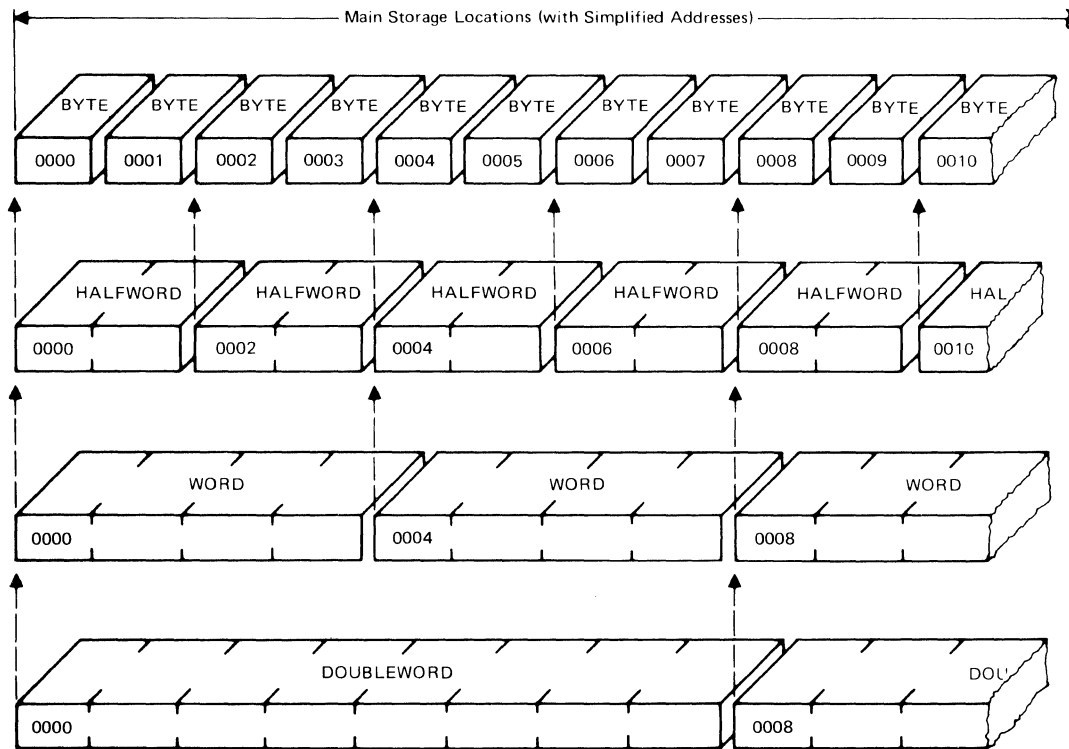


Figure 2 - 4. Principle of Integral Boundaries in Processor Storage

Data Positioning

Restrictions on data positioning in processor storage depend on several factors, such as whether the data field is variable or fixed length. With some exceptions, fields may be positioned on any byte boundary in processor storage. For good performance, it is generally advisable to position fixed-length fields on integral boundaries, so that unnecessary storage accesses are avoided. The byte-oriented operand function which is described in Section 3, allows most fixed-length fields to be positioned on byte boundaries rather than only on integral boundaries. Using other than integral boundaries affects performance because extra storage access is required.

A boundary is integral for a unit of data when its processor storage address is a multiple of that unit's length in bytes. For example, halfwords (two bytes) should have processor storage addresses that are multiples of 2. Figure

2-4 shows integral boundaries for the common units of data, with processor storage addresses as four-digit decimal numbers (0000, 0001, 0002, and so on) rather than as the 24-bit binary numbers that are actually used. Sequential addresses for halfword integral boundaries are shown in Figure 2-4 as 0000,0002, 0004, etc. Words (four bytes) on integral boundaries have addresses that are multiples of 4 (shown in Figure 2-4 as 0000, 0004, 0008, etc.), and doublewords (eight bytes) on integral boundaries have addresses that are multiples of 8 (shown in Figure 2-4 as 0000, 0008, etc.).

Performance Factors

The storage units of 4300 Processors vary in capacities, access widths, and cycle times. Depending on the model, storage capacities range from 512K (524,288) bytes to 4,096K (4,194,304) bytes, some of which may, however, be dedicated to microcode. (In this manual, 1K=1,024.)

Storage Access Width is the number of bytes transferred to or from processor storage in each access. As access width increases, the quantity of data that may be transferred per unit time increases. The width for each processor is given in the description of individual processors in the section '4300 Processors'.

Storage Cycle Time is the length of time that processor storage is busy when a reference is made to it. Generally, the shorter the cycle time, the greater the number of operations that can be performed in any time interval. The storage cycle times are given in the description of individual processors in the section '4300 Processors'.

High-speed Buffer Storage is a buffer storage with a higher access rate than processor storage. It is used for storing blocks of instructions and operands. Once accessed, a block is kept in the buffer for as long as the access rate to that block justifies. There is thus a high probability that frequently used instructions and operands will be found in the high-speed buffer, with consequent potential benefits to performance.

Instruction Processing Functions

The processor is the controlling center of the installation. It provides facilities for:

- Addressing processor storage (described under 'Data Representation' and 'Addressing').
- Fetching and storing data.
- Arithmetic and logical processing of data.
- Executing instructions in a desired sequence.
- Initiating communication between processor storage and I/O devices.

Three types of programmable registers are provided by the processor: general, floating-point, and control. The 16 general registers and four floating-point registers are accessible to the problem programmer and are capable of receiving data, holding it, and permitting operations on it. The general registers are used primarily for binary (fixed-point) arithmetic, logical, and addressing operations. The floating-point registers are used only for floating-point arithmetic. The control registers provide for the handling of information used to control some processor operations. These registers are accessible to the control program by way of specific instructions.

Arithmetic and Logical Operations

The arithmetic and logical operations fall into four classes:

- Decimal (fixed-point) arithmetic
- Binary (fixed-point) arithmetic
- Floating-point arithmetic
- Logical operations

These classes differ in the data formats and field lengths used in the registers involved, and in the operations provided.

Decimal Arithmetic

Decimal arithmetic, used principally for commercial applications, is performed on signed decimal data. Generally, decimal data entering and leaving the processor via devices such as card reader-punches and printers is in zoned format (Figure 2-5). For processing and for compact storage in direct access and magnetic-tape devices, however, decimal data is in packed format (Figure 2-6). Packing fits two decimal digits (or one digit and sign) per byte. Because only four bits are needed to express one decimal digit, packing permits more efficient handling of decimal data.

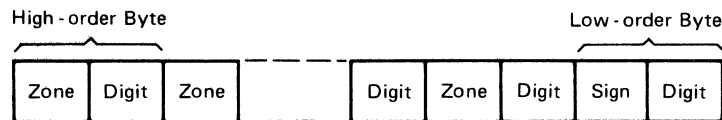


Figure 2-5. Zoned Decimal Number Format




Figure 2-6. Packed Decimal Number Format

Packed data is taken from processor storage, processed, and returned to storage without the data passing through any general registers; this is called storage-to-storage processing. The decimal field length, specified by the instruction, can be as much as 31 digits and sign, all packed in up to 16 bytes.

Binary Arithmetic

Binary arithmetic is used to perform arithmetic operations both on data and on storage addresses. The basic arithmetic operand is the 32-bit signed binary integer (a 31-bit integer with a leftmost sign bit, as shown in Figure 2-7). Halfword operands can be specified in many operations where a fullword is not needed, thus improving the use of storage. Addition, subtraction, and comparison may also be performed on 32-bit unsigned binary integers.

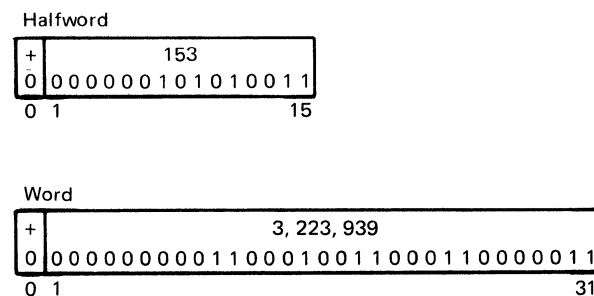


Figure 2 - 7. Binary Number Formats (with Signed Binary Data)

The 16 general registers, each 32 bits wide, are used for binary arithmetic operations. For full product and dividend precision two adjacent registers are coupled, effectively doubling the register width.

Floating-point arithmetic, used primarily in scientific applications, greatly increases the speed, precision, and efficiency of computations. In 4300 Processors, this form of numeric representation can express positive or negative values from about 10^{-78} to about 10^{76} .

S	Characteristic	Fraction
0	1	7
8		3

S	Characteristic	Fraction	
0 1		7 8	63

S	Characteristic	High - Order Fraction	
0 1	7 8		63
(Ignored)		Low - Order Fraction	
64	71 72		12

Four floating-point registers, each 64 bits wide, are provided. The availability of these registers eliminates much fetching and storing of intermediate results. The 16 general registers are also used, primarily for indexing and address arithmetic.

Logical Operations

The logical operations provide 4300 Processors with the ability to manipulate logical quantities. The manipulations include: comparing, testing, translating (character for character), editing (sign and punctuation control), and moving logical data. The data may have either a fixed- or variable-length format. (Figures 2-11 and 2-12).

Fixed-length data, processed through the general registers, may be one, four, or eight bytes long; variable-length data, processed storage to storage, can extend to 256 bytes, even longer for some operations.

Fixed - Length Logical Operand (One, Four, or Eight Bytes)




Figure 2-11. Fixed - Length Logical Format

Variable - Length Logical Operand (Up to 256 Bytes)




Figure 2-12. Variable - Length Logical Format

Instruction Execution Sequence

Normally, the processor executes instructions in the order of their sequence in storage. A change in this sequential operation can be caused by using special instructions such as 'branch' instructions or by interruptions (see "Interruption System" in this section).

Instruction Formats

The processor accesses processor storage to obtain the instructions and operands needed to execute programs and to return the results. The instructions may be of several different formats, identified by the format codes RR, RX, RS, S, SI, and SS (Figure 2-13).

RR denotes a register-to-register operation. The operands are in general registers, and the result replaces the first operand.

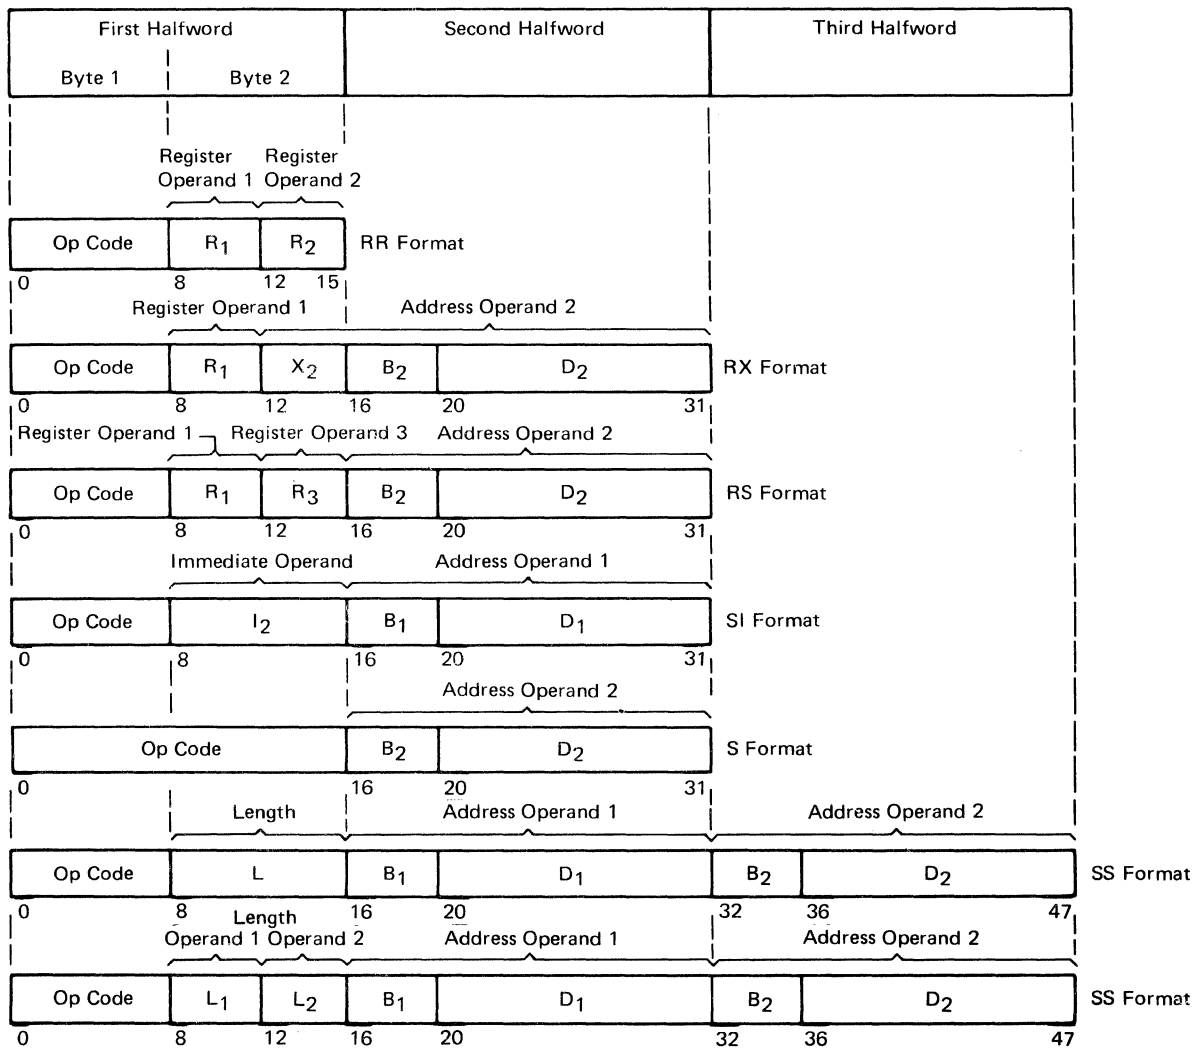


Figure 2-13. Basic Instruction Formats

RX denotes a register-and-indexed-storage operation. The first operand is in a general register, and the second operand is in a processor storage location. This format includes a quantity for indexing the processor storage address; the quantity is contained within a general register, which is used as an index register and specified by the instruction. The result of an RX operation may replace the first operand or the second operand, depending on the instruction.

RS denotes a register-and-storage operation. The first operand is in a general register, the second operand is in processor storage, and a controlling parameter is either contained in the instruction or is specified by another general register, depending on the type of instruction.

- S denotes an operation using an implied operand and storage.
- SI denotes an immediate-operand-and-storage operation. The first operand is one byte of data carried in the instruction itself (the immediate operand), and the second operand is in processor storage.
- SS denotes a storage-to-storage operation. Both operands are in processor storage.

Generally, the first byte of each of these formats gives the operation code (the 'Op code'), which identifies the operation to be performed; for S-format instructions, however, the first two bytes may be used for the Op code.

Input/Output

An input/output operation transfers data between processor storage and an I/O device. An I/O operation is initiated by a program instruction that addresses an I/O device and transfers a command to it. Direct-attached devices receive this command immediately; on channel-attached devices, a control unit receives the command via the standard I/O interface, decodes it, and starts the I/O device.

Channels

Channels direct the flow of data between processor storage and the I/O devices, thus enabling the processor to read, write and compute all at the same time by relieving the processor of direct communication with these devices. Channels communicate with I/O devices through control units.

The 4300 Processors have two types of channels: byte multiplexer channels and block multiplexer channels. Functionally, the channel data path is considered as being divided into subchannels. To a programmer, a subchannel is not visible and is uniquely identified by an I/O device address. Usually a subchannel is needed for each device connected to the channel.

Some subchannels can control several I/O devices (one device at a time), whereas others can control only one; these are called shared and nonshared subchannels, respectively. The number of subchannels available in a channel determines the number of I/O devices that can be connected.

I/O Adapters

Some 4300 Processors can also have I/O devices attached by I/O adapters. The I/O adapter takes the place of both channel and control unit, but only for a limited type and number of devices.

Byte Multiplexer Channels

Byte multiplexer channels separate the operations of high-speed devices from those of lower-speed devices. High-speed devices operate in burst mode, low-speed devices operate in byte multiplex mode. The mode of operation is determined by the I/O device and the channel.

Byte multiplexer subchannels may operate in either byte or burst mode. In byte multiplex mode, the single data path of the channel can be shared by a large number of lower-speed I/O devices (such as card readers, printers, and terminals operating concurrently); the channel receives and sends data to the I/O devices on demand. Burst mode is forced by devices such as magnetic tape units or disks and is not under the control of the programmer. Such high-speed devices, having established a logical connection with a channel, usually stay connected to it for the duration of data transfer and thereby force the channel into burst-mode state.

Byte multiplexer subchannels may be of either the shared or nonshared type. In byte mode, each subchannel can operate one low- or medium-speed I/O device concurrently with the other subchannels, provided the total load on the channel does not exceed the channel capacity. In burst mode, one byte multiplexer subchannel monopolizes the channel for the duration of a data transfer operation of one higher-speed I/O device.

Block Multiplexer Channels

Block multiplexer channels can concurrently operate many high-speed I/O devices on a single data path.

Block multiplexer channels operate either with block multiplexing inhibited or allowed. The inhibition of block multiplexing is functionally equivalent to selector channel operation, permitting attachment of all the I/O devices which can attach to selector channels. With block multiplexing allowed, these channels permit interleaving (multi-

plexing) of channel programs for high-speed devices in such a way that channel programs can be initiated sooner and channels can be freed earlier than would be possible with selector channels. The block multiplexer channels differ from the byte multiplexer channels primarily in that they interleave larger quantities of data and are thus suited to operate with much faster I/O devices. These quantities are referred to as blocks, and may include a number of records.

Block multiplexer channels provide a number of subchannels of the shared or nonshared type. The maximum data rates for block multiplexer channels vary with the processors and channel options available.

I/O Devices

I/O devices fall into a number of categories, some of which overlap. They are used in and for:

- Auxiliary storage
- Machine and manual (keyed) input, both local and remote
- Teleprocessing
- Reading (or output) of external documents and displays
- Process control
- Data acquisition

Many I/O devices function with an external data medium, such as a punched card or magnetic tape. Others handle only electrical signals, such as those in process-control and data acquisition systems.

Control Unit Function

The control unit function provides the logic circuitry and the storage areas (buffers) needed to operate the attached I/O devices and to communicate with the channel in a standard format. To the user, most control unit functions cannot be distinguished from I/O device functions.

The control unit function may be part of the I/O device or the processor (I/O adapters), or it can be a separate physical unit. Its effect is to change the standard signals on the channel to the specific signals needed by the I/O device.

Standard I/O Interface

The term standard I/O interface refers to the common command format and sequence of control signals that are used in exchanging data between I/O units and storage through channels and control units. The standardization includes the physical connection, that is, the cables and plugs, including the number and location of the signal pins. The interface allows the exchange of I/O information independent of the type of I/O device connected. Certain I/O devices that do not use the standard I/O interface do, however, use the same command format and therefore appear to the programmer as channel-attached.

Interruption System

When a system resource requires attention, or when equipment or program errors occur, a control program is automatically called to handle the situation. This intervention is controlled in 4300 Processors by the interruption system via control registers and program status words (PSWs).

As soon as an interruption occurs, the "old" PSW containing status information and an identification of the cause of the interruption, are stored at a fixed location. The processor then automatically fetches a "new" PSW from a different fixed location. Each class of interruption uses two fixed PSW locations in processor storage: one to receive the old PSW when the interruption occurs, and the other to supply the new PSW that governs the servicing of that class of interruption.

After the interruption has been serviced, the processor is restored by the control program to the status it had before the interruption. For this purpose the old PSW is restored as "current" PSW.

Classes of Interruptions

The interruption system separates interruptions into six classes:

Program interruptions are caused by various kinds of programming errors or other conditions; the exact condition is identified in an interruption code.

Supervisor Call interruptions are caused when the program

issues an instruction to pass control to the part of the control program, called the supervisor, which performs the supervisory functions associated with a task.

External interruptions are caused by certain external events, such as the time-of-day clock reaching a preset value, by the CPU timer going to zero after a preset interval of time, or by the operator pressing the interrupt key.

I/O interruptions are caused by an I/O unit ending an operation or otherwise needing attention. Identification of the device and channel causing the interruption is stored in the I/O old PSW or in a special storage location; in addition, the status of the device and channel is stored in a fixed location.

Machine Check interruptions are caused when the checking circuits detect an equipment malfunction.

Restart interruptions are caused by the operator activating the restart function at the keyboard.

Disallowing of Interruptions

Most interruptions may be either allowed or temporarily disallowed. Some are always allowed. When an interruption is disallowed, it is either delayed or does not take place, the outcome depending mainly on the class of interruption. The following interruptions can be disallowed:

- I/O interruptions
- External interruptions
- Some program interruptions
- Machine-check interruptions

Disallowed I/O or external interruptions remain pending. Disallowed machine-check interruptions remain pending or cause a check-stop, depending on severity.

Supervisor call interruptions, restart interruptions, and most program interruptions cannot be disallowed and are always accepted.

Priority of Interruptions

During the execution of an instruction, several interruptive events may occur simultaneously. In this situation competing interruption requests are serviced in a fixed order of priority.

Storage Concepts

The 4300 Processors have a physical storage called processor storage. Processor storage is accessed by means of a mapping device which is used by one of the following two facilities:

- One-level addressing facility in ECPS:VSE mode to create a single virtual storage
- Dynamic address translation facility in System/370 mode to create a single or multiple virtual storages

Storage control therefore depends on the mode of processor operation.

Processor Storage

Processor storage is the physical storage where data and instructions reside at the time they are accessed by the processor and the channels. However, some processor storage may not be available to the user. In some processors, part of processor storage is used for microcode and address translation tables, the amount depending on the configuration. In the 4331 Model Group 2 and the 4341, processor storage is supported by a high-speed buffer storage in which frequently used data and instructions are stored for high-speed access.

One-Level Addressing

One-level addressing is a storage-control facility, available in the ECPS:VSE mode, that allows both the processor and the channel programs to uniformly address a single virtual storage of up to 16M bytes. Virtual storage is normally larger than the underlying real storage. A supervisory control program is required to keep control of the parts of virtual storage which are currently mapped onto processor storage. This control is dynamic and transparent to the other programs except for the time delay caused by translation.

Dynamic Address Translation

Another storage control facility called dynamic address

translation (DAT), compatible with System/370, and available in the System/370 mode, allows the processor to address multiple apparent storages of up to 16M bytes each. Thus, one or more virtual storages map onto real storage, and real storage, depending on the model, either corresponds directly to or maps onto processor storage (where the program resides at execution).

The virtual storages can be accessed by the processor programs only. The channel programs can only access real storage. When dynamic address translation is not used in System/370 mode, there is no virtual storage, and all programs use real storage.

Functions and Features of 4300 Processors

This section describes the more important standard functions and optional features of 4300 Processors, listed under the main elements of the processor.

Some features are standard for some 4300 Processors and optional for others, and some features are available to only certain processors. (See Section "4300 Processors" for the features available on a specific processor.)

Processor Storage Functions

Processor storage includes all storage where data and instructions reside when they are accessed by the processor or the channels.

Processor Storage Capacities

Processor storage capacities vary from 512K bytes (524,288 bytes) to 4M bytes (4,194,304 bytes), depending on the processor model. Processor storage also includes space for internal needs such as work areas, microcode, and the address translation table.

Storage Protection

Key-controlled storage protection (store and fetch) prevents the unauthorized changing or use of the contents of processor storage. Store protection prevents the contents of storage from being altered by storage addressing errors in programs or by input from I/O devices. Fetch protection prevents the unauthorized fetching of data and instructions from processor storage. As many as 15 processor storage areas can be protected at one time, key 0 permitting unconditional access. The key-controlled storage protection function, including store protection and fetch protection, is standard on all 4300 Processors.

Protection is achieved by dividing storage into 2,048-byte blocks and by associating a storage key (Figure 3-1) with

each block. The storage key contains four access-control bits and one fetch-protection bit. The storage key may be thought of as a lock. Each block of storage, therefore, has its own "lock". Two instructions are provided for assigning and inspecting the key, whose access-control bits form a four bit code. The same code may be used by many blocks, using binary values 0000-1111.

A user's right of access to storage is identified by a four-bit access key (Figure 3-1). The access key may be thought of as the key for the "lock". During a processor-storage reference (storing or fetching), the storage key is compared with the access key associated with the reference. Access to the location is granted only when the four access-control bits of the storage key match the access key, or when the access key is zero (0000). The fetch-protection bit of the storage key determines whether fetch protection is operative for the storage block associated with that key. If the bit is 1, fetch protection is operative; if it is 0, fetch protection is inoperative.

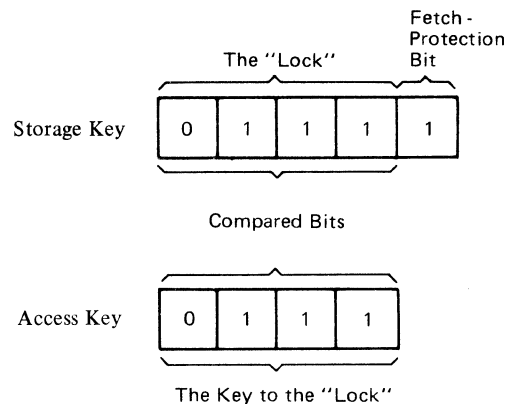


Figure 3 - 1. Storage Key and Access Key, Showing Matching Keys

Processor Functions

Instruction Sets

The 4300 Processors have three instruction sets: the standard, commercial, and universal (Figure 3-2).

The standard instruction set includes all instructions that are not part of any separately defined feature. These instructions provide the basic processing capability of the processors.

The instruction set is fully described in the IBM 4300 Processors Principles of Operation, for ECPS:VSE Mode, GA22-7070, and in the IBM System/370 Principles of Operation, GA22-7000, for the System/370 mode.

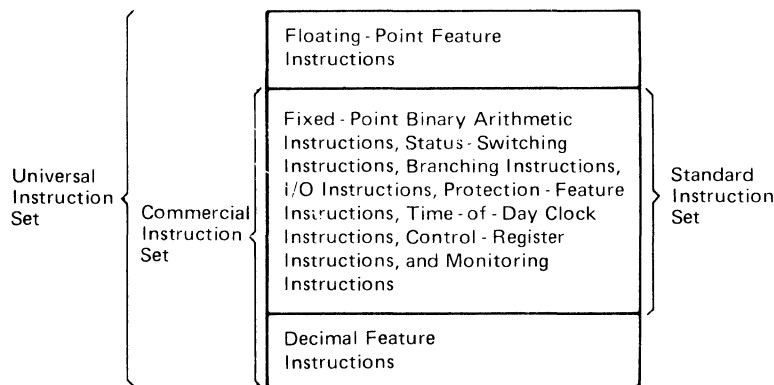


Figure 3 - 2. Instruction Sets for 4300 Processors

The clock comparator is used to cause an external interruption when the time-of-day clock has reached a preset value. This value is placed into the comparator by an instruction. Once set up, the value is compared at each clock increment.

The CPU timer measures elapsed processing time with high resolution. It may be set by an instruction to the desired

elapsed-time value. When the value is decremented to zero, an external interruption is generated.

Interval Timer

The interval timer occupies a fullword in storage that is decremented every 1/300 of a second. When the value reaches zero, an external interruption is generated.

Byte-Oriented Operand

Before describing this function, a distinction needs to be made between privileged and unprivileged instructions, some of which refer to fixed-length data fields. Essentially, privileged instructions are those used solely with control programs, whereas unprivileged instructions are used in processing or problem programs, as well as in control programs.

The byte-oriented operand feature removes the integral-boundary restriction from fixed-length fields referenced by most unprivileged instructions, permitting the fields to be located in processor storage on byte boundaries. Whenever possible, however, these fixed-length fields should be located on integral boundaries, because this gives optimum performance.

Extended Control Program Support: VSE Mode (ECPS:VSE Mode)

The ECPS:VSE mode provides a new simplified method of mapping virtual storage to the underlying processor storage. All storage addressing for both the processor and I/O channels is virtual. The unprivileged (problem-state) instructions in this mode are fully compatible with those of System/370.

This standard function of the 4300 Processors requires VSE for support.

System/370 Mode

The System/370 mode, which includes dynamic address translation, allows the user to address multiple virtual storage areas, each up to 16,777,216 bytes in size. In this mode, both the unprivileged (problem-state) and privileged (supervisor-state) instructions are fully compatible with

those of System/370, so that all System/370 programs which comply with certain compatibility requirements can be run on a 4300 Processor.

Program Reset

A program reset operation terminates the current processing sequence (for example, instruction or interruption) and clears the supervisor call interruption condition, as well as any pending external interruption and machine check interruption conditions. An I/O system reset is performed in each channel. The register and storage contents remain unchanged.

Store Status

The store status function places the contents of the programmable registers into processor storage. The function is selected by the operator and should be used before loading diagnostic programs, such as a stand-alone dump program, which would otherwise destroy the register contents. The store status function is available only in the System /370 mode.

Machine Save

The machine save function saves the current processor status and the status and contents of processor storage page zero for subsequent retrieval by programming. The function should be used before loading diagnostic programs which would otherwise destroy the register contents. Machine save is available only in ECPS:VSE mode.

Basic Control Mode

Basic control (BC) mode provides a PSW format which is compatible with that of System/360.

Extended Control Mode

Extended control (EC) mode provides for an expanded PSW format, which is used for all except System/360 programs.

Program Event Recording

Program event recording (PER), a debugging aid, is controlled by bit 1 of the EC-mode program status word (PSW). PER allows the program to be alerted to each:

- Successful execution of a branch instruction
- Alteration of the contents of designated general registers
- Fetching of an instruction from designated locations of processor storage or alteration to these instructions

Conditional Swapping

Conditional swapping, by means of the Compare and Swap (CS) and the Compare Double and Swap (CDS) instructions, provides for the controlled sharing of common storage areas by programs that operate in a configuration using multiprogramming.

PSW Key Handling

PSW key handling allows the four-bit PSW key, which is part of the current PSW, to be inserted into general register 2 by means of the Insert PSW Key (IPK) instruction; or the current PSW key may be replaced by means of the Set PSW Key from Address (SPKA) instruction.

Clear I/O

Clear I/O allows the use of the Clear I/O (CLRIO) instruction, which causes the current operation with the addressed device to be discontinued and the state of the operation at that time to be indicated in the stored channel status word (CSW). The I/O device is cleared of any pending conditions.

External Signals

The external signal feature allows the connection of signal lines which originate in an external source and which may request interruptions. Each signal line is separately identified during an interruption and may thus call for specific program support.

Channel Features

Channel-to-Channel Adapter

The channel-to-channel adapter available on some 4300 Processors provides a path for data transfers between two channels and synchronizes such transfers, providing processors with inter-channel communication.

The channels are usually on separate processors. Connecting a channel of one processor to a channel of another has the effect of interconnecting two processors.

The adapter uses one or two control-unit positions on each of the two connected channels, but only one channel need have the adapter.

Channel Command Retry

Command retry, a feature (dependent on the channel and control unit) on some channels of 4300 Processors, can cause a channel command to be retried without requiring an I/O interruption or software support. The number of retries is device-dependent.

Processor Features

Compatibility Features for other IBM Devices

Features are available for transferring programs written for existing IBM configurations to certain configurations of 4300 Processors. These programs are mainly channel programs for certain I/O devices and console devices that are configured on existing IBM systems but not on 4300 Processors. There is also a feature for running programs written for the 1400-series on the 4331 Processors.

--- This page has been left blank. ---

4300 Processors

4331 Processor, Model Groups 1 and 2

The 4331 Processor (Figure 4-1) is a medium-sized, general-purpose machine employing integrated circuitry and advanced processor design. It consists of a single processor with multiprogramming capability and can operate in either the ECPS:VSE mode with a single virtual storage of up to 16,777,216 bytes or in the System/370 mode, with multiple virtual storages of up to 16,777,216 bytes each. Either of these two operating modes can be selected by the operator. Other major functions and features of the 4331 Processor include:

- An attachment for an operator console, which consists of a display screen, a keyboard, and control panel. This type of operator console provides ease and flexibility of operation.
- I/O adapters (direct attachments) for selected I/O devices which can eliminate the need for channels and external control units, therefore increasing the compactness of the installation.
- An attachment for a system diskette facility associated with the operator console, for loading processor microcode, channel microcode, and diagnostic programs.
- An attachment for a diskette drive which is available to the user as an I/O device.

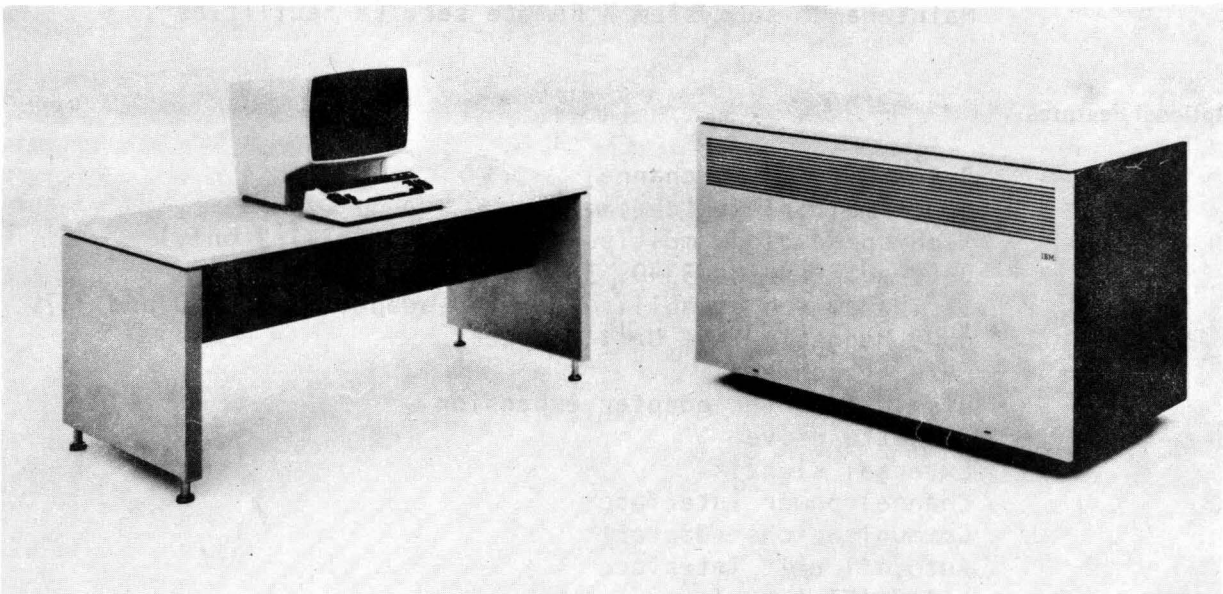


Figure 4-1 4331 Processor

Standard Functions

- Virtual storage
- Dynamic address translation
- Channel indirect data addressing in System /370 mode
- Channel virtual addressing in ECPS:VSE mode
- Storage protection
- System /370 universal instruction set
- Move inverse
- Clear I/O
- Byte-oriented operands
- Extended precision floating point arithmetic
- Extended control program support: VSE mode
- System /370 mode
- EC and BC mode
- Clock comparator
- CPU timer
- Interval timer
- Time-of-day clock
- Control registers
- Monitoring
- Program event recording
- PSW key handling
- Key-controlled storage protection
- Error checking and correction in processor storage
- Machine check handling
- Processor identification
- Channel identification
- Channel command retry on block multiplexer channel
- Display/printer adapter
- Reloadable control storage
- High-speed buffer storage (4331-2 only)
- System diskette facility
- Maintenance subsystem / Remote service facilities

Optional Features

- Byte multiplexer channel
- Block multiplexer channels
- High-speed block multiplexer channel (4331-2 only)
- DASD adapter for 3340, 3310, 3370
- String switch capability on DASD adapter for 3340 and 3370
- 8809 Magnetic Tape Unit adapter
- 5424 attachment
- Display/printer adapter expansion
- Diskette drive
- External signals
- Channel power interface
- Communications adapter
- Autocall unit interface
- EIA/CCITT interface

High-speed modem interface
 Line attachment base for clocked modems
 Line attachment base for nonclocked modems
 Local attachment interface
 1200 bps integrated modem:
 Nonswitched
 Nonswitched with switched network backup
 and auto answer
 Nonswitched with switched network backup
 and manual answer
 Switched with auto answer
 Switched with manual answer
 1401/1440/1460 compatibility feature
 Direct access storage compatibility
 2311/2314/2319 on 3310 or 3370
 3330/3340 on 3370
 ECPS:VM
 System /3 data import mode
 Printer-keyboard mode
 Katakana for operator console (Japan only)

Prerequisite

IBM 3278 Model 2A Display Console.

Processor Components

The IBM 4331 Processor Model Group 1 or Model Group 2 is a single processor, with its processor storage and a number of channels. The processor is the controlling center of the machine. It controls processor storage and uses microcode to execute instructions (control, general, floating point, decimal and I/O instructions). The microcode is loaded from the system diskette and stored partly in reloadable control storage and partly in processor storage. Model Group 2 has an additional read only storage which contains the microcode for most arithmetic and logic operations. Model Group 2 also has a high-speed buffer storage which provides fast access to operands and instructions.

I/O devices can be attached to the 4331 Processor in two ways: by I/O adapters which allow direct connection of I/O devices, and by multiplexer channels that allow connection of I/O devices over the I/O interface and control units.

Directly attached I/O devices are connected to the processor through the following: The direct access storage devices use the DASD attachment; the magnetic tape units use the 8809 Magnetic Tape Unit adapter; the multi-function

card unit is attached by the 5424 adapter: teleprocessing lines are connected to the processor by the communications adapter: work stations and line printers are connected by the display/printer adapter and the display/printer adapter expansion feature.

The 4331 Processors can be fitted with two types of multiplexer channel: byte multiplexer and block multiplexer. The byte multiplexer channel is designed for concurrent operation of a large number of relatively slow I/O devices in byte interleave mode. The block multiplexer channel is designed for relatively fast devices that transfer blocks of data in bursts.

Instruction Sets

The universal instruction set is standard.

Error Checking and Correction

With the error checking and correction function in processor storage, single and double bit errors are automatically detected, and all single bit errors are corrected.

Processor Storage

Processor Storage Capacities

Note: A part of processor storage is occupied by microcode and is, therefore, not available to the user.

<u>Capacity (Bytes)</u>	<u>4331 Model Group 1</u>	<u>4331 Model Group 2</u>
524,288	I1	-
1,048,576	J1	J2
2,097,152	-	K2
3,145,728	-	KJ2
4,194,304	-	L2

Storage Cycle Time

Read Cycle	0.9 usec (4 bytes)	2.6 usec (64 bytes)
Write Cycle	1.3 usec (4 bytes)	3.1 usec (64 bytes)

Storage Access Width

4 bytes

64 bytes

Channels

As optional features, byte multiplexer and block multiplexer channels are available on the 4331. A high-speed block multiplexer channel is additionally available on Model Group 2 only. When installed, the optional channels are incorporated in the processor.

The 4331 Processor Model Group 1 can have one byte multiplexer channel with up to 31 subchannels of which four can be shared. The number of subchannels in the byte multiplexer of Model Group 1 is reduced by two for the DASD adapter, two for the magnetic tape unit adapter, one for the CA and one for each CA line, and one for the block multiplexer channel. The 4331 Processor Model Group 2 can have one byte multiplexer channel with up to 36 subchannels of which four can be shared. The number of subchannels is reduced by one for the CA and one for each CA line. The byte multiplexer channel operates in interleaved mode at speeds of up to 18 kilobytes/second (kbs) in single byte mode, 36 kbs in dual byte mode, 62 kbs in 4-byte mode, and 0.5 megabytes/second in burst mode.

The Model Group 1 can have one block multiplexer channel and the Model Group 2 can have two block multiplexer channels and one high-speed block multiplexer channel. On each channel up to 32 nonshared subchannels and eight shared subchannels are available. The data rate of the block multiplexer channel on the 4331-1 is 0.5 megabytes/second. On the 4331-2 the data rate is 1.25 megabytes/second for the first block multiplexer and 0.6 megabytes/second for the second block multiplexer. The data rate on the high-speed block multiplexer channel is up to 1.86 megabytes/second. The block multiplexer channel has the command retry feature.

The maximum channel configurations of the 4331 are:

+-----+-----+ 4331-1 MAXIMUM CONFIGURATION +-----+-----+	
Byte multiplexer channel	1
Block multiplexer channel	1
DASD adapter	1
8809 adapter	1

4331-2	MAXIMUM CONFIGURATION (Any one column)		
Byte multiplexer channel	1	1	1
Block multiplexer channel	1	1	1
Block multiplexer channel, additional		1	1
High-speed block multiplexer channel			1
DASD adapter	1	1	1
DASD adapter, additional	1	1	
8809 adapter	1		

Processor Control

The controls of the processor are grouped at the operator console, which consists of a display, a keyboard and a control panel. From the console, the operator is able to start and stop the processor and to display and alter selected information in storage. After completing the initial microcode load (IML) procedure, the operator can load object programs from I/O devices via the keyboard and display.

The operator's console of the 4331 Processors operates automatically under the standard command set of the 3277/3278 Display Station or under the optional sets of the 1052/3210/3215 Printer Keyboards. If both command sets are installed, the optional command set can be selected at IPL time.

The operator console is controlled by the display/printer adapter.

DASD Adapter

The DASD adapter allows the direct attachment of IBM direct access storage devices which can be 3310s, 3370s, and/or 3340/3344s. The 4331 Model Group 1 can have one DASD adapter and the Model Group 2 can have two DASD adapters. A DASD adapter can control up to four strings of direct access storage devices. A maximum of two strings can be 3340/3344s, the other two strings can be any combination of 3310s or 3370s. The four strings can also be all 3370s or all 3310s or any combination of both. Only two strings can

be host to emulated devices. If one string consists of 3340/3344s, only one string can be host to emulated devices.

The DASD adapter provides support for a string switch in each 3370-A1 or 3340-A2. The support consists of microcode. A 3370 string can be equipped with the string switch or it can be used as a host for emulated devices, but not both.

8809 Magnetic Tape Unit Adapter

The magnetic tape unit adapter allows the direct attachment of up to six 8809 Magnetic Tape Units Model 1A, 2, and 3.

5424 Multifunction Card Unit Adapter

This adapter allows any model of the IBM 5424 Multifunction Card Unit to be attached directly to the 4331 Processor.

Communications Adapter (CA)

The CA allows the direct attachment of any combination of up to eight teleprocessing lines, using Start/Stop (SS), Synchronous Data Link Control (SDLC), or Binary Synchronous Control (BSC). Any two control procedures can be installed together. Operating speeds for SDLC and BSC are up to 9,600 bps, or up to 64,000 bps over the high-speed interface (56,000 bps in the USA). Only one high-speed line (above 9,600 bps) is available per system. The 38LS adapter speed of start/stop lines is from 75 bps to 1,200 bps. A maximum of two autocal units can be attached.

Display/Printer Adapter

The display/printer adapter controls the operator console and up to seven devices (fifteen when the display/printer adapter expansion feature is installed). These devices include the IBM 3278-2 Keyboard/Display, the IBM 3287 Terminal Printer Model 1 or 2, and a maximum of two line printers, which can be the IBM 3289 Printer Model 4, and/or the IBM 3262 Printer Model 1 or 11.

Programming Support

The 4331 Processors are supported by DOS, DOS/VS, VSE, OS/VS1, VM/370 systems and related user programs written to run on a System/370 machine.

Note: Please refer to your IBM representative for the appropriate release numbers.

4341 Processor

The 4341 (Figure 4-2) is a powerful and versatile performer as a commercial, scientific, data acquisition, teleprocessing, and general purpose processor. It offers virtual storage, System/370 compatibility, large scale integrated technology, and large processor storage. The processor is air-cooled. Arithmetic, logic and control functions are provided as well as storage, channels and diskette drive. (The diskette drive is not available to the user as an I/O device.)

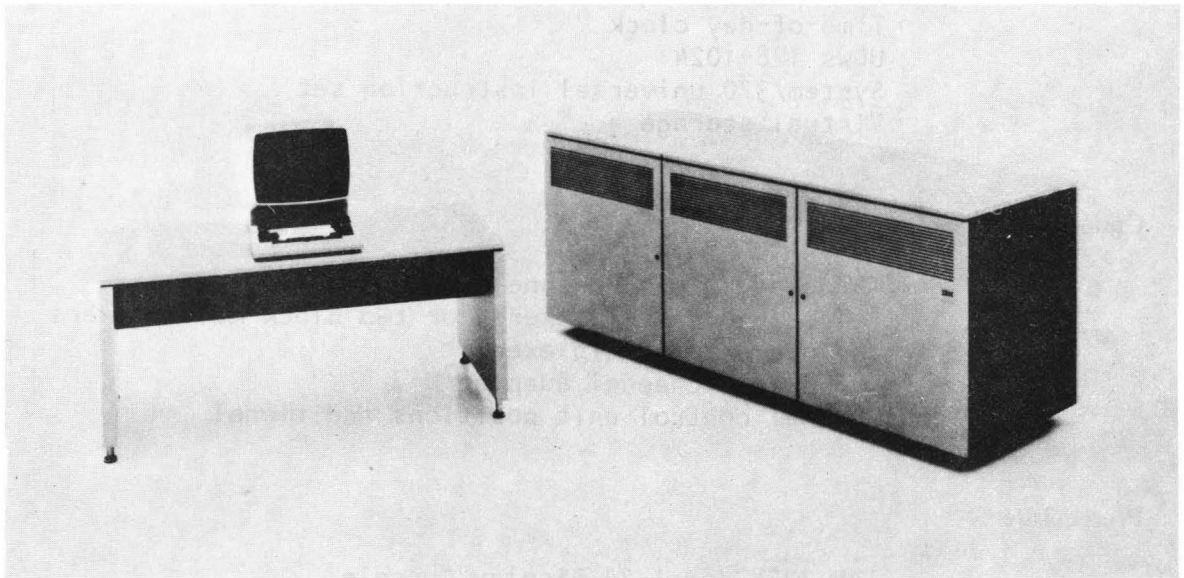


Figure 4-2 4341 Processor

Standard Features

- Block multiplexer channels (two)
- Byte multiplexer channel (one)
- Byte-oriented operands
- Channel command retry
- Channel indirect data addressing in System /370 mode
- Clock comparator and CPU timer
- Control registers
- CPU identification
- Dynamic address translation
- EC and BC modes
- Error checking and correction in processor storage
- Extended control program support: VSE Mode
- Extended control program support: VM/370 Assist
- Extended control program support: VS1 Assist

Extended precision floating-point arithmetic
External signal
High-speed buffer storage (cache)
Instruction retry
Interval timer
Key-controlled storage protection
Machine check handling
Program event recording
PSW key handling
Reloadable control storage
Support processor
System diskette drive
System/370 mode
Time-of-day clock
UCWs 128-1024
System/370 universal instruction set
Virtual storage

Optional Features

Three additional channels
(three block multiplexers, or two block multiplexers
and one byte multiplexer)
Channel-to-channel adapter
Channel control unit positions additional

Prerequisite

IBM 3278 Model 2A Display Console.

Processor Components

The 4341 Processor consists of a single processor with its processor storage and channels.

Channels

Six channels in two groups are available. Group 1 (standard) consists of one byte multiplexer channel and two block multiplexer channels. The latter have a block transfer rate of up to two million bytes per second for each channel. Group 2 (optional) consists of three block multiplexer channels or two block multiplexer channels and one byte multiplexer channel. A single channel block transfer rate of up to two million bytes/second is available on two of the three optional channels and one million bytes/second

on the other optional channel.

Channel-to-Channel Adapter

One channel-to-channel feature is optionally available to interconnect two channels. The adapter uses one control unit position on each of the connected channels.

Console

The console provides for interaction with the 4341 Processor for operation and maintenance. The operator control panel is integrated into the primary display console keyboard. The console is the means to turn power on and off, to perform initial microcode load (IML), initial program load (IPL), and to start and stop processor operations.

The console also allows the operator to manually control such functions as storage displaying and altering, address comparing, normal processing, or instruction stepping. The console indicates to the operator both proper operations and any malfunctions that occur.

For maintenance and service support the console can display and store the status of the 4341 Processor complex and other valuable servicing information. The console also provides a means for using diagnostic tools.

Two console modes are available: display mode and printer-keyboard mode. Three additional devices may be attached as optional consoles. They may be 3278 Model 2A Display Consoles without the operator control panel, or 3287 Terminal Printers Model 1 or 2, or any combination thereof.

System Diskette Drive

The system diskette drive allows both IML of system microcode and recording of errors for diagnosis.

Support Processor

The support processor provides for automatic analysis of failure symptoms. The result of this "self-diagnostic" is a processor-generated eight-digit reference code which

contains information to guide the customer engineer to the failing unit. This reference code is not only logged on the system diskette, but is displayed on the display console to alert the operator.

Compatibility

Any program written for System/370 will operate on the 4341 Processor in System/370 mode, provided that it (1) is not time-dependent, (2) does not depend on system facilities (storage size, I/O equipment, optional features, etc.) being present when the facilities are not included in the configuration, (3) does not depend on features or facilities (interruptions, operation codes, etc.) being absent when the facilities are included in the 4341 Processor, and (4) does not depend on results or functions which are defined in the "Principles of Operations" to be unpredictable or model-dependent.

Any program written for the 4300 Processor in ECPS:VSE mode will operate on the 4341 Processor, provided that it follows the above rules.

Any program written for System/360 will operate on the 4341 Processor in System/370 mode, provided that it follows the above rules and does not depend on functions that differ between System/360 and System/370.

For more details, see the IBM System/370 Principles of Operation, GA22-7000, or the IBM 4300 Processor Principles of Operation for ECPS:VSE Mode, GA22-7070.

Programming Support

Programming support for the 4341 Processor is provided by DOS/VS, VSE, OS/VS1, and VM/370, as described in the appropriate programming publications.

Input/Output and Data Communications Configurator

Introduction

This configurator, intended as a guide and reference for system planners, provides information about the attachment of current local and remote input/output (I/O) equipment used in 4300 Processors.

Information on both locally and remotely attached equipment is presented in this configurator. The presentations are separated for clarity, and both are arranged in two ways: by equipment category (such as direct access storage devices, display devices, and printers) and by machine numbers (such as 2314, 3330, and 3420).

Local Input/Output Equipment

The following input/output (I/O) devices, control units and systems can be operated locally as part of some or all 4300 Processors (as described later in this manual). The equipment is arranged first by category, and then in chart form (by device or system number). The chart, together with the legend and notes, provides information about the local attachment of current IBM equipment.

Local Input/Output Equipment Categories

Audio Communications Devices

7770 Audio Response Unit Model 3

Auxiliary Processors

3838 Array Processor Models 1-3

Character Recognition Devices

1255 Magnetic Character Reader Models 1-3
1287 Optical Reader Models 1, 3 and 5
1288 Optical Page Reader Model 1
1419 Magnetic Character Reader Model 1
3881 Optical Mark Reader Model 1
3886 Optical Character Reader Model 1
3890 Document Processor Models A1-A6, B1-B6
3895 Document Reader/Inscriber Models 1 and 2

Control Units

2314 Storage Control Models A1 and B1
2803 Tape Control Models 1-3
2804 Tape Control Models 1-3
2821 Control Unit Models 1-3, 5 and 6
2822 Paper Tape Reader Control Model 1
2835 Storage Control Model 2
2840 Display Control Model 2
2841 Storage Control Model 1
3255 Display Control Model 1
3258 Control Unit Model 1
3803 Tape Control Models 1 and 2
3811 Control Unit Model 1
3830 Storage Control Models 2 and 3
3880 Storage Control Model 1

Data Transmission Multiplexers/Controllers

2701 Data Adapter Unit Model 1
3272 Control Unit Models 1 and 2
3274 Control Unit Models 1A, 1B and 1D
3704 Communications Controller Models A1-A4
3705 Communications Controller. All models
3791 Controller Models 1C, 2A, 2B, 11C, 12A and 12B

Direct Access Storage Devices

2305 Fixed Head Storage Model 2
2311 Disk Storage Drive Model 1

- 2314 A-Series Direct Access Storage Facility:
 - 2312 Disk Storage Model A1
 - 2313 Disk Storage Model A1
 - 2318 Disk Storage Model A1
- 2314 B-Series Direct Access Storage Facility:
 - 2319 Disk Storage Models B1 and B2
- 3310 Direct Access Storage Models A1, A2, B1 and B2
- 3330 Disk Storage Models 1, 2 and 11
- 3333 Disk Storage and Control Models 1 and 11
- 3340 Direct Access Storage Facility Models A2, B1 and B2
- 3344 Direct Access Storage Models B2 and B2F
- 3350 Direct Access Storage Models A2, A2F, B2, B2F, C2 and C2F
- 3370 Direct Access Storage Models A1 and B1

Diskette Input/Output Devices

- 3540 Diskette Input/Output Unit Models B1 and B2

Display Devices

- 2250 Display Unit Models 1 and 3
- 3251 Display Station Model 1
- 3277 Display Station Models 1 and 2
- 3278 Keyboard/Display Models 1-4
- 3278 Model 2A Display Console
- 3279 Color Display Station Models 2A, SB, 3A and 3B

Magnetic Character Inscribers

(See Character Recognition Devices)

Magnetic Character Readers

(See Character Recognition Devices)

Magnetic Tape Devices

- 2401 Magnetic Tape Unit Models 1-6 and 8
- 2415 Magnetic Tape Unit and Control Models 1-6
- 2420 Magnetic Tape Unit Models 5 and 7
- 2816 Switching Unit Model 1
- 3410 Magnetic Tape Unit Models 1-3
- 3411 Magnetic Tape Unit and Control Models 1-3
- 3420 Magnetic Tape Unit Models 3-8

8809 Magnetic Tape Unit Models 1A, 2 and 3

Optical Readers

(See Character Recognition Devices)

Printers

1403 Printer Models 2, 7 and N1
1443 Printer Model N1
3203 Printer Model 5
3211 Printer Model 1
3262 Printer Models 1, 3, 11 and 13
3284 Printer Models 1 and 2
3286 Printer Models 1 and 2
3287 Terminal Printer Models 1, 1C, 2 and 2C
3288 Line Printer Model 2
3289 Line Printer Models 1, 2 and 4
3736 Printer Model 1
3800 Printing Subsystem

Punched Card Devices

1442 Card Read Punch Model N1
1442 Card Punch Model N2
2501 Card Reader Models B1 and B2
2520 Card Read Punch Model B1
2520 Card Punch Models B2 and B3
2540 Card Read Punch Model 1
3505 Card Reader Models B1 and B2
3525 Card Punch Models P1-P3
5424 Multifunction Card Unit Models A1 and A2,
(Japan only: Models K1-K3)

Punched Tape Devices

2671 Paper Tape Reader Model 1

Systems, Subsystems, Processors

3250 Graphics Display System
3270 Information Display System

3730 Distributed Office Communication System
 3790 Communication System
 3850 Mass Storage System
 4331 Processor
 4341 Processor*
 System/370 Models 145, 145-3, 148, 158, and 3031, 3032, 3033 Processors**
 System/7***

- * A channel-to-channel adapter is available to interconnect two channels (4341 Processor, System /360, System /370). One control unit position is required on each connected channel.
- ** A channel-to-channel adapter is available for connecting to a 4341 Processor.
- *** A channel attachment is available for connecting the system to a 4331 Processor and operating the system as a control unit.

Legend for Table of Local Input/Output Equipment

- i I/O adapter
- b Block multiplexer channel
- m Byte multiplexer channel
- bm Underscore shows preferred channel for attachment
- > See information in the "'Means of Attachment'" column
- Not applicable
- * May not be available

Attachment Data for Local I/O Devices and Control Units

INPUT/OUTPUT DEVICE OR CONTROL UNIT				MEANS OF ATTACHMENT TO 4300		NO. OF I/O DEVICES OR LINES ATTACHABLE
NO.	MODELS	NAME	ATTACHES TO	4331	4341	
1255	1-3	Magnetic Character Reader	S/360/370 Adapter	<u>bm</u>	<u>bm</u>	1 per system
1287	1,3	Optical Reader	---->	<u>bm</u>	<u>bm</u>	8 per system
	5	Optical Reader	---->	<u>bm</u>	<u>bm</u>	*D
1288	1	Optical Page Reader	---->	<u>bm</u>	<u>bm</u>	8 per system
1403	2,7,N1	Printer	2821-1,-2,-3,-5	<u>bm</u> *M	<u>bm</u>	*R
1419	1	Magnetic Character Reader	S/360 Adapter (#7720)	<u>bm</u>	<u>bm</u>	*D
			S/360 Adapter (#7730)	<u>bm</u>	m	*D
1442	N1	Card Read Punch	---->	<u>bm</u>	<u>bm</u>	*D
	N2	Card Punch	---->	<u>bm</u>	<u>bm</u>	*D
1443	N1	Printer	---->	<u>bm</u>	<u>bm</u>	*D
2250	1	Display Unit	---->	<u>bm</u>	<u>bm</u>	*D
	3	Display Unit	2840-2	<u>bm</u>	<u>bm</u>	4 per 2840
2305	2	Fixed Head Storage *N	2835-2	-	b	2 per 2835
2311*	1	Disk Storage Drive	2841-1	b	b	8 per 2841
2312*	A1	Disk Storage	2314-A1	See 2314-A1		*H
2313*	A1	Disk Storage	2314-A1	See 2314-A1		*H
2314*	A-Series	Direct Access Storage Facility	---->	b	b	9 drives *H
	B-Series	Direct Access Storage Facility	---->	b	b	9 drives *I
	A1	Storage Control	---->	See 2314 A-Series		9 drives *H
	B1	Storage Control	---->	See 2314 B-Series		9 drives *I
2318*	A1	Disk Storage	2314-A1	See 2314 A-Series		*H

INPUT/OUTPUT DEVICE OR CONTROL UNIT			MEANS OF ATTACHMENT TO 4300		NO. OF I/O DEVICES OR LINES ATTACHABLE	
NO.	MODELS	NAME	ATTACHES TO	4331	4341	
2319*	B1	Disk Storage	2314-B1	See 2314 B-Series	*I	
	B2	Disk Storage	2314-B1 (via 2319-B1)	See 2314 B-Series	*I	
2401*	1-3	Magnetic Tape Unit	2803-1,-2	bm	b	*L
	4,5,6	Magnetic Tape Unit	2803-2	bm	b	*L
	8	Magnetic Tape Unit	2803-3	bm	b	*L
	1-3	Magnetic Tape Unit	2804-1,-2	-	b	*L
	4,5,6	Magnetic Tape Unit	2804-2	-	b	*L
	8	Magnetic Tape Unit	2804-3	-	b	*L
2415*	1-6	Magnetic Tape Unit and Control	---->	bm	b	*D
2420	5,7	Magnetic Tape Unit	2803-2	bm	b	*L
2501	B1,B2	Card Reader	---->	<u>bm</u>	<u>bm</u>	*D
2520	B1	Card Read Punch	---->	<u>bm</u>	<u>bm</u>	*D
	B2,B3	Card Punch	---->	<u>bm</u>	<u>bm</u>	*D
2540	1	Card Read Punch	2821-1,-5,-6	<u>bm</u>	<u>bm</u>	*R
2671	1	Paper Tape Reader	2822-1	bm	bm	1 per 2822
2701	1	Data Adapter Unit	---->	<u>bm</u>	<u>bm</u>	4 lines max
2803	1-3	Tape Control *K	---->	See 2401 and 2420		*L
2804	1-3	Tape Control *K	---->	See 2401		*L
2816	1	Switching Unit	2803-1, 2	bm	b	*T
2821	1-3,5,6	Control Unit	---->	See 1403 and 2540		*R *M
2822	1	Paper Tape Reader Control	---->	See 2671		*D
2835	2	Storage Control	---->	See 2305		2 per channel
2840	2	Display Control	---->	See 2250-3		4 2250-3's
2841	1	Storage Control	---->	See 2311		*S
3203	5	Printer and Control	---->	<u>bm</u>	<u>bm</u>	*D
3211	1	Printer	3811-1	<u>bm</u>	<u>bm</u>	1 per 3811
3250		Graphics Display System	3258-1	See 3258-1		*D

INPUT/OUTPUT DEVICE OR CONTROL UNIT				MEANS OF ATTACHMENT TO 4300		NO. OF I/O DEVICES OR LINES ATTACHABLE
NO.	MODELS	NAME	ATTACHES TO	4331	4341	
3251	1	Display Station	3255-1,3258-1	See 3258-1		2 per 3255
3255	1	Display Control Unit	3258-1	See 3258-1		4 per 3258
3258	1	Control Unit *G	----	b	b	
3262	1,11	Printer	----	i	-	*Q
3262	3,13	Printer	3274	<u>bm</u>	<u>bm</u>	*0
3270	-	Information Display System	----	See 3272		*0
3272	1,2	Control Unit	----	<u>bm</u> *M	<u>bm</u>	*0
3274	1A,1B,1D	Control Unit	----	<u>bm</u>	<u>bm</u>	*0
3277	1,2	Display Station	----	See 3272, 3274		*0
3278	1-4	Keyboard/Display	3274	<u>bm</u>	<u>bm</u>	*0
	2	Keyboard/Display	----	i	-	*Q
	2A	Display Console	----	i	i	*Q
3279	2A,2B,3A 3B	Color Display Station	3274	See 3274		*0
3284	1,2	Printer	3272, 3274	See 3272, 3274		*0
3286	1,2	Printer	3272, 3274	See 3272, 3274		*0
3287	1,2	Terminal Printer	3272, 3274	See 3272, 3274		*0
	1,2	Terminal Printer	----	i	i	*Q
	1C,2C	Terminal Printer	3274	See 3274		*0
3288	2	Line Printer	3272, 3274	See 3272, 3274		*0
3289	1,2	Printer	3274	See 3274		*0
	4	Printer	----	i	-	*Q
3310	A1, A2	Direct Access Storage	----	i	-	*E
3330	1,2,11	Disk Storage	3333-1,11	See 3333-1,11		3 per 3333
3333	1,11	Disk Storage and Control	3830-2,3 3880-1	- b *F	b	*C *W
3340	A2	Direct Access Storage	3830-2 3880-1	- b *F	b	4 per 3830 *B *W
			----	i	-	*A *B
	B1,B2	Direct Access Storage	3340-A2	See 3340-A2		3 per 3340 *B
3344	B2,B2F	Direct Access Storage	3340-A2	See 3340-A2		3 per 3340 *B
			----	See 3340-A2		*B
3350	A2,A2F	Direct Access Storage	3830-2,3 3880-1	- b *F	b	*J *W
	B2,B2F C2,C2F	Direct Access Storage	3350-A2,-A2F	See 3350-A2,A2F		*J
3370	A1,B1	Direct Access Storage	3880	b *F	b	*W
			----	i	-	*E
3410	1	Magnetic Tape Unit	3411-1	<u>bm</u>	b	3 per 3411-1
	2	Magnetic Tape Unit	3411-2	<u>bm</u>	b	5 per 3411-2
	3	Magnetic Tape Unit	3411-3	<u>bm</u>	b	5 per 3411-3

INPUT/OUTPUT DEVICE OR CONTROL UNIT				MEANS OF ATTACHMENT TO 4300		NO. OF I/O DEVICES OR LINES ATTACHABLE
NO.	MODELS	NAME	ATTACHES TO	4331	4341	
3411	1-3	Magnetic Tape Unit and Control	---> --->	bm See 3410	b	*D
3420	3,5,7	Magnetic Tape Unit	3803-1	<u>bm</u>	b	*L
	4	Magnetic Tape Unit	3803-2	b	b	*L
	6,8	Magnetic Tape Unit	3803-2	-	b	*L
3505	B1,B2	Card Reader	--->	<u>bm</u> *M	<u>bm</u>	*D
3525	P1-P3	Card Punch	3505 -B1,B2	<u>bm</u> *M	<u>bm</u>	*D
3540	B1,B2	Diskette Input/Output Unit	--->	bm	bm	*D
3704	A1-A4	Comm. Controller	Chan Adptr Type 1	m	m	32 lines
3705	A11	Comm. Controller	Chan Adptr Type 1	m	m	352 lines
			Chan Adptr Type 2,3 *P	<u>bm</u>	<u>bm</u>	352 lines
3730	-	Distributed Office Communications System	--->	See 3791		*D
3732	1	Text Display Station	3791-11C 12A,12B	bm	m	*V
3736	1	Printer	3791-11C 12A,12B	bm	m	*V
3790		Communications System	--->	See 3791		
3791	1C,2A,2B 11C,12A 12B	Comm. Controller	--->	bm	m	*D
3800	1	Printing Subsystem	--->	<u>bm</u>	<u>bm</u>	*D
3803	1,2	Tape Control	--->	See 3420		*L
3811	1	Control Unit	--->	See 3211		*D
3830	2	Storage Control	--->	See 3330,3333, 3340,3350		*D *F
	3	Storage Control	--->	See 3330,3333 3350,3851		*D
3838	1-3	Array Processor	--->	-	b	*D
3850		Mass Storage System	--->	See 3851		*C
3851	A1-A4 B1-B4	Mass Storage Facility	3830-3 --->	- -	b <u>bm</u>	*C *C

INPUT/OUTPUT DEVICE OR CONTROL UNIT				MEANS OF ATTACHMENT TO 4300		NO. OF I/O DEVICES OR LINES ATTACHABLE
NO.	MODELS	NAME	ATTACHES TO	4331	4341	
3880	1	Storage Control	--->	See 3330,3333, 3340,3350,3370		*W
3881	1	Optical Mark Reader	--->	bm *M	m	*D
3886	1	Optical Character Reader	--->	bm*M	bm	*D
3890	A1-A6 B1-B6	Document Processor	--->	bm	bm	
3895	1,2	Optical Reader/ Inscriber	--->	bm	m	
5424	A1,A2 K1-K3	Multifunction Card Unit	--->	i	-	1 per system *U
7770	3	Audio Response Unit	--->	m	m	48 lines
8809	1A,2,3	Magnetic Tape Unit	--->	i	-	6 per system

Notes on Local Equipment

*A When the DASD attachment and the System/3 data import feature are installed in the 4331 Processors, 3348 data modules recorded on an IBM System/3 Model 12 or 15 can be read into storage. Writing on the 3348 modules is not possible.

*B The 3340-A2 and -B2 each have two disk drives; the 3340-B1 has one. The 3344-B2 and -B2F each have two disk drives. Generally, a 3340-A2 can attach a total of three 3340-B1s and/or -B2s and, in certain configurations, 3344-B2s and/or -B2Fs, for a maximum of eight drives per string. As many as four 3340-A2s with the associated 3340 B-units (maximum of 32 drives) or four 3340-A2's with 3340 and 3344 B-units, which together use a maximum of 64 logical device addresses, can be attached to a 3830 Model 2. The 3344 B-units may be used in only the first and third of four possible strings.

Up to four 3340-A2s can be attached to each data path of the 3880. For configurations attaching 3340/3344s the storage director uses 64 contiguous device addresses irrespective of the number of drives attached. The 3340 Model A2s on the first and third strings may

attach up to three 3340 Models B1s/B2s and/or 3344s in any combination. The 3340 Model A2 on the second string may attach up to three 3340 Model B1s/B2s. The 3340 Model A2 on the fourth string may attach one 3340 Model B1 or B2.

Up to two 3340/A2s can be attached to the DASD adapter of the 4331.

*C The 3330 and 3333 Models 1 and 11 have two disk drives, and the 3330 Model 2 has one. One 3333 can attach up to three 3330s for a maximum of eight drives per 3333. Up to four 3333/3330 and/or 3350 strings can attach to a 3830-3.

*D No special restrictions; depends on the number of available system channel control unit positions and, for some units, on channel loading considerations.

*E A maximum of four 3310 and/or 3370 strings can be attached to the DASD adapter of the 4331. A 3310 string can consist of up to four devices, a 3370 string can consist of up to eight devices ('device' means a separately addressable unit). The 3310-A1 contains the string controller and one device (or 'volume'). The 3310-A2 contains two devices. The 3310-B1 attaches to the -A2 and contains one device, the -B2 two devices. The 3370-A1 contains the string controller and two devices. The 3370-B1 is attached to the -A1 and contains two devices.

For a storage director on the 3880 controlling 3370 DASD, a maximum of four 3370-A1s, each with up to three 3370-B1s, may be attached.

*F High speed block multiplexer channel of the 4331 Model Group 2 only.

*G Operates in selector mode, not in block multiplex mode.

*H A 2314 A-Series Direct Access Storage Facility (DASF) consists of a 2314 Storage Control Model A1 and combinations of Model A1 units of 2312, 2313, and 2318 Disk Storage, forming a single interconnected unit. Each 2312-A1 provides one disk storage drive, each 2313-A1 four drives, and each 2318-A1 two drives. A full-configuration 2314 A-Series, which consists of two 2313s and one 2312, has eight drives and one spare. On the 4331-2, the 2314 A-Series must be attached to the high speed block multiplexer channel if this channel is installed.

*I A 2314 B-Series Direct Access Storage Facility consists of a 2314 Storage Control Model B1, one 2319 Disk

Storage Model B1, and up to two units of 2319 Disk Storage Model B2, forming a single interconnected unit having three, six, or nine (eight active, one spare) disk drives. Each 2319-B1 and -B2 has three drives. On the 4331-2, the 2314 B-Series must be attached to the high-speed block multiplexer channel, if this channel is installed.

*J The 3350-A2, -A2F, -B2, -B2F, -C2, and -C2F each have two drives. A 3350 string can be formed by attaching one of the following combinations to a 3350-A2 or -A2F for a maximum of eight drives: (1) up to three 3350-B2 or -B2F units or (2) one or two 3350-B2 or -B2F units and (at the end of the string) one 3350-C2 or -C2F unit, or (3) one 3350-C2 or -C2F unit. As many as four 3350 strings can be attached to a 4341 or 4331-2 Processor through the 3830-2 or -3 Storage Control.

*K The 2803 is a single-channel control unit; the 2804 is a two-channel control unit. A 2804 requires one control-unit position on each of two channels in the same system.

*L Up to eight:
800-bpi drives (2401-1 to -3) per 2803-1 or 2804-1.
800- and 1600-bpi drives (2401-1 to -6 and 2420-5, -7) per 2803-2.
800- and 1600-bpi drives (2401-1 to -6) per 2804-2.
800- and 1600-bpi drives (3420-3, -5, -7) per 3803-1 or -2.
2401-8's per 2803-3 or 2804-3.
6250-bpi or 6250/1600-bpi drives (3420-4, -6, -8) per 3803-2.

The 3803 tape switching features permit switching of as many as sixteen 3420s among two, three, or four 3803s.

*M The order of preference for attaching buffered devices to the 4331 is:

1. To the block multiplexer channel
2. To the byte multiplexer channel with the device set to:
 - (a) burst mode
 - (b) multibyte mode

*N One or two modules of 2305 Fixed Head Storage and a 2835 Storage Control form a 2305 Fixed Head Storage facility, a single interconnected unit.

*O A locally attached 3270 Information Display System has a 3272 Control Unit Model 1 or 2 that directs the operation of various combinations of up to thirty-two 3277 Display Stations Models 1 and 2, 3284 and 3286 Printers Models 1 and 2, and 3288 Line Printers Models 2. The 3272-1 controls only Model 1 devices, but the

3272-2 controls both Model 1 and 2 devices.

Through the 3274, up to 32 of the following terminals can be controlled.

- 3262-3,13 Printer
- 3277-1,2 Display Station
- 3278-1,2,3,4 Display Station
- 3279-2A,2B,3A,3B Color Display Station
- 3284-1,2 Printer
- 3286-1,2 Printer
- 3287-1,1C,2,2C Terminal Printer
- 3288-2 Line Printer
- 3289-1,2 Line Printer

*P Neither channel adapter type 2 nor channel adapter type 3 attaches to 3705-A1, -B1, -C1, or -D1.

*Q The 4341 Processor allows for the direct attachment of the prerequisite 3278 Model 2A Display Console, and three additional devices as optional consoles. The additional devices may be 3278-2As without the operator's control panel, or 3287-1 or -2 terminal printers, or any combination thereof.

The display/printer adapter on the 4331 Processor allows for attachment of the prerequisite 3278-2A display console and up to seven (fifteen with optional feature) of the following devices:

- 3278-2 Display Station
- 3287-1,2 Terminal Printer
- 3289-4 Printer
- 3262-1,11 Printer

Any combination is allowed, provided (1) only seven (with optional feature, fifteen) devices are installed, and (2) no more than two line printers (3289 and/or 3262) are installed.

*R One 1403 and one 2540 per 2821-1.
One 1403 per 2821-2.
Two (or, with a third printer control, three) 1403s per 2821-3.
Two (or, with a third printer control, three) 1403s and one 2540 per 2821-5.
One 2540 per 2821-6.

*S The basic 2841 can control as many as eight 2311s.

*T The 2816 permits switching of as many as eight magnetic tape drives (2401 Models 1-6 and 2420s) among four 2803s. With a second 2816 and 16-drive addressing, 4,8,12 or 16 drives can be switched among two, three,

or four 2803s.

- *U 5424-K1, K2 and K3 are for Japan only.
- *V A 3791-11C, 12A or 12B with Configuration Support #9171 can support up to twelve 3732 Text Display Stations and up to eight 3736 Printers in any combination up to a combined maximum of 16 devices. If feature #9275 is also installed, the individual and combined total is 30.
- *W A 3880 provides two independent data paths called storage directors and is connected to the high speed block multiplexer channel of the 4331-2 or to the block multiplexer channel(s) on the 4341.

Each Storage Director provides for attachment of either up to four 3340-A2s or up to four 3370-A1s or up to four 3333s (any model) and 3350-A2/A2Fs in any combination.

For configurations attaching 3340/3344 DASD, the Storage Director uses 64 contiguous addresses irrespective of the number of drives attached. The 3340-A2s on the first and third strings may attach up to three 3340-B1s/B2s and/or 3344s in any combination. The 3340-A2 on the second string may attach up to three 3340-B1s/B2s. The 3340-A2 in the fourth string may attach one 3340-B1/B2.

For a Storage Director attaching 3370 DASD, a maximum of four 3370-As, each with up to three 3370-B1s may be attached.

For a Storage Director attaching 3330/3333/3350 DASD, the maximum is four 3333-1s, 3333-11s, and/or 3350-A2s/A2Fs in any combination. Each string with a 3333-1 or -11 may attach up to three 3330-1s/2s or -11s. Each string with a 3350-A2/A2F may attach up to three 3350-B2s/B2Fs or up to two 3350-B2s/B2Fs and a 3350/C2/C2F.

Both storage directors can be attached to the same channel; to different channels on the same processor (4341 only); or to channels on two separate processors.

- *Y 4331 Model Group 2 only

Remote Input/Output Equipment

The following IBM equipment can be operated in a data communications environment as part of some or all 4300 Processors (as described later in this manual). They are arranged first by category, and then in chart form (by device or system number). The chart, together with the legend and notes, provides information about the remote attachment of current IBM equipment.

Remote I/O Equipment Categories

Audio Communication Devices

7770 Audio Response Unit Model 3*

Control Units for Display Devices

3271 Control Unit Models 1, 2, 11 and 12

3274 Control Unit Model 1C and 51C

3276 Control Unit Display Station Models 1-4 and 11-14

Data Encryption Devices

3845 Data Encryption Device Models 1-3 and 11-13

3846 Data Encryption Device Models 1-3, 12 and 13

Data Terminal Devices

1001 Data Transmission Terminal

2740 Communications Terminal Models 1 and 2

2741 Communications Terminal

3614 Consumer Transaction Facility Models 1, 2, 11 and 12

3624 Consumer Transaction Facility Models 1, 2, 11 and 12

3735 Programmable Buffered Terminal

3767 Communications Terminal

3780 Communications Terminal

5100/5110 Portable Computer

Communicating Magnetic Card/Selectric R Typewriter (CMS/ST)

6240 Magnetic Card Typewriter-Communicating

Magnetic Card II Typewriter-Communicating

Data Transmission Multiplexers

2701 Data Adapter Unit
3704 Communications Controller**
3705 Communications Controller**

Display Devices

3275 Display Station Models 2 and 12
3276 Control Unit Display Station Models 1-4 and 11-14
3277 Display Station Models 1 and 2
3278 Display Station Models 1-4

Modulator/Demodulator Devices

2711 Line Adapter Unit***
3863 Modem
3864 Modem
3865 Modem
3872 Modem***
3874 Modem***
3875 Modem***

Printers

6640 Document Printer-Communicating

Communications and Industry Subsystems

1030 Data Collection System
3270 Information Display System
3600 Finance Communication System
3630 Plant Communications System
3650 Retail Store System
3660 Supermarket Key-Entry System
3660 Supermarket Scanning System
3730 Distributed Office Communication System
3740 Data Entry System
3770 Data Communication System
3790 Communication System

Processors and Systems

4300 Processors
 4331 Processor Model Groups 1 and 2
 4341 Processor
5230 Data Collection System
8100 Information System
Series/1
System/3 Models 4, 6, 8, 10, 12 and 15
System/7
System/32
System/34
System/38
System/360
 Models 20-75
System/370
 Models 115-168
 3031 Processor
 3032 Processor
 3033 Processor
6/420 Information Processor-Communicating
6/430 Information Processor-Communicating
6/440 Information Processor-Communicating
6/442 Information Processor-Communicating
6/450 Information Processor-Communicating
6/452 Information Processor-Communicating

*For attachment to a channel of the 4300 Processors for operation with one or more attached inquiry type terminals.

**For attachment to a channel of the 4300 Processors to control data communications with remote I/O devices.

***For attachment at each end of a data communication line to modulate or demodulate the signal.

Legend:

b Block multiplexer channel.
m Byte multiplexer channel.
bm Underscore shows preferred channel for attachment
i_~ I/O adapter (communications adapter).
---> See the information in the 'Local Processor' columns.
Part of the remote system.
+ The local attaching units are:
 2701 Data Adapter Unit
 3704 Communications Controller
 3705 Communications Controller
 7770 Audio Response Unit Model 3
- Not applicable.

Attachment Data for Remote I/O Devices and Terminal Systems

TERMINAL			REMOTE ATTACHING UNIT *E	LOCAL ATTACHING UNIT	LOCAL PROCESSOR	
NO.	MODELS	NAME			4331	4341
1001	1	Data Transmission Terminal	-	7770	m	m
1030	-	Data Collection System	1031#	{ 2701 3704, 3705 *A 3705 *B	<u>bm</u> m <u>bm</u>	<u>bm</u> m <u>bm</u>
2740	1,2	Communications Terminal	-	{ 2701 3704, 3705 *A 3705 *B ---->	<u>bm</u> m	<u>bm</u> m
2741	1	Communications Terminal	-		<u>bm</u> i	<u>bm</u> -
2770	-	Data Communication System	2772#	{ 2701 3704,3705 *A 3705 *B ---->	<u>bm</u>	<u>bm</u>
3270	-	Information Display System	3271-1,-2#		m	m
3275	2	Display Station	-		<u>bm</u> i	<u>bm</u> -
3270	-	Information Display System	3271-11,12#	{ 3704,3705*A 3705 *B ---->	m	m
3275	12	Display Station	-		<u>bm</u> i	<u>bm</u> -
3270	-	Information Display System	3274-1C,51C	{ 2701 3704,3705*A 3705 *B ---->	<u>bm</u>	<u>bm</u>
3276	1-4, 11-14	Control Unit Display Station	-		m <u>bm</u> i	m <u>bm</u> -

TERMINAL			REMOTE	LOCAL	LOCAL PROCESSOR	
NO.	MODELS	NAME	ATTACHING UNIT *E	ATTACHING UNIT	4331	4341
3600	-	Finance Communication System	3601-1,-2A, -2B,-3A, -3B#, 3602-1A, -1B#	{ 3704, 3705 *A 3705 *B ---->	m <u>bm</u> i	m <u>bm</u> -
3614	1,2, Consumer Transaction 11,12	Facility -				
3624	1,2, Consumer Transaction 11,12	Facility -				
3630		Plant Communication System	3631/3632 (-1A,1B)#			
3650	-	Retail Store System	3651-A50, -B50#			
3660	-	Supermarket Scanning System	3651-A60, -B60#			
3730	-	Supermarket Key-Entry System Distributed Office Comm- unication System	3661-1# 3791-11C, 12A, 12B	{ 2701 3704,3705 *A 3705 *B ---->	bm m <u>bm</u> i	bm m <u>bm</u> -
3735	1	Programmable Buffered Ter- minal	-			
3740	-	Data Entry System	3741-2, 3747#			
3767	1,2	Communication Terminal	-			
3770	-	Data Communication System	-	{ 2701 *D 3704,3705*A 3705 *B ----> *D	bm m <u>bm</u> i	bm m <u>bm</u> -
3780	1	Communications Terminal	-	{ 2701 3704,3705*A 3705 *B ---->	bm m <u>bm</u> i	bm m <u>bm</u> -

TERMINAL		NAME	REMOTE ATTACHING UNIT *E	LOCAL ATTACHING UNIT	LOCAL PROCESSOR	
NO.	MODELS				4331	4341
3790	-	Communication System	3791#	{ 3704,3705*A 3705 *B ---->	m <u>bm</u> i	m <u>bm</u> -
5100	-	Portable Computer	-	{ 2701 3704,3705*A 3705 *B ---->	<u>bm</u> m <u>bm</u> i	<u>bm</u> m <u>bm</u> -
5230	-	Data Collection System	5231#	---->	i	-
8100	-	Information System	8130#	{ 2701 3704, 3705 *A 3705 *B ---->	<u>bm</u> m <u>bm</u> i	<u>bm</u> m <u>bm</u> -
		Series/1	8140#			
			4953#			
			4955#			
-	4	System/3	5404#			
-	6	System/3	5406#			
-	8	System/3	5408#			
-	10	System/3	5410#			
-	12	System/3	5412#			
-	15	System/3	5415#			
-	-	System/7	5010#			
-	-	System/32	5320#			
-	-	System 34	5340#			
-	-	System 38	5381#	{ 3704, 3705 *A 3705 *B ---->	m <u>bm</u> i	m <u>bm</u> -
-	20	System/360*	-	{ 2701 3704,3705 *A 3705 *B ---->	<u>bm</u> m <u>bm</u> i	<u>bm</u> m <u>bm</u> -
-	25	System/360*	2701,3704, 3705,i			
-	22-	System/360*	2701,3704, 3705			
-	75	System/370	2701,3704, 3705,i			
-	115-	System/370	2701,3704, 3705,i			
-	138	System/370	2701,3704, 3705			
-	145-	System/370	2701,3704, 3705			
-	168					

TERMINAL		NAME	REMOTE ATTACHING UNIT *E	LOCAL ATTACHING UNIT	LOCAL PROCESSOR	
NO.	MODELS				4331	4341
3031	-	Processor Complex Part of	2701,3704,	<div> <div> 2701 3704 3705 *A 3705 *B ----> </div> <div> bm m bm i </div> <div> bm m bm - </div> </div>		
3032	-	Processor Complex System	3705			
3033	-	Processor Complex /370				
-	-	6/420 Information Processor-Communicating	-			
-	-	6/430 Information Processor-Communicating	-			
-	-	6/440 Information Processor-Communicating	-			
-	-	6/442 Information Processor-Communicating	-			
-	-	6/450 Information Processor-Communicating	-			
-	-	6/452 Information Processor-Communicating	-			
-	-	6640 Document Printer Communicating	-			
-	-	6240 Magnetic Card Typewriter-Communicating	-			
-	-	Magnetic Card II Typewriter-Communicating	-			
-	-	Communicating Mag Card	-			
-	-	SELECTRIC R Typewriter	-			
4300		Processors				
-	4331		2701,3704,			
-	-1,2		3705,i			
-	4341		2701,3704,			
			3705			

Notes:

- *A 3705 equipped with a channel adapter type 1.
- *B 3705 equipped with a channel adapter type 2 or 3 (channel adapters type 2 and type 3 are mutually exclusive).
- *C 3767 equipped with Start/Stop.
- *D 3770 equipped with SDLC/BSC Switch Control.
- *E Communication facility, which includes the communication line with a signal modulation and demodulation device (modem) at each end.

Index

- access width, storage 22
- access key 36
- adapters, I/O 29, 43, 45
- addressing, storage 20, 23, 33
- arithmetic 23
 - binary 24
 - decimal 23
 - floating-point 25
 - operations 23
- attachment data for
 - local I/O devices 60
 - remote I/O devices 72
- basic control (BC) mode 39
- binary arithmetic 24
- block multiplexer channel 29, 46
- boundaries, integral 21
- buffer storage, high-speed 22
- burst mode 29
- byte mode 29
- byte multiplexer channel 29 46
- byte-oriented operand 38
- bytes 19
- channel
 - command retry 41
 - features 41
- channels 28, 47, 52
 - block multiplexer 29, 47, 52
 - byte multiplexer 29, 47, 52
- channel-to-channel adapter 41, 52
- clear I/O 40
- clock comparator 37
- codes 19
- command retry 41
- commercial instruction set 37
- communications adapter 46, 49
- compatibility, program 41
- compatibility with other IBM systems 16, 41, 50, 54
- conditional swapping 40
- configurator, input/output 55
- console 48, 53
- control
 - panel 18, 48
 - registers 23
 - unit 28, 30
- CPU timer 37

- cycle, main storage 22
- DAT (dynamic address translation) 33
- DASD attachment 45, 48, 64, 65
- data
 - blocks 30
 - fields 19
 - fixed-length 19, 21, 26
 - variable-length 19, 21, 26
 - formats 19
 - positioning 21
 - representation 19
- decimal arithmetic 23
- decimal instructions 37
- devices, I/O 30, 55
- disallowed interruptions 32
- diskette 2D drive 43
- display/printer adapter 46, 49
- DOS/VS 50, 54
- doubleword 19
- dynamic address translation (DAT) 33
- EBCDIC (Extended Binary-Coded Interchange Code) 19
- ECPS:VSE Mode 16, 33, 38, 43
- ECPS:VS1 Assist 16
- ECPS:VM/370 Assist 16
- extended control (EC) mode 39
- extended precision floating-point feature 25
- external interruptions 32
- external signal 40
- fetch protection 36
- floating-point
 - arithmetic 25
 - extended precision (feature) 25
 - instructions 37
 - number formats 25
 - registers 23
- formats
 - data 19
 - instruction 26
- fullword (same as word) 19
- general registers 23
- halfword 19
- high-speed buffer storage 22
- input/output 28
- configurator 55
- instruction
 - addressing 23
 - execution sequence 26
 - formats 26

- instruction sets 37, 46
- integral boundaries 21
- interface, I/O 28, 31
- interruption system 31
- interruptions
 - allowing of 32
 - classes of 31
 - disallowing of 32
 - priority 32
- interval timer 38
- I/O (input/output)
 - adapter 29, 43, 45
 - attachment data
 - for local equipment 60
 - for remote equipment 72
 - configurations 55
 - control of 28, 30
 - devices 30
 - interface 28, 31
 - interruptions 32
 - local equipment 55
 - remote equipment 69
- local I/O equipment 55
- logical operations 23, 26
- machine-check interruption 32
- machine save 16, 39
- magnetic tape unit adapter 45, 49
- main storage 20
- modes of operation 16
 - basic control (BC) 39
 - ECPS:VSE 16, 33, 38, 43
 - extended control (EC) 39
 - System/370 16, 34, 38, 43
- multi-function card unit adapter 46, 49
- multiple virtual storage 33
- nonshared subchannels 28
- one-level addressing 33
- Op codes (operation codes) 28
- operator controls 18, 48, 53
- optional features
 - (4331 Processor) 44
 - (4341 Processor) 52
- OS/VS1 50, 54
- packed format 23
- performance factors 22
- positioning of data 21
- privileged instructions 38

- processors
 - features 35, 41, 44, 51
 - functions 35, 36, 44
 - individual descriptions 43, 51
- processor storage 19, 33, 35, 46
 - capacities 35, 46
 - features 35
- program
 - control 18
 - event recording 40
 - interruptions 31
 - status word 31
- program reset 39
- programming
 - DOS/VS 50, 54
 - OS/VS1 50, 54
 - VM/370 50, 54
 - VSE 50, 54
- PSW 31
- PSW key handling 40
- real storage 34
- registers 23
- remote I/O equipment 69
- restart interruption 32
- RR instruction format 26
- RS instruction format 27
- RX instruction format 27
- S instruction format 28
- shared subchannels 28
- SI instruction format 28
- SS instruction format 28
- standard features (4341 Processor) 51
- standard functions (4331 Processor) 44
- standard instruction set 36
- standard I/O interface 28, 31
- storage
 - access width 22
 - addressable 20
 - addressing 20, 22, 33
 - buffer 22
 - capacities 35, 46
 - concepts 33
 - cycle time 22
 - key 36
 - main 20
 - processor 19, 33, 35, 46
 - protection 35
 - real 35
 - virtual 15, 34
- store status 39
- subchannels 28
- supervisor call interruption 31

support processor 53
system diskette 43, 53
System/360
 compatibility 16, 54
System/370
 mode 16, 34, 38, 43

time-of-day clock 37

universal instruction set 37
unprivileged instructions 38

virtual storage 15, 34
VM/370 (Virtual Machines/370) 16, 50, 54
VSE 50, 54

word (fullword) 19

zoned format 23

This manual is part of a library that serves as a reference source for systems analysts, programmers, and operators of IBM systems. This form may be used to communicate your views about this publication. They will be sent to the author's department for whatever review and action, if any, is deemed appropriate. Comments may be written in your own language; use of English is not required.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation whatever. You may, of course, continue to use the information you supply.

Note: *Copies of IBM publications are not stocked at the location to which this form is addressed. Please direct any requests for copies of publications, or for assistance in using your IBM system, to your IBM representative or to the IBM branch office serving your locality.*

Possible topics for comment are:

Clarity Accuracy Completeness Organization Coding Retrieval Legibility

If you wish a reply, give your name and mailing address:

What is your occupation? _____

Number of latest Newsletter associated with this publication: _____

Thank you for your cooperation. No postage stamp necessary if mailed in the U.S.A. (Elsewhere, an IBM office or representative will be happy to forward your comments or you may mail directly to the address in the Edition Notice on the back of the front cover or title page.)

Cut or Fold Along Line

Reader's Comment Form

Cut or Fold Along Line

Fold and tape

Please Do Not Staple

Fold and tape




NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 40 ARMONK, N.Y.

POSTAGE WILL BE PAID BY ADDRESSEE:

International Business Machines Corporation
Department 812B
1133 Westchester Avenue
White Plains, New York 10604

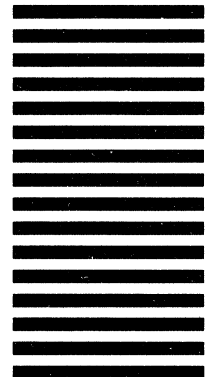

Fold and tape

Please Do Not Staple

Fold and tape



International Business Machines Corporation
Data Processing Division
1133 Westchester Avenue, White Plains, N.Y. 10604

IBM World Trade Americas/Far East Corporation
Town of Mount Pleasant, Route 9, North Tarrytown, N.Y., U.S.A. 10591

IBM World Trade Europe/Middle East/Africa Corporation
360 Hamilton Avenue, White Plains, N.Y., U.S.A. 10601

IBM 4300 Processors Summary (File No. 4300 - 00) Printed in U.S.A. GA33 - 1523 - 1



International Business Machines Corporation
Data Processing Division
1133 Westchester Avenue, White Plains, N.Y. 10604

IBM World Trade Americas/Far East Corporation
Town of Mount Pleasant, Route 9, North Tarrytown, N.Y., U.S.A. 10591

IBM World Trade Europe/Middle East/Africa Corporation
360 Hamilton Avenue, White Plains, N.Y., U.S.A. 10601