


# 10 System Index

*symbolics*

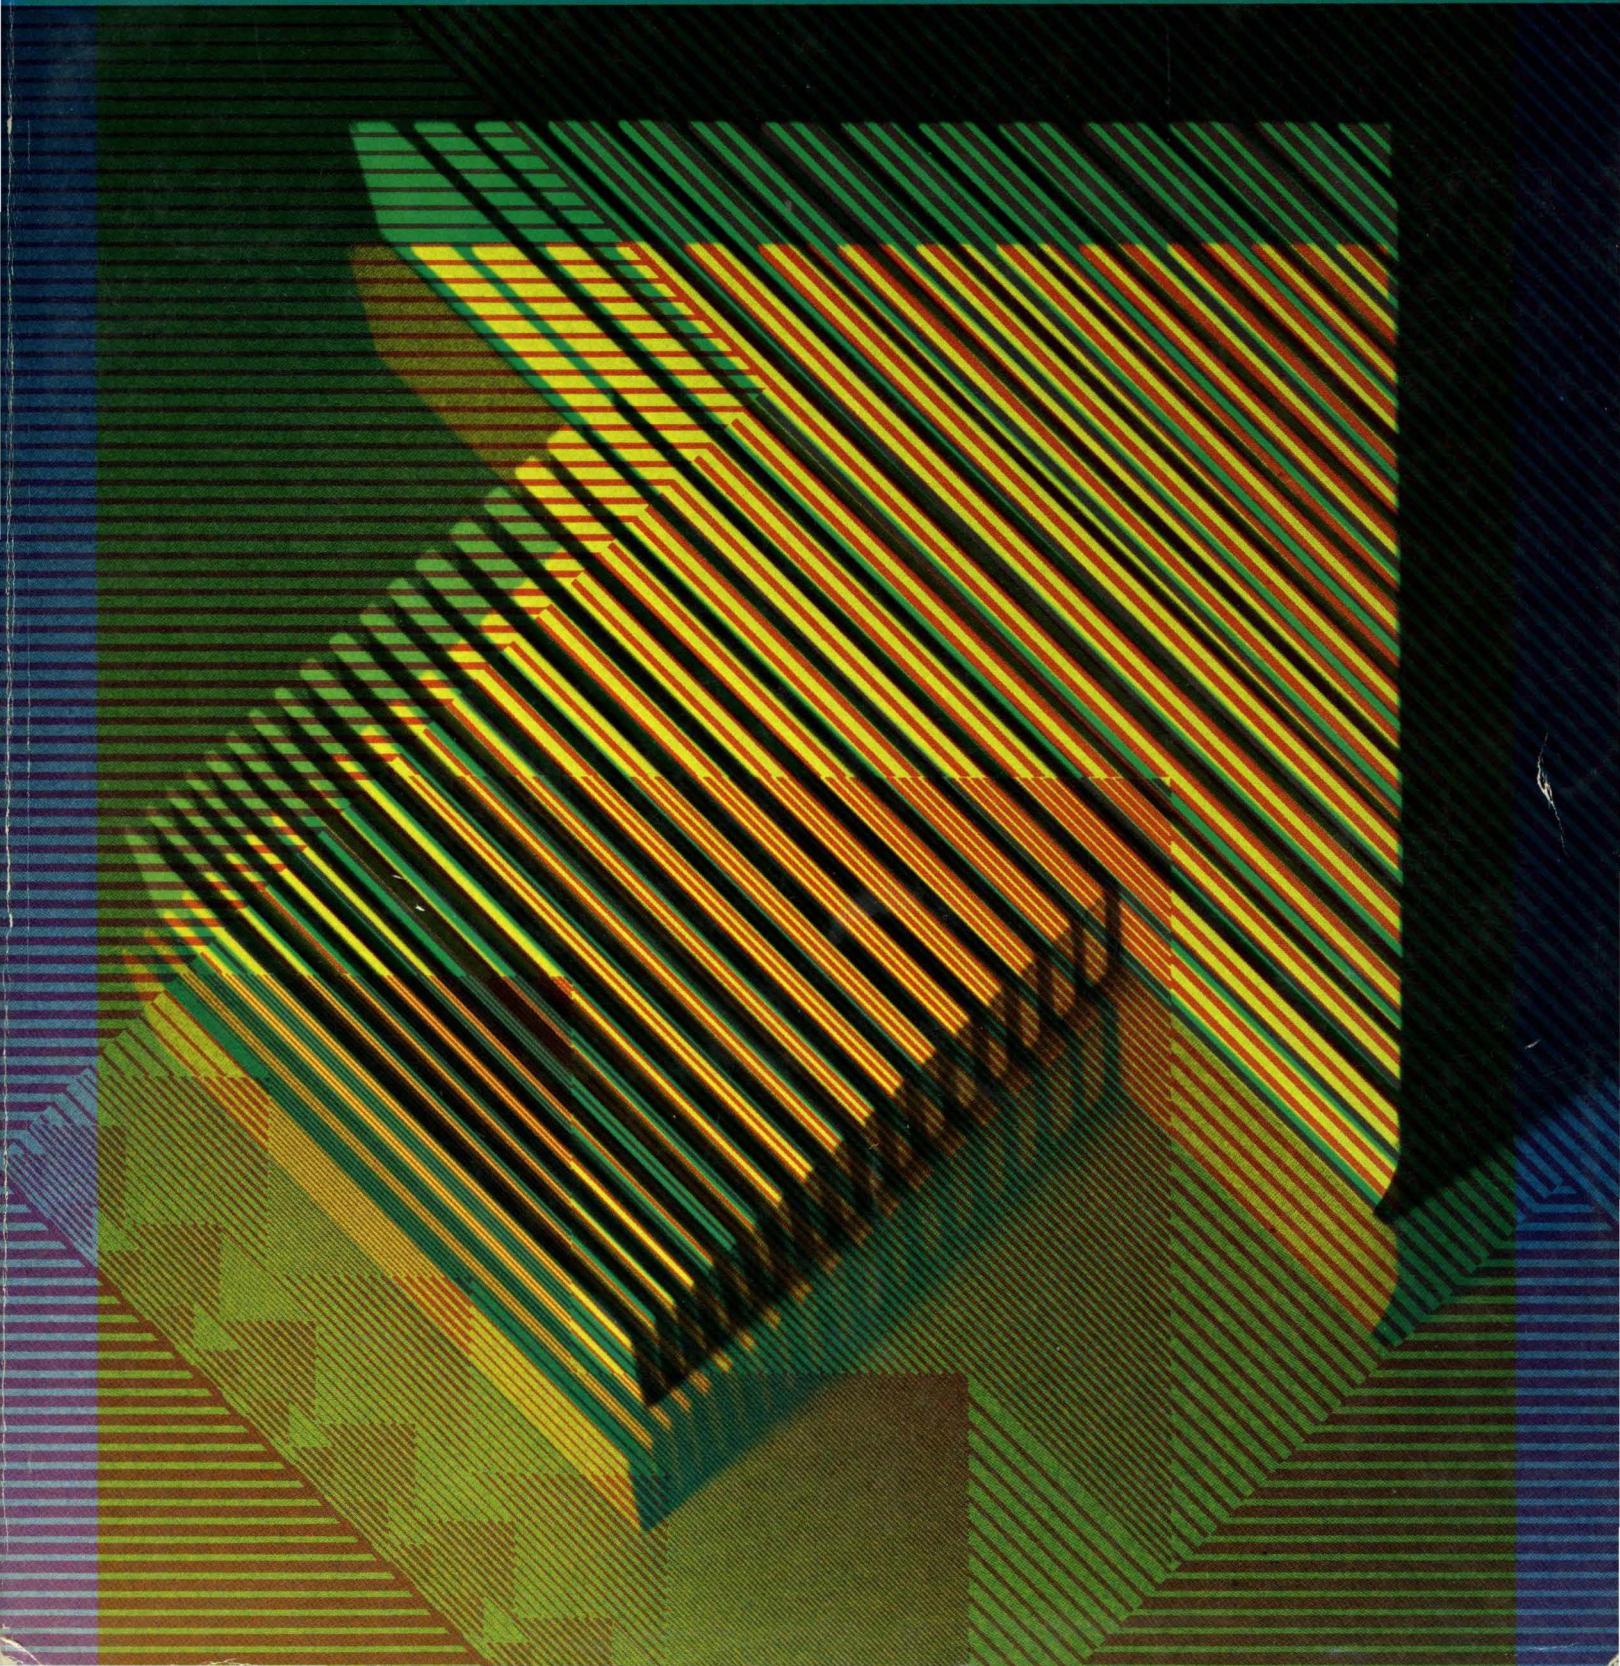

# 10 System Index

*symbolics*

---

# System Index

# 996115

March 1985

**This document corresponds to Release 6.0 and later releases.**

The software, data, and information contained herein are proprietary to, and comprise valuable trade secrets of, Symbolics, Inc. They are given in confidence by Symbolics pursuant to a written license agreement, and may be used, copied, transmitted, and stored only in accordance with the terms of such license.

This document may not be reproduced in whole or in part without the prior written consent of Symbolics, Inc.

Copyright © 1985, 1984, 1983, 1982, 1981, 1980 Symbolics, Inc. All Rights Reserved.  
Font Library Copyright © 1984 Bitstream Inc. All Rights Reserved.

Symbolics, Symbolics 3600, Symbolics 3670, Symbolics 3640, SYMBOLICS-LISP, ZETALISP, MACSYMA, S-GEOMETRY, S-PAINT, and S-RENDER are trademarks of Symbolics, Inc.

TENEX is a registered trademark of Bolt Beranek and Newman Inc. UNIX is a trademark of Bell Laboratories, Inc. VAX and VMS are trademarks of Digital Equipment Corporation.

## Restricted Rights Legend

Use, duplication, or disclosure by the government is subject to restrictions as set forth in subdivision (b)(3)(ii) of the Rights in Technical Data and Computer Software Clause at FAR 52.227-7013.

Text written and produced on Symbolics 3600-family computers by the Documentation Group of Symbolics, Inc.

Text typography: Century Schoolbook and Helvetica produced on Symbolics 3600-family computers from Bitstream, Inc., outlines; text masters printed on Symbolics LGP-1 Laser Graphics Printers.

Cover design: Schafer/LaCasse

Cover printer: W.E. Andrews Co., Inc.

Text printer: ZBR Publications, Inc.

Printed in the USA.

Printing year and number: 87 86 85 9 8 7 6 5 4 3 2 1

## Index

### How to Use This Index

This System Index includes entries from all indexes from all books in the entire documentation set. It has entries for all Lisp objects, chapter and section titles, and many useful concepts and topics.

This is a permuted, keyword-in-context index. Each original index entry appears in many places, one for each keyword. For example, consider the following entry:

Mail collections in universes

It appears in the Index under "collections", "mail", and "universes". Formatting puts the keyword just to the right of the blank center column. Read entries across the entire line, from left to right. For example:

```

Mail    collections in universes 6-64
      Mail collections in universes 6-64
Mail collections in  universes 6-64

```

Each index entry is followed by a book number (6 in the example above), a hyphen, and a page number (64 in the example). When an entry contains references to more than one book, the new book number precedes the relevant page number(s). For example:

```
Sending message to another user 1-72, 1-160, 6-104
```

This entry directs you to pages 72 and 160 of Book 1, *User's Guide to Symbolics Computers*, and page 104 of Book 6, *Communicating with Other Users*.

Page numbers designate the beginning of the section in which the item is described. For multipage sections, this might not be the page on which the relevant description actually appears.

Entries for the Release Notes use the mnemonic RN rather than a number.

Entries are sorted by the method called "letter-by-letter alphabetizing". This method ignores spaces and other white space between words. The advantage, in a large index such as this one, is that you do not have to know the writer's style for spelling certain words that do not have standard spellings, and you can predict where the word will fall in the alphabetical spelling.

#	#	#
	≠ function 2-100	
≤	≤ function 2-99	≤
≥	≥ function 2-99	≥
*	* *** variable 1-180 ** variable 1-180	*
!	! Exclamation point (!) line continuation indicator 3-23, 3-54 ! character file not backed up flag 5-236 ! Dired command 3-153	!
#	# #♦ Reader Macro 2-30 #* syntax 2-637, 2-642 #' Reader Macro 2-28 #' special form 2-162 #+ Reader Macro 2-29 SCL and #+ Reader Macro 2-644, 2-645 #, Reader Macro 2-28 SCL and #- Reader Macro 2-30 #- Reader Macro 2-644, 2-645 #. Reader Macro 2-29 #/ character identifier 2-277 #\ or #/ Reader Macro 2-27 #: package qualifier 2-584 #: Reader Macro 2-29 #:symbol-syn-stream 5-23 #:syn-stream 5-23 #< Reader Macro 2-30 #b Reader Macro 2-29 #m Reader Macro 2-29 #M sharp-sign reader macro 4-329 #n Reader Macro 2-29 #o Reader Macro 2-29 #P Reader Macro 2-643 #q Reader Macro 2-29 #Q sharp-sign reader macro 4-329 # reader macros 2-27 #r Reader Macro 2-29 SCL and #S macro form 2-642 @# text formatting command 37 #x Reader Macro 2-29 #\backspace 7-108 #\ character identifier 2-277 #\ or #/ Reader Macro 2-27 #\return 7-108 #\tab 7-108 #~ Reader Macro 2-28	#

Use #|...|# Instead of #|...|# to Comment Out Lisp Code RN-79  
 #| Reader Macro 2-30  
 Use #|...|# Instead of #|...|# to Comment Out Lisp Code RN-79

- |    |                                                                                                                                                                                                                                                                           |    |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| \$ | \$ character do not reap file flag 5-236<br>\$ Dired command 3-152                                                                                                                                                                                                        | \$ |
| &  | & keywords 2-151, 2-309                                                                                                                                                                                                                                                   | &  |
| *  | * character 5-153<br>* function 2-102<br>* string 9-30<br>* variable 1-179<br>*\$ function 2-102<br>* :wild pathname component specifier 5-186<br>* descriptor file indicator 9-24<br>:* keyword symbol 9-30<br>@* text formatting command 37<br>SCL and * variable 2-642 | *  |
| +  | + function 2-100<br>+ variable 1-179<br>+\$ function 2-100<br>++ variable 1-180<br>+++ variable 1-180<br>+ flag in Zmacs 3-115                                                                                                                                            | +  |
| ,  | , Dired command 3-149                                                                                                                                                                                                                                                     | ,  |
| -  | - function 2-101<br>- variable 1-179<br>-\$ function 2-101<br>- message status 1-57                                                                                                                                                                                       | -  |
| .  | Dot (.) in symbols 2-357<br>. Font Editor drawing command 3-236<br>@. text formatting command 3-37                                                                                                                                                                        | .  |

/	/	/
	// function 2-102 // variable 1-179 // <b>\$</b> function 2-103 / Font Editor command 3-261	
1	1	1
Reading Integers in Bases Greater Than Audio Wavetable Size Increased From 256 to DAT	1+ function 2-104 1+ <b>\$</b> function 2-104 1- function 2-104 1- <b>\$</b> function 2-105 10 2-21 1024 Words RN-60 16-bit Data packet 9-118 <b>sys:</b> <b>%1d-alloc</b> function 2-246 <b>sys:</b> <b>%1d-aref</b> function 2-246 <b>sys:</b> <b>%1d-aset</b> function 2-246 <b>zwei:</b> <b>*1r-reply-mode*</b> variable 6-90 c-X 1 Zmacs command 3-130 c-X 1 Zmail Command 6-39	
2	2	2
Two Windows (c-X) Audio Wavetable Size Increased From c-X c-X	2) Zmacs command 4-65 256 to 1024 Words RN-60 2 Zmacs command 3-129 2 Zmail Command 6-39	
3	3	3
View Two Windows (c-X) New Microcode In Release 6.0:  Addition of Subtraction of New Functions: <b>%32-bit-plus</b> and  New Functions: @b text formatting command @i text formatting command @t text formatting command  The Mouse Scaling Now Works on <b>sys:%baep</b> Now Works on  Release 6.0 Is Supported Only on PC Metering on the  Instructions for Managing Disk Space on the  c-X	3) Zmacs command 4-65 319. RN-7 32-bit Numbers 2-119 32-bit mode data 8-29 32-bit numbers 2-119, RN-33 32-bit numbers 2-119, RN-33 <b>%32-bit-difference</b> RN-33 <b>%32-bit-difference</b> function 2-119, RN-33 <b>%32-bit-plus</b> function 2-119, RN-33 <b>%32-bit-plus</b> and <b>%32-bit-difference</b> RN-33 3-34 3-34 3-34 36-bit mode data 8-29 3600-family Calendar Clock 7-355 3600-family Computers RN-68 3600-family Consoles That Support Digital Audio RN-68 3600-family Disk System Definitions and Constants 8-29 3600-family Disk System User Interface 8-29 3600-family Machines RN-7 3600 Family 8-61 3600 FEP files selected for dumping 0-20 3640 0-55 3640: Customizing and Saving the World 0-55 3640: Saving Subsequent Worlds 0-57 3 Zmacs command 3-129	

4		4	4
	Modified Two Windows (c-X Canonical types in UNIX c-X	4) Zmacs command 4-65 4.2 Pathnames 5-178 4 Zmacs command 3-129	
5		5	5
	Compatibility with the Pre-release Release Running Release	5.0 Package System 2-625 5.0 to Release 6.0 Documentatlon Map RN-4 5 and Release 6.0 concurrently 0-87	
6		6	6
	Changes to Networks in Release Changes to the FEP in Release Changes to the File System in Release Changes to the Lisp Language in Release Changes to the User Interface in Release Changes to Utilities in Release Changes to Zmacs in Release Changes to Zmail in Release c-m-Y Has Been Changed to c-X c-Y in Release Common Lisp Character Switchover in Release Ephemeral-object Garbage Collection in Release	6.0 RN-75 6.0 RN-77 6.0 RN-71 6.0 RN-9 6.0 RN-55 6.0 RN-51 6.0 RN-47 6.0 RN-69 6.0 RN-69 6.0 RN-12 6.0 RN-51	
	Examples of Specifications of Panes and Constraints Before Release	6.0 7-196	
	Files Using <b>defwrapper</b> Forms Must Be Recompiled in Release	6.0 RN-28	
	Funargs Supported in Release Improvements to Lisp in Release Improvements to the File System in Release Improvements to the User Interface in Release Improvements to Utilities in Release Improvements to Zmacs in Release Incompatible Changes to Lisp in Release Incompatible Changes to Networks in Release	6.0 RN-10 6.0 RN-40 6.0 RN-71 6.0 RN-66 6.0 RN-52 6.0 RN-47 6.0 RN-9 6.0 RN-75	
	Incompatible Changes to the User Interface in Release	6.0 RN-55	
	Incompatible Changes to Zmacs in Release Incompatible Changes to Zmail in Release Lexical Scoping in Release New Features in Lisp in Release New Features in Networks in Release New Features in the User Interface in Release New Features in Utilities in Release New Features in Zmacs in Release Notes and Clarifications for Release	6.0 RN-47 6.0 RN-69 6.0 RN-10 6.0 RN-31 6.0 RN-75 6.0 RN-61 6.0 RN-51 6.0 RN-48 6.0 RN-79	
	Specifying Panes and Constraints Before Release	6.0 7-188	
	Summary of Character and String Compatibility Functions in Release	6.0 RN-18	
	Symbols Added to or Removed From <b>global</b> in Release	6.0 RN-24	
	New Microcode in Release Release New Feature in Release New Feature in Release New Feature in Release Running Release 5 and Release Release Release 5.0 to Release Release Booting the Release	6.0: 319. RN-7 6.0: Introduction and Highlights RN-1 6.0: Symbolics Common Lisp RN-45 6.0: the Command Processor RN-61 6.0: the Document Examiner RN-52 6.0 concurrently 0-87 6.0 Documentation Changes RN-2 6.0 Documentation Map RN-4 6.0 is Supported Only on 3600-family Machines RN-7 6.0 world 0-87	



Elapsed Time in 60ths of a Second 7-356

**8****8****8**

DAT 8-bit Data packet 9-118  
c-X 8 Zmacs command 3-129

:

:

:

: character as keyword identifier 2-576  
: message status 1-57  
: package qualifier 2-585, 2-601, 2-603

;

;

;

Semicolon (;) comment indicator 3-171  
Semicolon (;) macro character 2-26  
Set Comment Column (c-X ;) Zmacs command 4-23  
c-X ; Zmacs command 3-172

&lt;

&lt;

&lt;

< function 2-99  
< :oldest version specifier 5-186  
< :oldest version specifier 5-185  
<= function 2-99

=

=

=

= function 2-98  
=> link indicator in directory listings 5-236  
= Dired command 3-150  
@= text formatting command 3-37  
c-X = Zmacs command 3-47

&gt;

&gt;

&gt;

> function 2-98  
@> text formatting command 3-37

?

?

?

? Dired command 3-148  
? Font Editor command 3-260  
HELP ? Zmacs command 1-51, 3-14

**A****A****A**

Example of a Search String for HELP A 3-46  
FUNCTION A 1-141  
Areas (A) 1-186  
Abbreviated FEP input 1-197  
BABYL pathname type abbreviation 5-180  
CWARNS pathname type abbreviation 5-180  
Function abbreviation 2-28  
INIT pathname type abbreviation 5-180  
LISP pathname type abbreviation 5-180  
MAIL pathname type abbreviation 5-180

MIDAS pathname type abbreviation 5-180  
 OUTPUT pathname type abbreviation 5-180  
 PATCH-DIRECTORY pathname type abbreviation 5-180  
 (PDIR) pathname type abbreviation 5-180  
 PRESS pathname type abbreviation 5-180  
 QFASL pathname type abbreviation 5-180  
 QWABL pathname type abbreviation 5-180  
 TEXT pathname type abbreviation 5-180  
 ULOAD pathname type abbreviation 5-180  
 UNFASL pathname type abbreviation 5-180  
 XMAIL pathname type abbreviation 5-180  
 UNIX pathname abbreviations 5-180  
 VAX/VMS pathname abbreviations 5-180  
 ABORT 1-139, 2-532, 4-98  
 Dired Abort 3-148  
 Exiting From the Debugger: Abort 4-261  
 Abort character 2-32  
 ABORT command 1-62, 1-67, 6-23, 6-42  
**sys:** **abort** flavor 2-502, 2-526, 2-532, 4-129  
 ABORT key 2-502, 2-526  
 Abort signals 9-98  
 Abort At Top Level 3-42  
 Transmit Abort bit 9-131  
 ABORT Debugger command 4-264, 4-271  
 ABORT Dired command 3-148  
 Aborted Zmail Messages 6-43  
 ABORT Font Editor command 3-261  
 Aborting Zmail Commands 6-23  
 Abort Patch (m-X) 3-191, 4-243  
 [Abort Send] Editor menu item 6-42  
**net:** **abort-service-access-path-future** function 9-43  
 ABORT Zmacs command 3-42  
 [Abort] 7-247, 7-251  
 [Abort] Filter Creation Display menu item 6-60  
 [Abort] Save-Exit menu item 6-17  
**above loop** keyword 2-207, 2-225  
**abs** function 2-101  
 Absolute value 2-101  
 Absolute branch format directive 5-35  
 Abstract types 2-418, 2-425  
**:abstract-flavor** Option for **defflavor** 2-441, 2-450  
 Abstract-operation functions 2-418  
**abstract-dynamic-item-list-mixin** flavor 7-235  
**tv:** abstract types 2-431  
 Combining accent 1-233  
 Acute **accept** function 9-136  
**chaos:** **:accept** message 9-212  
**:accept-p** property 9-215  
 Messages Accepted by **tv:menu** 7-299  
**:accept-p** stream option for **net:define-server** 9-51  
 CLM: What the Read Function Accepts 2-643  
 The Reader Now Accepts Floating-point Infinity RN-41  
**make-array** No Longer Accepts Obsolete Form RN-28  
**defflavor** Now Accepts the Option **:required-init-keywords** RN-40  
 Changing default selections for tape access 0-17  
 Tape Access 0-17  
 Access functions 2-147  
**fs:** **access-error** flavor 2-549  
 Direct Access Bidirectional File Streams 5-116  
 Keyboard as random access device 7-160  
 Access files on network file servers 9-125  
 Direct Access File Streams 5-115  
 Effect of Character Set Translation on Direct Access File Streams 5-10  
 Accessing Directories 5-117  
 Accessing Files 5-91  
 Accessing Arrays Specially 8-18

- CLM: Accessing Directories 2-645
- Functions for Accessing Directories 5-117
- Accessing FEP Files 5-222, 8-43
- Accessing Multidimensional Arrays as
  - One-dimensional 2-245
- Accessor functions 2-379, 2-401
- :accessor-prefix** Option for **deffavor** 2-441, 2-448
- Disk Event Accessor Functions 8-33
- Direct Access Output File Streams 5-116
- Service access path 9-41
- File access paths 9-55
- Chaosnet File Access Protocol 9-125
- Accidental deletion 3-43
- Acknowledgement 9-111
- Waiting for Acknowledgement of the EOF Packet on Writing with
  - QFILE 9-177
- Acknowledgement packet header field 9-106, 9-111, 9-117
- A command 6-23
- acquired machine 0-87
- Across Physical Hosts 5-196, RN-72
- action 7-82
- action 7-82
- action 7-82
- action 7-82
- action 7-82, 7-86
- action 7-86
- Actions 1-130, 1-131, 1-132
- Actions 1-133
- Actions on Code in a Zmacs Buffer 4-71
- Actions with Mouse-sensitive Items 7-280
- Activate window 7-295
- :activate-p** init option for **tv:menu** 7-295
- :activate-p** init option for **tv:essential-window** 7-107
- :activation** option 5-63, 7-31
- Active frame 2-494
- Active patches 3-186, 3-190, 4-238, 4-242
- Active processes 8-75, 8-77
- Active windows 7-76
- :active-p** method of **si:process** 8-92
- sys: active-processes** variable 8-80
- QFILE active channel 9-153
- Active elements in arrays 2-238, 2-247
- active frame 2-494
- Active inferiors of windows 7-76, 7-79, 7-86
- active processes 1-185, 4-303
- [Active Structure Edit] Maintenance Operations menu
  - item 0-39
- Activities and Window Selection 7-94
- Activity 7-94
- Activity and Window Selection RN-66
- Activity Command 1-31, 4-9
- :activity** command processor argument type 7-48
- Actual parameters 2-151
- netl: \*actual-number-of-wired-packet-buffers\***
  - meter 9-198
- Acute accent 1-233
- [Add System] 0-20
- :cold** option for **add-initialization** 8-67
- :first** option for **add-initialization** 8-67
- :login** option for **add-initialization** 8-67
- :logout** option for **add-initialization** 8-67
- :normal** option for **add-initialization** 8-67
- :now** option for **add-initialization** 8-67
- :once** option for **add-initialization** 8-67
- :redo** option for **add-initialization** 8-67

- :site** option for
- :system** option for
- compiler:**
- zwei:**
- chaos:**
- Symbols
- Optional Argument **:ask**
- Improvements to **tv:**
- :keyboard-process** option for **tv:**
- :process-name** option for **tv:**
- :typeahead** option for **tv:**
- tv:**
- add-initialization** 8-67
- add-initialization** 8-67
- add-initialization** function 8-67
- add-network** message 9-204
- add-network** message to interfaces 9-210
- add-optimizer** special form 4-327
- add1** function 2-104
- add-asynchronous-character** method of **si:interactive-stream** 7-17
- add-bug-recipient** function 6-31
- Add Cc Field Zmail Command 6-37
- add-contact-name-for-protocol** function 9-54
- Add Disk-type command 1-201
- Added to or Removed From **global** in Release 6.0 RN-24
- Added to **zwei:save-all-files** RN-68
- Add Fcc Field Zmail Command 6-37
- Add From Field Zmail Command 6-38
- add-function-key** RN-68
- add-function-key** 7-135
- add-function-key** 7-135
- add-function-key** 7-135
- add-function-key** function 7-135
- add-highlighted-item** method of **tv:menu-highlighting-mixin** 7-243
- add-highlighted-value** method of **tv:menu-highlighting-mixin** 7-243
- Adding a LMFS Partition 1-212
- Adding an Item to the Create Column 7-239
- Adding an Item to the Programs Column 7-239
- Adding an Item to the System Menu 7-238
- Adding a Partition to LMFS 0-35, 5-213, 5-219
- Adding a Spare World Load as LMFS File Space 1-212, 5-219
- Adding a Type Keyword Property 7-269
- Adding Bug Lists to Zmail 6-31
- Adding item to menu 7-235
- Adding keywords to messages 6-75
- Adding new keywords to initialization functions 8-67
- Adding New Keywords to **make-system** 4-227
- Adding new methods 2-438
- Adding new networks 9-37
- Adding new objects to the namespace database 9-22
- Adding New Options to **defsystem** 4-214
- Adding new symbols to locked packages 2-626
- Adding patches to Lisp image 0-46
- [Add in Gray] Font Editor menu item 3-240, 3-260
- Adding to the End of an Array 2-251
- add-initialization** 8-67
- add-initialization** 8-67
- add-initialization** 8-67
- add-initialization** 8-116
- add-initialization** 8-67
- Adding a Type Decoding Method 7-269
- Add In-reply-to Field Zmail Command 6-38
- Addition 2-100, 2-104
- Additional Character Object Enhancements RN-15
- Addition of 32-bit numbers 2-119, RN-33
- fs:** **add-logical-pathname-host** 5-197
- Add More Text Zmail Command 6-38
- Add Paging-file command 1-201
- Add Patch (m-X) 3-188, 4-240
- Add Patch Changed Definitions (m-X) 3-189, 4-241
- Add Patch Changed Definitions of Buffer (m-X) 3-188, 4-241

- Add region to patch file 3-186, 4-238
- Address 9-37
- address 8-29
- address 1-198
- address 8-29
- address 9-108
- address 1-201
- address 5-225, 8-46
- address 8-29
- :address** attribute 9-37
- address:** Host Object Attribute 9-8
- Addresses 9-207
- Addresses 9-37
- addresses 9-104
- Addresses and Indices 9-104
- Addressing 9-89
- Addressing 6-95
- address in routing table 9-108
- :address** option for **net:define-server** 9-51
- Address packet header field 9-106
- Address packet header field 9-106
- Address register 9-131
- :address-resolution-parameters** message 9-213
- Address Zmail Command 6-45
- Address Zmail Command 6-45
- Address Zmail Command 6-45
- Address Zmail Command 6-45
- add-select-key** function 7-137
- Adds Private Patch to Your World RN-53
- Add Subject Field Zmail Command 6-38
- Add to Field Zmail Command 6-37
- tv:** **add-to-system-menu-create-menu** function 7-239
- tv:** **add-to-system-menu-programs-column** function 7-239
- tv:** **add-typeout-item-type** special form 7-282
- A Dired command 3-153
- adjustable arrays 2-641
- adjust-array-size** function 2-249
- :adjust-geometry-for-new-variables** method of **tv:choose-variable-values-window** 7-276
- Adjusting the FED Display 3-255
- Administrative Functions 9-28
- Advanced General-purpose Stream Operations 5-13
- :advance-input-buffer** message 5-21
- :advance-output-buffer** message 5-21
- Advice 4-284
- Advice 4-283
- Advice to functions 4-281
- advise-1** function 4-283
- advise-within** special form 4-285
- advised-functions** variable 4-283
- advise** special form 2-302, 4-281
- Advising a Function 4-281
- Advising One Function Within Another 4-285
- affiliation:** User Object Attribute 9-14
- After-daemon methods 2-431
- after logging out 1-3
- :after** method type 2-455, 2-457
- after-network-initialization-list** variable 9-211
- after powering up 1-1
- After Reading a Zmail Message 1-66
- After Zmail Error 6-24
- After Zmail Error 6-24
- after] **trace** menu item 4-92
- after] **trace** menu item 4-92
- after] **trace** menu item 4-92, 4-98
- Block number field in disk
- Chaosnet
- Disk
- Host
- Setting Chaosnet
- Translate relative file block number into disk
- Unit number field in disk
- Network
- Networks and
- Numeric host
- Dial Network
- Zmail Support for Internet Domain
- Connection
- Destination
- Source
- My
- h-F Move Forward Over
- h-K Kill
- h-RUBOUT Kill Previous
- h-T Transpose
- tv:**
- New Function **note-private-patch**
- tv:**
- tv:**
- tv:**
- SCL and
- Namespace System
- :around**
- Designing the
- si:**
- si:**
- Cold boot
- net:**
- Cold boot
- What to Do
- Garbage on Screen
- No Response
- [Break
- [Cond
- [Cond break

- [Print Warning] after] **trace** menu item 4-92
- Against Deleting LMFS File Partitlons RN-80
- Aggregated Boolean Tests 2-215
- AI-CHAOS-11 9-129
- Aid for Debugging Macros 2-369
- Summary of Debugging Aids 4-273
- Programming Aids for Defining Macros 2-343
- Aids for Flavors and Windows 4-141
- :alias-for-selected-windows** message 7-96
- Aligning Code 4-26
- Aligning Indentation in Zmacs 3-165
- Alist 2-59
- Defaults alist 5-133, 5-147, 5-148
- Filter-keyword alist 6-75
- Filter-mail file alist 6-77, 6-81
- Filter-universe Alist 6-73
- si:encapsulated-definition** debugging info alist element 2-325
- Debugging info alist functions 2-302, 2-323, 2-325
- Macro Expand Expression All (m-X) Zmacs command 4-100
- sys:** **all-processes** variable 8-80
- Set all bits alu function 7-119
- Select All Buffers As Tag Table (m-X) Zmacs command 4-57
- Undo all changes to buffer 3-121
- Disable all character set translation in ASCII files 5-91
- [Clear all choices] Choice Boxes menu item 0-22
- Select All Conversations by References 6-72
- Maclisp **allfiles** function 5-201
- Save All Files (m-X) Renamed to Save File Buffers (m-X) RN-47
- [Close All Files] Maintenance Operations menu item 0-39
- [Expunge] **\*all-flavor-names\*** variable 2-429
- Sending message to All FS] Maintenance Operations menu item 0-39
- Macro Expand Expression **all-lisp-machines** 9-21
- Disk event tasks currently all Lisp Machines at site 1-72, 6-103, 9-135
- Disk event tasks that can be concurrently All Now Bound to m-sh-M RN-47
- Default area to Deallocation **:allocate** message 5-225, 8-45
- Deallocation **:allocate-packet** message 9-206
- neti:** **allocate-resource** function 8-135
- allocated 8-33
- allocated 8-33
- allocate disk arrays 8-31
- allocated objects of a resource 8-135
- allocate-packet-buffer** function 9-197
- allocate\_pkt** function 9-144
- Allocating and freeing Chaosnet storage resources 8-131
- Allocating and freeing window system storage resources 8-131
- Allocating Extra Paging Space 0-44, 5-240
- Funargs and Lexical Closure Allocation 2-139, 2-140, 2-141, 2-312, 2-313
- Storage allocation 2-250, 8-131
- Storage allocation error 2-538
- Memory allocation of conses 2-56
- Clearing the Trap-on-exit Flag for the Current and All Outer Frames 4-266
- Setting the Trap-on-exit Flag for the Current and All Outer Frames 4-266
- &allow-other-keys** RN-39
- &allow-other-keys** Lambda-list Keyword 2-310, 2-373
- How the Package System Allows Symbol Sharing 2-569
- :allow-unknown-keywords** option for **make-stack-group** 8-5
- Clear all points 3-259
- All reply mode 1-67
- List all supported servers 9-216
- [Erase All] Font Editor menu item 3-239, 3-243, 3-259

- aloc** function 2-244
- alphabetic-case-affects-string-comparison** variable 2-273
- alphabetic-case-affects-string-comparison** is Now Obsolete RN-31
- si:** **alphabetic** syntax description 2-34
- alpha-char-p** function 2-270
- alphalessp** function 2-292
- alphanumericp** function 2-270
- Alterant Macros 2-397
- Alterant Macros 2-395
- :alterant** option for **defstruct** 2-385, 2-386
- Alteration of List Structure 2-54
- Altering a Character in the FED Character Box 3-237
- Altering slot values of structures 2-395
- Altering the FED Character Box 3-238
- Altering User Option Variables 7-267
- Altering Zmail Header Fields 6-37
- Alternative configuration 3-227
- Altmode character 2-32
- Alu functions 7-108, 7-118, 7-119
- tv:** **alu-and** variable 7-120
- tv:** **alu-andca** variable 7-119
- tv:** **alu-ior** variable 7-119
- tv:** **alu-seta** variable 7-119
- tv:** **alu-xor** variable 7-119, 7-124
- And alu function 7-120
- And-with-complement alu function 7-119
- Exclusive-or alu function 7-119
- Inclusive-or alu function 7-119
- Set all bits alu function 7-119
- zwei:** **\*always-jump-after-get-new-mail-from-inbox\*** variable 6-85
- always loop** keyword 2-215
- always** option for **:reset** 8-92
- \*always-select-saved-current-msg\*** variable 6-93
- Am I 3-47
- Am I 3-47
- Amplitude envelopes 7-324
- Analyzing Structures 8-16
- and** function 2-178
- and left\*** RN-37
- and loop** keyword 2-207, 2-210, 2-216, 2-222
- :and** method combination type 2-455
- :and** method type 2-455, 2-458
- and** special form 2-178
- And-with-complement alu function 7-119
- [And] Filter Creation Display menu item 6-61
- Anonymous module 4-199
- Another 4-285
- Another 3-134
- Another 3-134
- Another Buffer 6-77
- Another Buffer 3-124
- another user 1-72, 1-160, 6-104
- ANS Answer to a simple transaction packet 9-114
- chaos:** **answer** function 9-136
- chaos:** **answer-string** function 9-136
- Chaos: answered-state connection state 9-136
- Answered message property 1-57
- Answering Questions the System Asks 1-227
- ANS Answer to a simple transaction packet 9-114
- ANS Answer to STATUS request 9-123
- :anticyclic** boundary condition for **:draw-cubic-spline** 7-125

- Find
  - :any-tyl** message 5-24
  - Any Candidates 1-123
  - Any Extended Command 3-7
  - :any-tyl** method of **sl:interactive-stream** 7-11
  - :any-tyl** method of **tv:any-tyl-mixin** 4-129
  - :any-tyl** method of **tv:stream-mixin** 7-134
- :any-tyl** method of **tv:**
  - any-tyl-mixin** 4-129
  - any-tyl-mixin** flavor 4-129
  - :any-tyl-no-hang** method of **sl:interactive-stream** 7-11
  - :any-tyl-no-hang** method of **tv:stream-mixin** 7-135
- [Tree edit
  - any] File System Maintenance menu item 0-39, 5-231
  - ap-1** function 2-244
  - ap-2** function 2-245
  - ap-leader** function 2-245
  - append** function 2-51, 2-56
  - Append Buffer (m-X) Converse Command 1-71
  - Append Buffer m-X Converse Command 6-103
  - Append Conversation (m-X) Converse Command 1-72
  - Append Conversation by References 6-72
  - Append Conversation m-X Converse Command 6-103
  - Appending messages 6-71
  - Appending, Prepending, and Inserting Text in Zmacs 3-124
  - Appending a Region to a Buffer 3-124
  - Appending a Region to a File 3-124
  - appending loop** keyword 2-212
  - append loop** keyword 2-212
  - :append** method combination type 2-455, 2-456
  - Append Next Kill 3-75
  - Append To Buffer 3-124
  - Append To File (m-X) Zmacs command 3-124
  - Append to Referenced Msg 6-72
  - Append to tape dump parameter 0-6
  - [Append] Message Summary Line menu item 6-71
  - Application: Handlers Examining the Stack 2-494
  - Application: Handlers Examining the Stack 2-495
  - Applications Programs Treat Conditions 2-481
  - apply** function 2-8, 2-151, 2-159
  - apply** and **funcall** No Longer Work for Special Forms RN-27
- Reference Material:
  - How
    - Apply Function 3-153
    - applyhook** 4-290
    - applyhook** RN-11
    - applyhook** function 4-291
    - applyhook** variable 4-291
    - applyhook** and lexical scoping RN-11
    - Applying Arbitrary Functions to Files in Dired 3-153
    - Applying functions to list items 2-201
    - :appropriate-width** method of **tv:choose-variable-values-window** 7-276
- Dired
  - Apply Function 3-153
  - applyhook** 4-290
  - applyhook** RN-11
  - applyhook** function 4-291
  - applyhook** variable 4-291
  - applyhook** and lexical scoping RN-11
  - Applying Arbitrary Functions to Files in Dired 3-153
  - Applying functions to list items 2-201
  - :appropriate-width** method of **tv:choose-variable-values-window** 7-276
- Changes to **evalhook** and
  - applyhook** 4-290
  - applyhook** RN-11
  - applyhook** function 4-291
  - applyhook** variable 4-291
  - applyhook** and lexical scoping RN-11
  - Applying Arbitrary Functions to Files in Dired 3-153
  - Applying functions to list items 2-201
  - :appropriate-width** method of **tv:choose-variable-values-window** 7-276
- Variable
  - Apropos 1-51, 3-14
  - Apropos 3-210
  - apropos** function 1-178, 4-38
- Function
  - Apropos (m-X) Zmacs command 4-41
  - Apropos (m-X) Zmail command 6-5, 6-15
- Zmail:
  - Apropos Command 6-6
- Variable
  - Apropos Zmacs command 3-210
  - ar-1** function 2-244
  - ar-2** function 2-244
- Select
  - Arbitrary Format Mail File (m-X) Zmail command 6-95
- Applying
  - Arbitrary Functions to Files in Dired 3-153
- Conceptual Zmail
  - Architecture 6-11
- Zmail
  - Architecture 6-11



- Arctangent 2-106, 2-107
- area 8-107
- Compiled function storage area 1-185, 4-303
- Display status of window Area 3-19
- Echo area 8-107
- Packages storage area 8-107
- Property list storage area 8-107
- Symbol print names storage area 8-107
- Symbols storage area 8-107
- Zmacs Echo Area 3-19
- Area name 8-103
- Area number 8-103
- Echo Area's Minibuffer 3-19
- area-list** variable 8-106
- area-name** function 8-106
- %area-number** function 8-106
- sys:** **area-overflow** flavor 2-537
- Area and Region Predicates 8-108
- Area Functions and Variables 8-104
- :area** init option for **si:eq-hash-table** 2-71
- :area** keyword for **make-list** 2-49
- :area** option for **make-array** 2-241, 8-31
- si:** **area-predicate-all-areas** function 8-108
- si:** **area-predicate-areas-with-objects** function 8-108
- Areas 8-103, 8-121
- Constants storage areas 8-107
- Display status of areas 1-185, 4-303
- Interesting Areas 8-107
- Introduction to Areas 8-103
- Mapping functions over areas 8-108
- Memory management of storage areas 8-103
- Mouse-sensitive Areas 7-203
- Storage management of areas 8-103
- Areas (A) 1-186
- Areas Example 7-286
- area to allocate disk arrays 8-31
- aref** 2-255
- aref** function 2-235, 2-244, 2-277
- Arg 3-24
- arg** function 2-165
- dbg:** **arg** function 4-267
- %arg-desc-Interpreted** numeric argument descriptor field 2-324
- %%arg-desc-Interpreted** numeric argument descriptor field 2-324
- %arg-desc-max-args** numeric argument descriptor field 2-324
- %arg-desc-min-args** numeric argument descriptor field 2-324
- %arg-desc-quoted** numeric argument descriptor field 2-324
- %arg-desc-rest-arg** numeric argument descriptor field 2-324
- Quick Arglist 3-47
- Arglist (m-X) 3-48
- arglist** declaration 2-312
- arglist** function 2-302, 2-323, 4-43
- arglist** variable 2-325, 4-98, 4-276
- Quick Arglist (c-sh-A) Zmacs command 4-43
- Arglist (m-X) Zmacs command 3-48
- :arg** option for **trace** 4-92, 4-278
- :argpdl** option for **trace** 4-92, 4-277
- [ARGPDL] **trace** menu item 4-92
- args-info** function 2-324
- %args-info** function 2-325
- Argument RN-42
- argument 2-639
- array-pop** Takes an Optional Second SCL and **documentation** as **setf**

- set-syntax-macro-char** Takes an Optional Fourth Argument RN-40
- si:install-microcode** Takes a Second Optional Argument RN-41
- Argument Lists 4-43
- argument-typecase** special form 2-506
- Argument **:ask** Added to **zwei:save-all-files** RN-63
- argument descriptor 2-324
- argument descriptor field 2-324
- argument descriptor field 2-324
- argument descriptor field 2-324
- argument descriptor field 2-324
- argument descriptor field 2-324
- argument descriptor field 2-324
- argument for macro-expander functions 2-138
- argument for **the** special form 2-640
- argument list 3-47, 3-48
- argument lists 2-189
- argument number without consing list 8-23
- Arguments 2-153
- arguments 2-505
- Arguments 3-24
- arguments 3-24
- Arguments 3-24
- arguments 2-139
- arguments 4-324
- Arguments 2-138
- arguments 3-22, 3-24, 3-45
- Arguments 3-24
- Arguments 2-157
- Arguments: Starting Servers 9-214
- Arguments: Starting Servers 9-215
- Arguments and Motion Commands 3-60
- Arguments and the Motion Commands 3-60
- Arguments to **:initial-input** Input Editor Option RN-67
- Arguments to a Command 1-11
- Arguments to functions 2-323
- Arguments with Motion Commands 3-60
- Arguments with Motion Commands 3-60
- argument to **:patchable** option for **defsystem** 4-236
- Argument to **:replace-input** Message to Interactive Streams RN-67
- Argument to **read-or-end** RN-57
- argument to **setsyntax** 2-36
- argument to **setsyntax** 2-36
- argument to **setsyntax** 2-36
- argument to **setsyntax** 2-36
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument to **typep** 2-9
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- argument type 7-48
- activity** command processor
- boolean** command processor
- :date** command processor
- :documentation-topic** command processor
- :enumeration** command processor
- :font** command processor
- :host** command processor
- :integer** command processor
- :make-system-version** command processor
- :number** command processor
- :package** command processor
- :pathname** command processor
- Optional
- Numeric
- %arg-desc-interpreted** numeric
- %%arg-desc-interpreted** numeric
- %%arg-desc-max-args** numeric
- %%arg-desc-min-args** numeric
- %%arg-desc-quoted** numeric
- %%arg-desc-rest-arg** numeric
- environment*
- SCL and *value-type*
- Display
- Keywords in
- Variable
- Binding Parameters to
- Checking for valid
- Defaults to Numeric
- Echoing
- Example of Numeric
- Functional
- Ignored
- Lexical Environment Objects and
- Numeric
- Overview of Numeric
- Safety of **&rest**
- General
- Medium
- Negative Numeric
- Numeric
- New Optional
- Supplying Positional
- Example of Negative Numeric
- Example of Numeric
- patch-atom*
- New Optional
- Change in Optional
- :macro**
- :single**
- :splicing**
- nil*
- :atom**
- :fix**
- :float**
- :instance**
- :list-or-nil**
- :non-complex-number**
- :null**
- :number**
- argument type 7-48

- :printer** command processor
- :string** command processor
- :system** command processor
- Command Processor
  - Base Flavor: **sys:**
  - sys:**
    - Use of
    - Performing
  - Chaosnet
- Adding to the End of an
  - art-16**
  - art-string**
  - art-fat-string**
  - Bit-save
- Changing the Size of an
  - Command
  - Copying an
- Copying From and to the Same
  - Getting Information About an
  - Inspecting an
  - Named structure
  - Screen
- argument type 7-48
- argument type 7-48
- argument type 7-48
- Argument Types 7-48
- Arithmetic 2-100
- Arithmetic errors 2-534
- arithmetic-error** 2-534
- arithmetic-error** flavor 2-534
- Arithmetic Operations on Characters RN-21
- arithmetic operations on characters in SCL 2-265, RN-12
- :around** Advice 4-284
- Arpanet digest messages 6-48
- Arpanet Gateway Protocol 9-127
- Arpanet INR/INS attention-getting feature 9-125
- Arpanet Name/Finger protocol 9-126
- Arpanet Telnet and Supdup protocols 9-125
- Arpanet Time protocol 9-127
- Array 2-251
- array 9-198
- array 2-277
- array 2-277
- array 4-116, 4-129, 7-78, 7-79
- Array 2-249
- array 7-330
- Array 2-252
- Array 2-253
- Array 2-246
- array 4-299
- array 2-238, 2-241
- array 7-79
- Array decoding 2-255
- Array dimensions 2-235, 2-247
- Array Errors 2-540
- \*array** function 2-263
- Array Initialization 2-241
- Array leaders 2-238, 2-241, 2-248
- array** macro 2-263
- Array Registers 2-255
- Array subscripts 2-235, 2-248
- Array Types 2-235, 2-241
- array-#-dlms** function 2-247
- array-dimensions** function 2-247
- array-element loop** iteration path 2-225
- array-elements loop** iteration path 2-225, 2-257
- array-grow** function 2-249
- array-leader** function 2-245
- array-length** function 2-246
- array-pop** function 2-252
- array-pop** Takes an Optional Second Argument RN-42
- array-push** function 2-251
- array-register** 2-255
- sys:**
- sys:** **array-register** declaration 2-312
- Array-register variable 2-255
- array-type** function 2-246
- array-types** function 2-237
- array-types** variable 2-237
- array-active-length** function 2-247
- Array as pattern in dummy description 7-188
- array-bits-per-element** function 2-238
- array-bits-per-element** variable 2-238
- arraycall** function 2-262, 2-263
- array can contain 8-31
- array-column-major-index** RN-37
- array-column-major-index** function 2-248
- Number of disk blocks disk
- New Function:

- sys:** **array-column-span** function 8-18
- Macisp Array Compatibility 2-262
- The Array Data Type 2-5
- array-dimension-n** function 2-247
- arraydms** function 2-247
- array-displaced-p** function 2-248
- Bit size of array elements 2-236
- Character strings as array elements 2-236
- Integers as array elements 2-236
- Returning array elements 2-244
- Storing into array elements 2-244
- array-element-size** function 2-238
- array-elements-per-q** function 2-238
- array-elements-per-q** variable 2-238
- New Array Error Flavor:
  - sys:array-wrong-number-of-subscripts** RN-38
- Basic Array Functions 2-241
- array-has-leader-p** function 2-248
- sys: array-has-no-leader** flavor 2-540
- Array header information 2-239
- array-in-bounds-p** function 2-248
- array-indexed-p** function 2-248
- array-indirect-p** function 2-248
- CLM: Array Information 2-642
- Packets with array leader 9-200
- Line Item **array-leader-length** function 2-249
- Array Leaders 7-313
- arrayp** function 2-8, 2-69
- array-push-extend** function 2-251
- array-push-portion-extend** RN-37
- array-push-portion-extend** function 2-251
- sys: array-register-1d** 2-245
- sys: array-register-1d** declaration 2-312
- Array Register Restrictions 2-258
- Array Registers 2-257
- Array Registers RN-37
- Array Registers and Performance 2-255
- Array Representation Tools 2-237
- :array** returned by **typep** 2-9
- array-row-major-index** function 2-642
- SCL and Arrays 2-235, 2-303
- Active elements in arrays 2-238, 2-247
- CLM: Arrays 2-641
- Command arrays 7-329
- Dead arrays 2-262
- Default area to allocate disk arrays 8-31
- Disk Arrays 8-31, 8-35
- Displaced Arrays 2-239, 2-241, 2-248, 9-198
- Drawing pictures onto arrays 7-118
- Extra Features of Arrays 2-238
- Flonum arrays 2-262
- Grouped Arrays 2-401
- Indirect Arrays 2-240, 2-241, 2-248
- Integer arrays 2-262
- Multics external arrays 2-262
- Multidimensional Arrays 2-237
- Numeric arrays 2-5
- Pixels and Bit-save Arrays 7-78
- Primitives for Drawing Onto Arrays 7-126
- SCL and adjustable arrays 2-641
- SCL and column-major order for arrays 2-641
- SCL and multidimensional arrays 2-641
- Sorting arrays 2-79
- Storage of arrays 2-235
- Un-garbage-collected arrays 2-262
- Arrays, Characters, and Strings 2-233

- SCL arrays and circular-structure labelling restriction 2-641
- Screen Arrays and Exposure 7-79
- Sorting Arrays and Lists 2-79
- Zero-dimensional Arrays Are Now Supported RN-42
- Arrays as functions 2-235
- Arrays as lists 2-236
- Accessing Multidimensional Arrays as One-dimensional 2-245
- Arrays in compiled code files 4-331, 5-241
- Arrays on the control stack 8-26
- arrays on the data stack 8-28
- Consing Arrays Overlaid with Lists 2-250
- Arrays Specially 8-18
- Accessing Arrays That Are Named Structures 2-16
- Printed Representation of Arrays That Are Not Named Structures 2-17
- Printed Representation of Multidimensional array subscripts 2-245
- Multidimensional Array Subscripts RN-22
- Use of Characters as Arrays used as functions 2-305
- art-16b** array type 2-236
- art-1b** array type 2-236
- art-2b** array type 2-236
- art-4b** array type 2-236
- art-8b** array type 2-236
- art-boolean** Array Type 2-237
- art-Nb** Array Type 2-236
- art-q** Array Type 2-236
- art-string** Array Type 2-236
- art-fat-string** Array Type 2-236
- art-q-list** Array Type 2-236
- sys:** **array-wrong-number-of-dimensions** flavor 2-540
- New Array Error Flavor: **sys:** **array-wrong-number-of-subscripts** RN-38
- sys:** **array-wrong-number-of-subscripts** flavor 2-541
- Arrest reasons 8-75
- :arrest-reason** method of **si:process** 8-91
- :arrest-reasons** method of **si:process** 8-91
- Arrest Process State 6-23
- Arrest Reasons 8-91
- :arrest-reasons** option for **make-process** 8-85
- arrow 4-297
- Zmail in Arrow Window 4-116
- Run and Arrow Window: Interaction, Processes, and the Mouse 4-129
- Mouse cursor as an **art-16** array 9-198
- The Basic **art-16b** 9-198
- The **art-16b** array type 2-236
- art-1b** array type 2-236
- art-2b** array type 2-236
- art-4b** array type 2-236
- art-8b** 9-195
- art-8b** array type 2-236
- art-boolean** Array Type 2-237
- art-Nb** Array Type 2-236
- art-q** Array Type 2-236
- art-string** array 2-277
- art-string** Array Type 2-236
- art-fat-string** array 2-277
- art-fat-string** Array Type 2-236
- art-q-list** Array Type 2-236
- as-1** function 2-244
- as-2** function 2-244
- ASCII Characters 2-274
- ascii** function 2-293
- ASCII Strings 2-290
- :ascii-characters** serial I/O parameter 5-253
- ascii-code** function 2-274
- Use of Symbolics Lisp Machine Characters in Source Code Where ASCII Characters Are Desired RN-20

- Disable all character set translation in
- Disable special treatment of Rubout in
  - UNIX
  - Installing an
  - Installing an
  - Registering an
  - Remote
- Questions Users Commonly
  - Optional Argument
- Answering Questions the System
  - netl:**
- Symbol
  - chaos:**
  - Init File Form: Balanced Quotation Marks and
  - Interactive-stream Operations for
    - Output streams to buffered
      - QFILE
      - QFILE Errors and
    - Assignment of RS-232 Signals to Pins in
  - Self-evaluating
    - Channels
    - Arpanet INR/INS
  - :address**
- ASCII character set 5-5, 5-251, 5-253
- ASCII files 5-91
- ASCII files 5-91
- :ascii** option for **with-open-file** 5-91
- ASCII print server 0-67
- ASCII Print Server on UNIX 0-67
- ASCII Print Server on VMS 0-68
- ASCII Print Server on VMS 0-76
- ASCII terminal 9-69, 9-70
- ascii-to-char** function 2-274
- ascii-to-string** function 2-290
- :ascii-translation** stream option for **net:define-server** 9-51
- aset** 2-255
- aset** function 2-235, 2-244
- ash** function 2-115
- Ask 1-228
- :ask-window** Constraint Size Specification 7-188
- :ask** Added to **zwe:save-all-files** RN-68
- :ask** Constraint Size Specification 7-188
- Asks 1-227
- ask-terminal-parameters** function 9-69
- [Ask] Save-Exit menu item 6-17
- as loop** keyword 2-207
- ass** function 2-65
- Assign key bindings 3-208
- Assignment of RS-232 Signals to Pins 5-247
- Assignment of RS-232 Signals to Pins in
  - Asynchronous Null Modems 5-247
- assoc** function 2-65, 8-67
- associated with property list 2-67
- Associating Actions with Mouse-sensitive Items 7-280
- Associating a File with a Buffer 3-122
- Association lists 2-59, 2-64, 2-67, 2-238
- Association of buffers with files 3-30
- Association of files with buffers 3-30
- :assoc tv:choose-variable-values** variable type 7-259
- assq** function 2-64
- assure-enabled** function 9-142
- Asterisks 1-168, 3-215
- Asynchronous Characters 7-139
- :asynchronous-character-p** method of **si:interactive-stream** 7-17
- Asynchronous Characters 7-17
- :asynchronous-characters** init option for **si:interactive-stream** 7-17
- asynchronous devices 5-18, 5-114
- Asynchronous execution of functions 8-85
- Asynchronous Marks 9-192
- Asynchronous Marks 9-191
- Asynchronous Null Modems 5-247
- atan** function 2-107
- atan2** function 2-107
- Atom 1-227, 2-3
- atom** function 2-7
- :atom** argument to **typep** 2-9
- Atomic symbol 2-3
- Atom Query Replace 3-104
- atoms and SCL 2-637
- Atom Word Mode (m-X) Zmacs command 4-12
- attached to user processes 9-104
- attention-getting feature 9-125
- Attribute 2-67
- attribute 9-37

<b>:leader</b> global line	attribute	7-313
<b>:mouse-item</b> line item entry	attribute	7-311
<b>:mouse-self</b> global line	attribute	7-311
<b>:mouse</b> global line	attribute	7-311
<b>:mouse</b> line item entry	attribute	7-311
<b>:service</b>	attribute	9-38, 9-44
<b>address:</b> Host Object	Attribute	9-8
<b>affiliation:</b> User Object	Attribute	9-14
Backspace file	attribute	3-141, 3-143, 5-109
Base	Attribute	3-141
Base file	attribute	3-141, 3-143, 5-109
<i>Baseline</i> Font	Attribute	3-222, 7-144
<b>birthday:</b> User Object	Attribute	9-14
<b>bitmap-printer:</b> Host Object	Attribute	9-9
<i>Char-exists</i> Table Font	Attribute	3-223
Char-height	attribute	7-108
Char-width	attribute	7-108
<b>character-size:</b> Printer Object	Attribute	9-18
<i>Character Height</i> Font	Attribute	3-221, 7-143
<i>Character Width</i> Font	Attribute	3-222, 7-144
<i>Chars-exist-table</i> Font	Attribute	7-145
<b>default-font:</b> Printer Object	Attribute	9-17
<b>default-printer:</b> Site Object	Attribute	9-19
<b>default-bitmap-printer:</b> Site Object	Attribute	9-19
<b>descriptor-file</b>	attribute	9-24
<b>descriptor-file:</b> Namespace Object	Attribute	9-22
<b>descriptor-file</b> keyword for <b>terminal-f-argument</b>	attribute	9-22
<b>dont-reply-to-mailing-lists:</b> Site Object	Attribute	9-20
<b>dplt-logo:</b> Printer Object	Attribute	9-18
<b>file-control-lifetime:</b> Host Object	Attribute	9-11
<b>finger-location:</b> Host Object	Attribute	9-9
<i>Fixed-width</i> Font	Attribute	3-222, 7-144
Fonts	Attribute	3-141
Fonts file	attribute	5-109
<b>font-widths-file:</b> Printer Object	Attribute	9-18
<b>format:</b> Printer Object	Attribute	9-17
<b>header-font:</b> Printer Object	Attribute	9-17
<b>home-address:</b> User Object	Attribute	9-13
<b>home-host:</b> User Object	Attribute	9-13
<b>home-phone:</b> User Object	Attribute	9-13
<b>host:</b> Printer Object	Attribute	9-17
<b>host-for-bug-reports:</b> Site Object	Attribute	9-19
<b>host-protocol-desirability:</b> Site Object	Attribute	9-19
<b>interface-options:</b> Printer Object	Attribute	9-17
<b>interface:</b> Printer Object	Attribute	9-17
<b>internet-domain-name:</b> Namespace Object	Attribute	9-22
<i>Left Kern</i> Font	Attribute	3-222, 7-144
<b>lispname:</b> User Object	Attribute	9-12
<b>local-namespace:</b> Site Object	Attribute	9-19
<b>location:</b> Host Object	Attribute	9-9
<b>login-name:</b> User Object	Attribute	9-12
Lowercase	Attribute	3-142
Lowercase file	attribute	3-142, 3-143, 5-109
<b>machine-type:</b> Host Object	Attribute	9-8
<b>mail-address:</b> User Object	Attribute	9-13
Mode file	attribute	5-109
<b>name:</b> Host Object	Attribute	9-7
<b>name:</b> Network Object	Attribute	9-14
<b>name:</b> Printer Object	Attribute	9-16
<b>name:</b> User Object	Attribute	9-12
<b>name</b> keyword for <b>terminal-f-argument</b>	attribute	9-7
<b>network-namespace</b>	attribute	9-25
<b>nickname:</b> Host Object	Attribute	9-7
<b>nickname:</b> Network Object	Attribute	9-14
<b>nickname:</b> User Object	Attribute	9-13
Nofill file	attribute	3-142, 3-143

**other-sites-ignored-in-zmail-summary:** Site Object Attribute 9-20  
 Package attribute 2-579  
 Package file attribute 5-109  
**page-size:** Printer Object Attribute 9-18  
 Patch-File file attribute 3-143, 5-109  
**peripheral:** Host Object Attribute 9-11  
**personal-name:** User Object Attribute 9-12  
**pretty-name:** Host Object Attribute 9-9  
**pretty-name:** Printer Object Attribute 9-16  
**pretty-name:** Site Object Attribute 9-18  
**primary-name-server:** Namespace Object Attribute 9-22  
**primary-name-server** keyword for **terminal-f-argument**  
 attribute 9-22  
**printer:** Host Object Attribute 9-9  
**print-spooler-options:** Host Object Attribute 9-10  
**project:** User Object Attribute 9-14  
**protocol:** Printer Object Attribute 9-17  
**remarks:** User Object Attribute 9-14  
 SCL and *constituent* character attribute 2-643  
 SCL and *non-terminating macro* character attribute 2-643  
**search-rules:** Namespace Object Attribute 9-21  
**search-rules** keyword for **terminal-f-argument** attribute 9-21  
**secondary-name-server:** Namespace Object Attribute 9-22  
**secondary-name-server** keyword for **terminal-f-argument**  
 attribute 9-22  
**secure-subnets:** Site Object Attribute 9-20  
**server-machine:** Host Object Attribute 9-11  
**service:** Host Object Attribute 9-10  
**short-name:** Host Object Attribute 9-7  
**site-directory:** Site Object Attribute 9-19  
**site-system:** Site Object Attribute 9-19  
**site:** Host Object Attribute 9-7  
**site:** Network Object Attribute 9-14  
**site:** Printer Object Attribute 9-16  
**spooled-printer:** Host Object Attribute 9-10  
**standalone:** Site Object Attribute 9-20  
**subnet:** Network Object Attribute 9-15  
**supervisor:** User Object Attribute 9-14  
**system-type:** Host Object Attribute 9-8  
 Tab-Width file attribute 3-143  
**terminal-f-argument:** Site Object Attribute 9-21  
**timezone:** Site Object Attribute 9-20  
**type:** Network Object Attribute 9-15  
**type:** Printer Object Attribute 9-16  
 Unknown attribute 3-138  
**update-by** attribute 9-33  
**user-property:** Object Attribute 9-8, 9-13, 9-15, 9-16, 9-18, 9-22  
**validate-lmfs-dump-tapes:** Site Object Attribute 9-21  
 Vsp attribute 3-143, 7-108, 7-116  
**work-address:** User Object Attribute 9-13  
**work-phone:** User Object Attribute 9-13  
 Attribute indicator 1-112, 9-4  
 Attribute lists 3-137, 3-138  
 Attribute value 1-112, 9-4  
 Attribute-manipulating Commands 3-137  
 Attribute-manipulating Commands 3-138  
 Example of File Attribute Checking 3-138  
 Buffer and File Attribute Descriptions 3-141  
 Describe Attribute List 3-149  
 File attribute list 2-579  
 Parser for file attribute list 5-109  
 Setting the Zmacs Font in the Attribute List 1-80  
 Reparse Attribute List (m-X) Zmacs command 3-137, 4-10  
 Update Attribute List (m-X) Zmacs command 3-138, 4-10  
 Update Attribute List Query 3-141  
 File Attribute Lists 4-10, 5-109



- Parsing file
- Warnings about file
- Blinker Width* and *Blinker Height* Font
  - Character
- Data Types of Namespace System
  - Ethernet
  - File
  - Font
  - Global line
  - Host
  - Namespace
  - Namespace System
  - Network
- Other Set Commands for File and Buffer
  - Printer
  - Process
  - Reading file
- SCL and *illegal* character
- Set commands for file and buffer
- Setting Buffer
  - Site
- Storing database object
  - User
- User-defined file
- Window
  - File
  - Namespace
  - Namespace
  - Namespace
  - Window
  - Namespace
- Viewing File
- Syntax and Base
  - Buffer and File
- attribute lists 5-109
- attribute lists 3-138
- Attribute lists in files 4-10
- Attributes 3-137
- Attributes 3-223, 7-145
- attributes 3-221, 7-143
- Attributes 1-112, 9-4
- attributes 9-213
- attributes 3-137, 6-96
- attributes 3-221, 7-143
- attributes 7-307
- attributes 9-7
- attributes 9-21
- Attributes 1-112, 9-4
- attributes 9-14
- Attributes 3-140
- attributes 9-16
- Attributes 8-89
- attributes 5-111
- attributes 2-643
- attributes 3-143
- Attributes 3-141
- attributes 9-18
- attributes 9-25
- attributes 9-11
- attributes 5-109
- attributes 7-108
- attributes as pathname properties 5-138
- Attributes for a New Lispm Host 0-79
- Attributes for a New UNIX Host 0-80
- Attributes for a New VMS Host 0-80
- Attributes for Character Output 7-115
- Attributes for New Hosts 0-79
- Attributes in Dired 3-149
- Attributes in Source Files RN-9
- Attributes in Zmacs 3-137
- Attributes of a Mouse-sensitive Item 7-280
- Attributes of buffers 4-10
- Attributes of TV Fonts 3-221, 7-143
- Attributes Table 2-643
- [Attributes] System menu item 4-141
- Audible beep 5-19
- Audio 7-329
- Works on 3600-family Consoles That Support Digital Audio RN-68
- Audio 7-330
- audio-exists** variable 7-330
- audio-index** function 7-331
- audio-limit** function 7-331
- audio-loop** macro 7-334
- audio-room** function 7-331
- audio-start** function 7-335
- audio-stop** function 7-335
- audio:audio-exists** variable 7-330
- audio:audio-index** function 7-331
- audio:audio-limit** function 7-331
- audio:audio-loop** macro 7-334
- audio:audio-room** function 7-331
- audio:audio-start** function 7-335
- audio:audio-stop** function 7-335
- audio:audio-push-audio-stop** function 7-331
- audio:computing-immediate-audio-samples** macro 7-333
- audio:fix-sample** function 7-336
- audio:fix-channel-float** function 7-336
- audio:fix-polyphonic-wave-table-entry**
- SCL and Standard Constituent Character
- Functions, Variables, and Macros for Digital
  - sys:%beep** Now
- Testing for the Existence of
  - audio:**

- function 7-337
- audio:float-sample** function 7-336
- audio:float-channel-fix** function 7-336
- audio:float-polyphonic-wave-table-entry** function 7-337
- audio:frequency-polyphonic-increment** function 7-337
- audio:modify-audio-command-arg** function 7-332
- audio:\*number-of-polyphonic-voices\*** variable 7-330
- audio:polyphonic-wave-table-entry-channels** function 7-337
- audio:push-array-of-audio-samples** function 7-333
- audio:push-audio-jump** function 7-331
- audio:push-audio-load-voice** function 7-331
- audio:push-audio-polyphony** function 7-332
- audio:push-audio-zero-flag** function 7-331
- audio:push-immediate-audio-sample** macro 7-333
- audio:reserve-audio-flags** function 7-334
- audio:sample-channels** function 7-336
- audio:\*sample-rate\*** variable 7-329
- audio:sample-add-fix** function 7-336
- audio:sample-add-float** function 7-336
- audio:sample-add-sample** function 7-336
- audio:set-audio-repeat-count** macro 7-334
- audio:wait-for-audio-flag** function 7-335
- audio:with-audio** macro 7-330
- Audio Command Format 7-322
- Audio command lists 7-321, 7-327
- Audio Command Lists 7-330
- Audio Command Lists 7-334
- Audio Command Opcodes 7-323
- audio commands 7-322
- Audio Facilities 7-317
- Audio Facilities 7-339
- Audio Facilities 7-319
- Audio Facilities 7-329
- Audio Facilities 7-321
- Audio Microtask 7-335
- Audio Microtask 7-321
- Audio Parameters 7-329
- audio:**
  - audio:push-audio-stop** function 7-331
  - Audio Wavetable Size Increased From 256 to 1024 Words RN-60
  - Audio Wrapping Form 7-330
- The
  - :author** FEP file property 5-227, 8-48
  - :author** file property 5-117
  - tv:** **autoexposing-more-mixin** flavor 7-116
  - Autoexposure 7-86, 7-116
  - Auto Fill in Text Mode 1-170, 3-214
  - Auto Fill Minor Mode 3-195
  - Auto Fill Mode 3-142, 3-143, 3-196
  - Auto Fill Mode (m-X) Zmacs command 4-12
  - Automatically 3-102
  - Automatically 6-5
  - Automatically in Zmacs 3-102
  - \*automatically-recover-from-hung-disks\*** variable 8-38
  - Automatic drawing help 3-243
  - Automatic error recovery 8-34
  - Automatic Storage Management 8-101
- Specifying
  - Aux-variables in Lambda Lists 2-157
  - &aux** keyword for **defmacro** 2-373
  - &aux** Lambda-list Keyword 2-310
  - available 9-144
  - Available At a Lisp Listener and in Zmacs 1-128
- Number of input packets
- Lookup Commands
- Building
  - Looping Through
- Format of
  - Digital
- Examples of Using the
  - Introduction to the Digital Lisp Primitives for the Digital Microcode Support for the Digital Starting and Stopping the The Digital
- Digital
  - audio:**
- The
  - tv:**
- Init File Form:
  - Example of Filling Text with
- Overview of Locating and Replacing Strings
  - Zmail: Help Displayed
  - Locating and Replacing Strings
  - si:**

Bytes available in a disk block 8-29  
 Data cells available in a disk block 8-29  
 Lookup Commands Available in an Editor 1-128  
 Lookup Commands Available in the Document Examiner 1-127  
 Lookup Commands Available in the Document Examiner, Editor, and Command Processor 1-122  
 Lookup Commands Available in the Document Examiner and Editor 1-123  
 Number of packet slots available in transmit window 9-144  
 Available virtual memory 8-129  
 Collision avoidance 9-99  
   :await-rewind message to tape streams 5-273  
   c-X A Zmacs command 3-124  
   HELP A Zmacs command 1-51, 3-14, 3-45  
   c-X A Zmail command 6-38

**B**

**B**

FUNCTION  
 Select Buffer (c-X) B 1-141  
   B) Zmacs command 4-59  
   BABYL mail file format 6-95  
   BABYL pathname type abbreviation 5-180  
   Back 3-43  
   Back-Next character 2-32  
   Back-translation 5-189  
   Back bit 9-131  
   **back-convert-constraints** function 7-195  
   backed up flag 5-236  
   Backed up in Dired 3-152  
   Background processes 6-11, 6-12, 9-134  
   Background Process 7-86  
   Background Save (m-X) Zmail Command 6-81  
   Backquote character 2-345  
   Backquote constructing list structure 1-233  
   backquote facility 2-345  
   Backquote macro character 2-26  
   Backslash (\) character 9-24  
   BACKSPACE 1-140  
   Backspace character 2-32  
   Set Backspace (m-X) Zmacs command 3-141, 3-143, 4-10  
   Backspace file attribute 3-141, 3-143, 5-109  
   **:backspace-not-overprinting-flag** init option for  
   **tv:sheet** 7-108, 7-117  
   Going Back to First Indented Character in Zmacs 3-165  
   Backtrace 4-264, 4-271  
   Debugger's backtrace 8-3  
   Backtrace information 4-268  
   Backtrace Commands 4-262  
   Backtrace of the call stack 4-268  
   **:back-translated-pathname** method of  
   **fs:logical-pathname** 5-199  
   LMFS Backup 5-212  
   Finding Backup Copies of Files 0-12  
   Backup dump tape directory 0-10  
   File backup flag 3-153  
   Verifying a backup tape 0-10  
   Backward 1-50, 3-26  
   Backward Character 3-61  
   Backward List 3-65  
   Backward Page 3-69  
   Backward Paragraph 1-50, 3-26, 3-68  
   Backward Sentence 1-50, 3-26, 3-62  
   Backward Sexp 3-65  
   Backward Word 1-50, 3-26, 3-61  
   Zmail Backward-references: Field 6-36  
   Backward Kill Sentence 1-53, 3-28

**B**

- Backward Kill Sexp 1-53, 3-28, 3-79
- Backward Kill Sexp (c-m-RUBOUT) Zmacs command 4-60
- Backward Kill Word 1-53, 3-28, 3-78
- Backward on the Line 3-82
- backward to start of line 3-82
- Backward up List 3-66
- Backward Up List (c-m-X) Zmacs command 3-79
- dbg:** **bad-array-mixin** flavor 2-540
- sys:** **bad-array-type** flavor 2-540
- sys:** **bad-connection-state** flavor 2-555
- sys:** **bad-data-type-in-memory** flavor 2-534
- Badheader message property 1-57, 6-35
- Balanced Quotation Marks and Asterisks 1-168, 3-215
- Balancing Parentheses 4-26
- band-transfer** Service 9-56
- Bands 1-209, 5-215
- bar 8-124
- bar 3-255
- Bars 1-6
- bars for quoting 2-643
- Base 3-138, 4-10
- base 1-227
- Base Attribute 3-141
- Base flavor 2-451
- base** variable 2-14, 7-257
- Base (m-X) Zmacs command 3-141, 3-143, 4-10
- Base and Syntax Defaults 3-139
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- Base Attributes in Source Files RN-9
- Base Command 1-31
- Base Command 1-33
- Base Command 1-33
- Based on Characteristics 6-67
- based on filter 6-49
- Based on **fs:file-request-failure** 2-546
- Based on Position 6-49, 6-67
- based on string 6-49
- Based on **sys:package-error** 2-542
- Based on the Stack of Recently Seen Messages 6-68
- Base file attribute 3-141, 3-143, 5-109
- Base Flavor 2-536
- Base Flavor: **sys:arithmetic-error** 2-534
- Base Flavor: **sys:cell-contents-error** 2-533
- Base Flavor: **sys:floating-point-exception** 2-535
- Baseline 3-222, 3-238, 7-144, 7-145
- Baseline* Font Attribute 3-222, 7-144
- :baseline** method of **tv:sheet** 7-142
- Bases Greater Than 10 2-21
- Base to Decimal RN-9
- Bashing the Process 8-92
- Basic flavors 7-205
- Basic Objects 2-1
- Basic, and Mixin Flavors 7-205
- tv:** **basic-frame** flavor 7-100, 7-177
- tv:** **basic-menu** flavor 7-220
- Basic and Mixin Pop-up and Momentary Menus 7-220
- Basic Array Functions 2-241
- Basic Arrow Window 4-116
- basic-choose-variable-values** 7-270
- basic-choose-variable-values** 7-274
- basic-choose-variable-values** 7-274
- Backward Kill Sexp 1-53, 3-28, 3-79
- Backward Kill Sexp (c-m-RUBOUT) Zmacs command 4-60
- Backward Kill Word 1-53, 3-28, 3-78
- Backward on the Line 3-82
- backward to start of line 3-82
- Backward up List 3-66
- Backward Up List (c-m-X) Zmacs command 3-79
- dbg:** **bad-array-mixin** flavor 2-540
- sys:** **bad-array-type** flavor 2-540
- sys:** **bad-connection-state** flavor 2-555
- sys:** **bad-data-type-in-memory** flavor 2-534
- Badheader message property 1-57, 6-35
- Balanced Quotation Marks and Asterisks 1-168, 3-215
- Balancing Parentheses 4-26
- band-transfer** Service 9-56
- Bands 1-209, 5-215
- bar 8-124
- bar 3-255
- Bars 1-6
- bars for quoting 2-643
- Base 3-138, 4-10
- base 1-227
- Base Attribute 3-141
- Base flavor 2-451
- base** variable 2-14, 7-257
- Base (m-X) Zmacs command 3-141, 3-143, 4-10
- Base and Syntax Defaults 3-139
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- Base Attributes in Source Files RN-9
- Base Command 1-31
- Base Command 1-33
- Base Command 1-33
- Based on Characteristics 6-67
- based on filter 6-49
- Based on **fs:file-request-failure** 2-546
- Based on Position 6-49, 6-67
- based on string 6-49
- Based on **sys:package-error** 2-542
- Based on the Stack of Recently Seen Messages 6-68
- Base file attribute 3-141, 3-143, 5-109
- Base Flavor 2-536
- Base Flavor: **sys:arithmetic-error** 2-534
- Base Flavor: **sys:cell-contents-error** 2-533
- Base Flavor: **sys:floating-point-exception** 2-535
- Baseline 3-222, 3-238, 7-144, 7-145
- Baseline* Font Attribute 3-222, 7-144
- :baseline** method of **tv:sheet** 7-142
- Bases Greater Than 10 2-21
- Base to Decimal RN-9
- Bashing the Process 8-92
- Basic flavors 7-205
- Basic Objects 2-1
- Basic, and Mixin Flavors 7-205
- tv:** **basic-frame** flavor 7-100, 7-177
- tv:** **basic-menu** flavor 7-220
- Basic and Mixin Pop-up and Momentary Menus 7-220
- Basic Array Functions 2-241
- Basic Arrow Window 4-116
- basic-choose-variable-values** 7-270
- basic-choose-variable-values** 7-274
- basic-choose-variable-values** 7-274
- Backward Kill Sexp 1-53, 3-28, 3-79
- Backward Kill Sexp (c-m-RUBOUT) Zmacs command 4-60
- Backward Kill Word 1-53, 3-28, 3-78
- Backward on the Line 3-82
- backward to start of line 3-82
- Backward up List 3-66
- Backward Up List (c-m-X) Zmacs command 3-79
- dbg:** **bad-array-mixin** flavor 2-540
- sys:** **bad-array-type** flavor 2-540
- sys:** **bad-connection-state** flavor 2-555
- sys:** **bad-data-type-in-memory** flavor 2-534
- Badheader message property 1-57, 6-35
- Balanced Quotation Marks and Asterisks 1-168, 3-215
- Balancing Parentheses 4-26
- band-transfer** Service 9-56
- Bands 1-209, 5-215
- bar 8-124
- bar 3-255
- Bars 1-6
- bars for quoting 2-643
- Base 3-138, 4-10
- base 1-227
- Base Attribute 3-141
- Base flavor 2-451
- base** variable 2-14, 7-257
- Base (m-X) Zmacs command 3-141, 3-143, 4-10
- Base and Syntax Defaults 3-139
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- Base Attributes in Source Files RN-9
- Base Command 1-31
- Base Command 1-33
- Base Command 1-33
- Based on Characteristics 6-67
- based on filter 6-49
- Based on **fs:file-request-failure** 2-546
- Based on Position 6-49, 6-67
- based on string 6-49
- Based on **sys:package-error** 2-542
- Based on the Stack of Recently Seen Messages 6-68
- Base file attribute 3-141, 3-143, 5-109
- Base Flavor 2-536
- Base Flavor: **sys:arithmetic-error** 2-534
- Base Flavor: **sys:cell-contents-error** 2-533
- Base Flavor: **sys:floating-point-exception** 2-535
- Baseline 3-222, 3-238, 7-144, 7-145
- Baseline* Font Attribute 3-222, 7-144
- :baseline** method of **tv:sheet** 7-142
- Bases Greater Than 10 2-21
- Base to Decimal RN-9
- Bashing the Process 8-92
- Basic flavors 7-205
- Basic Objects 2-1
- Basic, and Mixin Flavors 7-205
- tv:** **basic-frame** flavor 7-100, 7-177
- tv:** **basic-menu** flavor 7-220
- Basic and Mixin Pop-up and Momentary Menus 7-220
- Basic Array Functions 2-241
- Basic Arrow Window 4-116
- basic-choose-variable-values** 7-270
- basic-choose-variable-values** 7-274
- basic-choose-variable-values** 7-274

- :selected-choice-font** init option for **tv**:
- :stack-group** init option for **tv**:
- :string-font** init option for **tv**:
- :unselected-choice-font** init option for **tv**:
- :value-font** init option for **tv**:
- :variables** init option for **tv**:
- tv**:
- The
- tv**:
- Font
- Font Editor
- :configuration** init option for **tv**:
- :configuration** method of **tv**:
- :configurations** init option for **tv**:
- :constraints** init option for **tv**:
- :get-pane** method of **tv**:
- :pane-name** method of **tv**:
- :panes** init option for **tv**:
- :selected-pane** init option for **tv**:
- :send-all-exposed-panes** method of **tv**:
- :send-all-panes** method of **tv**:
- :send-pane** method of **tv**:
- :set-configuration** method of **tv**:
- tv**:
- basic-choose-variable-values** 7-275
- basic-choose-variable-values** 7-274
- basic-choose-variable-values** 7-275
- basic-choose-variable-values** 7-275
- basic-choose-variable-values** 7-275
- basic-choose-variable-values** 7-274
- basic-choose-variable-values** flavor 7-272
- Basic Choose Variable Values Flavor 7-272
- basic-choose-variable-values** Init-plist
- Options 7-274
- Basic Concepts 3-221
- Basic Concepts 3-227
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-179
- basic-constraint-frame** 7-189, 7-196
- basic-constraint-frame** 7-187
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-179, 7-189, 7-196
- basic-constraint-frame** 7-98, 7-187
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-188
- basic-constraint-frame** 7-188
- basic-constraint-frame** flavor 7-175
- Basic definition of the function spec 2-297, 2-325
- Basic General-purpose Stream Operations 5-11
- basic-lgp-stream** 4-124
- basic-lgp-stream** 4-124
- basic-lgp-stream** flavor 4-124
- Basic List Operations 2-46
- Basic Locking Subprimitive 8-17
- basic-momentary-menu** flavor 7-220
- basic-mouse-sensitive-items** RN-57
- basic-mouse-sensitive-items** 7-283
- basic-mouse-sensitive-items** 7-283
- basic-mouse-sensitive-items** 7-283
- basic-mouse-sensitive-items** Example 7-284
- basic-mouse-sensitive-items** flavor 7-280
- basic-mouse-sensitive-items** Init-plist
- Options 7-283
- basic-mouse-sensitive-items** Messages and
- Functions 7-283
- basic-multiple-choice** flavor 7-254
- Basic Multiple Choice Flavor 7-254
- basic-scroll-bar** flavor 7-175
- basic-scroll-window** 7-305
- basic-scroll-window** 7-305
- basic-scroll-window** flavor 7-305
- Basics of Scroll Windows 7-305
- Basic Special-purpose Stream Operations 5-19
- Basic String Operations 2-278
- Basic Text Formatting Commands 3-37
- Basic Text Formatting Environments 3-34
- Basic Windows 7-105
- \*batch-mode-p\*** variable 4-229
- :batch** option for **make-system** 4-79, 4-222
- :baud** serial I/O parameter 5-253
- Bcc: Field 6-35
- Beep 3-42
- beep 5-19
- %beep** 7-327
- Beep Example 7-342
- beep** function 5-88
- :beep** message 5-19
- Beep (c-G) Zmacs command 4-59
- Flavors of
- si**:
- Zmail
- Audible
- The Beep Feature **sys**:

- The Beep Feature **sys:%beep** 7-327
- Beeping 1-70, 6-102
- sys: %beep** Now Works on 3600-family Consoles That Support Digital Audio RN-68
- :beep** option for **fquery** 7-56
- :before-cold** initialization list 8-71
- Before-daemon methods 2-431
- :before-cold** option for **add-initialization** 8-67
- :before** method type 2-455, 2-457
- Before Release 6.0 7-196
- Before Release 6.0 7-188
- [Before] Filter Creation Display menu item 6-81
- [before] **trace** menu item 4-92
- [Cond before] **trace** menu item 4-92
- [Cond break before] **trace** menu item 4-92, 4-98
- [Print before] **trace** menu item 4-92
- Goto Beginning 1-50, 3-26, 3-70
- Mark Beginning 3-92
- Beginning/End of Buffer 3-70
- Beginning of Buffer 3-92
- Beginning of Definition 3-66
- Beginning of Line 1-50, 3-26, 3-63, 3-81
- beginning of line 3-56
- Beginning of Topic 1-134
- Mouse Behavior 7-281
- Standard Variable Bindings Now Guarantee Consistent Behavior in Break and Debugging Loops RN-42
- Default Behavior of Converse 1-70, 6-101
- being loop** keyword 2-207, 2-222
- below loop** keyword 2-207, 2-225
- Zmail Bfcc Field 6-35
- BFD files 7-140
- B Font Editor command 3-255
- Bidirectional disk streams 5-222, 5-226, 8-43, 8-47
- Bidirectional file streams 5-115
- Bidirectional File Streams 5-116
- bidirectional stream 7-377
- :bignum** returned by **typep** 2-9
- Bignums 2-4, 2-8, 2-89
- bigp** function 2-8
- binary 2-29
- Binary files 0-31, 2-613
- Binary integers 2-89
- Binary mode 5-91
- Documentation binary file 1-119
- :binary-file-byte-size** 5-163
- Binary format directive 5-31
- BINARY QFILE OPEN option 9-166
- :bin** canonical type 5-200
- bind** function 8-23
- binding 8-3
- binding 9-155
- Binding 3-104
- Binding handlers 2-487
- Binding stack 8-3, 8-5
- Binding Variables 2-125, 2-331
- Binding condition handlers 2-481
- Binding local and special variables 2-126
- Binding of a symbol 2-3
- Binding Parameters to Arguments 2-153
- Bindings 2-125, 2-210, 2-331, 2-561
- bindings 3-208
- Bindings 3-208
- Extended command key bindings 3-46
- Stack group bindings 8-3
- Assign key bindings 3-208
- Definition of Key bindings 3-208
- Extended command key bindings 3-46
- Stack group bindings 8-3

- Zmacs Key
- Rebound Variable
- Setting Key
- Standard Variable
  - How Key
  - Replacing **io-buffer-output-function** and Special Forms for Break and the Debugger Now Condition
  - Upright
    - Clear Receiver
    - Clear Transmitter Control
    - CRC Error
    - Hyper
    - %%kbd-mouse**
    - Loop Back
    - Lost Count
    - Meta
    - Receive Done
    - Receive Interrupt Enable
    - Reset
    - Spy
    - Super
    - Timer Interrupt Enable
    - Transmit Abort
    - Transmit Done
    - Transmit Interrupt Enable
    - Trap on exit
  - Pixels and Two-dimensional
    - sys:**
    - sys:**
  - Mouse buttons,
    - Copying
- Character Comparisons Affected by Case, Style, and Character Comparisons Ignoring Case, Style, and Least Modifier
  - Rotate
  - Shift
  - Significant
- String Comparisons Affected by Case, Style, and String Comparisons Ignoring Case, Style, and String Searching Affected by Case, Style, and String Searching Ignoring Case, Style, and
  - Bindings 3-208
  - Bindings During Evaluation 4-260
  - Bindings in Init Files 1-168, 3-215
  - Bindings in loops 2-210, 2-220
  - Bindings Now Guarantee Consistent Behavior in Break and Debugging Loops RN-42
  - Binding Standard Variables for Writing Lisp Style Command Loops 1-153
  - Bindings Work: the Comtab 3-208
  - Binding **tv:kbd-tyl-hook** Are Obsolete RN-56
  - Binding Variables 2-128
  - Bind **readtable** to **si:standard-readtable** RN-43
  - Bind Recursion 2-502
  - bin** file dumper 4-309, 4-316
  - bin** file type 4-318
  - Biphase NRZI technique 9-98
  - birthday**: User Object Attribute 9-14
  - bit 9-131
  - bit 9-131
  - bit 5-5
  - bit 9-131
  - bit 5-5
  - bit 7-132, 7-151
  - bit 9-131
  - bit 9-131
  - bit 5-5
  - bit 9-131
  - bit 9-131
  - bit 9-131
  - bit 5-5
  - bit 9-131
  - bit 9-131
  - bit 9-131
  - bit 9-131
  - bit 9-131
  - bit 9-131
  - bit 2-523
  - Bit manipulation 2-114
  - Bit representation 9-98
  - Bit-save array 4-116, 4-129, 7-78, 7-79
  - Bit-save Arrays 7-78
  - bit-test** function 2-114
  - bit-array 7-121
  - bitbit** errors 2-537
  - bitbit** function 2-254
  - :bitbit** message 7-118
  - bitbit-array-fractional-word-width** flavor 2-537
  - bitbit-destination-too-small** flavor 2-537
  - :bitbit-from-sheet** method of **tv:sheet** 7-120
  - :bitbit** method of **tv:sheet** 7-120
  - :bitbit-within-sheet** method of **tv:sheet** 7-121
  - Bit Count register 9-131
  - bitmap-printer**: Host Object Attribute 9-9
  - bit mask 7-229
  - Bit numbering convention 9-107
  - Bit Rectangles to and From Windows 7-120
  - Bits 2-270
  - Bits 2-271
  - bits 2-115
  - bits 5-5
  - bits 2-115
  - bits 2-114
  - bits 2-115
  - Bits 2-282
  - Bits 2-283
  - Bits 2-286
  - Bits 2-287

- Set all bits alu function 7-119
- Bit size of array elements 2-236
- bits per byte 5-91
- Number of **bit-test** on Characters RN-21
- Use of **ib**, **ldb-test**, **logand**, and Black pane 3-239
- Retrieving the Black-and-white screens 7-140
- [Move **:black** pattern in dummy description 7-188
- Black Plane While Manipulating FED Registers 3-241
- Black] Font Editor menu item 3-238, 3-259
- Deleting **:blank** dummy description 7-188
- Inserting Blank Line in Zmacs 3-167
- Delete Blank Line in Zmacs 3-167
- Blank Lines 1-53, 3-28
- @blankspace text formatting command 3-37
- Blink rate 7-146
- :blink** blinker visibility 7-146
- :deselected-visibility** init option for tv: **blinker** 7-148
- :deselected-visibility** method of tv: **blinker** 7-149
- :follow-p** init option for tv: **blinker** 7-148
- :half-period** init option for tv: **blinker** 7-149
- :half-period** method of tv: **blinker** 7-149
- Half-period of a blinker 7-146
- Mouse blinker 7-146
- :read-cursorpos** method of tv: **blinker** 7-148
- :set-cursorpos** method of tv: **blinker** 7-148
- :set-sheet** method of tv: **blinker** 7-149
- :set-visibility** method of tv: **blinker** 7-148
- :set-deselected-visibility** method of tv: **blinker** 7-149
- :set-follow-p** method of tv: **blinker** 7-148
- :set-half-period** method of tv: **blinker** 7-149
- :visibility** init option for tv: **blinker** 7-148
- :x-pos** init option for tv: **blinker** 7-148
- :y-pos** init option for tv: **blinker** 7-148
- Blinker height 3-223, 7-145
- Blinker messages 7-148
- Blinker shape 7-150
- Blinker size 7-150
- Blinker width 3-223, 7-145, 7-146
- :blinker-p** init option for tv: **sheet** 4-116
- Blinker Height** Font Attributes 3-223, 7-145
- Blinker Operations 7-147
- Blinkers 4-133, 7-103, 7-146
- blinkers 7-146
- blinkers 7-146
- blinkers 7-149
- blinkers 7-146
- blinker visibility 7-146
- blinker visibility 7-146
- blinker visibility 7-146
- blinker visibility 7-146
- blinker visibility 7-146
- Blinker Width** and **Blinker Height** Font Attributes 3-223, 7-145
- :blip-handler** option 5-62, 7-30
- Blips 7-11, 7-132, 7-134, 7-229, 7-273, 7-275, 7-281
- Blips 7-229
- Blips RN-22
- BLISS-32 subroutine package 9-142
- block 8-29
- block 8-29
- :block-in** message 5-226, 8-47
- :block-length** message 5-226, 8-47
- :block-out** message 5-227, 8-47
- :block-size** file property 5-117
- :block** disk stream 5-222, 8-43
- Block disk stream messages 5-226, 8-47
- Command
- Distinguishing Characters From CHAOS.B32
- Bytes available in a disk
- Data cells available in a disk



- :hang-p** keyword for
  - block disk stream messages 8-53
  - Block Disk Streams 5-226, 8-47
  - Block mode disk streams 5-221, 8-42
  - block not found 8-40
  - block number 5-221, 5-226, 8-42, 8-47
  - Block number field in disk address 8-29
  - block number into disk address 5-225, 8-46
  - :block** option for **with-open-file** 5-91
  - Block restore format 1-201
  - Blocks 2-67
  - blocks 8-29
  - Blocks and Exits 2-183
  - Blocks and Exits 2-639
  - blocks disk array can contain 8-31
  - block** special form 2-183
  - %block-store-cdr-and-contents** function 8-22
  - %block-store-tag-and-pointer** function 8-22
  - blockvector field 9-144
  - blockvector field 9-144
  - blockvector field 9-144
  - blockvector field 9-144
  - blockvector field 9-144
  - blockvector field 9-144
  - &body** keyword for **defmacro** 2-373
  - &body** Lambda-list Keyword 2-310
  - Boldface text 3-34
  - Bolio Mode 3-157
  - Bookmarks 1-136
  - Bookmarks 1-132
  - bookmarks 1-129
  - bool** function 2-114
  - Boolean operations 2-113
  - :boolean** command processor argument type 7-48
  - Boolean operations 2-114
  - Boolean Tests 2-215
  - :boolean tv:choose-variable-values** variable type 7-259
  - Boot command 1-200
  - boot after logging out 1-3
  - boot after powering up 1-1
  - Booting 1-201
  - Booting 1-198, 1-201
  - Booting 1-44, 1-201
  - booting a new release 0-87
  - Booting a World 0-59
  - Booting the Release 6.0 world 0-87
  - boot initialization 8-67
  - border 7-176
  - border 7-176
  - tv: bordered-constraint-frame** flavor 7-177
  - Bordered constraint frames 7-176
  - tv: bordered-constraint-frame-with-shared-io-buffer** flavor 7-178
  - Border margin width 7-170
  - :border-margin-width** init option for **tv:borders-mixin** 7-171
  - :border-margin-width** method of **tv:borders-mixin** 7-171
  - border parameters 7-222, 7-295
  - Borders 7-103, 7-168
  - Borders 7-170
  - Borders, and Labels 7-168
  - borders-mixin** flavor 7-170
  - :borders** init option for **tv:menu** 7-222, 7-295
  - borders-mixin** 7-171
  - borders-mixin** 7-171
  - borders-mixin** 7-170
- Disk
  - File
- Translate relative file
  - Disk
  - CLM: Number of disk
  - sys:**
  - sys:**
  - Chan\_state channel
  - Chan\_sta\_rxav channel
  - Chan\_sta\_rxw channel
  - Chan\_sta\_txwa channel
  - Chan\_sta\_txw channel
- Zmacs
- Document Examiner List of List of
- Truth table for the Aggregated
  - Cold
  - Cold
  - Cold
  - Warm
  - Loading and
  - Warm
  - Frame
  - Pane
  - tv:**
  - tv:**
  - Initialize
  - Window
  - Window Margins, **tv:**
- :border-margin-width** init option for **tv:**
- :border-margin-width** method of **tv:**
- :borders** init option for **tv:**

- :set-border-margin-width** method of **tv:**
- :set-borders** method of **tv:**
- Using Two Windows, Select
- Choice boxes in
  - :anticyclic**
  - :clamped**
  - :cyclic**
  - :relaxed**
- Macro Expand Expression All Now
  - Altering the FED Character
  - Bottom Edge of the FED Character
  - Character Height of the FED Character
  - Exit choice
  - FED Character
  - Left and Right Edges of the FED Character
  - Top Edge of the FED Character
  - Using the mouse on the character
- Viewing and Altering a Character in the FED Character
  - Box 3-237
- What the Lines Mean in the FED Character
  - tv:**
  - Choice
  - Choice
  - Dumper Choice
  - Choice
  - Size of
  - Choice
  - [Clear all choices] Choice
  - [Prune systems] Choice
  - [Choice
  - Setting the
    - Curly
    - Square
    - Absolute
    - Relative
  - Clock sequence
  - Disk sequence
  - Mouse sequence
  - Sequence
- sys:**
  - \*break-bindings\*** variable 1-181
  - [Break after] **trace** menu item 4-92
  - [Cond break after] **trace** menu item 4-92, 4-98
  - Standard Variable Bindings Now Guarantee Consistent Behavior in
    - Break and Debugging Loops RN-42
    - Break and the Debugger Now Bind **readtable** to
      - si:standard-readtable** RN-43
    - [Break before] **trace** menu item 4-92
  - [Cond break before] **trace** menu item 4-92, 4-98
  - Breaking a line 3-22
- :borders** init option for **tv:borders-mixin** 7-170
- borders-mixin** 7-171
- borders-mixin** 7-171
- :bot-p** message to tape streams 5-273
- both-case-p** function 2-270
- :both** option for **trace** 4-92, 4-278
- Bottom 3-129
- Bottom Edge of the FED Character Box 3-237
- :bottom** init option for **tv:menu** 7-295
- :bottom** init option for **tv:sheet** 7-163
- :bottom-margin-size** method of **tv:sheet** 7-167
- bottom of margin 7-289
- Bound handlers 2-488, 2-501, 2-502
- boundary condition for **:draw-cubic-spline** 7-125
- boundary condition for **:draw-cubic-spline** 7-125
- boundary condition for **:draw-cubic-spline** 7-125
- boundary condition for **:draw-cubic-spline** 7-125
- boundp** function 2-562
- boundp-in-closure** function 2-336
- Bound to **m-sh-M** RN-47
- Box 3-238
- Box 3-237
- box 3-227, 3-237, 3-238
- Box 3-238
- box 7-262
- Box 3-227
- Box 3-237
- Box 3-237
- box 3-238

- BREAK Inspector command 4-300
- breakline** macro 5-48
- break** Loops Catch Trivial Errors in the Input Editor RN-66
- breakon** function 2-523, 4-98
- Break on exit from marked frame message 2-523
- :break** option for **trace** 4-92, 4-98, 4-276
- breakpoint into a program 1-180
- breakpoint loop 1-180
- Breakpoints 1-151, 2-523, 4-98
- breakpoints 2-523
- Breakpoints and Stepping Through Compiled Code 4-267
- break** special form 1-180, 4-98
- break** syntax description 2-34
- Bridge node 9-96
- Bridge connection type 9-108
- bridge connection type 9-108
- Bridges 9-37, 9-108
- :brief-help** option 5-61, 7-29
- Brief Documentation (c-sh-D) Zmacs command 4-39, 4-42
- A Brief Introduction to the Lisp World 1-151
- Bringing up a new major release on a newly acquired machine 0-87
- Broadcast: Chaosnet Software Protocol 9-119
- Broadcast packet 9-119
- Broadcast Sent connection state 9-121
- Broken Mouse 6-24
- :broken** system status 4-251
- Browsing documentation 1-120, 1-127
- BS character 2-32
- @b text formatting command 3-34
- Buffer 3-124
- Buffer 3-124
- Buffer 3-122
- Buffer 3-70
- Buffer 4-70
- Buffer 6-77
- Buffer 1-54, 1-55, 3-30, 3-31
- Buffer 3-122
- buffer 3-120
- Buffer 3-116
- buffer 1-66, 6-55
- Buffer 3-17
- Buffer 3-120
- Buffer 3-104
- buffer 0-37
- buffer 1-48, 3-13
- buffer 7-231
- Buffer 3-119
- Buffer 3-124
- Buffer 3-124
- buffer 3-90
- Buffer 3-92
- Buffer 3-92
- buffer 6-80
- Buffer** 3-20
- Buffer 3-70
- buffer 3-70
- Buffer 3-121
- Buffer 3-120
- Buffer 3-120
- Buffer 3-119
- buffer 1-66, 6-55, 6-68
- Buffer 3-30, 3-117
- format:**
- Lisp Listeners and
- Write a
- Enter a
- Conditional
- Debugger Commands for Dynamic
- st:**
- Fixed
- A
- BRD
- Using Zmail with a
- Appending a Region to a Append To
- Associating a File with a Beginning/End of
- Compiling Code in a Zmacs
- Copying a Zmail Message to Another
- Creating a
- Creating a Fundamental Mode
- Current
- Current Zmacs
- Deleting messages from mail
- Editor Window's
- Encrypting and Decrypting the
- Evaluate and Replace Into
- Free
- \*Function-Specs-to-Edit-m\*
- Get I/O
- Hardcopying the
- Inserting a Buffer Into Another
- Inserting a File Into a
- Insert text from register into
- Marking a Region From Here to Beginning of
- Marking a Region From Here to End of
- Messages in a mail
- Mode Line's
- Motion with Respect to the Whole
- Moving to end of
- Re-reading a File Into the
- Reading a File Into a New
- Reading a File Into an Existing
- Renaming the
- Restoring messages to mail
- Select

- Select Default Previous Buffer 3-117
  - Selected buffer 3-116
  - Select Previous Buffer 3-117
  - Size in bytes of packet buffer 9-198
- Summary of Compiler Actions on Code in a Zmacs Buffer 4-71
- The Editor Window and the Buffer 3-54
  - Undo all changes to buffer 3-121
  - Viewing a Buffer 3-119
- Buffer History 3-116
  - Buffer pointers 3-86
  - Select Buffer (c-X B) Zmacs command 4-59
  - Select Previous Buffer (c-m-L) Zmacs command 4-59
- Add Patch Changed Definitions of Buffer (m-X) 3-188, 4-241
- Append Buffer (m-X) Converse Command 1-71
  - Regenerate Buffer (m-X) Converse Command 1-72, 6-103
  - Write Buffer (m-X) Converse Command 1-71
  - Compile Buffer (m-X) Zmacs command 4-70
- Edit Changed Definitions Of Buffer (m-X) Zmacs command 4-56
- Evaluate Buffer (m-X) Zmacs command 3-175, 4-75
  - Evaluate and Replace Into Buffer (m-X) Zmacs command 3-175, 4-75
- Evaluate Changed Definitions of Buffer (m-X) Zmacs command 3-175
- Evaluate Into Buffer (m-X) Zmacs command 3-175, 4-75
  - Format Buffer (m-X) Zmacs command 3-33, 3-38, RN-49
  - Hardcopy Buffer (m-X) Zmacs command 1-107, 3-119, 3-267
  - Insert Buffer (m-X) Zmacs command 3-124, 4-63
- List Changed Definitions of Buffer (m-X) Zmacs command 3-183, 4-56
- Rename Buffer (m-X) Zmacs command 3-119
  - Revert Buffer (m-X) Zmacs command 3-121
  - View Buffer (m-X) Zmacs command 3-119
- Compile Changed Definitions Of Buffer (m-sh-C) Zmacs command 4-70
- Evaluate Changed Definitions Of Buffer (m-sh-E) Zmacs command 4-75
- Mode Line's *Buffer-status* 3-21
  - Buffer and File Attribute Descriptions 3-141
  - Buffer and File Attributes in Zmacs 3-137
  - Buffer and File Names 3-114
- Zmacs Buffer Attributes 3-140
- Other Set Commands for File and Set commands for file and buffer attributes 3-143
- Setting Buffer Attributes 3-141
  - :choice-box** I/O buffer command 7-273
  - :variable-choice** I/O buffer command 7-273
  - I/O buffer commands 7-273
- Zmacs Buffer Commands 3-117
- Writing the Buffer Contents to a File 3-121
  - Saving the Buffer Contents to the File 3-121
  - Buffer Contents with c-X c-F 1-55, 3-31
- Output streams to buffered asynchronous devices 5-18, 5-114
- Clear buffered input 5-18
- Special-purpose Stream Operations for Buffered Input Streams 5-20
- Clear buffered output 5-18
  - Buffered output stream 5-21
- Special-purpose Stream Operations for Buffered Output Streams 5-21
- Clear Buffered serial I/O 5-251
  - Buffer Flags for Existing Files 3-114
  - Buffer Flags for New Files 3-115
- Zmacs Buffer History 3-116
- Buffering capacity 5-261
  - Buffering disk transfers 8-31
  - Buffer Into Another Buffer 3-124
- Init File Form: Ordering Buffer Lists 1-168, 3-213
- Append Buffer m-X Converse Command 6-103
  - Write Buffer m-X Converse Command 6-102
  - :buffer-name** option for **zwei:open-editor-stream** 7-378
  - :buffer-name** option for **zwei:with-editor-stream** 7-378
- Packet buffer panic 9-202

- :raw I/O buffer property 7-132
- I/O buffer property list 7-132
- Read Buffer register 9-131
- Write Buffer register 9-131
- Buffers 3-30
- buffers 3-30
- Attributes of buffers 4-10
- Changing Buffers 3-117
- Commands to Mark Regions by Buffers 3-92
- Destroying Buffers 3-123
- Editing Buffers 3-118
- Editor buffers 6-13
- Example of Listing Buffers 3-118
- Expunging mail buffers 6-68, 6-80, 6-81
- File buffers 3-122
- I/O buffers 7-103, 7-132, 7-151, 7-176, 7-275
- I/O from editor buffers 7-377
- List Buffers 3-118
- Listing Buffers 3-117
- Mail buffers 6-11, 6-12, 6-77
- Multiple buffers 3-114, 4-65
- Possibility Buffers 3-110
- Reverting buffers 3-121, 3-122
- Saving Buffers 3-120
- Selecting, Listing, and Examining Zmacs Buffers 3-116
- Sharing I/O buffers 7-176
- Stream Facility for Editor Buffers 7-377
- Support Buffers 3-109
- Two New Zmacs Commands for Reverting Buffers RN-49
- Zmacs Commands for Finding Out About the State of Buffers 1-86, 3-217
- Zmail Mail Buffers 6-77
- Edit Buffers (m-X) Zmacs command 3-118
- Listing Zmail Buffers, Mail Files and Collections 6-77
- Copying Buffers and Files 4-63
- Creating and Saving Buffers and Files 3-30
- Description of Creating and Saving Buffers and Files 3-30
- Selecting Zmail Mail Buffers and Files 6-77
- Summary of Creating and Saving Buffers and Files 3-30
- Manipulating Buffers and Files in Zmacs 3-113
- Overview of Working with Buffers and Files in Zmacs 3-114
- Working with Buffers and Files in Zmacs 3-114
- Select All Buffers As Tag Table (m-X) Zmacs command 4-57
- Save File Buffers Command 1-30
- Save Mail Buffers Command 1-30
- I/O Buffers for Choose Variable Values Windows 7-273
- Init File Form: Putting Buffers Into Current Package 1-168, 3-213
- Changing Case of Buffers in Zmacs 3-160
- Comparing Files and Buffers in Zmacs 3-125
- Save All Files (m-X) Renamed to Save File Buffers (m-X) RN-47
- Init File Form: Edit Buffers on c-X c-B 1-169, 3-215
- Init File Form: Edit Buffers on m-X 1-169, 3-216
- Editor Buffers tape spec parameter 0-26
- Association of buffer streams 7-377
- List buffers with files 3-30
- [Flush Free] Buffers Zmacs command 3-115
- [Flush Free] File System Maintenance menu item 0-39
- Reporting a Buffs tape spec parameter 0-26
- bug 1-159
- bug function 1-159, 2-524, 4-264
- Bug mail 4-264, 4-271
- Bug reports 4-264, 4-271
- Bug (m-X) Zmail Command 6-29
- BUG-LISPM mailing list 2-524
- :bug-reports Option for defsystem 4-196, 6-31
- Report Bug Command 1-31

- Zmail
  - bug lists 6-31
  - Adding
    - Bug Lists to Zmail 6-31
    - Bug mail recipients 6-31
- Sending a
  - :bug-report-description** message 2-525
  - Bug Report in the Debugger 4-264
  - :bug-report-recipient-system** message 2-524
- Debugger
  - Bug Reports 2-524
  - Building Audio Command Lists 7-330
  - Built-in Customization Using Zmacs Minor Modes 3-195
  - Burying windows 7-86
  - [Bury] Edit Screen menu item 7-86
  - :but-first** option for **defstruct** 2-385, 2-390
  - butlast** function 2-53
- Reset
  - button 1-44, 1-199
  - Button-mask 7-229
- Mouse
  - button encoding 7-311
- Identifying mouse
  - buttons 7-151, 7-156, 7-157
- Mouse
  - buttons 1-7
- tv:momentary-menu** Example 4: Using the Mouse
  - Buttons 7-225
  - buttons, bit mask 7-229
  - :buttons** menu item type 7-210, 7-225, 7-311
- CLM:
  - By-position Constructor Functions 2-642
  - By-position Constructor Macros 2-396
  - [By individual filters] Map over Move menu item 6-80
  - by loop** keyword 2-207, 2-225
- Byte 2-115
  - byte 5-91
  - byte** function 2-116
  - Byte offset 9-198
  - Byte specifiers 2-115, 2-399, 8-18
  - byte-position** function 2-116
  - byte-size** function 2-116
  - :byte-size** file property 5-117
  - :byte-size** option for **copyf** 5-105
  - BYTE-SIZE QFILE OPEN option 9-166
  - :byte-stream** medium 9-215
  - :byte-stream** medium type 9-51
- Number of bits per
  - byte count 9-106
  - byte fields 8-21
  - Byte Fields and **defstruct** 2-399
  - Byte Manipulation Functions 2-115
  - Bytes available in a disk block 8-29
  - :byte-size** file-opening option 5-91
  - :byte-size** option for **with-open-file** 5-91
  - Byte Size Problem 9-179
  - bytes of packet buffer 9-198
  - byte specifier 2-116
  - byte specifier 2-116
  - byte specifier 2-116
  - byte specifiers 5-5
  - byte specifiers and file characters 2-268, RN-17
  - byte specifiers and keyboard characters 2-268, RN-17
  - Byte Stream Conventions: Interfacing to the Network System 9-212
  - Byte Stream Media 9-55
- Generic
  - byte streams 9-44
- c-X
  - B Zmacs command 1-55, 3-30, 3-31, 3-117

## C

## C

## C

	FUNCTION	C 1-141
	SELECT	C 3-40
	Replace	(c-%) Zmacs command 4-57
		c-% Zmacs command 3-102
		c-/ completion command 1-52, 3-14
		c-; Zmacs command 3-171
		c-= Zmacs command 3-47
	HELP or	c-? 1-52, 3-14
New Input Editor Commands: PAGE, COMPLETE,		c-? RN-61
		c-? completion command 1-52, 3-14
		c-? Zmacs minibuffer command 4-8
		c-ABORT 1-139
		c-A Debugger command 4-80, 4-271
		c-A Zmacs command 1-50, 3-26, 3-63, 3-81
		c-B Debugger command 4-264, 4-271
		c-B Stepper command 4-94
		c-B Zmacs command 1-50, 3-26, 3-61
		c-C Font Editor command 3-260
		c-D Dired command 3-151
		c-D Zmacs command 1-53, 3-28, 3-43, 3-76
		c-D Zmail command 6-55, 6-68
		c-E Debugger command 4-80, 4-264, 4-271
		c-END Converse command 1-71, 6-102
		c-E Stepper command 4-94
		c-E Zmacs command 1-50, 3-26, 3-63, 3-81
		c-F Zmacs command 1-50, 3-26, 3-61
	Beep	(c-G) Zmacs command 4-59
		c-G Zmacs command 3-42
		c-HELP 1-83
		c-HELP Debugger command 4-80, 4-264, 4-271
		c-HELP V Zmacs command 3-210
		c-K Dired command 3-151
		c-K Zmacs command 1-53, 3-28, 3-81
		c-L Debugger command 4-80, 4-264, 4-271
		c-L Zmacs command 3-55
		c-M 1-141
	FUNCTION	(C-(m)) RN-48
New Zwei Command: Copy Mouse		c-M Converse Command 1-71, 6-102
		c-M Debugger command 2-524, 4-264, 4-271
		c-N Debugger command 4-80, 4-264, 4-271
		c-N Dired command 3-149
		c-N Stepper command 4-94
		c-N Zmacs command 1-50, 3-26, 3-63, 3-81, 3-199
		c-N Zmail command 6-49
		c-O Zmacs command 3-167
		c-P Debugger command 4-80, 4-264, 4-271
		c-P Dired command 3-149
		c-P Zmacs command 1-50, 3-26, 3-63, 3-81
		c-P Zmail command 6-49
		c-Q 1-108, 1-141, 3-268
	FUNCTION	(c-R) Zmacs command 4-57
Reverse Search		c-R Debugger command 4-80, 4-264, 4-271
		c-REFRESH Font Editor command 3-261
		c-R Font Editor command 3-260
	Incremental Search	(c-S) Zmacs command 4-57
		c-SCROLL 1-134

Set Pop Mark c-S Debugger command 4-264, 4-271  
 (c-SPACE) Zmacs command 4-59  
 c-SPACE Zmacs command 3-88  
 c-SPACE Zmail command 6-50, 6-68  
 c-SUSPEND 1-146  
 FUNCTION  
 c-T command 6-23  
 c-T Debugger command 4-264, 4-271  
 c-T Zmacs command 3-76  
 c-U Stepper command 4-94  
 c-U Zmacs command 3-24  
 c-V 1-134  
 c-V Zmacs command 1-50, 3-26, 3-55  
 c-W Font Editor command 3-260  
 c-W Zmacs command 1-53, 3-28, 3-94  
 c-X ) Zmacs command 3-199  
 c-X Ø Zmail Command 6-39  
 One Window (c-X 1) Zmacs command 3-130, 4-65  
 Two Windows c-X 1 Zmail Command 6-39  
 (c-X 2) Zmacs command 3-129, 4-65  
 c-X 2 Zmail Command 6-39  
 View Two Windows (c-X 3) Zmacs command 3-129, 4-65  
 Modified Two Windows (c-X 4) Zmacs command 3-129, 4-65  
 c-X 8 Zmacs command 3-129  
 Set Comment Column (c-X ;) Zmacs command 4-23  
 c-X ; Zmacs command 3-172  
 c-X = Zmacs command 3-47  
 c-X A Zmacs command 3-124  
 c-X A Zmail command 6-38  
 Select Buffer (c-X B) Zmacs command 1-55, 3-30, 3-31, 3-117,  
 4-59  
 c-X C Zmail command 6-37  
 c-X Debugger command 4-271  
 Call Last Kbd Macro c-X D Zmacs command 3-144  
 (c-X E) Zmacs command 4-64  
 c-X E Zmacs command 3-200  
 Set Fill Column (c-X F) Zmacs command 4-12  
 c-X F Zmacs command 3-30, 3-196  
 Open Get Register (c-X G) Zmacs command 4-63  
 Mark Whole (c-X H) Zmacs command 4-63  
 Jump To Saved Position (c-X J) Zmacs command 4-59  
 c-X L Zmacs command 3-48  
 c-X M Zmail Command 6-46  
 Other Window (c-X O) Zmacs command 4-65  
 c-X O Zmacs command 1-62, 3-130  
 c-X O Zmail Command 6-38  
 c-X Q Zmacs command 3-202  
 c-X RUBOUT Zmacs command 1-53, 3-28, 3-83  
 Save Position (c-X S) Zmacs command 4-59  
 c-X Stepper command 4-94  
 c-X S Zmacs command 3-30  
 c-X S Zmail command 6-37  
 c-X T Zmacs command 3-94  
 c-X T Zmail command 6-37  
 c-X V Zmacs command 3-119  
 c-X W Zmacs command 3-30  
 Put Register (c-X X) Zmacs command 4-63  
 c-X Y Prune Yanked Headers Zmail Command 6-45  
 c-X Zmacs command 3-199  
 c-X [ Zmacs command 1-50, 3-26, 3-69  
 c-X ] Zmacs command 1-50, 3-26, 3-69  
 c-X ^ Zmacs command 3-129  
 Yank (c-Y) Zmacs command 4-60  
 c-Y yank command 3-15  
 Leaving Zmacs with c-Z 3-40  
 Quit (c-Z) Zmacs command 4-80  
 c-Z Inspector command 4-300



- c-Z In the Debugger 4-264, 4-271
- c-Z Zmail command 6-17, 6-19
- c-] Zmail command 6-42
- c-Ø c-Y 3-73
- c-Ø c-m-Y yank command 3-15, 3-73
- (c-; or m-;) Zmacs command 4-23
- c-; Zmacs command 3-173
- caaar** function 2-42, 2-43
- caaddr** function 2-42, 2-43
- caaar** function 2-42, 2-43
- caadar** function 2-42, 2-44
- caaddr** function 2-42, 2-44
- caadr** function 2-42, 2-43
- caar** function 2-42, 2-43
- Chaosnet
  - cable 9-96
  - Cable transceiver 9-96
- Interpreter
  - Caches Global Variable Declarations RN-27
  - cadaar** function 2-42, 2-44
  - cadadr** function 2-42, 2-44
  - cadar** function 2-42, 2-43
  - caddar** function 2-42, 2-44
  - caddr** function 2-42, 2-44
  - caddr** function 2-42, 2-43
  - cadr** function 2-42, 2-43
  - Calculation Module for the Sample Program 4-147
  - Calendar Clock 7-355
  - Calendar Clock Command 1-32
  - zwei:** **\*calendar-mode-week-starts-on-monday\***
    - variable 6-93
  - Call character 2-32
  - call** function 2-161
  - sys:** **call-trap** flavor 2-523
  - :callable-accessors** option for **defstruct** 2-385, 2-391
- ioctl** System
  - Call Commands 9-149
  - Call Cost with Public Carrier Networks 9-91
- Reducing
  - Callers 4-44
- Functions for identifying
  - callers 1-177
  - Callers (m-X) Zmacs command 4-44
  - Callers (m-X) Zmacs command 1-177, 4-38, 4-44
  - Callers (m-X) Zmacs command 4-44
  - Callers (m-X) Zmacs command 4-44
  - Callers (m-X) Zmacs command 4-44
  - The Zmacs Edit
    - Callers Commands 3-183
    - callers of variables 1-177
  - Identifying
    - calling 8-3
    - Calling the Last Keyboard Macro 3-200
    - Calling the Last Keyboard Macro 3-200
    - Calling the Server Function 9-214
    - Call Last Kbd Macro (c-X E) Zmacs command 4-64
  - Function
    - Call Other Systems 4-264
  - Example of
    - call stack 4-268
    - Cancel response 3-42
    - Cancel last command 3-42
    - Candidate List 1-127, 1-131
- Debugger Commands That
  - Backtrace of the
    - Candidates 1-131
    - Candidates 1-123
    - Candidates 1-124
    - Candidates 1-126
    - candidates 1-127
    - Canonical types 3-134
    - :canonical-type** message 5-151
    - :canonical-type** method of **fs:pathname** 5-166
    - Canonical coroutine example 8-7
- Document Examiner
  - List of Current
    - :bin**
    - :lisp**
    - :qbin**
  - Find Any
    - canonical type 5-200
  - Find Initial Substring
    - canonical type 5-200
  - Find Whole Word
    - canonical type 5-200
  - List of current
    - canonical type 5-200

- Correspondence of Canonical Types and Editor Modes 5-153
  - Canonical types example 5-130
  - Canonical Types in Pathnames 5-151
  - Canonical types in UNIX 4.2 Pathnames 5-178
  - Canonical types in UNIX Pathnames 5-176
  - Canonical types in VMS Pathnames 5-180
  - Capability 9-67, RN-75
  - capacity 5-261
  - :capacity** option for **make-area** 8-104
  - :capacity-ratio** option for **make-area** 8-104
  - @caption text formatting command 3-37
  - Captured free reference 2-126
  - Car 2-41, 2-43, 2-44
  - car** function 2-42, 2-83
  - car-location** function 2-45
  - Carbon copies 1-62
  - Cardinal format directive 5-36
  - Carriage return 1-49, 3-6
  - Carriage return character 5-5
  - Carriage return format directive 5-34
  - Carrier sense 9-99
  - :carrier-detect** serial I/O parameter 5-253
  - Carrier Networks 9-91
  - carry-dump** 0-31
  - carry-dump** 0-31
  - carry-dump** 0-31
  - carry-dump** function 0-31
  - carry-list** function 0-34
  - carry-load** function 0-32
  - Carry-tape Dumper 0-30
  - Carry-tape Lister 0-34
  - Carry-tape Loader 0-32
  - Carry-tape System 0-30
  - Carry-tape file groups 0-32
  - carry-dump** 0-31
  - carry-dump** 0-31
  - Cars and Cdrs 2-42
  - case 5-145
  - Case 1-234
  - case 5-145
  - Case, Style, and Bits 2-270
  - Case, Style, and Bits 2-271
  - Case, Style, and Bits 2-282
  - Case, Style, and Bits 2-283
  - Case, Style, and Bits 2-286
  - Case, Style, and Bits 2-287
  - :case-documentation** symbol 2-520
  - Case and Indentation in Zmacs 3-159
  - case checking in package-name lookup 2-640
  - :case** flavor combination 2-520
  - Case in Pathnames 5-145
  - case in pathnames 5-145
  - case in pathnames 5-145
  - Case in Zmacs 3-160
  - Case in Zmacs 3-160
  - :case** method combination 2-517, 4-133
  - :case** method combination type 2-455, 2-457
  - Case of Buffers in Zmacs 3-160
  - Case of Regions in Zmacs 3-160
  - Case of Words in Zmacs 3-160
  - caseq** special form 2-182
  - case representation 5-145
  - case representation 5-145
  - case representation 5-145
  - Case sensitivity of interning 2-604
  - Catch 2-197
- Overview of Remote Login Buffering
  - Reducing Call Cost with Public
    - :density** option for **tape:**
    - :reel** option for **tape:**
    - report** option for **tape:**
    - tape:**
    - tape:**
    - tape:**
  - :file-or-files** option for **tape:**
  - :tape-host** option for **tape:**
  - Composition of Native pathname component
  - Notation Conventions for Character Raw pathname component
  - Character Comparisons Affected by Character Comparisons Ignoring String Comparisons Affected by String Comparisons Ignoring String Searching Affected by String Searching Ignoring
  - Changing SCL
  - Interchange Raw Changing Overview of Changing
  - Changing Changing Changing
  - Interchange Native Raw

- Lisp Listeners and **break** Loops
  - Miscellaneous System Errors Not Entering the Debugger by
  - Init File Form: Edit Buffers on c-X
  - c-X
  - Zmail
  - Add
  - SELECT
  - Selecting a FED Character with the
  - Display Directory (c-X)
- Extracting
  - Destroying
- Composition of Cars and
  - c-X
  - External value
  - Function
  - Internal value
  - Value
  - Memory
  - Base Flavor: **sys:**
  - sys:**
  - Invalid contents in
  - Package
  - The Function
  - The Package
  - The Value
  - Data
- catch-error-restart-if** special form 2-513, 2-515
- catch-error-restart** special form 2-501, 2-502, 2-513, 2-515
- catch** special form 2-169, 2-197
- \*catch** special form 2-169, 2-200
- Catch Trivial Errors in the Input Editor RN-66
- Categorized by Base Flavor 2-536
- Causing an Error 1-193, 4-255
- c-B 1-169, 3-215
- c-B Zmacs command 3-115, 3-118
- Cc field 1-62
- Cc: Field 6-35
- Cc Field Zmail Command 6-37
- CCITT Recommendation X.25 interface 9-15
- C command 1-69, 6-99
- C Command 3-233
- CC symbol table 0-54
- c-D) Zmacs command 4-45
- cdaaar** function 2-42, 2-44
- cdaadr** function 2-42, 2-44
- cdaar** function 2-42, 2-43
- cdadar** function 2-42, 2-44
- cdaddr** function 2-42, 2-44
- cdadr** function 2-42, 2-43
- cdar** function 2-42, 2-43
- cddaar** function 2-42, 2-44
- cddadr** function 2-42, 2-44
- cddar** function 2-42, 2-43
- cddddr** function 2-42, 2-44
- cdddr** function 2-42, 2-43
- cddr** function 2-42, 2-43
- C Dired command 3-150
- Cdr 2-41, 2-43, 2-44
- cdr** function 2-42, 2-83
- cdr-code 8-22
- Cdr-code field 2-56
- cdr-code field 8-22
- Cdr-coding 2-41, 2-56
- Cdr-coding and Locatives 2-83
- Cdr-next 2-56
- cdr-next** variable 8-19
- Cdr-nil 2-56
- cdr-nil** variable 8-19
- Cdr-normal 2-56
- cdr-normal** variable 8-19
- Cdrs 2-42
- Cdr storing functions 2-297
- c-D Zmacs command 3-132
- ceiling** function 2-109
- cell 2-331
- cell 2-3
- cell 2-331
- cell 2-3, 2-83, 2-331, 2-561, 2-563
- cell as property list 2-67
- cell-contents-error** 2-533
- cell-contents-error** flavor 2-533
- cell errors 2-533
- cell of a symbol 2-3
- Cell of a Symbol 2-563
- Cell of a Symbol 2-566
- Cell of a Symbol 2-561
- Cells and Locatives 2-83
- cells available in a disk block 8-29
- Center text 3-34
- :center-around** method of

- tv:essential-set-edges** 7-167
- Center-dot character in TOPS-20 pathname display 5-183
- tv:momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
- Centering the Current Line in Zmacs 3-164
- Centering the Drawing in FED 3-255
- [Center View] Font Editor menu item 3-255, 3-259
- Buffer Contents with c-X c-F 1-55, 3-31
- Find File (c-X) c-F) Zmacs command 4-9
- C Font Editor command 3-234, 3-261
- CFTP 9-153
- c-X c-F Zmacs command 1-55, 3-31, 3-32
- %%ch-** byte specifiers and file characters 2-268, RN-17
- %%ch-char** variable 5-6
- %%ch-font** variable 5-6
- :change-properties** message 5-114
- Change-properties QFILE Command 9-190
- :change-property** message 5-227, 8-48
- changeable-name-mixin** 7-173
- changeable-name-mixin** flavor 7-173
- Change Characters Into Macro Characters 2-35
- Change Character Syntax 2-34
- Change current package 2-597
- Changed RN-53
- Changed RN-10
- Changed code 4-56
- Changed Code 4-56
- Changed Definitions (m-X) 3-189, 4-241
- Changed Definitions (m-X) Zmacs command 4-70
- Changed Definitions (m-X) Zmacs command 4-56
- Changed Definitions (m-X) Zmacs command 3-175, 4-75
- Changed Definitions (m-X) Zmacs command 4-56
- Changed Definitions of Buffer (m-X) 3-188, 4-241
- Changed Definitions Of Buffer (m-X) Zmacs command 4-56
- Changed Definitions of Buffer (m-X) Zmacs command 3-175
- Changed Definitions of Buffer (m-X) Zmacs command 3-183, 4-56
- Changed Definitions Of Buffer (m-sh-C) Zmacs command 4-70
- Changed Definitions Of Buffer (m-sh-E) Zmacs command 4-75
- c-m-Y Has Been Changed to c-X c-Y in Release 6.0 RN-69
- fs:** **change-file-properties** function 5-105, 5-119
- Change File Properties (m-X) Zmacs command 3-133
- Change Fonts 1-75
- ^F font change indicators 1-69
- Change in Optional Argument to **read-or-end** RN-57
- New Function: **change-instance-flavor** RN-31
- change-instance-flavor** function 2-436
- Change in window shape 7-175
- %change-list-to-cons** function 8-13
- Change of Default Base to Decimal RN-9
- :change-of-size-or-margins** method of **tv:sheet** 4-116, 7-166
- fs:** **change-property-failure** 2-551
- fs:** **change-property-failure** flavor 2-551
- changes 9-28
- Changes RN-28
- Changes RN-12
- Changes RN-2
- Changes files 9-24
- changes** descriptor file indicator 9-24
- :set-name** method of **tv:**
- Functions That
- Functions That
- :selective** Option for **load-patches** Has
- Setting Variables in Init Files Has
- Identifying
- Add Patch
- Compile
- Edit
- Evaluate
- List
- Add Patch
- Edit
- Evaluate
- List
- Compile
- Evaluate
- c-m-Y Has Been
- fs:**
- How to
- ^F font
- New Function:
- sys:**
- fs:**
- fs:**
- Eliminate record of
- Lambda-list Keyword
- Miscellaneous Lexical Scoping
- Release 6.0 Documentation

- neti: **change-server-error-disposition** function 9-55
- Namespace Database
  - Undo all
    - Changes Files 9-26
    - changes to buffer 3-121
    - Changes to Conditions RN-12
    - Changes to database 9-26
    - Changes to **evalhook** and **applyhook** RN-11
    - Changes to **fquery** Options RN-57
  - Incompatible
    - Changes to Lisp in Release 6.0 RN-9
    - Changes to Macro Expansion RN-11
    - Changes to namespace 9-26
  - Incompatible
    - Changes to Networks in Release 6.0 RN-75
    - Changes to Networks in Release 6.0 RN-75
    - Changes to Patch Files RN-52
    - Changes to **prompt-and-read** Options RN-58
    - Changes to Special Forms RN-11
    - Changes to the FEP in Release 6.0 RN-77
    - Changes to the File System in Release 6.0 RN-71
    - Changes to the Lisp Language in Release 6.0 RN-9
    - Changes to the User Interface in Release 6.0 RN-55
    - Changes to the User Interface in Release 6.0 RN-55
    - Changes to **tv:choose-variable-values** Variable Types RN-59
  - Incompatible
    - Changes to Utilities in Release 6.0 RN-51
    - Changes to Zmacs in Release 6.0 RN-47
  - Incompatible
    - Changes to Zmacs in Release 6.0 RN-47
    - Changes to Zmail in Release 6.0 RN-69
    - Changes to Zmail in Release 6.0 RN-69
    - Change Subject Pronouns Zmail Command 6-38
    - Change to **define-prompt-and-read-type** Dispatch Functions RN-59
    - Change to Subforms of **with-input-editing** RN-55
  - Changing Buffers 3-117
  - Changing a Flavor 2-468
  - Changing Case and Indentation in Zmacs 3-159
  - Changing Case in Zmacs 3-160
  - Changing Case in Zmacs 3-160
  - Changing Case of Buffers in Zmacs 3-160
  - Changing Case of Regions in Zmacs 3-160
  - Changing Case of Words in Zmacs 3-160
  - Changing default selections for tape access 0-17
  - Changing File Properties in Dired 3-149
  - Changing the Default Printer 1-175, 3-269
  - Changing the Properties of a File 3-133
  - Changing the Size of an Array 2-249
  - Changing the Status of a Patchable System 4-251
  - Changing the status of windows 7-103
  - Changing the Value of a Variable 2-125
  - Changing Window Size 3-129
- QFILE active
  - channel 9-153
- QFILE data
  - channel 9-153
- QFILE free
  - channel 9-153
  - Channel number 9-142
- Chan\_state
  - channel blockvector field 9-144
- Chan\_sta\_rxav
  - channel blockvector field 9-144
- Chan\_sta\_rxw
  - channel blockvector field 9-144
- Chan\_sta\_txw
  - channel blockvector field 9-144
- Chan\_sta\_txwa
  - channel blockvector field 9-144
- FEP
  - channel facility 5-261
  - Channels attached to user processes 9-104
  - Chan\_state channel blockvector field 9-144
  - Chan\_sta\_rxav channel blockvector field 9-144
  - Chan\_sta\_rxw channel blockvector field 9-144
  - Chan\_sta\_txwa channel blockvector field 9-144
  - Chan\_sta\_txw channel blockvector field 9-144
  - :**chaos** connection 9-44
  - :**chaos** medium 9-51

- chaos package 2-615, 9-134
- Chaos packet 9-198
- Set
  - Chaos-address command 1-201
  - :chaos-simple connection 9-44
  - CHAOS.B32 BLISS-32 subroutine package 9-142
  - chaos:accept function 9-136
  - chaos:add-contact-name-for-protocol function 9-54
  - chaos:answer function 9-136
  - chaos:answer-string function 9-136
  - Chaos:answered-state connection state 9-136
  - chaos:assure-enabled function 9-142
  - chaos:close-conn function 9-134
  - Chaos:cls-received-state connection state 9-136
  - chaos:connect function 9-134
  - chaos:conn-finished-p function 9-139
  - chaos:dat-op variable 9-159
  - chaos:data-available function 9-140
  - chaos:eof-op variable 9-159
  - chaos:fast-answer-string function 9-136
  - chaos:finish-conn function 9-139
  - Chaos:foreign-state connection state 9-136
  - chaos:get-pkt function 9-139
  - chaos:get-next-pkt function 9-140
  - chaos:host-data function 9-141
  - chaos:host-up function 9-135
  - Chaos:host-down-state connection state 9-136
  - Chaos:inactive-state connection state 9-136
  - chaos:interrupt-function function 9-140
  - chaos:listen function 9-136
  - Chaos:listening-state connection state 9-136
  - Chaos:los-received-state connection state 9-136
  - chaos:make-stream function 9-137
  - chaos:may-transmit function 9-139
  - chaos:my-address variable 0-83
  - chaos:notify function 9-135
  - chaos:notify-local-lispms function 1-72, 6-103, 9-135
  - Chaos:open-state connection state 9-136
  - chaos:open-foreign-connection function 9-134
  - chaos:pkt-link function 9-141
  - chaos:pkt-nbytes function 9-138
  - chaos:pkt-opcode function 9-138
  - chaos:pkt-string function 9-139
  - chaos:print-conn function 9-141
  - chaos:print-pkt function 9-141
  - chaos:print-all-pkts function 9-141
  - chaos:read-pkts function 9-140
  - chaos:reject function 9-136
  - chaos:remove-conn function 9-134
  - chaos:return-pkt function 9-139
  - Chaos:rfc-received-state connection state 9-136
  - Chaos:rfc-sent-state connection state 9-136
  - chaos:send-pkt function 9-139
  - chaos:send-string function 9-139
  - chaos:send-unc-pkt function 9-139
  - chaos:server-alist variable 9-51, 9-136
  - chaos:set-pkt-string function 9-139
  - chaos:simple function 9-134
  - chaos:state function 9-136
  - chaos:status function 9-141
  - chaos:wait function 9-137
- zwei:
  - chaos-direct-send-it is Now Obsolete RN-69
  - Chaosnet 9-95
  - Chaosnet 0-87
  - Chaosnet 9-95
  - Chaosnet 9-129
- Installing
- Introduction to
- Using Foreign Protocols in

- Chaosnet address 1-198
- Chaosnet cable 9-96
- Chaosnet Ether 9-96
- Chaosnet Interface 9-97
- Chaosnet Packets 9-96
- Chaosnet References 9-151
- Chaosnet Transceiver 9-97
- Setting
  - Chaosnet address 1-201
  - Chaosnet Arpanet Gateway Protocol 9-127
  - Chaosnet Connection States 9-121
  - Chaosnet Dover Printer Protocol 9-128
  - Chaosnet File Access Protocol 9-125
  - Chaosnet File Protocol 9-153
  - Chaosnet File Protocol (QFILE) 9-153
  - Chaosnet File Protocol (QFILE) 9-153
  - Chaosnet File Transfer Protocol 9-153
  - Chaosnet Hardware Programming Information 9-131
  - Chaosnet Hardware Protocol 9-95
- Introduction:
  - Chaosnet Hardware Protocols 9-98
  - Chaosnet Host Table Protocol 9-127
- Details of
  - UNIBUS
    - Chaosnet interface 9-131
    - Chaosnet Lisp Machine Implementation 9-134
    - Chaosnet Mail Protocol 9-125
    - Chaosnet Name Protocol 9-126
    - Chaosnet Network Control Program 9-102
- Higher-level
  - Chaosnet Protocols 9-123
  - Chaosnet Pulsar Protocol 9-124
  - Chaosnet RFC/ANS time protocol 9-50
  - Chaosnet Send Protocol 9-126
  - Chaosnet Software Protocol -- Details 9-114
  - Chaosnet Software Protocol -- Overview 9-102
  - Chaosnet Status Protocols 9-123
- Allocating and freeing
  - Chaosnet storage resources 8-131
  - Chaosnet Telnet and Supdup Protocols 9-125
  - Chaosnet Time Protocol 9-127
  - Chaosnet UNC encapsulation interface 9-206
- Software Installation:
  - Chaosnet UNIX Implementation 9-146
  - Chaosnet UNIX Implementation 9-150
  - Chaosnet VAX/VMS Implementation 9-142
  - chaos** network type 9-15
  - chaos\_accept** function 9-143
  - chaos\_ans** function 9-143
  - chaos\_assign** function 9-143
  - chaos\_close** function 9-143
  - chaos\_deassign** function 9-143
  - chaos\_eof** function 9-144
  - chaos\_finish** function 9-144
  - chaos\_force\_out** function 9-143
  - chaos\_in\_char** function 9-143
  - chaos\_in\_pkt** function 9-144
  - chaos\_lsn** function 9-143
  - chaos\_out\_char** function 9-143
  - chaos\_out\_pkt** function 9-144
  - chaos\_rfc** function 9-142
  - chaos\_sout** function 9-143
  - chaos\_state** function 9-145
  - chaos\_wait** function 9-145
  - chaos\_wait\_til** function 9-145
  - chaos\_xmit\_room** function 9-144
  - char** function 2-271
  - char<** function 2-271
  - char>** function 2-271
  - Char-aluf 7-108, 7-118
  - char-bit** function 2-269
  - char-bits** function 2-269
  - char-code** function 2-269

**char-downcase** function 2-272  
**char-equal** function 2-271  
Char-exists table 3-223  
Char-exists Table Font Attribute 3-223  
**char-flipcase** function 2-273  
**char-greaterp** function 2-272  
Char-height attribute 7-108  
**char-int** function 2-272  
**char-lessp** function 2-271  
**char-name** function 2-273  
**char-standard** function 2-275  
**char-subindex** function 2-269  
**char-upcase** function 2-272  
Char-width attribute 7-108  
**char<** function 2-271  
**char=** function 2-270  
**char>** function 2-271  
  
\* character 5-153  
Abort character 2-32  
Altmode character 2-32  
Back-Next character 2-32  
Backquote character 2-345  
Backquote macro character 2-26  
Backslash (\) character 9-24  
Backspace character 2-32  
Backward Character 3-61  
Break character 2-32  
BS character 2-32  
Call character 2-32  
Carriage return character 5-5  
Circle-plus character 2-32  
Circle-X character 2-25  
Clear character 2-32  
Clear-Input character 2-32  
Clear-Screen character 2-32  
Comma macro character 2-26  
Contracting a character 3-259  
CR character 2-32  
Delete character 7-113, 7-114  
Deleting the Current Character 3-76  
Deleting the Last Character 3-76  
Delta character 2-32  
Double-arrow character 5-185  
Drawing a character 3-227  
Editing a character 3-227  
End character 2-32  
Erase character 7-113, 7-114  
ESC character 2-32  
Form character 2-32  
Forward Character 3-61  
Gamma character 2-32  
Hand-Down character 2-32  
Hand-Left character 2-32  
Hand-Right character 2-32  
Hand-Up character 2-32  
Help character 2-32  
Hold-Output character 2-32  
Integral character 2-32  
Keyboard character 5-5  
Lambda character 2-32  
LF character 2-32  
Line character 2-32  
Macro character 2-26, 2-32  
Motion by Character 3-60  
Network character 2-32  
Overstrike character 2-32



- Page character 2-32, 5-5
- Page separator character 5-5
- Plus-Minus character 2-32
- Quote character 2-32
- Quote macro character 2-26
- Resume character 2-32
- Return character 2-32, 5-5
- Roman-I character 2-32
- Roman-II character 2-32
- Roman-III character 2-32
- Roman-IV character 2-32
- Rubout character 2-32
- RUBOUT Zmacs character 1-145, 3-76
- Selecting a FED Character by Creating a New Character 3-233
- Semicolon (;) macro character 2-26
- Sharp-sign macro character 2-26
- SP character 2-32
- Space character 2-32
- Status character 2-32
- Stop-Output character 2-32
- Stretching a character 3-259
- System character 2-32
- Tab character 2-32, 5-5
- Terminal character 2-32
- Up-Arrow character 2-32
- Character attributes 3-221, 7-143
- Character box 3-227, 3-237, 3-238
- Character codes 2-27, 2-265, RN-14
- Character Comparisons 2-270
- Character constants 2-27
- Character Conversions 2-272
- Character Fields 2-269
- Character files 0-31
- character** function 2-272
- Character height 3-221, 3-227, 3-238, 7-143, 7-145, 7-146
- Character mode 5-91
- Character Names 2-273
- Character object 5-84
- Character Objects 2-265
- Character output 5-46
- Character Predicates 2-270
- Character sets 9-107, 9-125, RN-15
- Character strings 2-277
- Character width 3-222, 3-238, 7-108, 7-144, 7-145, 7-162
- :char** init option for **tv:**
- :font** init option for **tv:**
- tv:**
- character-blinker** 7-150
- character-blinker** 7-150
- character-blinker** flavor 7-150
- :character-height** init option for **tv:menu** 7-295
- :character-height** init option for **tv:sheet** 7-164
- Character-related byte specifiers 5-5
- character-size:** Printer Object Attribute 9-18
- :character-width** init option for **tv:menu** 7-295
- :character-width** init option for **tv:sheet** 7-164
- :character-width** method of **tv:sheet** 7-114
- Summary of Character and String Compatibility Functions in Release 6.0 RN-18
- Character and String Functions for Old-Zetalisp/New-Zetalisp Compatibility RN-24
- : character as keyword identifier 2-576
- SCL and *constituent* character attribute 2-643
- SCL and *non-terminating macro* character attribute 2-643
- SCL and *illegal* character attributes 2-643
- SCL and Standard Constituent Character Attributes Table 2-643
- :set-character** method of **tv:** **character-blinker** 7-150

- Altering the FED Character Box 3-238
- Bottom Edge of the FED Character Box 3-237
- Character Height of the FED Character Box 3-238
- FED Character Box 3-227
- Left and Right Edges of the FED Character Box 3-237
- Top Edge of the FED Character Box 3-237
- Using the mouse on the character box 3-238
- Viewing and Altering a Character in the FED Character Box 3-237
- What the Lines Mean in the FED Character Box 3-237
- Selecting a FED Character by Creating a New Character 3-233
- Selecting a FED Character by Renaming Characters 3-234
- Notation Conventions for Character Case 1-234
- Undefined character code 7-108
- Character code for nonprinting characters 2-27
- Reading octal character codes 2-25
- Prefix character commands 1-49, 3-6
- Character Comparisons Affected by Case, Style, and Bits 2-270
- Character Comparisons Ignoring Case, Style, and Bits 2-271
- Character Compatibility RN-18
- Old-Zetalisp and New-Zetalisp String and \$ character do not reap file flag 5-236
- ! :character file-opening option 5-91
- Right margin character file not backed up flag 5-236
- Keyboard character flag 7-108
- Selecting a FED character format directive 5-33
- Selecting a FED Character From the Character Select Menu 3-233
- ITS Character From the [Show Font] Display 3-233
- Character handling 5-5
- Character Height Font Attribute 3-221, 7-143
- Character Height of the FED Character Box 3-238
- Character identifier 2-277
- #, character identifier 2-277
- #\ character in backquote facility 2-345
- Comma character incompatibilities 2-265, RN-12
- Zetalisp and SCL Character in FED 3-233
- Selecting a character in ITS pathnames 5-185
- Equivalence sign character in ITS pathnames 5-185
- Right horseshoe character in logical pathnames for nil 5-186
- Double-arrow character in logical pathnames for quoting 5-186
- Equivalence sign character in lozenge 5-34
- Enclose character input 5-75
- Echo Character in the FED Character Box 3-237
- Viewing and Altering a character in TOPS-20 pathname display 5-183
- Center-dot character in TOPS-20 pathnames 5-183
- Circle-X Character in Zmacs 3-165
- Going Back to First Indented Characteristics 6-67
- Selecting Zmail Messages Based on Characteristics 6-58
- Testing Zmail Message character names 2-644
- SCL and printed Character Names 2-32
- Special Character Object Details 2-265
- Additional Character Object Enhancements RN-15
- Details of Character Objects RN-14
- Font numbers and character objects 2-267, RN-15
- Printed Representation of Common Lisp Character Objects 2-16
- Character objects code field 2-265, RN-14
- Character objects device-font number field RN-16
- Character objects font field 2-265, RN-14
- Character Objects in Common Lisp RN-12
- Character objects style field 2-265, RN-14
- Character objects subindex field RN-16
- :character option for prompt-and-read 7-59
- :character-or-nil tv:choose-variable-values variable type 7-259
- VAX/VMS character output 9-143
- Window Attributes for Character Output 7-115

- Special function keys
  - ASCII
  - Asynchronous
  - %%ch-** byte specifiers and file
  - Character code for nonprinting
    - CLM: Macro
    - CLM: Predicates on
    - CLM: String
    - Creating new
    - Deleting and Transposing
    - Derived fields for
    - Drawing
    - Floating-point Exponent
    - Font
  - Functions That Change Characters Into Macro
    - Graphics
    - How the Reader Recognizes Macro
    - How Windows Display
    - Inserting
    - Inserting Formatting
  - Interactive-stream Operations for Asynchronous
    - Intercepted
  - %%kbd-** byte specifiers and keyboard
    - Macro
    - Mirror imaging
    - Mouse
    - Newline
    - Notation Conventions for Macro
    - Notation Conventions for Quoting
    - Octal representation of
    - Return
    - Selecting a FED Character by Renaming
    - Serial Stream Handling of Xon - Xoff
    - Setting Command Processor Special
      - Special
      - Transposing
      - Two Kinds of
    - Use of Arithmetic Operations on
    - Use of **ldb**, **ldb-test**, **logand**, and **bit-test** on
      - Use of Mouse
      - Use of Numerical Comparisons on
    - Using the CONTROL key while drawing
    - Using the META key while drawing
      - Arrays,
      - Saving
  - Obsolete Programming Practices Using
    - Drawing
  - Use of Integers in Source Code Where
    - Use of Symbolics Lisp
  - Use of
    - FED
    - Selecting a FED Character From the
    - Mousing on the FED
    - Using the mouse in the
      - ASCII
      - Expanded
      - Lisp Machine
      - Notation Conventions for the
      - Symbolics
- Character Output to Windows 7-108
- CHARACTER QFILE OPEN option 9-166
- character representation 5-5
  - Characters 2-265
  - Characters 2-274
  - Characters 7-139
  - characters 2-268, RN-17
  - characters 2-27
  - Characters 2-643
  - Characters 2-640
  - Characters 2-637
  - characters 3-234
  - Characters 3-76
  - characters 2-268, RN-16
  - characters 7-108
  - Characters 2-22
  - characters 7-103
  - Characters 2-35
  - characters 5-5
  - Characters 2-26
  - Characters 7-108
  - Characters 3-22
  - Characters 3-23
  - Characters 7-17
  - Characters 7-15
  - characters 2-268, RN-17
  - characters 1-233
  - characters 3-243
  - Characters 2-273
  - characters 3-22
  - Characters 1-233
  - Characters 1-233
  - characters 5-5
  - characters 7-305
  - Characters 3-234
  - Characters RN-80
  - Characters 1-166
  - characters 1-233, 2-32, 7-108
  - Characters 3-76
  - Characters 2-268
  - Characters RN-21
  - Characters RN-21
  - Characters RN-22
  - Characters RN-20
  - characters 3-235
  - characters 3-235
  - :characters** message 5-13, 5-114
  - Characters, and Strings 2-233
  - Characters and Pieces of Characters in FED
    - Registers 3-241
  - Characters and Strings RN-19
  - Characters and Strings on Windows 7-121
  - Characters Are Desired RN-19
  - Machine Characters in Source Code Where ASCII
    - Characters Are Desired RN-20
  - Characters as Array Subscripts RN-22
  - Character Select menu 3-229
  - Character Select Menu 3-229
  - Character Select Menu 3-233
  - Character Select Pane 3-263
  - character select pane 3-263
  - character set 5-5, 5-251, 5-253
  - character set 2-277
  - Character Set 5-5
  - Character Set 1-235
  - Character Set 5-5

- The Support for Nonstandard
    - QFILE
      - Disable all
      - QFILE NORMAL
      - QFILE RAW
      - QFILE SUPER-IMAGE
      - Effect of
        - Reading
        - Distinguishing
        - Reading
        - Messages to Remove
        - Transformations on
        - Saving Characters and Pieces of
        - Drawing
        - Two Kinds of
        - Performing arithmetic operations on
        - Use of Symbolics Lisp Machine
      - Use of
        - Displaying
        - Functions That Change
        - Displaying
        - Messages to Display
      - Special
      - CLM: Formatted Output to
        - CLM: Input From
        - Double-quote
      - Character Sets and
        - Common Lisp
        - Merging
        - Drawing
      - CLM: Standard Dispatching Macro
      - Functions That Change
      - SCL and Standard
    - Messages About
    - Selecting a FED
- Character Set 5-5
- Character Sets 2-275
- Character Sets and Character Styles 2-267
- Character set translation 5-10
- Character Set Translation 9-156
- character set translation in ASCII files 5-91
- character set translation mode 9-156
- character set translation mode 9-156
- character set translation mode 9-156
- Character Set Translation on Direct Access File Streams 5-10
- characters from an input stream 5-15
- Characters From Blips RN-22
- characters from the keyboard 7-103
- Characters From Windows 7-113
- Characters in FED 3-243
- Characters in FED Registers 3-241
- Characters in FED with the Mouse 3-235
- Characters in Old-Zetalisp RN-17
- characters in SCL 2-265, RN-12
- Characters in Source Code Where ASCII Characters Are Desired RN-20
- Characters in Source Code Where Integers Are Desired RN-19
- Characters in the Font in FED 3-233
- Characters Into Macro Characters 2-35
- characters on output devices 2-268, RN-16
- Characters on Windows 7-111
- :characters** option for **copyf** 5-105
- Characters Recognized by the Inspector 4-300
- Character Streams 2-644
- Character Streams 2-643
- character strings 1-233
- Character strings as array elements 2-236
- Character Styles 2-267
- Character Switchover in Release 6.0 RN-12
- Characters with the FED Gray Plane 3-240
- characters with the mouse 3-235
- Character Syntax 2-644
- Character Syntax 2-34
- Character Syntax Types Table 2-643
- :character tv:choose-variable-values** variable type 7-259
- Character Width and Cursor Motion 7-114
- Character Width* Font Attribute 3-222, 7-144
- Character with the C Command 3-233
- char-device-font** function 2-269
- :char** init option for **tv:character-blinker** 7-150
- char-mouse-button** function 2-273
- char-mouse-n-clicks** function 2-274
- char-not-equal** function 2-271
- char-not-greaterp** function 2-272
- char-not-lessp** function 2-272
- Chars-exist-table 7-145
- Chars-exist-table* Font Attribute 7-145
- char-to-ascii** function 2-274
- Char] 3-239
- Char] Font Editor menu item 3-239, 3-260
- Char] Font Editor menu item 3-234, 3-260
- Char] Font Editor menu item 3-234, 3-260
- check 9-166
- Check word 8-29, 9-96, 9-98
- check-arg** macro 2-505
- :check-ready** message to tape streams 5-273
- check-arg-type** macro 2-506
- check-arg-type** special form 2-576
- Getting Things Into Gray with [Gray
- [Gray
- [Rename
- [Save
- QFILE synchronization

- :checker** option for **defresource** 8-132
- Check for New Mail (m-X) Zmail Command 6-48
- :check-framing-errors** serial I/O parameter 5-253
- File Attribute
  - Checking 3-138
  - Checking for Package Name-conflict Errors 2-593
  - Checking for valid arguments 2-505
- SCL case
  - checking in package-name lookup 2-640
  - Checking on What the Machine is Doing 1-177
  - Checking the State 9-144
  - Checking the Status of Hardcopy Devices 1-109, 3-269
- sl: **check-memory-scan** macro 8-111
- :check-over-run-errors** serial I/O parameter 5-253
- :check-parity-errors** serial I/O parameter 5-253
- [Check Records] Maintenance Operations menu item 0-39
- sl: **checksum-band** function 0-52
- Check Unbalanced Parentheses When Saving Variable 3-211
- USART
  - chip 5-247
  - Choice boxes 7-203, 7-251
  - [Choice boxes] 0-21
  - :choice-box** I/O buffer command 7-273
- Exit
  - choice box 7-262
- Dumper
  - Choice box descriptor 7-289
  - Choice Boxes 0-21
  - Choice boxes in bottom of margin 7-289
  - Choice Boxes Menu 0-22
  - Choice Boxes menu item 0-22
  - Choice Boxes menu item 0-22
  - Choice Facilities 7-205
  - Choice Facilities 7-203
  - Choice Facilities 7-206
  - Choice Facilities 7-203
  - Choice Facilities 7-203
  - Choice Facilities 7-201
  - Choice Facilities Use the Flavor System 7-205
  - Choice Facility 7-289
  - Choice Facility 7-251
  - Choice Flavor 7-254
  - Choice Function 7-252
  - Choice Menu Flavors 7-254
  - Choice Menus 7-203, 7-251
  - Choices 7-203
  - Choices 7-203, 7-241, 7-247
  - :choices** option for **fquery** 7-56
- [Clear all choices]
  - choices] Choice Boxes menu item 0-22
- Using the mouse with multiple
  - choice window 7-251
  - choice window parameters 7-251, 7-255
  - choose 7-247
  - :choose** message 7-212, 7-229
  - Choose Facility 7-247
  - Choose Flavors 7-249
  - Choose Function 7-247
  - choose-gc-parameters** function 8-115
  - Choose Menus 7-203
  - :choose** method of **tv:menu** 7-223
  - :choose** method of **tv:multiple-choice** 7-255
  - Choose Mixin and Resource 7-248
  - :choose** proceed type 2-619
  - Choose Process Priority Levels 8-87
  - :choose tv:choose-variable-values** variable type 7-259
  - choose-user-options** function 7-266, 7-267
  - choose-variable-values** 7-259
  - choose-variable-values** 7-263
- Multiple menu
  - The Multiple Menu
  - Instantiable Multiple Menu
  - The Standard Multiple Menu
- Multiple Menu
  - Multiple Menu
- Multiple Menu
  - Multiple Menu
- How to
  - Multiple Menu
- :documentation** specification for **tv:**
- :extra-width** init option for **tv:**



- :set-variables** method of **tv**:
  - Defining a
- :setup** method of **tv**:
  - tv**: **choose-variable-values-window** Example 7-276
  - tv**: **choose-variable-values-window** flavor 7-272
  - tv**: **choose-variable-values-window** Messages 7-275
- I/O Buffers for
- Extracting value from
- Drawing Polygons and
  - si**: **circlecross** syntax description 2-34
- Data
  - fs**: **circular-link** flavor 2-552
  - fs**: **circular-list** function 2-50
- SCL arrays and
  - circular-structure labelling restriction 2-641
  - Circumflex in integer syntax 2-20
- c-X
  - cls** function 2-107, RN-35
  - c-I Zmacs command 3-165
  - cl** package 2-615, 2-633
  - cl:double-float** format 2-23
  - cl:long-float** format 2-23
  - cl:\*read-default-float-format\*** variable 2-23
  - cl:short-float** format 2-23
  - cl:single-float** format 2-23
  - :clamped** boundary condition for
    - :draw-cubic-spline** 7-125
  - Clarification of **gc-on** Printed Documentation RN-80
  - Clarification of What **readline** Returns RN-79
- Notes and
  - Clarifications for Release 6.0 RN-79
  - :class** message 9-32
  - Classes 1-113, 9-5
- Database
  - classes 0-87
- Defining Namespace
  - Classes 9-35
- Namespace
  - classes 0-87
- Namespace System
  - Classes 1-112, 9-4
  - Classes of Handlers 2-487
  - Classifiers 6-75
  - Classifying Zmail Messages 6-75
  - :class** option for **prompt-and-read** 7-59, RN-58
- Clauses 2-206
  - Clauses 2-207, 2-221
  - Clauses 2-218
- Iteration-driving
- Miscellaneous Other
  - Clean Directory (m-X) Zmacs command 3-136
  - Cleanup handler 2-197
  - Clear character 2-32
  - CLEAR INPUT 1-140
  - :clear-char** method of **tv:sheet** 7-113
  - :clear-eof** operation 9-137
  - :clear-eof** message to input tape streams 5-273
  - :clear-eof** Message to Windows is Obsolete RN-60
  - :clear-error** message to tape streams 5-273
  - :clear-hash** message 2-73
  - Clear-Input character 2-32
  - :clear-input** message 5-18, 5-251, 5-261
  - :clear-input** option for **fquery** 7-56
  - :clear-output** message 5-18
  - clear-resource** function 8-135
  - Clear-Screen character 2-32
  - :clear-window** message 5-20
  - :clear-window** method of **tv:sheet** 7-114

- [Clear all choices] Choice Boxes menu item 0-22
  - Clear all points 3-259
  - Clear buffered input 5-18
  - Clear buffered output 5-18
  - Clear Disk-types command 1-201
  - Clear gray plane 3-239, 3-260
  - [Clear Gray] Font Editor menu item 3-239, 3-260
  - clearing 1-201
  - clearing 1-201
  - Clearing the Drawing in FED 3-243
  - Clearing the Trap-on-exit Flag for the Current and All Outer Frames 4-266
  - FUNCTION CLEAR INPUT 1-141
  - :clear-input** method of **si:interactive-stream** 7-12
  - :clear-input** method of **tv:stream-mixin** 7-135
  - CLEAR INPUT Zmacs command 3-82
  - Clear Machine command 1-201
  - :clear** method of **si:heap** 2-78
  - Clear Paging-files command 1-201
  - [Clear Points] Font Editor draw mode menu item 3-235
  - Clear Receiver bit 9-131
  - :clear-rest-of-line** message 5-15
  - :clear-rest-of-line** method of **tv:sheet** 7-113
  - :clear-rest-of-window** method of **tv:sheet** 7-113
  - Clear Screen command 1-201
  - :clear-to-send** serial I/O parameter 5-253
  - Clear Transmitter bit 9-131
  - New Type for **:start-typeout** Message to Interactive Streams:
    - :clear-window** RN-67
  - [Clear] Inspector menu item 4-298
  - click 3-57
  - click 3-57
  - click 3-57
  - click 3-57
  - click 3-57
  - click 3-57
  - click 3-57
  - click 3-57
  - Click Middle on Summary Line 6-55
  - Click Right on Summary Line 6-55
  - Click Right on Summary Line Zmail Command 6-42
  - clicks 3-57
  - clicks 7-151
  - clicks 1-7, 4-129, 7-151, 7-152
  - clicks 7-311
  - Clipping 7-118
  - CLM: Arrays 2-641
  - CLM: Declarations 2-640
  - CLM: Documentation 2-645
  - CLM: Lambda-expressions 2-638
  - CLM: Lists 2-641
  - CLM: Modules 2-640
  - CLM: Pathnames 2-644
  - CLM: Reference 2-638
  - CLM: Strings 2-637, 2-642
  - CLM: Structures 2-642
  - CLM: Accessing Directories 2-645
  - CLM: Array Information 2-642
  - CLM: Blocks and Exits 2-639
  - CLM: By-position Constructor Functions 2-642
  - CLM: Creating New Streams 2-643
  - CLM: Data Types 2-637
  - CLM: Debugging Tools 2-645
  - CLM: Declaration Specifiers 2-640
  - CLM: Declaration Syntax 2-640
  - CLM: **defstruct** Options 2-642
  - CLM: Formatted Output to Character Streams 2-644
- L2:Move to point mouse
  - L:Move point mouse
  - M2:Save/Kill/Yank mouse
  - M:Mark thing mouse
  - R2:System menu mouse
  - R:Menu mouse
  - Zmail: Click Middle on Summary Line 6-55
  - Zmail: Click Right on Summary Line 6-55
  - Zmail: Click Right on Summary Line Zmail Command 6-42
  - Current meaning of mouse clicks 3-57
  - Encoded mouse clicks 7-151
  - Mouse clicks 1-7, 4-129, 7-151, 7-152
  - Reading mouse clicks 7-311



- CLM: Generalized Variables 2-639
  - CLM: Hash Tables 2-641
  - CLM: Input From Character Streams 2-643
  - CLM: Macro Characters 2-643
  - CLM: Macro Definition 2-639
  - CLM: Modifying Sequences 2-640
  - CLM: Other Environment Inquiries 2-645
  - CLM: Parsing of Numbers and Symbols 2-643
  - CLM: Pathname Functions 2-644
  - CLM: Predicates on Characters 2-640
  - CLM: Rules Governing the Passing of Multiple Values 2-639
  - CLM: Searching Sequences for Items 2-641
  - CLM: Sequences, Lists 2-641
  - CLM: Simple Sequencing 2-639
  - CLM: Special Forms 2-638
  - CLM: Specific Data Type Predicates 2-638
  - CLM: Standard Dispatching Macro Character Syntax 2-644
  - CLM: String Characters 2-637
  - CLM: the Compiler 2-645
  - CLM: the "Program Feature" 2-639
  - CLM: the Readtable 2-644
  - CLM: the Top-level Loop 2-642
  - CLM: Time Functions 2-645
  - CLM: Translating Strings to Symbols 2-640
  - CLM: Type Conversion Function 2-637
  - CLM: Type Declaration for Forms 2-640
  - CLM: What the Print Function Produces 2-644
  - CLM: What the Read Function Accepts 2-643
  - Clock 7-355
  - Clock resetting 1-201
  - Clock Command 1-32
  - clock-function-list** variable 8-80
  - :clock** option for **sl:sb-on** 8-80
  - Clock sequence break 8-80
  - close** function 5-103
  - :close** message 5-18
  - :close** operation 5-97, 9-137
  - close-abort QFILE OPEN options 9-155
  - close-conn** function 9-134
  - close-all-files** function 5-107
  - [Close All Files] Maintenance Operations menu item 0-39
  - Close and Synchronous Marks 9-176
  - Close connection packet 9-114
  - Closed subroutine 2-351
  - Closed connection state 9-121
  - :close** message to tape streams 5-273
  - CLOSE QFILE command 9-155, 9-175, 9-176
  - [Close] Command 5-235
  - [Close] File System Editor menu item 5-233
  - [Close] Filter Creation Display menu item 6-61
  - Closing a connection 9-114, 9-118, 9-134, 9-143
  - Closing a Directory 5-232
  - Closing Connections 9-134, 9-143
  - Closing Connections 9-136
  - Closing Connections 9-134
  - closure 4-299
  - closure** function 2-305, 2-335
  - closure-alist** function 2-335
  - closure-function** function 2-335
  - Closure-manipulating Functions 2-335
  - closure-variables** function 2-336
  - Closure? 2-331
  - Closure Allocation 2-139, 2-140, 2-141, 2-312, 2-313
- The 3600-family Calendar
- Set Calendar
  - sys:**
- QFILE unblinding QFILE
- chaos:**
  - fs:**
- QFILE
- CLS
- FSEdit
- Opening and
  - Opening and
  - Server-side: Opening and
  - User-side: Opening and
  - Inspecting a
- Dynamic
- What is a Dynamic Funargs and Lexical

- Dynamic
  - Examples of the Use of Dynamic Functions and Dynamic Lexical
  - Stack-allocated
  - Unbound
- Closure and flavors 2-423
  - closurep** function 2-9, 2-335
  - :closure** returned by **typep** 2-9
  - closures 2-303, 2-305, 2-331
  - Closures 2-333
  - Closures 2-295
  - closures 2-137, 2-303, 2-305, 2-331
  - closures 2-139
  - closure variable error 2-533
  - clrhash** function 2-74
  - clrhash-equal** function 2-74
  - CLS Close connection packet 9-114
  - CLS packet 9-118
  - cls-received-state connection state 9-136
  - c-L Zmacs command 3-160
  - c-m-( Zmacs command 3-66
  - c-m-) Zmacs command 3-66
  - (c-m-;) Zmacs command 4-23
  - c-m-; Zmacs command 3-171
  - c-m-? V Zmacs command 3-210
  - c-m-@ Zmacs command 3-91
  - c-m-ABORT 1-139
  - c-m-ABORT command 6-23, 6-46
  - c-m-A Debugger command 4-264, 4-271
  - c-m-A Zmacs command 3-66
  - c-m-B Debugger command 4-264, 4-271
  - c-m-B Zmacs command 3-65
  - CMD QFILE token 9-160
  - c-m-D Zmacs command 3-66
  - c-m-E Zmacs command 3-67
  - c-m-F Debugger command 4-264, 4-271
  - c-m-F Zmacs command 3-65
  - (c-m-H) Zmacs command 4-60
  - c-m-H Debugger command 4-264, 4-271
  - c-m-H Zmacs command 3-91
  - (c-m-K) Zmacs command 4-60
  - c-m-K Zmacs command 1-53, 3-28, 3-79
  - (c-m-L) Zmacs command 4-59
  - c-m-L Debugger command 4-264, 4-271
  - c-m-L on the SQUARE Key 1-169, 3-215
  - c-m-L Zmacs command 3-117
  - c-m-L Zmacs command 3-117
  - c-m-L Zmail command 6-77
  - c-m-N Debugger command 4-264, 4-271
  - c-m-N Zmacs command 3-65
  - c-m-O Zmacs command 3-166
  - c-m-P Debugger command 4-264, 4-271
  - c-m-P Zmacs command 3-65
  - (c-m-Q) Zmacs command 4-26
  - c-m-Q Zmacs command 3-165
  - c-m-R Debugger command 4-80, 4-264, 4-271
  - (c-m-RUBOUT) Zmacs command 4-60
  - c-m-RUBOUT Zmacs command 1-53, 3-28, 3-79
  - c-m-R Zmacs command 3-56
  - c-m-SCROLL 1-134
  - c-m-S Debugger command 4-264, 4-271
  - c-m-sh-E Zmacs command 3-175
  - (c-m-SPACE) Zmacs command 4-59
  - c-m-SPACE Zmacs command 3-88
  - c-m-SPACE Zmacs command 3-88
  - c-m-SPACE Zmail command 6-50
  - c-m-SUSPEND 1-146, 4-80
  - c-m-S Zmail command 6-39
  - c-m-TAB) Zmacs command 4-26
  - c-m-T Zmacs command 3-79
  - c-m-U Debugger command 4-264, 4-271
- Sending a Chaos:
    - c-X
- Kill Comment
- Mark Definition
- Kill Sexp
- Select Previous Buffer
- Init File Form:
  - c-X
- Indent Sexp
- Backward Kill Sexp
- Move To Previous Point
  - c-X
- c-X
- Indent For Lisp (TAB or

- c-m-U Zmacs command 3-66
  - (c-m-V) Zmacs command 4-65
  - c-m-V Debugger command 4-264, 4-271
  - c-m-V Zmacs command 3-130
  - c-m-W Debugger command 4-80, 4-264, 4-271
  - c-m-X 3-7
- Scroll Other Window
- (c-m-X) Zmacs command 3-79
  - c-m-X Debugger command 4-264, 4-271
  - c-m-Y Has Been Changed to c-X c-Y in Release 6.0 RN-69
  - c-m-Y input editor command 4-77
  - c-m-Y yank command 3-15
- c-Ø
  - c-m-Y yank command 3-15, 3-73
  - c-m-Z Zmacs command 3-175
  - c-m-[ Converse Command 6-102
  - c-m-[ Converse Command 1-71
  - c-m-[ Zmacs command 3-66
- Indent Region
  - (c-m-\) Zmacs command 4-26
  - c-m-\ Zmacs command 3-165
  - c-m-] Converse Command 6-102
  - c-m-] Converse Command 1-71
  - c-m-] Zmacs command 3-67
  - c-m-^ Zmacs command 3-166
- c-X
  - c-N Zmacs command 3-63
  - c-O c-Y yank command 3-15
- Aligning Code 4-26
- Changed code 4-56
- Commenting Out Code 4-83
- Compiling code 4-69, 4-70
- Compiling Lisp Code 4-70
- Debugger Commands for Dynamic Breakpoints and Stepping Through Compiled Code 4-267
  - Editing Code 4-56
  - Error logging code 2-494
  - Evaluating code 4-69, 4-75, 4-94
  - Evaluating Lisp Code 4-75
  - Finding Out About Existing Code 4-35
  - Finding source code 3-170
  - Formatting Lisp Code 5-51
  - Identifying Changed Code 4-56
  - Init File Form: White Space in Lisp Code 1-169, 3-215
  - Loop exit code 2-205, 2-212
  - Loop initialization code 2-205, 2-212
  - Macros That Surround Code 2-362
  - Undefined character code 7-108
- Use #|...|# Instead of #|...|# to Comment Out Lisp Code RN-79
- Writing and Editing Code 4-7
  - code-char** function 2-270
  - code as line item entry 7-308
  - compiled object code as line item entry 7-308
  - in-line coded functions 2-351
  - Open coded functions 2-351
  - Invalid type code error 2-534
  - Character objects code field 2-265, RN-14
  - Examining a Compiled Code File 4-300
  - Arrays in compiled code files 4-331, 5-241
  - Compiled code objects in compiled code files 4-331, 5-241
  - File Types of Lisp Source and Compiled Code Files 4-318
  - Instances in compiled code files 4-331, 5-241
  - Lists in compiled code files 4-331, 5-241
  - Numbers in compiled code files 4-331, 5-241
  - Putting Data in Compiled Code Files 4-331, 5-241
  - Symbols in compiled code files 4-331, 5-241
  - Character code for nonprinting characters 2-27
  - Tools for Compiling Code From the Editor Into Your World 4-316
  - Compiling Code in a Zmacs Buffer 4-70

- Summary of Compiler Actions on
  - Commenting Lisp
  - Introduction to Locating Source
  - Overview of Commenting Lisp
  - Inspecting a compiled
    - Compiled
    - Editing the source
    - Character
    - Disk Error
    - QFILE Error
  - Reading octal character
  - Locating Source
- Use of Integers in Source
- Use of Characters in Source
  - SCL
  - Subpackets and
- tv:**
- Controlling Garbage
  - Creating a Mail
  - Ephemeral-object Garbage
    - Expunging
    - Incremental garbage
    - Messages in a mail
    - Nonincremental garbage
    - Operating on a Mail
  - Operating on a Message in a Mail
  - Overview of Garbage
  - Principles of Garbage
  - Storage Requirements for Garbage
    - Mail
    - Mail
  - Ephemeral-object Garbage
    - Mail
- Listing Zmail Buffers, Mail Files and
  - Mail
  - Naming mail
- Hints for Using Keywords, Mail
  - Mail
  - [New
  - [Recycled
- Controlling the garbage
- Diagnostic test for ephemeral-object garbage
  - Garbage
- Hash Tables and the Garbage
  - Operation of the Garbage
- Output messages from the garbage
  - Status of garbage
- Strategy for Unattended Operation with the Garbage
  - The Garbage
  - Using the Garbage
- When and How to Use the Garbage
  - Ephemeral-object garbage
  - Garbage
- Code in a Zmacs Buffer 4-71
- Code in Zmacs 3-171
- Code in Zmacs 3-180
- Code in Zmacs 3-171
- code object 4-299
- code objects in compiled code files 4-331, 5-241
- code of a function 1-48, 1-158, 3-12
- codes 2-27, 2-265, RN-14
- Codes 8-33, 8-39
- Codes 9-193
- codes 2-25
- Code to Edit in Zmacs 3-180
- Use of Symbolics Lisp Machine Characters in Source
  - Code Where ASCII Characters Are Desired RN-20
  - Code Where Characters Are Desired RN-19
  - Code Where Integers Are Desired RN-19
- coerce** function 2-637
- Coercing Packets 9-198
- Coercion rules 2-90
- Coercion Rules for Numbers 2-90
- Cold Booting 1-198, 1-201
- Cold boot after logging out 1-3
- Cold boot after powering up 1-1
- :cold** initialization list 8-71
- cold-load-stream-old-selected-window**
  - variable 7-94
- :cold** option for **add-initialization** 8-67
- collecting loop** keyword 2-212
- Collection 8-124
- Collection 6-79
- Collection 8-119
- collection 6-80
- collection 8-113
- collection 6-80
- collection 8-113
- Collection 6-79
- Collection 6-80
- Collection 1-105, 8-114
- Collection 8-113
- Collection 8-122
- collection commands 6-79
- collection filters 6-58
- Collection in Release 6.0 RN-51
- collection messages 6-80
- Collections 6-77
- Collections 6-11, 6-67, 6-78
- collections 6-79
- Collections, and Mail Files 6-81
- collections in universes 6-64
- collection] Move menu item 6-79
- collection] Move menu item 6-79
- collect loop** keyword 2-212
- collector 8-115
- collector 0-87
- collector 8-131
- Collector 2-75
- Collector 8-117
- collector 8-124
- collector 8-124
- Collector 8-128
- Collector 8-113
- Collector 8-114
- Collector 1-105
- collector diagnostics 0-87
- collector process state 8-124

- Garbage collector run bar 8-124
- Printing garbage collector statistics 8-124
- Garbage collector warnings 8-124
- Collision avoidance 9-99
- Collisions 9-99
- Colon 1-234
- :colon-mode** option for **defpackage** 2-585
- :external** colon mode 2-601, 2-603
- :internal** colon mode 2-601, 2-603
- :colon-mode** Option for **defpackage** and **make-package** 2-601, 2-603
- :colon-mode** option for **make-package** 2-585
- Color map 7-103
- Color screens 7-103, 7-140
- Column 7-239
- Column 7-239
- column 7-179
- Column 3-196
- Column 3-63
- Column (c-X ;) Zmacs command 4-23
- Column (c-X F) Zmacs command 4-12
- Column-major ordering 2-248
- column-major order for arrays 2-641
- Column and the Motion Commands 3-63
- Columnar format 7-214, 7-296
- Column for Real Line Commands 1-168, 3-214
- column geometry 7-215
- column heading 1-57
- Column in Zmacs 3-172
- column position 3-63
- Columns 7-213
- columns 7-203, 7-247
- columns 7-236
- columns 7-214, 7-296
- :columns** init option for **tv:menu** 7-214, 7-296
- :column-spec-list** variable 7-236
- :column-spec-list** init option for **tv:dynamic-multicolumn-mixin** 7-237
- combination 2-520
- combination 2-517, 4-133
- combination 4-113, 4-116, 4-121
- Combination 2-455
- combination definition RN-32
- Combination Method Types 2-459
- combination type 2-455
- combination type 2-455, 2-456
- combination type 2-455, 2-457
- combination type 2-455
- combination type 2-455, 2-456
- combination type 2-455, 2-456
- combination type 2-455, 2-457
- combination type 2-455, 2-456
- combination type 2-455
- combination type 2-455, 2-456
- combination type 2-455
- combination type 2-455, 2-456
- combination type 2-455
- combination type 2-455, 2-456
- combination type 2-455
- combination type 2-455
- Combined methods 2-431, 2-438
- combined flavors 2-431
- Combined Methods 2-472
- Combined Methods 2-471
- Combined Methods (m-X) Zmacs command 4-142
- Combined Methods (m-X) Zmacs command 4-142
- :combined** method type 2-455, 2-458
- Combining flavors 2-431, 2-461
- Combining methods 2-461
- Adding an Item to the Create
- Adding an Item to the Programs
- Constraint frame configuration
  - Set Fill
  - Set Goal
- Set Comment
  - Set Fill
- SCL and Goal
- Init File Form: Setting Goal
  - Manipulating
- Subject or Text Zmall display
- Setting the Lisp Comment
  - Default
- Menus with several
  - Multiple dynamic
  - Set number of
- tv:**
  - :case** flavor
  - :case** method
  - :daemon** method
    - Method
    - Simple method
  - :and** method
  - :append** method
  - :case** method
  - :daemon** method
  - :daemon-with-and** method
  - :daemon-with-or** method
  - :daemon-with-override** method
  - :inverse-list** method
  - :list** method
  - :nconc** method
  - :or** method
  - :pass-on** method
  - :progn** method
- Instance variables of
  - Zmacs Command: Edit
  - Zmacs Command: List
    - Edit
    - List

	Combining abstract types	2-431
	Combining Choice Facilities	7-205
	Comma	1-233
	Comma character in backquote facility	2-345
	Comma macro character	2-26
	Command	7-281
	! Dired	command 3-153
	§ Dired	command 3-152
	, Dired	command 3-149
	. Font Editor drawing	command 3-236
	/ Font Editor	command 3-261
	:choice-box I/O buffer	command 7-273
	:create-directory Debugger	command 2-549
	:create-directories-recursively Debugger	command 2-549
	:variable-choice I/O buffer	command 7-273
	= Dired	command 3-150
	? Dired	command 3-148
	? Font Editor	command 3-260
	ABORT	command 1-62, 1-67, 6-23, 6-42
	ABORT Debugger	command 4-264, 4-271
	ABORT Dired	command 3-148
	ABORT Font Editor	command 3-261
	ABORT Zmacs	command 3-42
	Add Cc Field Zmail	Command 6-37
	Add Disk-type	command 1-201
	Add Fcc Field Zmail	Command 6-37
	Add From Field Zmail	Command 6-38
	Add In-reply-to Field Zmail	Command 6-38
	Add More Text Zmail	Command 6-38
	Add Paging-file	command 1-201
	Add Subject Field Zmail	Command 6-38
	Add to Field Zmail	Command 6-37
	A Dired	command 3-153
	Any Extended	Command 3-7
	Append Buffer (m-X) Converse	Command 1-71
	Append Buffer m-X Converse	Command 6-103
	Append Conversation (m-X) Converse	Command 1-72
	Append Conversation m-X Converse	Command 6-103
	Append To File (m-X) Zmacs	command 3-124
	Apropos (m-X) Zmail	command 6-5, 6-15
	Arglist (m-X) Zmacs	command 3-48
	Atom Word Mode (m-X) Zmacs	command 4-12
	Auto Fill Mode (m-X) Zmacs	command 4-12
	Backward Kill Sexp (c-m-RUBOUT) Zmacs	command 4-60
	Beep (c-G) Zmacs	command 4-59
	B Font Editor	command 3-255
	Boot	command 1-200
	BREAK Inspector	command 4-300
	Brief Documentation (c-sh-D) Zmacs	command 4-39, 4-42
	Bug (m-X) Zmail	Command 6-29
	c-% Zmacs	command 3-102
	c-/ completion	command 1-52, 3-14
	c-; Zmacs	command 3-171
	c-= Zmacs	command 3-47
	c-? completion	command 1-52, 3-14
	c-? Zmacs minibuffer	command 4-8
	c-A Debugger	command 4-80, 4-271
	c-A Zmacs	command 1-50, 3-26, 3-63, 3-81
	c-B Debugger	command 4-264, 4-271
	c-B Stepper	command 4-94
	c-B Zmacs	command 1-50, 3-26, 3-61
	c-C Font Editor	command 3-260
	c-D Dired	command 3-151
	c-D Zmacs	command 1-53, 3-28, 3-43, 3-76
	c-D Zmail	command 6-55, 6-68
	c-E Debugger	command 4-80, 4-264, 4-271

c-END Converse	command	1-71, 6-102
c-E Stepper	command	4-94
c-E Zmacs	command	1-50, 3-26, 3-63, 3-81
c-F Zmacs	command	1-50, 3-26, 3-61
c-G Zmacs	command	3-42
c-HELP Debugger	command	4-80, 4-264, 4-271
c-HELP V Zmacs	command	3-210
c-K Dired	command	3-151
c-K Zmacs	command	1-53, 3-28, 3-81
c-L Debugger	command	4-80, 4-264, 4-271
c-L Zmacs	command	3-55
c-M Converse	Command	1-71, 6-102
c-M Debugger	command	2-524, 4-264, 4-271
c-N Debugger	command	4-80, 4-264, 4-271
c-N Dired	command	3-149
c-N Stepper	command	4-94
c-N Zmacs	command	1-50, 3-26, 3-63, 3-81, 3-199
c-N Zmail	command	6-49
c-O Zmacs	command	3-167
c-P Debugger	command	4-80, 4-264, 4-271
c-P Dired	command	3-149
c-P Zmacs	command	1-50, 3-26, 3-63, 3-81
c-P Zmail	command	6-49
c-R Debugger	command	4-80, 4-264, 4-271
c-REFRESH Font Editor	command	3-261
c-R Font Editor	command	3-260
c-S Debugger	command	4-264, 4-271
c-SPACE Zmacs	command	3-88
c-SPACE Zmail	command	6-50, 6-68
c-T Debugger	command	4-264, 4-271
c-T Zmacs	command	3-76
c-U Stepper	command	4-94
c-U Zmacs	command	3-24
c-V Zmacs	command	1-50, 3-26, 3-55
c-W Font Editor	command	3-260
c-W Zmacs	command	1-53, 3-28, 3-94
c-X ) Zmacs	command	3-199
c-X Ø Zmail	Command	6-39
c-X 1 Zmacs	command	3-130
c-X 1 Zmail	Command	6-39
c-X 2 Zmacs	command	3-129
c-X 2 Zmail	Command	6-39
c-X 3 Zmacs	command	3-129
c-X 4 Zmacs	command	3-129
c-X 8 Zmacs	command	3-129
c-X ; Zmacs	command	3-172
c-X = Zmacs	command	3-47
c-X A Zmacs	command	3-124
c-X A Zmail	command	6-38
c-X B Zmacs	command	1-55, 3-30, 3-31, 3-117
c-X C Zmail	command	6-37
c-X Debugger	command	4-271
c-X D Zmacs	command	3-144
c-X E Zmacs	command	3-200
c-X F Zmacs	command	3-30, 3-196
c-X L Zmacs	command	3-48
c-X M Zmail	Command	6-46
c-X O	command	1-62
c-X O Zmacs	command	3-130
c-X O Zmail	Command	6-38
c-X Q Zmacs	command	3-202
c-X RUBOUT Zmacs	command	1-53, 3-28, 3-83
c-X Stepper	command	4-94
c-X S Zmacs	command	3-30
c-X S Zmail	command	6-37
c-X T Zmacs	command	3-94

c-X T Zmail	command	6-37
c-X Y Zmacs	command	3-119
c-X W Zmacs	command	3-30
c-X Y Prune Yanked Headers Zmail	Command	6-45
c-X Zmacs	command	3-199
c-X I Zmacs	command	1-50, 3-26, 3-69
c-X J Zmacs	command	1-50, 3-26, 3-69
c-X ^ Zmacs	command	3-129
c-Y yank	command	3-15
c-Z Inspector	command	4-300
c-Z Zmail	command	6-17, 6-19
c-] Zmail	command	6-42
c-Ø c-m-Y yank	command	3-15, 3-73
Call Last Kbd Macro (c-X E) Zmacs	command	4-64
Cancel last	command	3-42
C Dired	command	3-150
C Font Editor	command	3-234, 3-261
Change-properties QFILE	Command	9-190
Change File Properties (m-X) Zmacs	command	3-133
Change Subject Pronouns Zmail	Command	6-38
Check for New Mail (m-X) Zmail	Command	6-48
Clean Directory (m-X) Zmacs	command	3-136
Clear Disk-types	command	1-201
CLEAR INPUT Zmacs	command	3-82
Clear Machine	command	1-201
Clear Paging-files	command	1-201
Clear Screen	command	1-201
Click Right on Summary Line Zmail	Command	6-42
CLOSE QFILE	command	9-155, 9-175, 9-176
c-m- ( Zmacs	command	3-66
c-m-) Zmacs	command	3-66
c-m-; Zmacs	command	3-171
c-m-? V Zmacs	command	3-210
c-m-@ Zmacs	command	3-91
c-m-ABORT	command	6-23, 6-46
c-m-A Debugger	command	4-264, 4-271
c-m-A Zmacs	command	3-66
c-m-B Debugger	command	4-264, 4-271
c-m-B Zmacs	command	3-65
c-m-D Zmacs	command	3-66
c-m-E Zmacs	command	3-67
c-m-F Debugger	command	4-264, 4-271
c-m-F Zmacs	command	3-65
c-m-H Debugger	command	4-264, 4-271
c-m-H Zmacs	command	3-91
c-m-K Zmacs	command	1-53, 3-28, 3-79
c-m-L Debugger	command	4-264, 4-271
c-m-L Zmacs	command	3-117
c-m-L Zmail	command	6-77
c-m-N Debugger	command	4-264, 4-271
c-m-N Zmacs	command	3-65
c-m-O Zmacs	command	3-166
c-m-P Debugger	command	4-264, 4-271
c-m-P Zmacs	command	3-65
c-m-Q Zmacs	command	3-165
c-m-R Debugger	command	4-80, 4-264, 4-271
c-m-RUBOUT Zmacs	command	1-53, 3-28, 3-79
c-m-R Zmacs	command	3-56
c-m-S Debugger	command	4-264, 4-271
c-m-sh-E Zmacs	command	3-175
c-m-SPACE Zmacs	command	3-88
c-m-SPACE Zmail	command	6-50
c-m-T Zmacs	command	3-79
c-m-U Debugger	command	4-264, 4-271
c-m-U Zmacs	command	3-66
c-m-V Debugger	command	4-264, 4-271



c-m-V Zmacs	command	3-130
c-m-W Debugger	command	4-80, 4-264, 4-271
c-m-X Debugger	command	4-264, 4-271
c-m-Y Input editor	command	4-77
c-m-Y yank	command	3-15
c-m-Z Zmacs	command	3-175
c-m-[ Converse	Command	1-71, 6-102
c-m-I Zmacs	command	3-66
c-m-\ Zmacs	command	3-165
c-m-J Converse	Command	1-71, 6-102
c-m-J Zmacs	command	3-67
c-m-^ Zmacs	command	3-166
c-O c-Y yank	command	3-15
Compile Buffer (m-X) Zmacs	command	4-70
Compile Changed Definitions (m-X) Zmacs	command	4-70
Compile Changed Definitions Of Buffer (m-sh-C) Zmacs	command	4-70
Compile File	Command	1-16
Compile File (m-X) Zmacs	command	4-73
Compile Region (c-sh-C) Zmacs	command	4-70
Compile Region (m-X) Zmacs	command	3-94, 4-316
Compiler Warnings (m-X) Zmacs	command	4-79, 4-321
Compile System	command	1-17, 4-217
COMPLETE completion	command	1-52, 3-14
Complete QFILE	Command	9-191
COMPLETE Zmacs minibuffer	command	4-8
Continue	command	1-201
Continue QFILE	Command	9-182
Copy	command	1-201
Copy File	Command	1-18
Copy File (m-X) Zmacs	command	3-134, 5-105, 5-153
Copy Microcode	Command	1-18
Copy World	Command	1-19
Create-directory QFILE	Command	9-182
Create-link QFILE	Command	9-182
Create Directory	Command	1-19
Create Directory (m-X) Zmacs	command	3-131
Create Link	Command	1-19
Create Link (m-X) Zmacs	command	3-135
c-sh-A	command	2-302
c-sh-A Zmacs	command	3-47
c-sh-C Zmacs	command	3-94, 4-316
c-sh-D	command	2-302
c-sh-D Zmacs	command	3-47
c-sh-E Zmacs	command	3-175
c-sh-P Debugger	command	4-264, 4-271
c-sh-V Zmacs	command	3-48
c-U c-SPACE Zmail	command	6-50, 6-68
c-U c-U c-SPACE Zmail	command	6-50, 6-68
c-X c-; Zmacs	command	3-173
c-X c-B Zmacs	command	3-115, 3-118
c-X c-D Zmacs	command	3-132
c-X c-F Zmacs	command	1-55, 3-31, 3-32
c-X c-I Zmacs	command	3-165
c-X c-L Zmacs	command	3-160
c-X c-m-L Zmacs	command	3-117
c-X c-m-SPACE Zmacs	command	3-88
c-X c-m-S Zmail	command	6-39
c-X c-N Zmacs	command	3-63
c-X c-O Zmacs	command	1-53, 3-28, 3-167
c-X c-P Zmacs	command	3-92
c-X c-R Zmail	command	6-39
c-X c-S Zmacs	command	3-31, 3-121
c-X c-S Zmail	command	6-39
c-X c-T Zmacs	command	3-82
c-X c-U Zmacs	command	3-160

c-X c-Y Zmacs	command	3-120
c-X c-W Zmacs	command	1-55, 3-32, 3-121
c-X c-W Zmail	command	6-39
c-X c-X Zmacs	command	3-88
c-X c-Y Yank Current Message Zmail	Command	6-45
C Zmail	command	6-43
Data-connection QFILE	Command	9-163
D Dired	command	3-151
Decrypt Msg (m-X) Zmail	command	1-67
Defining a Command Processor	Command	7-44
Deinstall Macro (m-X) Zmacs	command	3-204, 4-64
Delete Conversation (m-X) Converse	Command	1-71, 6-102
Delete Duplicate Messages m-X Zmail	Command	6-56
Delete Duplicate Msgs (m-X) Zmail	command	6-68
Delete File	Command	1-20
Delete File (m-X) Zmacs	command	3-135
Delete QFILE	Command	9-180
Delete Referenced Msgs (m-X) Zmail	command	6-68
Describe Flavor (m-X) Zmacs	command	4-141
Describe Variable (m-X) Zmacs	command	3-210
Describe Variable At Point (c-sh-Y) Zmacs	command	4-39
D Font Editor	command	3-255, 3-260
Directory QFILE	Command	9-185
Dired (m-X) Zmacs	command	3-144, 4-45
Disable Services	Command	1-20
Disassemble (m-X) Zmacs	command	4-104
Disk Format	command	1-201
Disk Restore	command	1-201
Dismount	command	1-201
Display Directory (c-X c-D) Zmacs	command	4-45
Down Comment Line (m-N) Zmacs	command	4-23
D Zmail	command	6-68
D Zmail Kbd	Command	6-55
E Dired	command	3-150
Edit Buffers (m-X) Zmacs	command	3-118
Edit Callers (m-X) Zmacs	command	4-44
Edit Changed Definitions (m-X) Zmacs	command	4-56
Edit Changed Definitions Of Buffer (m-X) Zmacs	command	4-56
Edit Combined Methods (m-X) Zmacs	command	4-142
Edit Compiler Warnings (m-X) Zmacs	command	4-79, 4-321
Edit Definition	Command	1-20
Edit Definition (m-. ) Zmacs	command	4-40, 4-141, 4-142
Edit Directory	Command	1-20
Edit Directory (m-X) Zmacs	command	3-144
Edit File	Command	1-21
Edit File Warnings (m-X) Zmacs	command	4-321
Edit Font	Command	1-21
Editing a	Command	1-14
Edit Methods (m-X) Zmacs	command	4-65, 4-142
Edit Namespace Object	command	1-21, 9-22
E Font Editor	command	3-243, 3-259
Electric Shift Lock Mode (m-X) Zmacs	command	4-12
Enable Services	Command	1-22
END	command	1-62, 1-67, 6-42
END completion	command	1-52, 3-14
END Converse	command	1-71, 6-102
END Dired	command	3-148
End Kbd Macro Zmacs	command	3-199
END Zmacs minibuffer	command	4-8
End Zmail	Command	6-38
ESCAPE Inspector	command	4-300
Evaluate and Replace Into Buffer (m-X) Zmacs	command	3-175, 4-75
Evaluate Buffer (m-X) Zmacs	command	3-175, 4-75
Evaluate Changed Definitions (m-X) Zmacs	command	3-175, 4-75
Evaluate Changed Definitions of Buffer (m-X) Zmacs	command	3-175
Evaluate Changed Definitions Of Buffer (m-sh-E) Zmacs		

	command	4-75
Evaluate Into Buffer (m-X) Zmacs	command	3-175, 4-75
Evaluate Minibuffer (m-ESCAPE) Zmacs	command	4-75
Evaluate Region (c-sh-E) Zmacs	command	4-75
Evaluate Region (m-X) Zmacs	command	3-175
Example of the m-	Command	3-181
Expunge Directory	Command	1-22
Expunge QFILE	Command	9-183
E Zmail	command	6-81
F (Kbd) Zmail	Command	6-29
(fed) Lisp Listener	command	3-225
F Font Editor	command	3-260
Filepos QFILE	Command	9-179
Fill Long Comment (m-X) Zmacs	command	4-23
[Filters (M)] Zmail Profile Mode	command	6-73
Find File (c-X c-F) Zmacs	command	4-9
Find File In Fundamental Mode (m-X) Zmacs	command	3-122
Find File Zmacs	command	1-55, 3-31, 3-32
Finding the right	command	3-45
Find String (m-X) Zmail	command	6-49, 6-67
Find Symbol	Command	1-22
Find Unbalanced Parentheses (m-X) Zmacs	command	3-48, 4-26
Finish QFILE	Command	9-178
Format Buffer (m-X) Zmacs	command	3-33, 3-38, RN-49
Format File (m-X) Zmacs	command	3-33, 3-38, RN-49
Format Region (m-X) Zmacs	command	3-33, 3-38, RN-49
Forward (m-X) Zmail	Command	6-29
FSEdit [Close]	Command	5-235
FSEdit [Create Inferior Directory]	Command	5-234
FSEdit [Create Link]	Command	5-234
FSEdit [Decache]	Command	5-235
FSEdit [Delete]	Command	5-233
FSEdit [Delete (Immediate)]	Command	5-233
FSEdit [Edit]	Command	5-235
FSEdit [Edit Properties]	Command	5-234
FSEdit [Expunge]	Command	5-234
FSEdit [Hardcopy]	Command	5-235
FSEdit [Link Transparencies]	Command	5-235
FSEdit [Load]	Command	5-236
FSEdit [New Property]	Command	5-234
FSEdit [Open]	Command	5-234
FSEdit [Rename]	Command	5-233
FSEdit [Selective Open]	Command	5-235
FSEdit [Undelete]	Command	5-233
FSEdit [View]	Command	5-234
FSEdit [View Properties]	Command	5-233
FSEdit [Wildcard Delete]	Command	5-233
FUNCTION A	command	6-23
Function Apropos (m-X) Zmacs	command	4-41
FUNCTION c-T	command	6-23
FUNCTION F	command	9-21
FUNCTION H	command	1-183, 9-141
G Font Editor	command	3-260
G Zmail	command	1-64, 6-46
h-F Move Forward Over Address Zmail	Command	6-45
h-K Kill Address Zmail	Command	6-45
h-RUBOUT Kill Previous Address Zmail	Command	6-45
h-T Transpose Address Zmail	Command	6-45
Halt	command	1-201
Halt GC	Command	1-23
Halt Machine	Command	1-23
Hardcopy Buffer (m-X) Zmacs	command	1-107, 3-119, 3-267
Hardcopy File	Command	1-23
h-c-upper-left	command	1-44, 1-199
Help	Command	1-24
HELP ? Zmacs	command	1-51, 3-14

HELP A Zmacs	command	1-51, 3-14, 3-45
HELP completion	command	1-52, 3-14
HELP C Zmacs	command	1-51, 3-14, 3-45
HELP Debugger	command	4-264, 4-271
HELP Dired	command	3-148
HELP D Zmacs	command	1-51, 3-14, 3-45
HELP Font Editor	command	3-260
HELP L Zmacs	command	1-51, 3-14, 3-46
HELP SPACE Zmacs	command	1-51, 3-14
HELP Stepper	command	4-94
HELP U Zmacs	command	1-51, 3-14, 3-46
HELP V Zmacs	command	1-51, 3-14, 3-46, 3-210
HELP W Zmacs	command	3-46
HELP W Zmacs	command	1-51, 3-14
HELP Zmacs	command	4-7, 4-64
HELP Zmacs minibuffer	command	4-8
H Font Editor	command	3-255, 3-259
Incremental Search (c-S) Zmacs	command	4-57
Indent For Comment (c-; or m-;) Zmacs	command	4-23
Indent For Lisp (TAB or c-m-TAB) Zmacs	command	4-26
Indent New Comment Line (m-LINE) Zmacs	command	4-23
Indent New Line (LINE) Zmacs	command	4-26
Indent Region (c-m-\) Zmacs	command	4-26
Indent Sexp (c-m-Q) Zmacs	command	4-26
Initialize Mail	Command	1-24
Initialize Mouse	Command	1-24
Initialize Time	Command	1-24
Insert Buffer (m-X) Zmacs	command	3-124, 4-63
Insert File (m-X) Zmacs	command	3-124, 4-63
Insert File (m-X) Zmail	Command	6-45
Inspect	Command	1-26, 1-189, 4-295
Install Command (m-X) Zmacs	command	3-209
Install Macro (m-X) Zmacs	command	3-203, 4-64
Install Mouse Macro (m-X) Zmacs	command	4-64
ITS Hostat	command	9-123
Jump To Saved Position (c-X J) Zmacs	command	4-59
J Zmail	command	6-49, 6-67
K Dired	command	3-151
Kill Backward Up List (c-m-X) Zmacs	command	3-79
Kill Comment (c-m-;) Zmacs	command	4-23
Kill Sexp (c-m-K) Zmacs	command	4-60
LINE Zmacs	command	3-164
Lisp Mode (m-X) Zmacs	command	3-170, 4-12
List Buffers Zmacs	command	3-115
List Callers (m-X) Zmacs	command	1-177, 4-38, 4-44
List Changed Definitions (m-X) Zmacs	command	4-56
List Changed Definitions of Buffer (m-X) Zmacs	command	3-183, 4-56
List Combined Methods (m-X) Zmacs	command	4-142
List Definitions (m-X) Zmacs	command	3-183
List Files (m-X) Zmacs	command	3-131
List Fonts (m-X) Zmacs	command	1-75, 1-174, 3-223, 3-271, 7-142
List Matching Lines (m-X) Zmacs	command	4-57
List Matching Symbols (m-X) Zmacs	command	4-38
List Methods (m-X) Zmacs	command	4-142
List Sequences (m-X) Zmail	Command	6-77
List Variables (m-X) Zmacs	command	3-210
Load Compiler Warnings (m-X) Zmacs	command	4-79, 4-321
Load Fep file	command	1-201
Load File	Command	1-26
Load File (m-X) Zmacs	command	4-73
Load Microcode	command	1-201
Load Patches	Command	1-26
Load Sync-program	command	1-201
Load System	command	1-27, 4-217
Load World	command	1-201
Login	Command	1-28

Login QFILE	Command	9-184
Logout	Command	1-29
Long Documentation (m-sh-D) Zmacs	command	4-39, 4-42
L Zmail	command	6-75
M (Kbd) Zmail	Command	6-29
m-% Zmacs	command	3-102
m-) Zmacs	command	3-67
m-; Zmacs	command	3-171
m-< Debugger	command	4-264, 4-271
m-< Zmacs	command	1-50, 3-26, 3-70
m-= Zmacs	command	3-48
m-> Debugger	command	4-264, 4-271
m-> Zmacs	command	1-50, 3-26, 3-70
m-@ Zmacs	command	3-91
m-A Zmacs	command	1-50, 3-26
m-B Debugger	command	4-80, 4-264, 4-271
m-BREAK Debugger	command	2-532
m-B Zmacs	command	1-50, 3-26, 3-61
m-C Zmacs	command	3-160
m-D Zmacs	command	1-53, 3-28, 3-78
m-ESCAPE Zmacs	command	3-175
m-E Zmacs	command	3-62
m-F Zmacs	command	1-50, 3-26, 3-61
m-H Zmacs	command	3-92
m-I Debugger	command	4-264, 4-267, 4-271
m-K Zmacs	command	1-53, 3-28, 3-83
m-L Debugger	command	4-80, 4-264, 4-271
m-LINE Zmacs	command	3-172
m-L Zmacs	command	3-160
m-N Debugger	command	4-264, 4-271
m-N Zmacs	command	3-172
m-O Zmacs	command	3-166
m-P Debugger	command	4-264, 4-271
m-P Zmacs	command	3-172
m-RUBOUT Zmacs	command	1-53, 3-28, 3-78
m-R Zmacs	command	3-56
m-SCROLL Zmacs	command	1-50, 3-26, 3-56
m-S Debugger	command	4-264, 4-271
m-S Zmacs	command	3-164
m-T Zmacs	command	3-78
m-U Zmacs	command	3-160
m-V Zmacs	command	1-50, 3-26, 3-56
m-W Zmacs	command	3-94
m-X Debugger	command	4-264, 4-271
m-Y input editor	command	4-77
m-Y yank	command	3-15, 3-51, 3-74
m-Z Zmacs	command	3-176
m-[ Zmacs	command	1-50, 3-26, 3-68
m-\ Zmacs	command	1-53, 3-28
m-] Zmacs	command	1-50, 3-26, 3-68
m-^ Zmacs	command	1-53, 3-28, 3-166
Macro Expand Expression (c-sh-M) Zmacs	command	4-100
Macro Expand Expression All (m-X) Zmacs	command	4-100
[Mail (R)] Zmail	command	6-70
<b>make-area</b>	command	8-107
Mark Definition (c-m-H) Zmacs	command	4-60
Mark Whole (c-X H) Zmacs	command	4-63
M Font Editor	command	3-260
Modified Two Windows (c-X 4) Zmacs	command	4-65
Mount	command	1-201
[Move (M)] Zmail	command	6-77
Move to Default Previous Point (m-X) Zmail	command	6-50
Move To Previous Point (c-m-SPACE) Zmacs	command	4-59
Move to Previous Point (m-X) Zmail	command	6-50
m-sh-A input editor	command	1-122
m-sh-D	command	2-302

m-sh-D editor	command	1-122
m-sh-D Zmacs	command	3-47
m-sh-E Zmacs	command	3-175
m-sh-F input editor	command	1-122
m-sh-V input editor	command	1-122
Multiple Edit Callers (m-X) Zmacs	command	4-44
Multiple List Callers (m-X) Zmacs	command	4-44
Name Last Kbd Macro (m-X) Zmacs	command	3-203, 4-64
nc-N Zmail	command	6-67
nc-P Zmail	command	6-67
NETWORK X	command	1-115
nJ Zmail	command	6-67
nN Zmail	command	6-67
nP Zmail	command	6-67
N Zmail	command	6-49, 6-67
Occur (m-X) Zmail	command	6-49
One Window (c-X 1) Zmacs	command	4-65
Open Get Register (c-X G) Zmacs	command	4-63
OPEN QFILE	command	9-155, 9-164
Other Window (c-X O) Zmacs	command	4-65
Parts of a	Command	1-9
P Dired	command	1-108, 3-153, 3-268
Prepend To File (m-X) Zmacs	command	3-124
Print Modifications (m-X) Zmacs	command	4-56
[Profile] Zmail	command	1-170, 6-57
Properties QFILE	Command	9-189
Push Pop Point Explicit (m-SPACE) Zmacs	command	4-59
Put Register (c-X X) Zmacs	command	4-63
P Zmail	command	6-49, 6-67
Q Dired	command	3-148
QFILE	command	9-153
Q Font Editor	command	3-260
Query Replace (m-%) Zmacs	command	4-57
Query Replace (m-X) Zmacs	command	3-102
Quick Arglist (c-sh-A) Zmacs	command	4-43
Quit (c-Z) Zmacs	command	4-80
Q Zmail	command	6-17
R Dired	command	3-150
Reap File (m-X) Zmacs	command	3-136
Redistribute Msg (m-X) Zmail	Command	6-29
Redo (m-X) Zmail	Command	6-25
REFRESH Font Editor	command	3-261
Regenerate Buffer (m-X) Converse	Command	1-72, 6-103
Rename Buffer (m-X) Zmacs	command	3-119
Rename File	Command	1-29
Rename File (m-X) Zmacs	command	3-133, 5-153
Rename QFILE	Command	9-180
Reparse Attribute List (m-X) Zmacs	command	3-137, 4-10
Repeat Last Minibuffer	Command	3-51, 3-74
Replace (c-%) Zmacs	command	4-57
Replace String (m-X) Zmacs	command	3-102
Reply with Draft Messages Zmail	Command	6-42
Report Bug	Command	1-31
Reset	command	1-44, 1-199, 1-201
Reset Network	Command	1-30
RESUME Debugger	command	4-264, 4-271
RESUME Zmail	command	6-43
RETURN completion	command	1-52, 3-14
Return-keyboard-to-lisp	command	1-201
RETURN Zmacs minibuffer	command	4-8
Reverse Search (c-R) Zmacs	command	4-57
Revert Buffer (m-X) Zmacs	command	3-121
Revoke Msg (m-X) Zmail	Command	6-25
RUBOUT Dired	command	3-151
RUBOUT Zmacs	command	1-53, 3-28, 3-43
R Zmail	command	6-39

Save File Buffers	Command	1-30
Save File Zmacs	command	3-31
Save Mail Buffers	Command	1-30
Save Position (c-X S) Zmacs	command	4-59
Save Region (m-W) Zmacs	command	4-60
Save World	Command	1-30
Scroll Other Window (c-m-V) Zmacs	command	4-65
SCROLL Zmacs	command	1-50, 3-26
[Select (R)] Zmail	command	6-77
Select Activity	Command	1-31, 4-9
Select All Buffers As Tag Table (m-X) Zmacs	command	4-57
Select Arbitrary Format Mail File (m-X) Zmail	command	6-95
Select Buffer (c-X B) Zmacs	command	4-59
SELECT C	command	1-69, 6-99
Select Conversation (m-X) Zmail	command	6-69
SELECT F	command	0-35, 5-213
Selecting a FED Character with the C	Command	3-233
SELECT M	command	1-57, 6-17
Select Previous Buffer (c-m-L) Zmacs	command	4-59
Select System As Tag Table (m-X) Zmacs	command	4-57
Set Backspace (m-X) Zmacs	command	3-141, 3-143, 4-10
Set Base	Command	1-31
Set Base (m-X) Zmacs	command	3-141, 3-143, 4-10
Set Calendar Clock	Command	1-32
Set Chaos-address	command	1-201
Set Command Processor	Command	1-32
Set Comment Column (c-X ; ) Zmacs	command	4-23
Set Default-disk-unit	command	1-201
Set Disk-type	command	1-201
Set Display-string	command	1-201
Set-file-system QFILE	Command	9-184
Set Fill Column (c-X F) Zmacs	command	4-12
Set Fonts (m-X) Zmacs	command	3-141, 3-143, 4-10
Set Input Base	Command	1-33
Set Key (m-X) Zmacs	command	4-64
Set Lowercase (m-X) Zmacs	command	3-142, 3-143, 4-10
Set Microcode-name-and-version	command	1-201
Set Monitor-type	command	1-201
Set Nofill (m-X) Zmacs	command	3-142, 3-143, 4-10
Set Output Base	Command	1-33
Set Package	Command	1-33
Set Package (m-X) Zmacs	command	3-138, 3-143, 4-10
Set Patch File (m-X) Zmacs	command	3-143, 4-10
Set Pop Mark (c-SPACE) Zmacs	command	4-59
Set Site	Command	1-33
Set sleep time between updates Peek	command	1-185, 4-303
Set Tab Width (m-X) Zmacs	command	3-143, 4-10
Set Time	Command	1-33
Set User ID	Command	1-34
Set Variable (m-X) Zmacs	command	3-212
Set Visited File Name (m-X) Zmacs	command	3-122
Set Vsp (m-X) Zmacs	command	3-143, 4-10
S Font Editor	command	3-260
Show Command Processor Status	Command	1-35
Show Configuration	command	1-200
Show Directory	command	1-35, 1-200
Show Directory (m-X) Zmacs	command	3-132
Show Disabled Services	Command	1-35
Show Disk-label	command	1-200
Show Documentation	Command	1-35
Show Draft Disposition (m-X) Zmail	command	6-42
Show FEP Directory	Command	1-36
Show File	Command	1-36, 1-200
Show File (m-X) Zmacs	command	3-132
Show Font	Command	1-36
Show GC Status	Command	1-37

Show Herald	Command	1-37
Show Hosts	Command	1-37
Show Legal Notice	Command	1-37
Show Mail	Command	1-38
Show Notifications	Command	1-38
Show Object	Command	1-38
Show Status	command	1-200
Show System Modifications	Command	1-39
Show Users	Command	1-40
Show Version	command	1-200
Shutdown	command	1-201
Source Compare (m-X) Zmacs	command	3-125, 4-56
Source Compare Merge (m-X) Zmacs	command	3-125, 4-56
SPACE completion	command	1-52, 3-14
SPACE Dired	command	3-149
SPACE Stepper	command	4-94
SPACE Zmacs minibuffer	command	4-8
Split Screen (m-X) Zmacs	command	4-65
c-sh-C Debugger	command	4-264, 4-271
Start	command	1-201
Start Background Save (m-X) Zmail	Command	6-81
Start GC	Command	1-40, 1-106
Supplying Keywords and Values for a	Command	1-13
Supplying Positional Arguments to a	Command	1-11
Swap Point And Mark (c-X c-X) Zmacs	command	4-59
S Zmail	command	6-17, 6-81
Tags Query Replace (m-X) Zmacs	command	4-57
Tags Search (m-X) Zmacs	command	4-57
Test	command	1-201
Trace (m-X) Zmacs	command	3-48, 4-92, 4-94
Two Windows (c-X 2) Zmacs	command	4-65
U Dired	command	3-151
Uncomment Region (m-X) Zmacs	command	3-173
Undata-connection QFILE	Command	9-164
Undelete File	Command	1-41
Undigestify (m-X) Zmail	Command	6-48
Undo (m-X) Zmail	Command	6-25
(Universes (M)) Zmail Profile Mode	command	6-73
Up Comment Line (m-P) Zmacs	command	4-23
Update Attribute List (m-X) Zmacs	command	3-138, 4-10
U Zmail	command	6-68
U Zmail Kbd	Command	6-56
Variable Apropos Zmacs	command	3-210
V Dired	command	3-150
V Font Editor	command	3-253, 3-260
View Buffer (m-X) Zmacs	command	3-119
View Directory (m-X) Zmacs	command	3-132, 4-45
View File (m-X) Zmacs	command	3-132
View File Properties (m-X) Zmacs	command	3-133
View Kbd Macro (m-X) Zmacs	command	3-200
View Mail (m-X) Zmacs	Command	6-48
View Two Windows (c-X 3) Zmacs	command	4-65
Where Is Symbol (m-X) Zmacs	command	2-571, 4-38
Write Buffer (m-X) Converse	Command	1-71, 6-102
Write Conversation (m-X) Converse	Command	1-71, 6-102
Write File Zmacs	command	1-55, 3-32
Yank (c-Y) Zmacs	command	4-60
Yank Pop (m-Y) Zmacs	command	4-60
ZJ Zmail	command	6-67
(zmail) Lisp Listener	command	6-17
Zmail: Apropos	Command	6-6
Zmail Mail	Command	6-27
Zmail Reply	Command	6-31
\ Font Editor	command	3-261
Command arrays	Command	7-329, 7-330
Command Blips	Command	7-229



- Command Descriptions 1-16
- Command History 1-15, 3-43
- Command Menu 0-22
- Command menus 3-228, 7-203, 7-229
- Command Names 1-49, 3-6
- :command** option 5-64, 7-32
- Command tables 3-7, 3-208
- Install
  - tv:** **command-menu** Example 7-231
  - tv:** **command-menu** flavor 7-231, 7-293
  - tv:** **command-menu** Messages 7-231
  - :command-only** command processor mode 1-165
  - :command-preferred** command processor mode 1-165
- zwei:** **command-store** 3-201
- Command/Status Register 9-131
- command 3-34
- command 3-34
- command 3-34
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- command 3-37
- Command: Copy Mouse (C-(m)) RN-48
- Command: Describe Flavor 2-471
- Command: Edit Combined Methods 2-472
- Command: Edit Methods 2-471
- Command: List Combined Methods 2-471
- Command: List Methods 2-471
- Command: m-. 2-471
- Command and Response Format 9-158
- command and software installation 0-87
- Command Byte Size Problem 9-179
- Command Completion 1-85
- command completion 1-85
- Command Conventions 1-236
- Command Descriptions 9-163
- Command Documentation 6-15
- Command Does 3-44
- Command Does 3-45
- Command Does 3-45
- Command Does 3-44
- Command Format 7-322
- Command History 3-73
- command history 3-15
- command key bindings 3-46
- Command List 3-259
- command lists 7-321, 7-327
- Command Lists 7-330
- Command Lists 7-334
- Command Loop Input Editor Example 5-56, 7-24
- Command Loops 1-153
- Command Menu 3-229
- command-menu** 7-231
- Command Menu 1-60
- command-menu** 7-231
- @b text formatting
- @i text formatting
- @t text formatting
- @# text formatting
- @\* text formatting
- @. text formatting
- @= text formatting
- @> text formatting
- @blankspace text formatting
- @caption text formatting
- @foot text formatting
- @note text formatting
- @tabclear text formatting
- @tabdivide text formatting
- @tabset text formatting
- @\ text formatting
- @` text formatting
- New Zwei
  - Zmacs
  - Zmacs
  - Zmacs
  - Zmacs
  - Zmacs
  - Zmacs
  - Zmacs
  - Zmacs
  - QFILE
- Disk Restore
- The Filepos QFILE
  - FEP
- Help facilities, FEP
  - Mouse
  - QFILE
  - Zmail
- Example of Finding Out What a Zmacs
- Finding Out What an Extended
  - Finding Out What a Prefix
  - Finding Out What a Zmacs
    - Audio
  - Viewing the Editor
    - Yanking in the Extended
      - FED
        - Audio
      - Building Audio
        - Looping Through Audio
- Binding Standard Variables for Writing Lisp Style
  - Outside FED
    - :lo-buffer** init option for **tv:** Zmail
    - :lo-buffer** method of **tv:**

- :set-io-buffer** method of **tv**:
  - Document Examiner
  - Dumper
  - tv**:
    - command-menu** 7-231
    - command menu 1-133
    - Command Menu 0-22
    - command-menu-abort-on-deexpose-mixin** flavor 7-230
    - command-menu** Init-plist Options 7-231
    - command-menu-mixin** flavor 7-230, 7-293
    - Command Menu Mixins 7-230
    - command-menu-pane** flavor 7-231
    - Command Menus 7-231
    - Command menu within window frame 7-231
    - Command Name 1-11
    - Command Opcodes 7-323
    - Command Opcodes 7-326
    - Command Output 1-217
    - Command Pane 1-133
    - Command Pane Actions 1-133
    - Command Processor 1-14
    - Command Processor 1-164
    - Command Processor 1-15
    - Command Processor 1-14
    - Lookup Commands Available in the Document Examiner, Editor, and Command Processor 1-122
- New Feature in Release 6.0: the Overview of the
  - :activity**
  - :boolean**
  - :date**
  - :documentation-topic**
  - :enumeration**
  - :font**
  - :host**
  - :integer**
  - :make-system-version**
  - :number**
  - :package**
  - :pathname**
  - :printer**
  - :string**
  - :system**
- Defining a Set
  - Creating a
  - Deleting a
  - Finding a
- Customizing
  - :command-only**
  - :command-preferred**
  - :form-only**
  - :form-preferred**
  - Setting the
  - Turning the
  - The
  - Setting the
  - The
  - Setting
  - Show
- Aborting Zmail
- Attribute-manipulating
- Basic Text Formatting
- Comments in FEP
- Commonly Used FEP
  - Command Processor RN-61
  - Command Processor 1-9
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - command processor argument type 7-48
  - Command Processor Argument Types 7-48
  - Command Processor Command 7-44
  - Command Processor Command 1-32
  - Command processor command table 7-53
  - command processor command table 7-53
  - command processor command table 7-53
  - command processor command table 7-53
  - Command Processor Command Tables 7-52
  - Command Processor Display 1-166
  - command processor mode 1-165
  - command processor mode 1-165
  - command processor mode 1-165
  - command processor mode 1-165
  - Command Processor Mode 1-165
  - Command Processor on and Off 1-15
  - Command Processor Program Interface 7-41
  - Command Processor Prompt 1-165
  - Command Processor Reader 7-41
  - Command Processor Special Characters 1-166
  - Command Processor Status Command 1-35
  - Commands 1-49, 3-6
  - Commands 6-23
  - Commands 3-137
  - Commands 3-37
  - commands 1-197
  - Commands 1-200

<i>Compile</i>	Commands	1-16
Converse	Commands	1-71, 6-102
<i>Copy</i>	Commands	1-18
<i>Create</i>	Commands	1-19
Cursor movement	commands	1-50, 1-51, 3-26, 3-60
Debugger	commands	4-271
Debugger Special	Commands	2-525, 4-80
Delete	commands	1-53, 3-28
<i>Delete</i>	Commands	1-20
Dired	Commands	3-145, 3-146
<i>Disable</i>	Commands	1-20
Disk Handling	Commands	1-213
Documentation find	commands	1-120, 1-122
Documentation Lookup	Commands	1-122
<i>Edit</i>	Commands	1-20
Editor Menu	Commands	3-49
<i>Enable</i>	Commands	1-21
Entering	Commands	1-9, 1-10
Evaluation	commands	3-175
Examining Stack Frames with Debugger Backtrace	Commands	4-262
Example of Attribute-manipulating	Commands	3-138
Example of Negative Numeric Arguments with Motion	Commands	3-60
Example of Numeric Arguments with Motion	Commands	3-60
<i>Expunge</i>	Commands	1-22
Extended	commands	1-49, 3-6, 3-7, 3-45
FED Keyboard-only	Commands	3-261
FED Menu and Keyboard	Commands	3-259
FEP	Commands	1-200
File System Maintenance	Commands	0-39
<i>Find</i>	Commands	1-22
Finding Out About Zmacs	Commands	3-44
Format Conventions for Zmail	Commands	6-3
Format of audio	commands	7-322
FUNCTION	commands	7-135, 7-137
FUNCTION Key: Display and Hardcopy	Commands	1-141
FUNCTION Key: Selection and Notification	Commands	1-142
General Information-giving Zmacs	Commands	3-46
Goal Column and the Motion	Commands	3-63
<i>Halt</i>	Commands	1-23
<i>Hardcopy</i>	Commands	1-23
<i>Help</i>	Commands	1-24
How to Use Formatting	Commands	3-36
I/O buffer	commands	7-273
Init File Form: Fixing White Space for Kill/Yank	Commands	1-168, 3-214
Init File Form: Setting Goal Column for Real Line	Commands	1-168, 3-214
<i>Initialize</i>	Commands	1-24
Input Editor Font	Commands	1-79
<i>Inspect</i>	Commands	1-26
Inspector	commands	4-298
Introduction to the Motion	Commands	1-51, 3-60
Introduction to Zmacs	Commands	1-49, 3-6
Introduction to Zmacs Extended	Commands	1-49, 3-7
<i>loctl</i> System Call	Commands	9-149
Keyword-setting	commands	6-75
Kill	commands	1-53, 3-28
Less Common FEP	Commands	1-201
List of Zmail	commands	6-5
List the last sixty	commands	3-46
<i>Load</i>	Commands	1-26
<i>Login and Logout</i>	Commands	1-28
Mail collection	commands	6-79
Message-copying	commands	6-77
Message deletion	commands	6-68
Message stack	commands	6-50, 6-68
Method for Searching for Appropriate Zmacs	Commands	3-45
More HELP Commands for Finding Out About Zmacs	Commands	3-46

Motion	Commands	3-60
Mouse-sensitive Zmacs	commands	3-57
Names of	commands	3-7, 3-45
Negative Numeric Arguments and Motion	Commands	3-60
Numeric Arguments and the Motion	Commands	3-60
Online documentation for	commands	3-45
Other Hardcopy	Commands	3-269
Other Region-related	Commands	3-95
Other Zmail	Commands	6-45
Overview of Finding Out About Zmacs	Commands	3-44
Overview of Zmacs File Manipulation	Commands	3-131
Package	commands	2-612
Prefix	Commands	3-45
Prefix character	commands	1-49, 3-6
Printing and Hardcopy	Commands	3-267
Rearranging mail sequence	commands	6-71
Referenced message	commands	6-71
Region-manipulating	Commands	3-94
<i>Rename</i>	Commands	1-29
Reply	commands	6-31
<i>Reset</i>	Commands	1-29
<i>Save</i>	Commands	1-30
Searching for Appropriate Zmacs	Commands	3-45
<i>Select</i>	Commands	1-30
SELECT	commands	7-137, 7-139
<i>Send</i>	Commands	1-31
<i>Set</i>	Commands	1-31
<i>Show</i>	Commands	1-35
Simple Zmail Message Movement	Commands	6-49
<i>Start</i>	Commands	1-40
Substitutes for mouse	commands	6-23
Summary of Debugger	Commands	4-271
The Zmacs Edit Callers	Commands	3-183
The Zmacs Edit Definition	Commands	3-180
The Zmacs List Definition	Commands	3-182
<i>Undelete</i>	Commands	1-41
Using FSEdit	Commands	5-233
Zmacs Buffer	Commands	3-117
Zmacs File Manipulation	Commands	3-131
Zmacs Font	Commands	1-81
Zmacs Format	Commands	3-38
Zmacs Sorting	Commands	3-112
Zmacs text formatting	commands	3-37
Zmacs Window	Commands	3-129
Zmail Message Deletion	Commands	6-55
Zmail Message Movement	Commands	6-49
Package	"Commands"	2-612
Completion for Extended	Commands (m-X Commands)	1-84
Completion for Extended Commands (m-X	Commands)	1-84
New Input Editor	Commands: PAGE, COMPLETE, c-?	RN-61
Lookup	Commands Available At a Lisp Listener and in	Zmacs 1-128
Lookup	Commands Available in an Editor	1-128
Lookup	Commands Available in the Document	Examiner 1-127
Lookup	Commands Available in the Document Examiner,	Editor, and Command Processor 1-122
Lookup	Commands Available in the Document Examiner and	Editor 1-123
Lisp Listener	Commands for Converse	1-72, 6-103
Compare/Merge	Commands for Definitions	3-127
Debugger	Commands for Dynamic Breakpoints and Stepping	Through Compiled Code 4-267
Zmail	Commands for Editing the Recipient List	6-45
Other Set	Commands for File and Buffer Attributes	3-140
Set	commands for file and buffer attributes	3-143

- Zmacs Commands for Finding Out About Flavors 1-87, 3-218
- Zmacs Commands for Finding Out About Lisp 1-86, 3-217
- Zmacs Commands for Finding Out About the State of Buffers 1-86, 3-217
- Zmacs Commands for Finding Out About the State of Zmacs 1-86, 3-217
- More HELP Commands for Finding Out About Zmacs Commands 3-46
- Zmacs Commands for Flavors 2-471
- Three New Zmacs Commands for Formatting Text RN-49
- Zmacs Commands for Formatting Text 3-33
- Debugger Commands for Information Display 4-265
- Zmacs Commands for Interacting with Lisp 1-87, 3-218
- Commands for manipulating files 3-131
- Commands for Producing Hardcopy 1-107, 3-267
- Commands for Reading Mail 6-46
- Two New Zmacs Commands for Recompiling and Reloading Patches RN-49
- Two New Zmacs Commands for Reverting Buffers RN-49
- Commands for Sending Mail 6-27
- Debugger Commands for Stack Manipulation 4-263
- Undoing Commands in Zmail 6-25
- Debugger Commands That Call Other Systems 4-264
- Debugger Commands That Trap on Frame Exit 4-266
- Commands to Mark Regions 3-91
- Overview of Commands to Mark Regions 3-91
- Commands to Mark Regions by Buffers 3-92
- Commands to Mark Regions by Lisp Expressions 3-91
- Commands to Mark Regions by Pages 3-92
- Commands to Mark Regions by Paragraphs 3-92
- Example of Commands to Mark Regions by Paragraphs 3-92
- Commands to Mark Regions by Words 3-91
- Dired Command Summary 3-146
- Zmacs Help Command Summary 3-217
- Finding Out About Zmacs Commands with HELP 3-44
- Creating New Zmacs Commands with Keyboard Macros 3-199
- Procedure for Creating Zmacs Commands with Keyboard Macros 3-199
- Command processor command table 7-53
- Creating a command processor command table 7-53
- Deleting a command processor command table 7-53
- Finding a command processor command table 7-53
- Command Processor Command Tables 7-52
- Introduction to Zmacs Command Tables 3-7
- Sending command to user process 7-229
- :commas option for **format:onum** 5-45
- Indent For Comment (c-; or m-;) Zmacs command 4-23
- Kill Comment (c-m-;) Zmacs command 4-23
- Fill Long Comment (m-X) Zmacs command 4-23
- Set Comment Column (c-X ;) Zmacs command 4-23
- Setting the Lisp Comment Column in Zmacs 3-172
- Semicolon (;) Comment dump parameter 0-6
- comment indicator 3-171
- Overview of Commenting Lisp Code in Zmacs 3-171
- Commenting Lisp Code in Zmacs 3-171
- Commenting Out Code 4-83
- Indenting for Lisp Comment in Zmacs 3-171
- Killing a Lisp Comment in Zmacs 3-171
- Indent New Comment Line (m-LINE) Zmacs command 4-23
- Down Comment Line (m-N) Zmacs command 4-23
- Up Comment Line (m-P) Zmacs command 4-23
- Creating a New Indented Lisp Comment Line in Zmacs 3-172
- Moving Down to Lisp Comment on Next Line in Zmacs 3-172
- Moving up to Lisp Comment on Previous Line in Zmacs 3-172
- Use #|...|# Instead of #|...|# to Comment Out Lisp Code RN-79
- FEP File Comment Properties 1-209, 5-216

	Comments 1-233, 4-23
	comments 1-209, 5-216
Disk label	Comments From Regions in Zmacs 3-173
Inserting and Removing Lisp	Comments in FEP commands 1-197
	Comments in macros 2-26
	<b>comment</b> special form 2-164
	Committed guess 8-122
	common 2-637
SCL and type	<b>common-lisp</b> package 2-633
	common denominator 2-105
	common divisor 2-105
	Common FEP Commands 1-201
	Common Lisp RN-12
	Common Lisp 2-631
	Common Lisp RN-45
	Common Lisp 3-140
	Common Lisp 2-629
	Common Lisp Character Objects 2-16
	Common Lisp Character Switchover in Release
	6.0 RN-12
	Common Lisp Compatibility Package 2-615
	Common Lisp Differences 2-637
	Common Lisp Extensions 2-635
	Common Lisp Files 2-635
	Common Lisp Functions Not Included RN-23
	<b>common-lisp-global</b> package 2-615
	Common Lisp readable 2-27
	<b>common-lisp-system</b> package 2-633
	<b>common-lisp-user</b> package 2-633
	Commonly Ask 1-228
	Commonly Used FEP Commands 1-200
	Common Special Forms with Multiple Values 2-169
	Communicating with the Lisp Machine 1-9
	communication 1-201
	Communication with Interfaces 9-203
	Compact lists 2-56
	compact lists 2-79
	Compare 3-125
	Compare 3-125, 3-131
	Compare (m-X) Zmacs command 3-125, 4-56
	<b>compare-band</b> function 0-53
	Compare/Merge Commands for Definitions 3-127
	Compare Installed Definition 3-127
	Compare Merge 3-125
	Compare Merge (m-X) Zmacs command 3-125, 4-56
	Compare Merge Installed Definition 3-128
	Compare Merge Newest Definition 3-127
	Compare Merge Saved Definition 3-127
	Compare Newest Definition 3-127
	Compare Saved Definition 3-127
	Comparing/Merging Current/Installed Versions 3-127
	Comparing/Merging Current/Newest Versions 3-127
	Comparing/Merging Current/Saved Versions 3-127
	Comparing Files and Buffers in Zmacs 3-125
	Comparing file versions 3-150
	Comparing Recent Versions of Files in Dired 3-150
	Comparison and String Searching Functions RN-23
	Comparisons 2-270
	comparisons 2-11
	comparisons 2-227
	Comparisons 2-98
	comparisons 2-10
	comparisons 2-11, 2-282
	Comparisons Affected by Case, Style, and
	Bits 2-270
	String
Character	Comparisons Affected by Case, Style, and
Cons	
Keyword	
Numeric	
Object	
String	
Character	
String	

- Bits 2-282
- Character
  - String Comparisons Ignoring Case, Style, and Bits 2-271
  - String Comparisons Ignoring Case, Style, and Bits 2-283
  - Use of Numerical Comparisons on Characters RN-20
  - Character and String Functions for Old-Zetalisp/New-Zetalisp Compatibility RN-24
- Maclisp compatibility 2-503
- Maclisp Array Compatibility 2-262
- Old-Zetalisp and New-Zetalisp String and Character Compatibility RN-18
- Readtable Functions for Maclisp Compatibility 2-36
- Summary of Character and String Compatibility Functions in Release 6.0 RN-18
- Common Lisp Compatibility Package 2-615
- Functions for Compatibility with Maclisp Lexprs 2-165
- Compatibility with the Pre-release 5.0 Package System 2-625
- Files That Maclisp Must Compile 4-329
- Compile* Commands 1-16
- compile** function 4-307, 4-319
- compile-file** function 4-73, 4-307, 4-317
- compile-file** function 2-645
- Compile-like transformations 4-214
- :compile-load** compound transformation 4-201
- :compile-load** Transformation of **defsystem** 4-210
- Compile Buffer (m-X) Zmacs command 4-70
- Compile Changed Definitions (m-X) Zmacs command 4-70
- Compile Changed Definitions Of Buffer (m-sh-C) Zmacs command 4-70
- Compiled file 2-579
- Compiled functions 2-303, 2-305, 4-69
- :compiled-function** returned by **typep** 2-9
- Debugger Commands for Dynamic Breakpoints and Stepping Through Compiled Code 4-267
- Examining a Compiled Code File 4-300
- Arrays in compiled code files 4-331, 5-241
- Compiled code objects in compiled code files 4-331, 5-241
- File Types of Lisp Source and Compiled Code Files 4-318
- Instances in compiled code files 4-331, 5-241
- Lists in compiled code files 4-331, 5-241
- Numbers in compiled code files 4-331, 5-241
- Putting Data in Compiled Code Files 4-331, 5-241
- Symbols in compiled code files 4-331, 5-241
- Inspecting a compiled code object 4-299
- Compiled code objects in compiled code files 4-331, 5-241
- Compiled file names 6-94
- :compiled-function-area** variable 8-107
- The Compiled Function Data Type 2-4
- Compiled function object 4-309
- Compiled function storage area 8-107
- Compiled object code as line item entry 7-308
- Compile File (m-X) Zmacs command 4-73
- Compile File Command 1-16
- compiler:** **compile-file-load** function 4-73, 4-318
- compile-flavor-methods** macro 2-438, 2-485, 4-133
- :compile-load-init** Transformation of **defsystem** 4-211
- :compile** Option for **make-system** 4-222
- Compiler 2-645
- Compiler RN-28
- compiler 4-309, 4-315
- Compiler 4-307
- Compiler 4-307
- compiler 2-137
- Compiler 2-90
- compiler 4-327
- CLM: the Compiler 2-645
- Forms in a Top-level **progn** Are Top-level to the Function RN-28
- How to Invoke the compiler 4-309, 4-315
- Introduction to the Compiler 4-307
- Lexically scoped compiler 2-137
- Numbers in the Compiler 2-90
- Optimizer feature of the compiler 4-327

- Stream compiler 4-309
- Structure of the Compiler 4-309
- The Compiler 4-305
- compiler** package 2-615
- Compiler variables 4-324
- Compiler warnings 4-65, 4-70, 4-79
- compiler-let** 4-310
- compiler-let** special form 2-129
- compiler:add-optimizer** special form 4-327
- compiler:compile-file** function 4-73, 4-307, 4-317
- compiler:compile-file-load** function 4-73, 4-318
- compiler:file-declaration** function 4-325
- compiler:file-declare** function 4-325
- compiler:function-defined** function 4-325
- compiler:function-referenced** function 4-325
- compiler:functions-defined** variable 4-324
- compiler:functions-referenced** variable 4-325
- compiler:load-compiler-warnings** function 4-321
- compiler:make-obsolete** Now Makes a Flavor or Structure Obsolete RN-52
- compiler:make-obsolete** special form 4-323
- compiler:make-message-obsolete** special form 4-324
- compiler:top-level-form** property 4-315
- Summary of Compiler Actions on Code in a Zmacs Buffer 4-71
- Compile Region (c-sh-C) Zmacs command 4-70
- Compile Region (m-X) Zmacs command 3-94, 4-316
- compiler environments 4-329
- Compiler Handles Top-level Forms 4-310
- compiler on variables 2-126
- Compiler Source-level Optimizers 4-327
- Compiler Style Warnings 4-323
- Compiler Tools and Their Differences 4-316
- Controlling Compiler Warnings 4-323
- Lisp Compiler Warnings 3-176
- Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Edit Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Load Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Compiler Warnings Database 4-321
- Print compiler warnings database 4-321
- The Compiler Warnings Database 4-79
- Update compiler warnings database 4-321
- Compile System command 1-17, 4-217
- :compile** Transformation of **defsystem** 4-209
- Compiling code 4-69, 4-70
- Compiling and Evaluating Lisp 4-69
- Compiling and Loading a File 4-73
- Compiling a Region 3-94
- Tools for Compiling Code From the Editor Into Your World 4-316
- Compiling Code in a Zmacs Buffer 4-70
- Tools for Compiling Files 4-317
- Compiling Lisp Code 4-70
- Compiling Lisp Programs in Zmacs 3-175
- Compiling Lisp Programs in Zmacs 3-174
- Compiling Lisp Programs in Zmacs 3-174
- Compiling Single Functions 4-318
- Complement logical operation 2-114
- Dired Complement No Reap Flag 3-152
- Complement of a universe 6-64
- COMPLETE 1-140
- New Input Editor Commands: PAGE, COMPLETE, c-? RN-61
- :complete-help** option 5-60, 7-28



- :deleted** option for **fs:**
- :ln** option for **fs:**
- :old** option for **fs:**
- :out** option for **fs:**
- :read** option for **fs:**
- :write** option for **fs:**
- fs:**
- complete-pathname** function 5-120, 5-158
- COMPLETE** completion command 1-52, 3-14
- Completed or Aborted Zmail Messages 6-43
- [Complete Dump] File System Maintenance menu item 0-39
- zwei:**
- \*complete-get-inbox-in-background\*** variable 6-86
- :new-ok** option for **fs:**
- :print** option for **fs:**
- complete-pathname** 5-120, 5-158
- complete-pathname** 5-120, 5-158
- Complete QFILE Command 9-191
- :complete-string** option for **prompt-and-read** 7-59, RN-58
- COMPLETE** Zmacs minibuffer command 4-8
- Completion 1-52, 3-14, 4-8, 5-120, 5-158
- Completion 5-121, 5-159
- Completion 5-122, 5-161
- Completion 1-85
- completion 5-117
- completion 1-85
- Completion 3-14
- Completion 5-123, 5-161
- Completion 1-84
- Completion and Timeout Windows 1-84
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- completion command 1-52, 3-14
- Completion for Extended Commands (m-X Commands) 1-84
- Completion for m-. 1-85
- Completion in Other Contexts 1-85
- Completion in the Command Processor 1-14
- Completion in the Document Examiner 1-133
- completion with **prompt-and-read** 7-59
- complex** function 2-108, RN-34
- Complex magnitude 2-101
- Complex numbers 2-89, 2-95, RN-34
- Complex transformations 4-214
- Complex Modularity 2-509
- Complex Modularity 2-510
- Complex Numbers 2-24
- Complex Numbers 2-15
- Complex Numbers RN-33
- complexp** function 2-8, RN-35
- :complex** returned by **typep** 2-9
- component 5-140, 5-170
- component 5-140
- component 5-140
- component 5-140, 5-170
- component 5-140
- component 5-140
- component 5-140
- component 5-149
- component 5-149
- component 5-183
- component 5-149
- component 5-149
- component 5-140
- component 5-149
- component 5-149
- component 5-183
- component 5-149
- component 5-140
- component 5-149
- Pathname**
- Default Handlers and Reference Material: Default Handlers and How the Reader Recognizes Printed Representation of Rational and
- :newest** pathname
- :oldest** pathname
- :relative** pathname
- :unspecific** pathname
- :up** pathname
- :wild-inferiors** pathname
- :wild** pathname
- Device generic pathname
- Directory generic pathname
- Directory TOPS-20 pathname
- Host generic pathname
- nil** pathname
- Type generic pathname

- Type ITS pathname component 5-185
- Version generic pathname component 5-149
- Version ITS pathname component 5-185
- Version TENEX pathname component 5-183
- Version TOPS-20 pathname component 5-183
- :component-systems** Option for **defsystem** 4-197
- Native pathname component case 5-145
- Raw pathname component case 5-145
- Lowercase in pathname components 5-145
- Merging pathname components 5-147, 5-157
- Other Components 5-123, 5-161
- SCL and pathname components 2-644
- Uppercase in pathname components 5-145
- Values of Pathname Components 5-140
- Components of a Menu 7-208
- \* **:wild** pathname component specifier 5-186
- :compile-load** Composition of Cars and Cdrs 2-42
- Overlapping disk transfers with compound transformation 4-201
- File server computation 8-50
- Host computer 5-127
- Mouse Scaling Now Works on 3600-family computer crash 6-12
- audio:** Computers RN-68
- How Key Bindings Work: the **computing-immediate-audio-samples** macro 7-333
- Standard Comtab 3-208
- zwei:** comtab 3-208
- String **:\*comtab\*** keyword 7-381
- Documentation **\*comtab\*** variable 7-381
- Font Basic Comtabs 3-7, 3-208
- Font Editor Basic **:conc-name** option for **defstruct** 2-385, 2-387
- LMFS [Concatenate] Map over menu item 6-71, 6-80
- Window System Concatenating messages 6-71, 6-80
- Concatenating constant and variable output 5-44
- concatenation 2-279
- concept record 1-119
- Concepts 3-221
- Concepts 3-227
- Concepts 5-203
- Concepts 7-75
- Concepts: Saving New Versions of World
- Loads 0-45
- Conceptual Zmail Architecture 6-11
- concurrently 0-87
- concurrently allocated 8-33
- cond-every** special form 2-178
- [Cond after] **trace** menu item 4-92
- [Cond before] **trace** menu item 4-92
- [Cond break after] **trace** menu item 4-92, 4-98
- [Cond break before] **trace** menu item 4-92, 4-98
- condition** 2-529
- condition** 2-530
- condition** 2-530
- condition** 2-530
- condition** 2-531
- condition** 2-530
- condition** 2-530
- condition** 2-530
- condition** 2-530
- condition** 2-530
- condition 2-479
- condition 2-505
- condition** flavor 2-482, 2-529, 2-531, 4-133
- Condition Flavors 2-482
- Condition hierarchies 2-486
- Condition objects 2-479, 2-481, 2-519, 2-529
- Condition signalling 8-3
- :document-proceed-type** method of
- :proceed-types** init option for
- :proceed-types** method of
- :proceed-type-p** method of
- :report-string** method of
- :report** method of
- :set-proceed-types** method of
- :special-commands** method of
- :special-command-p** method of
- Signalling a
- sys:wrong-type-argument**

- Proceeding with
  - condition-bind** Handlers 2-520
  - condition-bind** special form 2-488, 2-501, 2-517, 4-133
  - condition-call** special form 2-492, 2-501
  - condition-case** special form 2-490, 2-501
  - Conditional breakpoints 2-523
  - Conditional construct 2-175
  - Conditional format directive 5-36
  - Conditionalization 2-216
- Read-time
  - conditionalization facility 2-29
  - Conditionals 2-177
  - [Conditional] **trace** menu item 4-92
  - condition-bind-default-if** special form 2-489
  - condition-bind-default** special form 2-489, 2-501, 2-509
  - condition-bind-if** special form 2-489
  - Condition Bind Recursion 2-502
  - condition-call** and **:no-error** 2-493
  - condition-call-if** special form 2-493
  - condition-case-if** special form 2-491
  - Condition flavor hierarchy 2-482
  - Condition Flavors 2-486
  - Condition Flavors Reference 2-529
  - condition for **:draw-cubic-spline** 7-125
  - condition for **:draw-cubic-spline** 7-125
  - condition for **:draw-cubic-spline** 7-125
  - condition for **:draw-cubic-spline** 7-125
  - condition functions 2-521
  - condition-handled-p** function 2-509, 2-510
  - condition handlers 2-481
  - condition objects 2-505
  - Conditions 2-477, 2-479, 4-201
  - Conditions RN-12
  - Conditions 2-485
  - conditions 2-482
  - Conditions 8-38
  - conditions 2-482, 8-4
  - Conditions 2-531
  - Conditions 2-481
  - Conditions 2-479
  - Conditions 2-619
  - conditions 2-517
  - Conditions 2-503
  - Conditions 2-501, 4-133
  - conditions 2-521
  - Conditions 2-502
  - conditions 2-482
  - Conditions 2-531
  - Conditions 2-523
  - conditions 2-535
  - Conditions as instances of flavors 2-479
  - Condition system package 2-615
  - cond** macro 2-639
  - :cond** option for **trace** 4-92, 4-276
  - cond** special form 2-177
  - configuration 3-227
  - Configuration 3-227
  - Configuration 1-60
  - Configuration 1-57
  - Configuration files 1-198, 1-209, 5-215
  - Configuration and Drawing Transformation 3-259
  - configuration column 7-179
  - Configuration command 1-200
  - Configuration-description-list 7-188
  - configuration entity 7-179
  - configuration files 1-209, 5-215
- Creating a Set of
  - :anticyclic** boundary
  - :clamped** boundary
  - :cyclic** boundary
  - :relaxed** boundary
  - Proceedable
    - dbg:**
    - Binding
    - Creating
  - Changes to
  - Creating New
    - Debugger
    - Disk Error
    - Error
    - Fundamental
  - How Applications Programs Treat
  - Introduction to Signalling and Handling
    - Package-related
    - Proceedable
  - Reference Material: Signalling
    - Signalling
  - Signalling proceedable
    - Signalling Simple
    - Simple
    - Standard
    - Tracing
  - Using the RESUME key with floating-point
- SCL and returned values from
  - Alternative
    - Wide
  - Zmail Message Window
  - Zmail Summary Window
    - FED
  - Constraint frame
    - Show
  - Constraint frame
    - FEP

- Constraint frame configuration fill 7-179
- :**configuration** init option for
- tv:basic-constraint-frame** 7-188
- :**configuration** method of
- tv:basic-constraint-frame** 7-188
- Constraint frame configuration name 7-179
- Constraint frame configuration row 7-179
- Frame configurations 3-259, 7-175
- :**configurations** init option for
- tv:basic-constraint-frame** 7-179
- zwei:** **\*configure-middle-mode\*** variable 6-93
- [Configure] Font Editor menu item 3-227, 3-256, 3-259
- Configuring and Selecting Zmail Windows 6-38
- Configuring a site 0-87
- Configuring Large Sites for Multiple Mail Servers 0-64
- Installing and Configuring the Mailer 0-61
- Configuring your site 0-87
- Conflicts 2-357, 2-613
- Name conflicts 2-581
- Package name conflicts 2-359
- prog-Context** conflicts 2-574
- Symbol name
- Conformal Indirection 2-240
- New Function: **conjugate** RN-35
- conjugate** function 2-101, RN-35
- Conn 9-134
- chaos:** **connect** function 9-134
- Using the Terminal Program with Hosts Connected to the Serial Line 5-265
- :**chaos** connection 9-44
- :**chaos-simple** connection 9-44
- :**tcp** connection 9-44
- Closing a connection 9-114, 9-118, 9-134, 9-143
- Establishing a connection 9-103, 9-114, 9-134, 9-142
- Forwarded connection 9-114
- Open a stream connection 9-134
- QFILE connection 9-153
- QFILE control connection 9-153
- QFILE data connection 9-153
- Stream connection 9-114
- Connection index 9-104
- Connection Interrupts 9-140
- Connection Problems 2-555
- Connection States 9-136
- sys:** **connection-closed** flavor 2-555
- sys:** **connection-error** flavor 2-555
- Connection-initiation protocols 9-114
- sys:** **connection-lost** flavor 2-556
- sys:** **connection-refused** flavor 2-555
- Connection address in routing table 9-108
- sys:** **connection-closed-locally** flavor 2-555
- Connection cost in routing table 9-108
- Connection Establishment: Chaosnet Software Protocol 9-114
- Connection interrupt functions 9-140
- sys:** **connection-no-more-data** flavor 2-556
- CLS Close connection packet 9-114
- FWD Forward a request for connection packet 9-114
- OPN Open connection packet 9-114
- RFC Request for connection packet 9-114
- Network connection problems 2-555
- Foreign-protocol-mode Connections 9-149
- Opening and Closing Connections 9-134, 9-143
- Record-mode Connections 9-148
- Server-side: Opening and Closing Connections 9-136
- Special Files for Creating Connections 9-147

- Stream-mode Connections 9-148
- Tty-mode Connections 9-149
- User-side: Opening and Closing Connections 9-134
  - Connections: Chaosnet Software Protocol 9-102
  - connection state 9-121
  - Chaos:answered-state connection state 9-136
  - Chaos:cls-received-state connection state 9-136
  - Chaos:foreign-state connection state 9-136
  - Chaos:host-down-state connection state 9-136
  - Chaos:inactive-state connection state 9-136
  - Chaos:listening-state connection state 9-136
  - Chaos:los-received-state connection state 9-136
  - Chaos:open-state connection state 9-136
  - Chaos:rfc-received-state connection state 9-136
  - Chaos:rfc-sent-state connection state 9-136
  - Closed connection state 9-121
  - Conn\_st\_closed VAX/VMS connection state 9-144
  - Conn\_st\_full VAX/VMS connection state 9-144
  - Conn\_st\_incom VAX/VMS connection state 9-144
  - Conn\_st\_los VAX/VMS connection state 9-144
  - Conn\_st\_lsn VAX/VMS connection state 9-144
  - Conn\_st\_new VAX/VMS connection state 9-144
  - Conn\_st\_open VAX/VMS connection state 9-144
  - Conn\_st\_rfcrcv VAX/VMS connection state 9-144
  - Conn\_st\_rfcsnt VAX/VMS connection state 9-144
  - Foreign connection state 9-121
  - Incomplete Transmission connection state 9-121
  - Listening connection state 9-121
  - Lost connection state 9-121
  - Open connection state 9-121
  - RFC Received connection state 9-121
  - RFC Sent connection state 9-121
  - Chaosnet Connection States 9-121
  - Physical Connection to the Dial Network 9-77
    - Bridge connection type 9-108
    - Direct connection type 9-108
    - Fixed bridge connection type 9-108
- chaos:**
  - conn-finished-p** function 9-139
  - :conn** option for **net:define-server** 9-51
  - Conn\_st\_closed VAX/VMS connection state 9-144
  - Conn\_st\_full VAX/VMS connection state 9-144
  - Conn\_st\_incom VAX/VMS connection state 9-144
  - Conn\_st\_los VAX/VMS connection state 9-144
  - Conn\_st\_lsn VAX/VMS connection state 9-144
  - Conn\_st\_new VAX/VMS connection state 9-144
  - Conn\_st\_open VAX/VMS connection state 9-144
  - Conn\_st\_rfcrcv VAX/VMS connection state 9-144
  - Conn\_st\_rfcsnt VAX/VMS connection state 9-144
  - Cons 2-41, 2-42, 8-113
  - Cons comparisons 2-11
  - cons** function 2-45, 2-56
  - Cons as menu item 7-208
  - Cons as property list 2-67
  - Cons Data Type 2-4
  - Conses 2-25
  - conses 2-56
  - Conses 2-17
  - Conses represented as pointers 2-56
- The
  - How the Reader Recognizes
  - Memory allocation of
  - Printed Representation of
- Hash table considerations while using multiprocessing 2-69
- sys:**
  - cons-in-area** function 2-45, 8-103
  - cons-in-fixed-area** flavor 2-538
  - Consing 8-113
  - Consing arrays on the data stack 8-28
  - consing list 8-23
  - Consing Lists on the Control Stack 8-26
- Variable argument number without

- Print-Print consistency 2-591
- Print-Read consistency 2-591
- Read-Read consistency 2-591
- Consistency Rules for Packages 2-591
- Consistent RN-30
- Consistent Behavior in Break and Debugging Loops RN-42
- Console 1-5
- Consoles That Support Digital Audio RN-68
- Consolidate from dump parameter 0-6
- :cons** option for **defstruct-define-type** 2-410
- Constant 2-135
- constant 8-39
- constant 8-40
- constant 8-40
- constant 8-39
- constant 8-40
- constant 8-40
- constant 8-40
- constant 8-39
- constant 8-40
- constant 8-39
- constant 8-30
- constant 8-30
- constant and variable output 5-44
- Constants 8-29
- constants 2-27
- constants-area** variable 8-107
- Constants storage areas 8-107
- Constant Values 2-161
- constituent** character attribute 2-643
- Constituent Character Attributes Table 2-643
- Constraint frames 7-175, 7-179, 7-188
- Constraint language 7-175, 7-179, 7-188
- constraint-frame** flavor 7-177
- \*\*constraint-node\*\*** variable 7-184, 7-188
- \*\*constraint-stacking\*\*** variable 7-184, 7-188
- Constraint frame configuration column 7-179
- Constraint frame configuration entity 7-179
- Constraint frame configuration fill 7-179
- Constraint frame configuration name 7-179
- Constraint frame configuration row 7-179
- Constraint frame pane 7-179
- constraint frames 7-176
- constraint frames 7-188
- constraint frames 7-188
- Constraint Frame Specification 7-180
- Constraint Frame Specification 7-182
- constraint-frame-with-shared-io-buffer** 7-179
- constraint-frame-with-shared-io-buffer** flavor 7-178
- Constraint Function 7-262
- \*\*constraint-remaining-height\*\*** variable 7-184, 7-188
- \*\*constraint-remaining-width\*\*** variable 7-184, 7-188
- Constraints 7-185
- Constraints RN-57
- constraints 7-175
- Constraints 7-179
- Constraints Before Release 6.0 7-196
- Constraints Before Release 6.0 7-188
- :constraints** init option for
  - tv:basic-constraint-frame** 7-189, 7-196
- Constraint Size Specification 7-188
- Constraint Size Specification 7-188
- Constraint Size Specification 7-188
- Print-Print consistency 2-591
- Print-Read consistency 2-591
- Read-Read consistency 2-591
- Consistency Rules for Packages 2-591
- Consistent RN-30
- Consistent Behavior in Break and Debugging Loops RN-42
- Console 1-5
- Consoles That Support Digital Audio RN-68
- Consolidate from dump parameter 0-6
- :cons** option for **defstruct-define-type** 2-410
- Constant 2-135
- constant 8-39
- constant 8-40
- constant 8-40
- constant 8-39
- constant 8-40
- constant 8-40
- constant 8-40
- constant 8-39
- constant 8-40
- constant 8-39
- constant 8-30
- constant 8-30
- constant and variable output 5-44
- Constants 8-29
- constants 2-27
- constants-area** variable 8-107
- Constants storage areas 8-107
- Constant Values 2-161
- constituent** character attribute 2-643
- Constituent Character Attributes Table 2-643
- Constraint frames 7-175, 7-179, 7-188
- Constraint language 7-175, 7-179, 7-188
- constraint-frame** flavor 7-177
- \*\*constraint-node\*\*** variable 7-184, 7-188
- \*\*constraint-stacking\*\*** variable 7-184, 7-188
- Constraint frame configuration column 7-179
- Constraint frame configuration entity 7-179
- Constraint frame configuration fill 7-179
- Constraint frame configuration name 7-179
- Constraint frame configuration row 7-179
- Constraint frame pane 7-179
- constraint frames 7-176
- constraint frames 7-188
- constraint frames 7-188
- Constraint Frame Specification 7-180
- Constraint Frame Specification 7-182
- constraint-frame-with-shared-io-buffer** 7-179
- constraint-frame-with-shared-io-buffer** flavor 7-178
- Constraint Function 7-262
- \*\*constraint-remaining-height\*\*** variable 7-184, 7-188
- \*\*constraint-remaining-width\*\*** variable 7-184, 7-188
- Constraints 7-185
- Constraints RN-57
- constraints 7-175
- Constraints 7-179
- Constraints Before Release 6.0 7-196
- Constraints Before Release 6.0 7-188
- :constraints** init option for
  - tv:basic-constraint-frame** 7-189, 7-196
- Constraint Size Specification 7-188
- Constraint Size Specification 7-188
- Constraint Size Specification 7-188

- :even** Constraint Size Specification 7-188
- :funcall** Constraint Size Specification 7-188
- :limit** Constraint Size Specification 7-188
- Fraction Constraint Size Specification 7-188
- Integer Constraint Size Specification 7-188
- tv:** **\*\*constraint-total-height\*\*** variable 7-184, 7-188
- tv:** **\*\*constraint-total-width\*\*** variable 7-184, 7-188
- Conditional
  - construct 2-175
  - Constructing Items 7-307
  - Constructing Line Items 7-307
  - Constructing List Items 7-313
  - constructing list structure 1-233
  - Constructor macros 2-379, 2-395
  - Constructor and Alterant Macros 2-395
  - Constructor Functions 2-642
  - Constructor Macros 2-396
  - :constructor** option for **defresource** 8-132
  - :constructor** option for **defstruct** 2-385, 2-386, 2-396
  - :constructor** option for **defwindow-resource** 7-107
  - constructs 2-206
  - Contact Names: Chaosnet Software Protocol 9-103
  - Contention 9-99
  - Contents 3-129
  - contents 1-200, 1-213
  - Contents 1-125
  - contents 0-18
  - Contents 9-106
  - Contents 9-159
  - contents in cell errors 2-533
  - Contents in Dired 3-149
  - Contents of a Dialnet Registry 9-82
  - Contents of a Directory 3-132
  - contents of a directory 3-131
  - Contents of a FED Register 3-241
  - contents of window 7-114
  - contents of windows 7-78
  - contents of windows 7-78
  - Contents to a File 3-121
  - Contents to the File 3-121
  - Contents with c-X c-F 1-55, 3-31
  - Context 5-134
  - Contexts 1-85
  - Contexts 1-86
  - Continuation format directive 5-35
  - continuation indicator 3-23, 3-54
  - Continue command 1-201
  - [Continue (R)] Draft File Zmail Menu Item 6-39
  - [Continue (R)] Draft Message Zmail Menu Item 6-41
  - continue-whopper** function 2-463
  - Continue QFILE Command 9-182
  - net:** **continue-service-access-path-future** function 9-42
  - Continue Zmail Menu Item 6-39, 6-41
  - [Continue] Zmail menu item 6-43
  - Continuing Completed or Aborted Zmail Messages 6-43
  - Contracting a character 3-259
  - Contracting a Drawing Horizontally in FED 3-250
  - Contracting a Drawing Vertically in FED 3-250
  - Contracting Drawings in FED 3-246
  - Contracts 2-418
  - Control 2-173, 2-175
  - Control 9-141
  - Control 2-175
  - control 2-175
  - Control 2-187
- Backquote
  - Using the
  - CLM: By-position
  - By-position
- Expressions in loop
  - Ether
  - Creating Two Windows, Specifying Other
    - File
    - Find Table of
    - Listing of tape
    - Packet
    - QFILE Packet Data
    - Invalid
    - Viewing and Editing File
      - Displaying the
        - List
      - Retrieving the
        - Delete
      - Regenerating
        - Saving
      - Writing the Buffer
        - Saving the Buffer
        - Buffer
      - Pathname Defaulting From the Current
        - Completion in Other
      - Summary of Help Functions in Different
    - Exclamation point (!) line
  - Stretching and
    - Flow of
    - Information and
    - Introduction to Flow of
    - Program
    - Transfer of

- Control bit 5-5
- Control packets 9-134
- Control stack 8-3, 8-5
- Control: Chaosnet Software Protocol 9-111
- control connection 9-153
- CONTROL key while drawing characters 3-235
- Controlled packets 9-105, 9-111
- Controlling Compiler Warnings 4-323
- Controlling Garbage Collection 8-124
- Controlling the Evaluation of Top-level Forms 4-314
- Controlling the Format of **trace** Output 4-279
- Controlling the garbage collector 8-115
- Controlling the Mouse Outside a Window 7-158
- Controlling the Printed Representation of an Object 2-19
- control parameters 5-253
- Control Program 9-102
- Control Program 9-96
- Control Protocol 9-44, 9-129
- control stack 8-26
- Control Stack 8-26
- control stack 8-26
- control stack 4-264, 4-271
- control structures 2-175
- control structures 2-175
- convention 9-107
- convention 2-7
- Conventions 1-235
- Conventions 1-231
- Conventions 3-9
- Conventions 3-9
- Conventions 3-9
- conventions 5-127
- Conventions 5-200
- Conventions 1-227
- Conventions 1-235
- Conventions 1-236
- Conventions 1-231
- Conventions 3-9
- Conventions: Interfacing to the Network System 9-212
- Conventions and Examples 3-9
- Conventions and Helpful Hints 1-227
- Conventions for Character Case 1-234
- Conventions for Functions 1-231
- Conventions for Lisp Objects 1-231
- Conventions for Maclisp 1-235
- Conventions for Macro Characters 1-233
- Conventions for Macros and Special Forms 1-232
- Conventions for Methods and Variables 1-233
- Conventions for Packages and Keyword Names 1-234
- Conventions for Quoting Characters 1-233
- Conventions for the Character Set 1-235
- Conventions for Zmail Commands 6-3
- Conventions Quick Reference 1-235
- Conversation (m-X) Converse Command 1-72
- Conversation (m-X) Converse Command 1-71
- Conversation (m-X) Converse Command 1-71
- Conversation (m-X) Zmail command 6-69
- Conversation by References 6-72
- Conversation by References 6-72
- Conversation by References 6-72
- Conversation m-X Converse Command 6-103
- Conversation m-X Converse Command 6-102
- Conversation m-X Converse Command 6-102
- Flow and Error
- QFILE
- Using the
- Modem
- Chaosnet Network
- Network
- Transmission
- Arrays on the
- Consing Lists on the
- Lists on the
- Manipulating the
- Exit
- Nonlocal exit
- Bit numbering
- Naming
- Documentation
- Documentation Notation
- Example 1 of Zmacs Notation
- Example 2 of Zmacs Notation
- Example 3 of Zmacs Notation
- File name
- Init File Naming
- Miscellaneous
- Modifier Key
- Mouse Command
- Understanding Notation
- Zmacs Manual Notation
- Byte Stream
- Zmacs Notation
- System
- Notation
- Notation
- Notation
- Notation
- Notation
- Notation
- Notation
- Notation
- Notation
- Notation
- Format
- Notation
- Append
- Delete
- Write
- Select
- Append
- Delete
- Select
- Append
- Delete
- Write



- Select All
    - Conversations 1-69, 6-99
    - Conversations by References 6-72
    - Converse 6-97
  - Customizing
    - Converse 1-172, 6-105
  - Default Behavior of
    - Entering
      - Converse 1-70, 6-101
    - Introduction to
      - Converse 3-40
  - Lisp Listener Commands for
    - Using
      - Converse 1-69, 6-99
      - Converse 1-72, 6-103
      - Converse 1-70, 6-101
      - Converse Commands 1-71, 6-102
      - Converse variables 1-172, 6-105
      - (Converse) 6-3
- Interactive message system
  - zwei:**
    - \*converse-gagged\*** 1-72, 6-103
    - \*converse-mode\*** variable 1-172, 6-105
    - \*converse-append-p\*** variable 1-173, 6-106
    - \*converse-beep-count\*** variable 1-173, 6-106
- Append Buffer (m-X)
  - Converse Command 1-71, 6-103
- Append Conversation (m-X)
  - Converse Command 1-72, 6-103
- c-END
  - Converse command 1-71, 6-102
- c-M
  - Converse Command 1-71, 6-102
- c-m-J
  - Converse Command 1-71, 6-102
- c-m-[
  - Converse Command 1-71, 6-102
- Delete Conversation (m-X)
  - Converse Command 1-71, 6-102
  - Converse command 1-71, 6-102
- END
  - Converse Command 1-72, 6-103
- Regenerate Buffer (m-X)
  - Converse Command 1-71, 6-102
- Write Buffer (m-X)
  - Converse Command 1-71, 6-102
- Write Conversation (m-X)
  - Converse Command 1-71, 6-102
  - \*converse-end-exits\*** variable 1-174, 6-106
  - Converse messages 1-72, 6-103
  - Converse messages 1-72, 6-103
  - Converse Pop-up Message Window 1-70, 6-101
- Turning off
  - Converse 5-201
- Turning on
  - Conversion Function 2-637
  - Conversion of numbers 2-90
- MacIisp
  - Conversion 5-201
- CLM: Type
  - Conversion Function 2-637
  - Conversion of numbers 2-90
- Character
  - Conversions 2-272
- Numeric Type
  - Conversions 2-107
- String
  - Conversions 2-285
- Time
  - Conversions 7-367
  - Conversions Between Sample Formats 7-335
  - Conversions for the Polyphony Feature 7-337
  - Converting LGP to Screen Coordinates 4-121
  - Converting logical pathname to physical
    - pathname 5-186, 5-199
  - Converting Non-Integral Numbers to Integers RN-36
  - Converting Numbers to Floating-point
    - Numbers RN-36
  - Converting physical pathname to logical
    - pathname 5-199
  - Converting site files 0-87
  - :convert-to-device-units** method of
    - si:make-hardcopy-stream** 3-275
- New Functions for
  - Coordinates 4-121
- New Functions for
  - coordinates 7-118
  - Copier 0-15
  - Copier 0-18
  - :copier** option for **defstruct** 2-385, 2-392
  - :copier** option for **defstruct-define-type** 2-410, 2-412
- Converting LGP to Screen
  - copies 1-62
- Graphics
  - copies 1-174, 3-271
- Distribution
  - Copies of Files 0-12
  - Copier 0-18
  - Copy command 1-201
  - Copy Commands 1-18
  - Copy space 8-117
  - copy-closure** function 2-336
  - copy-readtable** function 2-33
  - copy-tape** function 0-18
- Carbon
  - copies 1-62
- Default printer for screen
  - copies 1-174, 3-271
- Finding Backup
  - Copy command 1-201
  - Copy Commands 1-18
  - Copy space 8-117
  - copy-closure** function 2-336
  - copy-readtable** function 2-33
  - copy-tape** function 0-18
- tape:
  - copy-tape** function 0-18

- :byte-size** option for
- :characters** option for
- :create-directories** option for
- :report-stream** option for
  
- Examples of
  - copyalist** function 2-50
  - copy-array-contents** function 2-253
  - copy-array-contents-and-leader** function 2-253
  - copy-array-portion** function 2-253
  - copyf** 5-105
  - copyf** 5-105
  - copyf** 5-105
  - copyf** 5-105
  - copyf** function 5-105
  - Copy File (m-X) Zmacs command 3-134, 5-105, 5-153
  - Copy File Command 1-18
  - Copying files 3-150, 5-105
  - Copying Instances 2-465
  - Copying messages 6-77
  - Copying a File Into Another 3-134
  - Copying a File Into Another 3-134
  - Copying an Array 2-252
  - Copying and Renaming Files in Dired 3-150
  - Copying a Zmail Message to Another Buffer 6-77
  - Copying Bit Rectangles to and From Windows 7-120
  - Copying Buffers and Files 4-63
  - Copying distribution tape 0-18
  - Copying FEP Files 8-53
  - Copying From and to the Same Array 2-253
  - copylist** function 2-50, 2-56
  - copylist\*** function 2-50
  - Copy message into reply 6-69
  - Copy Microcode Command 1-18
  - Copy Mouse (C-(m)) RN-48
  - copy-pathname-defaults** function 5-162
  - copysymbol** function 2-567
  - copytree** function 2-50
  - copytree-share** RN-37
  - copytree-share** function 2-50
  - Copy World Command 1-19
  - Coroutine 2-423, 8-3
  - Coroutine Streams 5-25
  - coroutine-bidirectional-stream** flavor 5-28
  - coroutine example 8-7
  - coroutine-input-stream** flavor 5-28
  - coroutine-output-stream** flavor 5-28
  - coroutines 8-7
  - Coroutine Streams 5-27
  - :correct-input** 2-504, 2-543
  - correctable-login-problems** flavor 2-547
  - Correcting Typos 3-22
  - Correspondence of Canonical Types and Editor Modes 5-153
  - cos** function 2-106
  - cosd** function 2-107
  - cosh** function 2-107, RN-35
  - Cosine 2-106
  - cost in routing table 9-108
  - Cost with Public Carrier Networks 9-91
  - count 9-106
  - count 9-106
  - Count bit 9-131
  - si:** **\*count-disk-device-checks\*** variable 8-41
  - si:** **\*count-disk-ecc-errors\*** variable 8-41
  - si:** **\*count-disk-errors-lost\*** variable 8-41
  - si:** **\*count-disk-hung-restarts\*** variable 8-41
  - si:** **\*count-disk-not-ready\*** variable 8-41
  - si:** **\*count-disk-other-errors\*** variable 8-41
  - si:** **\*count-disk-overruns\*** variable 8-41
  - si:** **\*count-disk-search-errors\*** variable 8-41
  - si:** **\*count-disk-seek-errors\*** variable 8-41
  
- New Zvel Command:
  - fs:**
  
- New Function:
  - si:**
  - Canonical
  - si:**
  - si:**
  - Generator
  - Functions for Creating
  - fs:**
  
- Connection
  - Reducing Call
  - Data byte
  - Forwarding
  - Lost

- si: **\*count-disk-select-errors\*** variable 8-41
  - si: **\*count-disk-state-machine-errors\*** variable 8-41
  - si: **\*count-disk-stops-lost\*** variable 8-41
- Time-slot
  - counter 9-99
  - counting loop** keyword 2-212
  - Count Lines Page 3-48
  - Count Lines Region 3-48
  - count loop** keyword 2-212
- Setting Generation Retention
  - Count on Files in Dired 3-152
  - Count packet header field 9-106
  - Count register 9-131
- Bit
  - si: **\*count-total-disk-errors\*** variable 8-41
- Zmail Window Partly
  - Covered 6-24
- c-X
  - c-0 Zmacs command 1-53, 3-28, 3-167
  - si: **\*cp-comtab\*** variable 7-53
  - cp-off** function 1-16
  - cp-on** function 1-16
  - si: **\*cp-prompt\*** variable 1-166
  - si: **\*cp-blank-line-mode\*** variable 1-166
  - si: **\*cp-command-dispatchers\*** variable 1-166
  - si: **\*cp-default-blank-line-mode\*** variable 7-43
  - si: **\*cp-default-dispatch-mode\*** variable 7-43
  - si: **\*cp-default-prompt\*** variable 7-44
  - si: **\*cp-dispatch-mode\*** variable 1-165
  - si: **\*cp-form-dispatchers\*** variable 1-166
  - fonts: **cpfont** font 1-75, 1-174, 3-223, 3-271, 7-142
  - si: **\*cp-timeout-default\*** variable 1-167
  - c-X c-P Zmacs command 3-92
- CR character 2-32
- crash 6-12
- Crashed 1-214
- Crashes 6-117
- CRC Error bit 9-131
- Create Commands 1-19
- Create Directory 3-131
- si: **create-comtab** function 7-53
- :create-directories** option for **copyf** 5-105
- :create-directory** Debugger command 2-549
- Create-directory QFILE Command 9-182
- Create-link QFILE Command 9-182
- :create-package** proceed type 2-542, 2-619
- Create a byte specifier 2-116
- Create a FEP File? 1-229
- Create an Environment 3-33
- Create a new message 6-27
- Create an Init File 1-164
- Create Column 7-239
- :create-data-map** message 5-225, 8-46
- :create-directories-recursively** Debugger command 2-549
- Create Directory (m-X) Zmacs command 3-131
- Create Directory Command 1-19
- fs: **create-directory-failure** flavor 2-550
- FSEdit [Create Inferior Directory] Command 5-234
- [Create Inferior Directory] File System Editor menu item 5-233
- Create Link (m-X) Zmacs command 3-135
- Create Link Command 1-19
- fs: **create-link-failure** flavor 2-551
- FSEdit [Create Link] Command 5-234
- [Create Link] File System Editor menu item 5-233
- Init File Form: Setting Find File Not to
- Functions That
  - Create New Files 1-168, 3-214
  - Create new logical host 5-197
  - Create New Readtables 2-33
  - :create-p** option for **zwei:open-editor-stream** 7-378
  - :create-p** option for **zwei:with-editor-stream** 7-378

- :create** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- [Create] System menu item 7-75
- Creating flavors 2-428
- Creating methods 2-429
- Creating panes 7-176
- Creating Symbols 2-566
- Creating a Buffer 1-54, 1-55, 3-30, 3-31
- Creating a command processor command table 7-53
- Creating a Directory 3-131
- Creating a Directory 3-131
- Creating a File 1-55, 3-32, 4-9
- Creating a Fundamental Mode Buffer 3-122
- Creating a logical host 4-217
- Creating a Mail Collection 6-79
- Creating and Manipulating Files 1-47
- Creating and Saving Buffers and Files 3-30
- Creating and Saving Buffers and Files 3-30
- Creating and Saving Buffers and Files 3-30
- Creating a New Character 3-233
- Creating a New Font in FED 3-230
- Creating a New Indented Lisp Comment Line in Zmacs 3-172
- Creating a New Namespace Object 1-117
- Creating an Init File 3-213
- Creating a Process 8-85
- Creating a Region 3-87
- Creating a Region with Keystrokes 3-87
- Creating a Region with the Mouse 3-87
- Creating a serial I/O stream 5-251
- Creating a Set of Condition Flavors 2-486
- Creating a Window 7-106
- Creating condition objects 2-505
- Creating Connections 9-147
- Creating Coroutine Streams 5-27
- Creating data types 2-379
- Creating Flavors 2-428
- Creating Hash Tables 2-71
- Creating instances of flavors 2-430
- Creating instances of structures 2-395
- Creating Links to Files 3-135
- Creating mailing lists 0-61
- Creating More Room on the Local Disk 0-43, 5-239
- Creating mouse-sensitive-area of screen 7-283
- Creating new characters 3-234
- Creating New Conditions 2-485
- CLM: Creating New Streams 2-643
- Creating New Zmacs Commands with Keyboard Macros 3-199
- Creating Two Windows, Specifying Other Contents 3-129
- Creating Two Windows with the Region in Top 3-129
- Procedure for Creating Zmacs Commands with Keyboard Macros 3-199
- Creating Zmail Filters 6-60
- Creating Zmail Universes 6-64
- :creation-date** message 5-114
- :creation-date** FEP file property 5-227, 8-48
- :creation-date** file property 5-117
- fs: creation-failure** 2-550
- fs: creation-failure** flavor 2-550
- The Filter Universe Creation Display 6-60
- [Abort] Filter Creation Display 6-64
- [And] Filter Creation Display menu item 6-60
- [And] Filter Creation Display menu item 6-61
- [Before] Filter Creation Display menu item 6-81

- [Close] Filter
- [Current] Universe
- [Done] Filter
- [Loaded] Universe
- [Not] Filter
- [Or] Filter
- [Sample] Filter
- File
- Creation Display menu item 6-61
- Creation Display menu item 6-64
- Creation Display menu item 6-60
- Creation Display menu item 6-64
- Creation Display menu item 6-61
- Creation Display menu item 6-61
- Creation Display menu item 6-60
- creation errors 2-550
- :cr-not-newline-flag** init option for **tv:sheet** 7-108, 7-117
- Cross-host translation functions 5-145
- crunit** function 5-201
- c-R Zmail command 6-39
- c-sh-A command 2-302
- (c-sh-A) Zmacs command 4-43
- c-sh-A Zmacs command 3-47
- (c-sh-C) Zmacs command 4-70
- c-sh-C Zmacs command 3-94, 4-316
- c-sh-D command 2-302
- (c-sh-D) Zmacs command 4-39, 4-42
- c-sh-D Zmacs command 3-47
- (c-sh-E) Zmacs command 4-75
- c-sh-E Zmacs command 3-175
- (c-sh-M) Zmacs command 4-100
- c-sh-P Debugger command 4-264, 4-271
- (c-sh-V) Zmacs command 4-39
- c-sh-V Zmacs command 3-48
- c-SPACE Zmail command 6-50, 6-68
- c-SPACE Zmail command 6-50, 6-68
- c-S Zmacs command 3-31, 3-121
- c-S Zmail command 6-39
- c-T Zmacs command 3-82
- Draw a cubic spline 3-259
- c-U c-SPACE Zmail command 6-50, 6-68
- c-U c-SPACE Zmail command 6-50, 6-68
- c-U c-U c-SPACE Zmail command 6-50, 6-68
- Curly brackets 1-232
- Current buffer 3-120
- Current font 7-108, 7-140
- Current message 1-64, 6-11, 6-13
- Current package 2-597
- Current patch 3-190, 4-242
- Current process 8-77
- :current-font** method of **tv:sheet** 7-142
- :current-geometry** message 7-216
- :current-geometry** method of **tv:menu** 7-214
- current-process** variable 8-77, 8-78
- Current/Installed Versions 3-127
- Current/Newest Versions 3-127
- Current/Saved Versions 3-127
- Current and All Outer Frames 4-266
- Current and All Outer Frames 4-266
- Current Candidates 1-131
- current candidates 1-127
- Current Character 3-76
- Current Context 5-134
- Current Frame 4-266
- Current Line 3-81
- Current Line in Zmacs 3-164
- Current Line in Zmacs 3-162
- Current Lisp Expression 3-79
- Current Lisp Expression 3-79
- current Lisp world 0-46
- currently allocated 8-33
- Currently Used 1-147
- Current mail file 1-57
- Comparing/Merging
- Comparing/Merging
- Comparing/Merging
- Clearing the Trap-on-exit Flag for the Document Examiner List of List of
- Deleting the Pathname Defaulting From the
- Setting the Trap-on-exit Flag for the Document Examiner List of List of
- Deleting the Centering the Indenting
- Deleting the
- Deleting the List Containing the Save
- Disk event tasks
- Keys Not



Display Directory c-X c-B Zmacs command 3-115, 3-118  
 (c-X c-D) Zmacs command 4-45  
 Buffer Contents with c-X c-D Zmacs command 3-132  
 Find File c-X c-F 1-55, 3-31  
 (c-X c-F) Zmacs command 4-9  
 c-X c-F Zmacs command 1-55, 3-31, 3-32  
 c-X c-I Zmacs command 3-165  
 c-X c-L Zmacs command 3-160  
 c-X c-m-L Zmacs command 3-117  
 c-X c-m-SPACE Zmacs command 3-88  
 c-X c-m-S Zmail command 6-39  
 c-X c-N Zmacs command 3-63  
 c-X c-O Zmacs command 1-53, 3-28, 3-167  
 c-X c-P Zmacs command 3-92  
 c-X c-R Zmail command 6-39  
 c-X c-S Zmacs command 3-31, 3-121  
 c-X c-S Zmail command 6-39  
 c-X c-T Zmacs command 3-82  
 c-X c-U Zmacs command 3-160  
 c-X c-V Zmacs command 3-120  
 c-X c-W Zmacs command 1-55, 3-32, 3-121  
 c-X c-W Zmail command 6-39  
 Swap Point And Mark (c-X c-X) Zmacs command 4-59  
 c-m-Y Has Been Changed to c-X c-X Zmacs command 3-88  
 c-X c-Y in Release 6.0 RN-69  
 c-X c-Y Yank Current Message Zmail  
 Command 6-45  
 c-X Zmacs command 3-88  
 c-Ø c-Y 3-73  
 :cyclic boundary condition for  
 :draw-cubic-spline 7-125  
 c-m-Y Has Been Changed to c-X c-Y in Release 6.0 RN-69  
 c-X c-Y yank command 3-15  
 c-X c-Y Yank Current Message Zmail Command 6-45  
 HELP C Zmacs command 1-51, 3-14, 3-45  
 C Zmail command 6-43  
 c-X C Zmail command 6-37

## D

## D

## D

SELECT D 1-119, 3-40  
 D2257 disk drive 1-214  
 DAC 7-321  
 Daemon methods 2-431, 4-116  
 Daemon users 9-11  
 :daemon method combination 4-113, 4-116, 4-121  
 :daemon method combination type 2-455  
 :daemon-with-and method combination type 2-455,  
 2-456  
 :daemon-with-or method combination type 2-455,  
 2-456  
 :daemon-with-override method combination  
 type 2-455, 2-457  
 chaos: dat-op variable 9-159  
 DAT 16-bit Data packet 9-118  
 DAT 8-bit Data packet 9-118  
 32-bit mode data 8-29  
 36-bit mode data 8-29  
 Logical end of data 9-118  
 Data packets 9-134  
 Data sets 5-247  
 Data terminals 5-247  
 Data Types 2-3  
 chaos: data-available function 9-140  
 Data-connection QFILE Command 9-163

- fs:**
  - data-error** flavor 2-546
  - %data-type** function 8-16
  - data-type** function 8-12
  - data-type keyword 2-219
- fixnum loop** data-type keyword 2-219
- flonum loop** data-type keyword 2-219
- integer loop** data-type keyword 2-219
- notype loop** data-type keyword 2-219
- number loop** data-type keyword 2-219
- si:** **data-types** function 8-13
- sys:** **\*data-types\*** variable 8-13
- Adding new objects to the namespace
  - Changes to
    - Compiler Warnings Database 4-321
  - Dialnet Representation in the Namespace
    - Documentation database 1-119
  - Editing objects in the namespace
    - Managing the Namespace Database 9-24
    - Namespace database 0-87
    - Network database 9-37
    - Network not in namespace database 9-206
    - Print compiler warnings database 4-321
    - Pruning the documentation database 1-121
    - Queries to network database 9-33
    - The Compiler Warnings Database 4-79
    - Topics Pruned From the Documentation Database 1-121
    - Update compiler warnings database 4-321
    - Updates to network database 9-33
    - Update the namespace database 9-28
    - Updating the Namespace Database 1-116
    - Database classes 0-87
    - Database objects 0-87
    - Database Changes Files 9-26
    - Database data types 1-112, 9-4, 9-29
    - Database deletion request 9-33
    - database descriptor files 9-24
    - database installation 1-121
    - Database Log Files 9-26
    - database object attributes 9-25
    - Database Object Files 9-25
    - Data byte count 9-106
    - Data cells available in a disk block 8-29
    - data channel 9-153
    - Data Circuit Terminating Equipment 5-247
    - data connection 9-153
    - Data Contents 9-159
    - Data Format 9-186
    - Data Formats: Chaosnet Software Protocol 9-107
    - Datagram Media 9-56
    - :datagram** medium 9-215
    - Datagram Protocol 9-129
    - datagram protocols 9-215
    - datagrams 9-44
    - Data in Compiled Code Files 4-331, 5-241
    - data map 5-225, 8-46
    - Data packet 9-118
    - Data packet 9-118
    - Data packet 9-118, 9-129
    - Data representation type 8-103
    - data stack 8-28
    - Data Stack 8-28
    - data structure 7-378
    - data structures 7-303
    - Data Terminal Equipment 5-247
    - :data-terminal-ready** serial I/O parameter 5-253
    - data type 8-12
  - Namespace
    - Namespace
      - Documentation
      - Namespace
      - Storing
      - Namespace
  - QFILE
    - QFILE
    - QFILE Packet
    - QFILE Directory
  - User
    - Server functions for
      - Generic
      - Putting
      - FEP file
      - DAT 16-bit
      - DAT 8-bit
      - UNC Uncontrolled
  - Consing arrays on the
    - The
      - Bp Zwei
      - Displaying
  - dtp-array**



- ntp-closure** data type 8-12
- ntp-fix** data type 8-12
- ntp-instance** data type 2-467, 8-12
- ntp-list** data type 8-12
- ntp-locative** data type 8-12
- ntp-nil** data type 8-12
- ntp-null** data type 8-12
- ntp-symbol** data type 8-12
- ntp-compiled-function** data type 8-12
- ntp-element-forward** data type 8-12
- ntp-even-pc** data type 8-12
- ntp-extended-number** data type 8-12
- ntp-external-value-cell-pointer** data type 8-12
- ntp-gc-forward** data type 8-12
- ntp-header-forward** data type 8-12
- ntp-header-l** data type 8-12
- ntp-header-p** data type 8-12
- ntp-instance-header** data type 2-467
- ntp-lexical-closure** data type 8-12
- ntp-odd-pc** data type 8-12
- ntp-one-q-forward** data type 8-12
- ntp-select-method** data type 2-467
- The Array Data Type 2-5
- The Compiled Function Data Type 2-4
- The Cons Data Type 2-4
- The List Data Type 2-5
- The Locative Data Type 2-5
- The Symbol Data Type 2-3
- Destroying data type field 8-22
- Extracting data type field 8-22
- Data type names 2-576
- CLM: Specific Data Type Predicates 2-638
- CLM: Data Types 2-637
- Creating data types 2-379
- Database data types 1-112, 9-4, 9-29
- Namespace System Lisp Data Types 9-29
- Numeric Data Types 2-4
- Printed Representation of Miscellaneous Data Types 2-18
- Data Types of Namespace System Attributes 1-112, 9-4
- Data Types Recognized by **loop** 2-219
- Data Type Subprimitives 8-12
- Data with QFILE 9-155
- Date 7-353
- date 1-57
- Date formats 7-353, 7-359, 7-361
- Date: Field 6-35
- Date and time 1-198
- Date and time format directive 5-42
- :date** command processor argument type 7-48
- date directory last expunged indicator 5-236
- date dumped dump parameter 0-6
- :date** option for **prompt-and-read** 7-59, RN-58
- :date-or-never** option for **prompt-and-read** 7-59, RN-58
- :date-or-never tv:choose-variable-values** variable type 7-259
- Dates and Times 7-351
- Dates and Times 7-359
- Dates and Times 7-361
- Dates and Times 7-353
- :date tv:choose-variable-values** variable type 7-259
- day 7-353
- Printing
- Reading
- Representation of
- Time of
- time:** **daylight-savings-p** function 7-369
- time:** **daylight-savings-time-p** function 7-369
- :french** day-of-the-week-representation 7-370

**:german** day-of-the-week-representation 7-370  
**:italian** day-of-the-week-representation 7-370  
**:long** day-of-the-week-representation 7-370  
**:medium** day-of-the-week-representation 7-370  
**:roman** day-of-the-week-representation 7-370  
**:short** day-of-the-week-representation 7-370  
**time:** **day-of-the-week-string** function 7-370  
 Days of the week 7-353  
**dbg** function 1-194, 4-98, 4-256  
**dbg** package 2-615  
**dbg:arg** function 4-267  
**dbg:bad-array-mixin** flavor 2-540  
**dbg:condition-handled-p** function 2-509, 2-510  
**dbg:\*debugger-bindings\*** variable 1-181  
**dbg:debugger-condition** flavor 2-501, 2-511, 2-529, 2-532  
**dbg:\*debug-io-override\*** variable 4-268, 5-22  
**dbg:decode-micro-pc** function 1-215  
**dbg:\*defer-package-dwim\*** variable 4-268  
**dbg:\*frame\*** variable 4-268  
**dbg:frame-active-p** function 2-497  
**dbg:frame-arg-value** function 2-498  
**dbg:frame-local-value** function 2-498  
**dbg:frame-next-active-frame** function 2-496  
**dbg:frame-next-interesting-active-frame** function 2-496  
**dbg:frame-next-nth-active-frame** function 2-496  
**dbg:frame-next-nth-interesting-active-frame** function 2-496  
**dbg:frame-next-nth-open-frame** function 2-497  
**dbg:frame-next-open-frame** function 2-496  
**dbg:frame-number-of-locals** function 2-498  
**dbg:frame-number-of-spread-args** function 2-497  
**dbg:frame-out-to-interesting-active-frame** function 2-497  
**dbg:frame-previous-active-frame** function 2-496  
**dbg:frame-previous-interesting-active-frame** function 2-496  
**dbg:frame-previous-open-frame** function 2-496  
**dbg:frame-real-function** function 2-497  
**dbg:frame-real-value-disposition** function 2-498  
**dbg:frame-self-value** function 2-498  
**dbg:frame-total-number-of-args** function 2-497  
**dbg:fun** function 4-268  
**dbg:get-frame-function-and-args** function 2-495  
**dbg:\*interactive-handlers\*** variable 2-511  
**dbg:invoke-restart-handlers** function 2-516  
**dbg:loc** function 4-267  
**dbg:print-frame-locals** function 2-499  
**dbg:print-function-and-args** function 2-499  
**dbg:proceedable-ferro** flavor 2-532  
**dbg:\*proceed-type-special-keys\*** variable 2-528  
**dbg:\*show-backtrace\*** variable 4-268  
**dbg:special-commands-mixin** flavor 2-525  
**dbg:\*special-command-special-keys\*** variable 2-528  
**dbg:val** function 4-268  
**dbg:with-erring-frame** macro 2-494, 2-495  
**dbg** Function 1-194, 4-256  
 DCE 5-247  
 D Dired command 3-151  
**:deactivate** method of **tv:menu** 7-223, 7-299  
 Deactivating menu window 7-223, 7-299  
 Dead arrays 2-262  
**deallocate-resource** function 8-135  
**neti:** **deallocate-packet-buffer** function 9-197

Entering the Debugger with the

- deallocate-whole-resource** function 8-135
- deallocate\_pkt** function 9-144
- Deallocating allocated objects of a resource 8-135
- debug-ic** variable 5-22
- Debugger** 1-44, 2-502, 2-517, 2-523, 4-79, 4-80, 4-98, 4-253
  - Debugger 4-264, 4-271
  - Debugger 4-80
  - Debugger 1-192, 2-532, 4-255
  - Debugger 4-265
  - Debugger 4-264
  - Debugger 4-259
  - Debugger 4-262
  - Debugger 4-267
  - debugger 0-54
  - Debugger 4-259
  - Debugger 4-264
  - Debugger 4-80
  - Debugger commands 4-271
  - Debugger conditions 2-482
  - Debugger Functions 4-267
  - Debugger Help 4-261
  - debugger** package 2-615
  - Debugger Variables 4-268
  - Debugger's backtrace 8-3
- dbg:** \***debugger-bindings\*** variable 1-181
- dbg:** **debugger-condition** flavor 2-501, 2-511, 2-529, 2-532
  - Debugger: Abort 4-261
  - Debugger: Recovering From Errors and Stuck States 1-44
  - Debugger: Resume 4-261
  - Debugger Backtrace Commands 4-262
  - Debugger Bug Reports 2-524
  - Debugger by Causing an Error 1-193, 4-255
  - Debugger command 2-549
  - Debugger command 2-549
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
- Exiting From the The
  - Debugger: Abort 4-261
  - Debugger: Recovering From Errors and Stuck States 1-44
  - Debugger: Resume 4-261
  - Debugger Backtrace Commands 4-262
  - Debugger Bug Reports 2-524
  - Debugger by Causing an Error 1-193, 4-255
  - Debugger command 2-549
  - Debugger command 2-549
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
- Proceeding From the Error in the Examining Stack Frames with
  - Debugger: Abort 4-261
  - Debugger: Recovering From Errors and Stuck States 1-44
  - Debugger: Resume 4-261
  - Debugger Backtrace Commands 4-262
  - Debugger Bug Reports 2-524
  - Debugger by Causing an Error 1-193, 4-255
  - Debugger command 2-549
  - Debugger command 2-549
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-80, 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
  - Debugger command 4-264, 4-271
- Entering the **:create-directory** **:create-directories-recursively**
  - ABORT
  - c-A Debugger command 4-80, 4-271
  - c-B Debugger command 4-264, 4-271
  - c-E Debugger command 4-80, 4-264, 4-271
  - c-HELP Debugger command 4-80, 4-264, 4-271
  - c-L Debugger command 4-80, 4-264, 4-271
  - c-M Debugger command 2-524, 4-264, 4-271
  - c-N Debugger command 4-80, 4-264, 4-271
  - c-P Debugger command 4-80, 4-264, 4-271
  - c-R Debugger command 4-80, 4-264, 4-271
  - c-S Debugger command 4-264, 4-271
  - c-T Debugger command 4-264, 4-271
  - c-X Debugger command 4-271
  - c-m-A Debugger command 4-264, 4-271
  - c-m-B Debugger command 4-264, 4-271
  - c-m-F Debugger command 4-264, 4-271
  - c-m-H Debugger command 4-264, 4-271
  - c-m-L Debugger command 4-264, 4-271
  - c-m-N Debugger command 4-264, 4-271
  - c-m-P Debugger command 4-264, 4-271
  - c-m-R Debugger command 4-80, 4-264, 4-271
  - c-m-S Debugger command 4-264, 4-271
  - c-m-U Debugger command 4-264, 4-271
  - c-m-V Debugger command 4-264, 4-271
  - c-m-W Debugger command 4-80, 4-264, 4-271
  - c-m-X Debugger command 4-264, 4-271
  - c-sh-P Debugger command 4-264, 4-271
  - HELP Debugger command 4-264, 4-271
  - m-< Debugger command 4-264, 4-271

- m-> Debugger command 4-264, 4-271
- m-B Debugger command 4-80, 4-264, 4-271
- m-BREAK Debugger command 2-532
- m-I Debugger command 4-264, 4-267, 4-271
- m-L Debugger command 4-80, 4-264, 4-271
- m-N Debugger command 4-264, 4-271
- m-P Debugger command 4-264, 4-271
- m-S Debugger command 4-264, 4-271
- m-X Debugger command 4-264, 4-271
- RESUME Debugger command 4-264, 4-271
- s-sh-C Debugger command 4-264, 4-271
- Summary of Debugger Commands 4-271
  - Debugger Commands for Dynamic Breakpoints and Stepping Through Compiled Code 4-267
  - Debugger Commands for Information Display 4-265
  - Debugger Commands for Stack Manipulation 4-263
  - Debugger Commands That Call Other Systems 4-264
  - Debugger Commands That Trap on Frame Exit 4-266
- Entering the Display Debugger From the Debugger 4-265
  - Debugger functions to return values in current stack frame 4-267
- Getting Out of the Debugger in Zmail 6-23
  - Customizing Debugger keystrokes 2-526
  - [Edit] Display Debugger menu item 4-80
  - [Retry] Display Debugger menu item 4-80
  - Break and the Debugger Now Bind **readtable** to **si:standard-readtable** RN-43
    - Debugger Proceed and Restart Options 1-193, 4-256
    - Debugger Special Commands 2-525, 4-80
- Entering the Debugger with m-SUSPEND 1-194, 4-256
- Entering the Debugger with the **dbg** Function 1-194, 4-256
- Debugging 4-79
- Tools for Lisp Debugging 1-189
  - debugging-info** function 2-302, 2-323
- Summary of Debugging Aids 4-273
  - si:encapsulated-definition** debugging info alist element 2-325
  - Debugging info alist functions 2-302, 2-323, 2-325
  - Debugging in the FEP 1-222
  - Debugging Lisp Programs 4-79
- Standard Variable Bindings Now Guarantee Consistent Behavior in Break and Debugging Loops RN-42
  - Aid for Debugging Macros 2-369
  - CLM: Debugging Tools 2-645
  - dbg:** **\*debug-fo-override\*** variable 4-268, 5-22
  - FSEdit [Decache] Command 5-235
  - [Decache] File System Editor menu item 5-233
  - [DeCache] Inspector menu item 4-297, 4-298
  - decf** macro 2-149
- Change of Default Base to Decimal RN-9
  - Decimal format directive 5-31
  - :decimal-number** option for **prompt-and-read** 7-59, RN-58
  - :decimal-number-or-nil** option for **prompt-and-read** 7-59
  - :decimal-number-or-nil tv:choose-variable-values** variable type 7-259, RN-59
  - :decimal-number tv:choose-variable-values** variable type 7-259, RN-59
- Trailing decimal point 2-14
- arglist** declaration 2-312
- def** declaration 2-312
- SCL and **declaration** declaration 2-640
- SCL and **ftype** declaration 2-640
- SCL and **inline** declaration 2-640

- SCL and **notinline** declaration 2-640
- SCL and **optimize** declaration 2-640
- special** declaration 2-312
- sys:array-register** declaration 2-312
- sys:array-register-1d** declaration 2-312
- sys:downward-funarg** declaration 2-139, 2-141, 2-313
- sys:downward-function** declaration 2-139, 2-140, 2-312
- sys:function-parent** declaration 2-312
- unspecial** declaration 2-312
- Using the **sys:function-parent** Declaration 2-319
- values** declaration 2-312
- SCL and **declaration** declaration 2-640
- System **declaration file** 2-598, 2-621, 4-218
- CLM: Type **Declaration for Forms** 2-640
- Declarations 2-311
- Declarations 2-640
- Interpreter Caches Global Variable **Declarations** RN-27
- The Interpreter Understands **Declarations** RN-42
- The **sys:downward-function** and **sys:downward-funarg** **Declarations** 2-140
- CLM: **Declaration Specifiers** 2-640
- CLM: **Declaration Syntax** 2-640
- declare** 4-315
- Declared System** RN-53
- New Function **sl:map-system-files** Operates on a **Declared System** RN-53
- New Function **si:set-system-file-properties** Operates on a **Declared System** RN-53
- declare** special form 2-126, 2-311
- declare** special form 2-640
- Declaring a Named Constant** 2-135
- decode-micro-pc** function 1-215
- decode-universal-time** function 2-645
- decode-universal-time** function 7-367
- :decode-variable-type** method of **tv:basic-choose-variable-values** 7-269, 7-270
- decoding** 2-255
- Decoding Macro PCs** 1-216
- Decoding Message** 7-270
- Decoding Method** 7-269
- Decoding Micro PCs** 1-215
- decompose** function 2-259
- Decrementing generalized variables** 2-149
- Decrypting the Buffer** 3-120
- Decrypt Msg (m-X)** Zmail command 1-67
- Decrypt Text** 1-67
- Deexposed windows** 7-82, 7-86
- :deexposed-typein-action** init option for **tv:sheet** 7-116
- :deexposed-typein-action** method of **tv:sheet** 7-116
- Deexposed timeout action** 7-86
- deexposed timeout action** 7-82
- deexposed timeout action** 7-82
- deexposed timeout action** 7-82
- deexposed timeout action** 7-82
- deexposed timeout action** 7-82, 7-86
- :deexposed-typeout-action** init option for **tv:sheet** 7-116
- :deexposed-typeout-action** method of **tv:sheet** 7-116
- :deexpose** message to windows 7-79
- :deexpose** method of **tv:menu** 7-299
- def** 4-310
- def** declaration 2-312
- Default base** 1-227
- Default font** 1-75, 1-174, 3-223, 3-271, 7-142
- Default handlers** 2-501, 2-502
- Default printer** 1-174, 3-271
- SCL and **Special Form for** **dbg:**
- SCL and **time:**
- Array**
- Type**
- Adding a Type**
- math:**
- Encrypting and**
- Zmail**
- :error**
- :expose**
- :normal**
- :notify**
- :permit**

- Default syntax 3-140
- Default type 5-147
- Default version 5-147
- default-font**: Printer Object Attribute 9-17
- :default-font** Init option for **tv:menu** 7-222, 7-296
- :default-handler** Option for **defflavor** 2-441, 2-447
- fs:** **default-pathname** example 5-130, 5-132, 5-134
- fs:** **default-pathname** function 5-162
- :default-pointer** option for **defstruct** 2-385, 2-386
- default-printer**: Site Object Attribute 9-19
- sl:** **default-quantum** variable 8-90
- :default-services** message 9-209
- Default area to allocate disk arrays 8-31
- Change of
  - Default Base to Decimal RN-9
  - Default Behavior of Converse 1-70, 6-101
  - default-bitmap-printer**: Site Object Attribute 9-19
  - zwei:** **\*default-cc-list\*** variable 6-88
  - Default column position 3-63
  - default-cons-area** variable 8-103, 8-104, 8-107
  - Default-disk-unit command 1-201
  - Set
    - zwei:** **\*default-draft-file-name\*** variable 6-91
    - tv:** **defaulted-multiple-menu-choose** function 7-248
    - zwei:** **\*default-fcc-list\*** variable 6-89
  - :default-font** keyword to
    - si:\*hardcopy-default-fonts\*** 1-174, 3-271
  - default fonts 1-174, 3-271
  - Default Forms In Lambda Lists 2-155
  - Default forms of lambda-list parameters 2-151
- default** function 5-201
- MacIisp Stream
  - default handler 5-11
- Reference Material:
  - Default Handlers and Complex Modularity 2-509
  - Default Handlers and Complex Modularity 2-510
  - Defaulting 5-130, 5-131
  - Defaulting an Output File Pathname From an Input File 5-132
- Pathname
  - Defaulting From the Current Context 5-134
- Special
  - Defaulting of the Name 5-122, 5-160
  - Defaulting of the Type 5-122, 5-160
- zwei:** **\*default-initial-window-configuration\*** variable 6-87
- :default-init-plist** Option for **defflavor** 2-441, 2-442, 4-116
- zwei:** **\*default-mail-buffer-generation-retention-count\*** variable 6-92
- Default mail file 6-11, 6-12
- Default mail file names 6-94
- zwei:** **\*default-mail-window-configuration\*** variable 6-89
- Default major mode 3-198
- Init File Form: Setting
  - Default Major Mode 1-168, 3-213
  - :default** method type 2-455, 2-457
  - Default move-destination file 6-70
  - zwei:** **\*default-move-mail-file-name\*** variable 6-91
  - :default** option for **zwei:open-editor-stream** 7-378
  - fs:** **\*default-pathname-defaults\*** example 5-130
  - fs:** **\*default-pathname-defaults\*** variable 5-148
  - SCL and
    - \*default-pathname-defaults\*** variable 2-644
  - Default Pathnames in Dired 3-147
  - Select
    - Default Previous Buffer 3-117
  - Move to
    - Default Previous Point 3-88
  - Move to
    - Default Previous Point (m-X) Zmail command 6-50
  - Changing the
    - Default Printer 1-175, 3-269
    - Default printer for screen copies 1-174, 3-271
    - DEFAULT QFILE OPEN option 9-166
- Base and Syntax
  - Defaults 3-139
  - Manipulating
    - defaults 5-156
  - More About
    - Defaults 5-131

- Pathname defaults 5-147, 5-158
- Sticky pathname defaults 5-131, 5-133
- Tailoring Pathname Defaults 5-130
- Using pathname defaults 5-129
- Defaults alist 5-133, 5-147, 5-148
- default selections for tape access 0-17
- Changing **sl:** **\*default-sequence-break-interval\*** variable 8-81
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- Sticky pathname defaults example 5-133
- :defaults** option for **zwei:with-editor-stream** 7-378
- Defaults to Numeric Arguments 3-24
- zwei:** **\*default-summary-template\*** variable 6-92
- Default surface type 5-151
- Default translation rule 5-189
- :default-value** option for **make-plane** 2-261
- Default values for instance variables 2-431
- Default Variable 3-211
- One Window [Default] Profile Mode menu Item 1-171, 6-57
- defconstant** special form 2-135, 4-310
- defconst** special form 2-126, 2-135, 4-70, 4-310
- \*defer-package-dwim\*** variable 4-268
- dbg:**
- :abstract-flavor** Option for
- :accessor-prefix** Option for
- :default-handler** Option for
- :default-init-plist** Option for
- :documentation** Option for
- :export-instance-variables** Option for
- :gettable-instance-variables** Option for
- :included-flavors** Option for
- :init-keywords** Option for
- :initable-instance-variables** Option for
- :method-combination** Option for
- :method-order** Option for
- :mixture** Option for
- :no-vanilla-flavor** Option for
- :ordered-instance-variables** Option for
- :outside-accessible-instance-variables** Option for
- :required-flavors** Option for
- :required-methods** Option for
- :required-init-keywords** Option for
- :required-instance-variables** Option for
- :settable-instance-variables** Option for
- :special-instance-variables** Option for
- deffavor** 2-441, 2-450
- deffavor** 2-441, 2-448
- deffavor** 2-441, 2-447
- deffavor** 2-441, 2-442, 4-116
- deffavor** 2-441, 2-449, 4-141
- deffavor** 2-441, 2-448
- deffavor** 2-441, 2-485, 4-113
- deffavor** 2-441, 2-444
- deffavor** 2-441, 2-442
- deffavor** 2-441, 2-485, 4-124, 4-126
- deffavor** 2-441, 2-449
- deffavor** 2-441, 2-449
- deffavor** 2-441, 2-445
- deffavor** 2-441, 2-445
- deffavor** 2-441, 2-447
- deffavor** 2-441, 2-447
- deffavor** 2-441, 2-443, 4-116
- deffavor** 2-441, 2-442, 4-113
- deffavor** 2-441, 2-442, RN-40
- deffavor** 2-441, 2-442
- deffavor** 2-441
- deffavor** 2-441, 2-448
- deffavor** macro 2-428, 4-113, 4-116, 4-310
- deffavor** Options 2-441
- deffavor: :export-instance-variables** RN-31
- deffavor** Now Accepts the Option
- :required-init-keywords** RN-40
- defformat** special form 5-42
- deff** special form 2-307, 4-310
- deffunction** special form 2-356
- @define** macro 2-308
- define-medium** macro 9-209
- define-medium** special form 9-45
- define-protocol** 9-50
- define-protocol** 9-50
- define-protocol** 9-50
- define-protocol** special form 9-50, 9-209
- define-server** 9-51
- define-server** 9-51
- define-server** 9-51
- define-server** 9-51
- define-server** 9-51
- define-server** 9-51
- define-server** special form 9-51
- net:**
- net:**
- :desirability** option for **net:**
- :invoke** option for **net:**
- :property** option for **net:**
- net:**
- :address** option for **net:**
- :conn** option for **net:**
- :direction** stream option for **net:**
- :host** option for **net:**
- :medium** option for **net:**
- :network** option for **net:**
- net:**





- CLM: Macro Definition 2-639
- End of Definition 3-67
- Loading the System Definition 4-217
- Mark Definition 3-91
- Positioning the Window Around a Definition 3-56
  - Simple method combination definition RN-32
  - Source Compare Installed Definition 3-127
  - Source Compare Merge Installed Definition 3-128
  - Source Compare Merge Newest Definition 3-127
  - Source Compare Merge Saved Definition 3-127
  - Source Compare Newest Definition 3-127
  - Source Compare Saved Definition 3-127
- Symbol definition 2-3, 2-563
  - Definition types 2-319
  - Mark Definition (c-m-H) Zmacs command 4-60
  - Edit Definition (m-. ) Zmacs command 4-40, 4-141, 4-142
  - Edit Definition Command 1-20
  - The Zmacs Edit Definition Commands 3-180
  - The Zmacs List Definition Commands 3-182
  - tv:choose-variable-values Type Definition Example 7-271
    - Editing the definition of a function 1-48, 1-158, 3-12
    - Definition of a Zmacs Keyboard Macro 3-199
    - Definition of a Zmacs Variable 3-210
    - Definition of Key Bindings 3-208
    - definition of the function spec 2-297, 2-325
    - Definition of Zmacs Minor Modes 3-195
- Basic Definitions 4-40
  - Compare/Merge Commands for Definitions 3-127
    - Formatted print of function definitions 1-180, 5-51
    - How Programs Manipulate Definitions 2-316
    - Namespace System Object Definitions 9-7
    - Selective evaluation in macro definitions 2-345
    - Simple Function Definitions 2-300
    - Storage Layout Definitions 8-18
  - Add Patch Changed Definitions (m-X) 3-189, 4-241
  - Compile Changed Definitions (m-X) Zmacs command 4-70
  - Edit Changed Definitions (m-X) Zmacs command 4-56
  - Evaluate Changed Definitions (m-X) Zmacs command 3-175, 4-75
  - List Definitions (m-X) Zmacs command 3-183
  - List Changed Definitions (m-X) Zmacs command 4-56
  - 3600-family Disk System Definitions and Constants 8-29
  - SCL and equivalent macro definitions for special forms 2-638
    - Add Patch Changed Definitions of Buffer (m-X) 3-188, 4-241
    - Edit Changed Definitions Of Buffer (m-X) Zmacs command 4-56
    - Evaluate Changed Definitions of Buffer (m-X) Zmacs command 3-175
    - List Changed Definitions of Buffer (m-X) Zmacs command 3-183, 4-56
  - Compile Changed Definitions Of Buffer (m-sh-C) Zmacs command 4-70
  - Evaluate Changed Definitions Of Buffer (m-sh-E) Zmacs command 4-75
  - Overview and Definitions of functions 2-316, 4-329
    - Loading System Definitions of Signalling and Handling 2-479
    - Loading System Definitions That Use Logical Pathnames 4-217
    - Definitions That Use Physical Pathnames 4-219
- deflambd-macro special form 2-356
- deflambd-macro-displace special form 2-356
- defmacro 2-373
- defmacro 2-373
- defmacro) 2-373
- defmacro 2-373
- defmacro RN-39
- defmacro 2-373
- defmacro 2-373
- defmacro 2-373
- defmacro macro 2-343, 2-344, 4-310
- defmacro-displace macro 2-372
- defmacro and lexical scoping 2-138
- defmacro lambda-list keyword &list-of and lexical

- scoping RN-12
- defmacro Patterns Are Now Made  
Consistent RN-30
- defmacro special form 2-305
- defmajor 3-198
- defmethod macro 2-429, 4-310
- defmethod special form 2-297
- defpackage 2-585
- defpackage 2-573
- defpackage 2-573
- defpackage 2-573
- defpackage 2-582
- defpackage 2-582
- defpackage 2-573, 2-574
- defpackage 2-574
- defpackage 2-571, 2-599
- defpackage and make-package 2-601, 2-603
- defpackage and make-package 2-599, 2-602
- defpackage and make-package 2-600, 2-603
- defpackage and make-package 2-600, 2-603
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-599, 2-602
- defpackage and make-package 2-600, 2-603
- defpackage and make-package 2-601, 2-603
- defpackage and make-package 2-599, 2-601
- defpackage and make-package 2-601, 2-603
- defpackage and make-package 2-599, 2-601
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-599, 2-602
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-600, 2-602
- defpackage and make-package 2-598, 2-599, 4-310
- defprop special form 2-69
- defpseudo-system special form 0-16, 0-25
- defresource 8-132
- defresource 8-132
- defresource 8-132
- defresource 8-132
- defresource 8-132
- defresource 8-132
- defresource 8-132
- defresource special form 7-107, 8-132
- defselect-method special form 2-437
- defselect special form 2-297, 2-305, 2-308, 4-310
- defsetf function 2-639
- def special form 2-307
- defstruct 2-385, 2-386
- defstruct 2-385, 2-390
- defstruct 2-385, 2-391
- defstruct 2-385, 2-387
- defstruct 2-385, 2-386, 2-396
- defstruct 2-385, 2-392
- defstruct 2-385, 2-386
- defstruct 2-385, 2-391
- defstruct 2-385, 2-386, RN-32
- defstruct 2-385, 2-387
- defstruct 2-385, 2-390
- defstruct 2-385, 2-389, 2-395
- defstruct 2-385, 2-389
- defstruct 2-385, 2-392
- defstruct 2-385, 2-391
- defstruct 2-385, 2-391
- defstruct 2-385, 2-390
- defstruct 2-385, 2-390
- defstruct 2-385, 2-390
- defstruct 2-385, 2-390, 2-395
- zwei:
  - :colon-mode option for
  - :export option for
  - :import-from option for
  - :import option for
  - :relative-names option for
  - :relative-names-for-me option for
  - :shadowing-import option for
  - :shadow option for
  - :use option for
  - :colon-mode Option for
  - :export Option for
  - :external-only Option for
  - :hash-inherited-symbols Option for
  - :import-from Option for
  - :import Option for
  - :include Option for
  - :new-symbol-function Option for
  - :nicknames Option for
  - :prefix-intern-function Option for
  - :prefix-name Option for
  - :relative-names-for-me Option for
  - :relative-names Option for
  - :shadowing-import Option for
  - :shadow Option for
  - :size Option for
  - dis:
  - :checker option for
  - :constructor option for
  - :finder option for
  - :free-list-size option for
  - :initial-copies option for
  - :initializer option for
  - :matcher option for
- SCL and
- :alterant option for
- :but-first option for
- :callable-accessors option for
- :conc-name option for
- :constructor option for
- :copier option for
- :default-pointer option for
- :eval-when option for
- :export option for
- :include option for
- :initial-offset option for
- :make-array option for
- :named option for
- :predicate option for
- :print option for
- :property option for
- :size-macro option for
- :size-symbol option for
- :times option for

- :type** option for
  - Extensions to
  - Options to
- SCL and **:named** option for
- SCL and **:type** option for
  - Using
  - Using Byte Fields and
- si:**
  - :cons** option for
  - :copier** option for
  - :defstruct** option for
  - :keywords** option for
  - :named** option for
  - :overhead** option for
  - :predicate** option for
  - :ref** option for
  - An Example of
  - Options to
  - New Option to
- :fixnum-array** Option for
- :flonum-array** Option for
  - SCL and
  - CLM:
- :array-leader** option for
- :array** option for
- :fixnum** option for
- :grouped-array** option for
- :list** option for
- :named-array** option for
- :named-list** option for
- :named-array-leader** option for
- :tree** option for
- sys:**
  - :bug-reports** Option for
  - :compile-load** Transformation of
  - :compile-load-init** Transformation of
  - :compile** Transformation of
  - :component-systems** Option for
  - :do-components** Transformation of
  - :fasload** Transformation of
  - :initial-status** Option for
  - :load-bfd** Transformation of
  - :maintaining-sites** Option for
  - :module** Option for
  - :name** Option for
  - :not-in-disk-label** Option for
  - :package** Option for
  - :patchable** Option for
  - :pathname-default** Option for
  - :readfile** Transformation of
  - :short-name** Option for
  - Adding New Options to
  - patch-atom** argument to **:patchable** option for
- defstruct** 2-385
- defstruct** 2-409
- defstruct** 2-385
- defstruct** 2-642
- defstruct** 2-642
- defstruct** 2-383
- defstruct** 2-399
- defstruct** macro 2-345, 2-383
- defstruct-description** property 2-407
- defstruct-define-type** 2-410
- defstruct-define-type** 2-410, 2-412
- defstruct-define-type** 2-410, 2-412
- defstruct-define-type** 2-410, 2-412
- defstruct-define-type** 2-410, 2-411
- defstruct-define-type** 2-410, 2-411
- defstruct-define-type** 2-410, 2-412
- defstruct-define-type** 2-410
- defstruct-define-type** 2-410
- defstruct-define-type** 2-409
- defstruct-define-type** 2-410
- defstruct-define-type** macro 2-409
- defstruct: :export** RN-32
- defstruct** Internal Structures 2-407
- defstruct** is Obsolete RN-28
- defstruct** is Obsolete RN-28
- defstruct** macro 2-642, 4-310
- :defstruct** option for **defstruct-define-type** 2-410, 2-412
- defstruct** Options 2-642
- defstruct** slot Initializations 2-642
- defstruct :type** 2-385
- defstruct :type** 2-385
- defstruct :type** 2-385, 2-386
- defstruct :type** 2-385, 2-386
- defstruct :type** 2-385
- defstruct :type** 2-385
- defstruct :type** 2-385
- defstruct :type** 2-385
- defstruct :type** 2-385
- defstruct :type** 2-385, 2-386
- defsubst** 2-351, 4-310
- defsubst** special form 2-305, 2-351
- defsubst-with-parent** macro 2-319
- defsystem** 4-310, 5-196
- defsystem** 4-196, 6-31
- defsystem** 4-210
- defsystem** 4-211
- defsystem** 4-209
- defsystem** 4-197
- defsystem** 4-210
- defsystem** 4-209
- defsystem** 4-196
- defsystem** 4-210
- defsystem** 4-196
- defsystem** 4-199
- defsystem** 4-194
- defsystem** 4-196
- defsystem** 4-194
- defsystem** 4-194
- defsystem** 4-195, 4-231, 4-235
- defsystem** 4-195, 4-231, 4-235
- defsystem** 4-209
- defsystem** 4-194
- defsystem** 4-214
- defsystem** 4-236
- defsystem** Modules 4-198
- defsystem** Options 4-194
- defsystem** Transformations 4-201, 4-210, 4-211
- defsystem** Macro 4-213
- :skip**

- List of Interaction Between
- Removing a
  - defsystem** special form 0-16, 4-57, 4-191, 4-231
  - defsystem** Transformations 4-209
  - defsystem** Transformations and **make-system** 4-202
  - defun** 4-310
  - defun-method** 2-437
  - defun-method** special form 2-436, 2-437
  - defunp** macro 2-302, 2-305
  - defun** special form 2-297, 2-300, 2-305
  - defvar** 4-310
  - defvar-resettable** special form 1-151
  - defvar** special form 2-126, 2-134, 4-16, 4-70
  - defwhopper-subst** RN-32
  - defwhopper-subst** macro 2-464
  - defwhopper** special form 2-463
  - defwindow-resource** 7-107
  - defwindow-resource** 7-107
  - defwindow-resource** special form 4-126, 7-107
  - defwindow-resource: :superior** RN-68
  - defwindow-resource** 7-107
  - defwindow-resource** 7-107
  - defwindow-resource** 7-107
  - defwrapper** macro 2-461
  - defwrapper** Forms Must Be Recompiled in Release 6.0 RN-28
- New Macro:
  - Degrees in trigonometric functions 2-106
  - Deinstalling a Macro 3-204
  - Deinstalling a Macro 3-204
  - Deinstall Macro (m-X) Zmacs command 3-204, 4-64
  - del** function 2-62
  - del-if** function 2-64
  - delayed-redisplay-label-mixin** 7-173
  - delayed-redisplay-label-mixin** 7-173
  - delayed-redisplay-label-mixin** flavor 7-173
  - :delayed-set-label** method of
  - tv:delayed-redisplay-label-mixin** 7-173
  - delaying-screen-management** special form 7-86, 7-89
- Files Using
  - delay time 9-99
  - Delete 3-151
  - Delete character 7-113, 7-114
  - Delete commands 1-53, 3-28
  - Delete Commands 1-20
  - Delete file 5-104
  - Delete Forward 1-53, 3-28, 3-76
  - delete** function 2-61
  - Delete Indentation 1-53, 3-28
  - delete** indicator 9-33
  - Delete line 7-114
  - :delete** message 5-114
  - Delete string 7-114
- Example of Installing and
  - [Delete (Immediate)] Command 5-233
  - [Delete (Immediate)] File System Editor menu item 5-233
- :delayed-set-label** method of **tv:**
- :update-label** method of **tv:**
- tv:**
- tv:**
- Propagation
  - :delete-char** method of **tv:sheet** 7-114
  - delete-comtab** function 7-53
  - delete-duplicates** function 2-640
  - delete-failure** 2-551
  - delete-failure** flavor 2-551
  - delete-initialization** function 8-69
  - :delete-line** method of **tv:sheet** 7-114
  - :delete-string** method of **tv:sheet** 7-114
  - \*delete-after-move-to-buffer\*** variable 6-85
  - Delete Blank Lines 1-53, 3-28
  - :delete-by-item** method of **si:heap** 2-78
  - :delete-by-key** method of **si:heap** 2-78
  - Delete contents of window 7-114
- Dired
  - si:**
  - fs:**
  - fs:**
- FSEdit
  - zwei:**
- SCL and **:replace** keyword for
  - si:**
  - fs:**
  - fs:**

- Delete Conversation (m-X) Converse Command 1-71, 6-102
  - Delete Conversation by References 6-72
  - Deleted property 6-68
  - deleted files dump parameter 0-6
  - Deleted in Dired 3-152
  - Deleted message property 1-57, 6-55
  - deleted messages 1-67
  - :deleted** option for **fs:complete-pathname** 5-120, 5-158
  - :deleted** option for **fs:directory-list** 5-117
  - :deleted** option for **open** 5-97
  - :deleted** option for **with-open-file** 5-91
  - DELETED QFILE DIRECTORY option 9-188
  - DELETED QFILE OPEN option 9-166
  - Delete Duplicate Messages m-X Zmail Command 6-56
  - Delete Duplicate Msgs (m-X) Zmail command 6-68
  - zwei:** **\*delete-expired-msgs\*** variable 6-89
  - deletef** function 5-104
  - Delete File (m-X) Zmacs command 3-135
  - Delete File Command 1-20
  - Delete Horizontal Space 1-53, 3-28
  - zwei:** **\*delete-middle-mode\*** variable 6-86
  - Delete QFILE Command 9-180
  - Delete Referenced Msgs (m-X) Zmail command 6-68, 6-71
  - Delete to end of line 7-113
  - Delete to end of window 7-113
  - Delete useless headers 6-45
  - [Delete] Command 5-233
  - [Delete] Command 5-233
  - [Delete] File System Editor menu item 5-233
  - [Delete] File System Editor menu item 5-233
  - [Delete] Map over menu item 6-80
  - [Delete] Zmail menu item 1-66, 6-55, 6-68, 6-79
  - Deleting Files 3-135
  - Deleting messages 6-80
  - Deleting Sentences 3-83
  - Deleting a command processor command table 7-53
  - Deleting and Transposing Characters 3-76
  - Deleting and Transposing Lines 3-81
  - Introduction to Deleting and Transposing Lines 3-81
  - Introduction to Deleting and Transposing Lisp Expressions 3-79
  - Introduction to Deleting and Transposing Lisp Expressions 3-79
  - Deleting and Transposing Text in Zmacs 3-71
  - Deleting and Transposing Words 3-78
  - Introduction to Deleting and Transposing Words 3-78
  - Deleting and Undeleting Messages in Zmail 6-68
  - Deleting and Undeleting Zmail Messages 1-66
  - Deleting a Region 3-94
  - Deleting Backward on the Line 3-82
  - Deleting Blank Line in Zmacs 3-167
  - Deleting Indentation in Zmacs 3-166
  - Warning Against Deleting LMFS File Partitions RN-80
  - Deleting messages from mail buffer 1-66, 6-55
  - Deleting Multiple File Versions in Dired 3-151
  - Deleting Multiple Versions 3-135
  - Introduction to Deleting Sentences 3-83
  - Deleting the Current Character 3-76
  - Deleting the Current Line 3-81
  - Deleting the Current Lisp Expression 3-79
  - Deleting the Current Sentence 3-83
  - Deleting the Current Word 3-78
  - Deleting the Last Character 3-76
  - Deleting the List Containing the Current Lisp
- Dump
- Protecting Files From Being
- Expunging
- FSEdit
- FSEdit [Wildcard]
- [Wildcard]
- Warning Against
- Introduction to

- Expression 3-79
  - Deleting the Previous Lisp Expression 3-79
  - Deleting the Previous Sentence 3-83
  - Deleting the Previous Word 3-78
  - Deleting Vs. Killing Text 3-72
  - Deleting Vs. Killing Text 3-72
  - deletion 3-43
  - Deletion 6-49
  - Deletion messages 7-113
  - Deletion, Expunging, and Versions 5-209
  - deletion commands 6-68
  - Deletion Commands 6-55
  - deletion errors 2-551
  - Deletion in Dired 3-150
  - deletion request 9-33
  - Deletions 3-43
  - del-if-not** function 2-64
  - :delimited-string** option for **prompt-and-read** 7-59, RN-58
  - :delimited-string-or-nil** option for **prompt-and-read** 7-59, RN-58
  - Delimiters 3-62, 3-83
  - Delivering packets 9-205
  - delq** function 2-61
  - Delta character 2-32
  - denominator 2-105
  - denominator 2-93, RN-34
  - denominator** function 2-108, RN-34
  - Density and Spacing 4-45
  - :density** option for **tape:carry-dump** 0-31
  - :density** option for **tape:make-stream** 5-269
  - Density tape spec parameter 0-26
  - Dens tape spec parameter 0-26
  - Den tape spec parameter 0-26
  - Dependencies 4-201
  - Dependencies 6-94
  - deposit-byte** function 2-117
  - deposit-field** function 2-117
  - Depth of recursion of printing lists 2-16
  - Derived Fields 2-268
  - Derived fields for characters 2-268, RN-16
  - Deriving Methods for Tools and Techniques 4-3
  - Descenders 3-238
  - describe** function 1-178, 2-69, 4-35, 4-104
  - :describe** message 2-453
  - Describe Variable 3-210
  - describe-area** function 8-106
  - describe-defstruct** function 2-384
  - describe-flavor** function 2-440, 4-141
  - describe-package** function 2-612
  - describe-pathname** function 5-165
  - describe-resource** function 8-136
  - describe-system** function 4-249
  - Describe Attribute List 3-149
  - Described in Tools and Techniques 4-4
  - Describe Flavor 2-471
  - Describe Flavor (m-X) Zmacs command 4-141
  - describe** function 2-645
  - :describe** keyword for **named-structure-invoke** 2-403, 2-404
  - fs:** **describe-logical-host** function 5-196
  - :describe** method of **sl:heap** 2-78
  - si:** **describe-system-versions** function 0-85
  - Describe Variable (m-X) Zmacs command 3-210
  - Describe Variable At Point 3-48
  - Describe Variable At Point (c-sh-V) Zmacs
- Overview of Accidental Zmail Message Movement and
    - LMFS Message Zmail Message File
  - Marking Files for Database Large
  - Description of Zmacs Sentence
  - Greatest common Integer
  - Program Development: Refining Stripe
  - Zmail System
  - The Device-font and Subindex
  - Features Zmacs Command:
    - SCL and

- command 4-39
- Describing Zmacs Variables 3-210
- description 7-188
- :black** pattern in dummy description 7-188
- :blank** dummy description 7-188
- :horizontal** stacking description 7-188
- :vertical** stacking description 7-188
- :white** pattern in dummy description 7-188
- Array as pattern in dummy description 7-188
  - Finding a Server Description 9-214
- List as pattern in dummy description 7-188
  - si:alphabetic** syntax description 2-34
  - si:break** syntax description 2-34
  - si:circlex** syntax description 2-34
  - si:doublequote** syntax description 2-34
  - si:macro** syntax description 2-34
  - si:single** syntax description 2-34
  - si:slash** syntax description 2-34
  - si:verticalbar** syntax description 2-34
  - si:whitespace** syntax description 2-34
- Slot description 2-407
- Symbol as pattern in dummy description 7-188
  - Description group 7-188
  - Description text 3-34
- Hardware
  - Description for Serial I/O 5-247
  - Description of Creating and Saving Buffers and Files 3-30
  - Description of Distribution Tapes 0-16
  - Description of Erasing Text 1-53, 3-28
- Reference
  - Description of Help Functions 1-88
  - Description of Motion by Lisp Expression 3-65, 3-79
  - Description of Moving the Cursor 1-50, 3-26
  - Description of Zmacs Sentence Delimiters 3-62, 3-83
- Buffer and File Attribute Descriptions 3-141
  - Command Descriptions 1-16
  - QFILE Command Descriptions 9-163
  - Service Descriptions 9-41
  - Choice box descriptor 7-289
  - Font descriptor 7-140
  - Instance descriptor 2-467
  - Numeric argument descriptor 2-324
- descriptor-file** attribute 9-24
- descriptor-file:** Namespace Object Attribute 9-22
- descriptor field 2-324
- %arg-desc-interpreted** numeric argument descriptor field 2-324
- %%arg-desc-interpreted** numeric argument descriptor field 2-324
- %%arg-desc-max-args** numeric argument descriptor field 2-324
- %%arg-desc-min-args** numeric argument descriptor field 2-324
- %%arg-desc-quoted** numeric argument descriptor field 2-324
- %%arg-desc-rest-arg** numeric argument descriptor field 2-324
- descriptor file 0-87
- descriptor file indicator 9-24
- descriptor file indicator 9-24
- descriptor file indicator 9-24
- descriptor-file** keyword for **terminal-f-argument** attribute 9-22
- descriptor files 9-24
- :deselect** message 7-99
- Deselected visibility 7-146
- :deselected-visibility** init option for **tv:blinker** 7-148
- :deselected-visibility** method of **tv:blinker** 7-149
- deseta** special form 2-133
- Program Development:
  - Design and Figure Outline 4-13
  - Designing the Advice 4-283
  - :desirability** message 9-208
  - :desirability** option for **net:define-protocol** 9-50
- Use of Characters in Source Code Where Integers Are Desired RN-19

- Use of Integers in Source Code Where Characters Are Desired RN-19
- Use of Symbolics Lisp Machine Characters in Source Code Where ASCII Characters Are Desired RN-20
- Destination word 9-96, 9-98
- Destination Address packet header field 9-106
- Destination Index packet header field 9-106
- Destroying Buffers 3-123
- Destroying cdr-code field 8-22
- Destroying data type field 8-22
- Destroying pointer field 8-22
- Destructuring 2-220, RN-30
- Destructuring RN-40
- destructuring-blind** special form 2-132
- Details 9-114
- Details 2-265
- Details of Chaosnet Hardware Protocols 9-98
- Details of Character Objects RN-14
- Details of Completion 5-121, 5-159
- determinant** function 2-259
- Determination in Pathnames 5-136
- Development: Design and Figure Outline 4-13
- Development: Drawing Stripes 4-27
- Development: Modifying the Output Module 4-112
- Development: Refining Stripe Density and Spacing 4-45
- Development Tools and Techniques 4-1
- device 7-160
- device 3-227
- device 7-103, 7-151
- Device Fonts RN-16
- :device** message 5-145
- Device-font and Subindex Derived Fields 2-268
- device-font number field RN-16
- Device generic pathname component 5-149
- :device** method of **fs:pathname** 5-166
- device-not-found** flavor 2-549
- Devices 1-109, 3-269
- devices 2-268, RN-16
- devices 5-18, 5-114
- Device tape spec parameter 0-26
- :device-wild-p** method of **fs:pathname** 5-173
- Dev tape spec parameter 0-26
- D exponential representation 2-94
- dfloat** function 2-108
- D Font Editor command 3-255, 3-260
- diagnostics 0-87
- Diagnostic test for ephemeral-object garbage collector 0-87
- :dial** example 9-44
- Dialnet 9-75
- Dialnet 9-73
- Dialnet Registries 9-81
- Dialnet Registry 9-82
- Dialnet Registry 9-83
- Dialnet Representation in the Namespace Database 9-79
- Dial Network 9-77
- Dial Network 9-85
- Dial Network Addressing 9-89
- dial** Network Medium 9-87
- dial** network type 9-15
- dialogue 9-153
- difference** function 2-101
- Differences 4-316
- Differences 2-637
- New Special Forms for Chaosnet Software Protocol -- Character Object
- math:**
  - Host Program
  - Program
  - Program
  - Program
- Program
- Keyboard as random access
- Mouse as a graphic input
- Mouse as an input
- The Character objects
- fs:**
  - Checking the Status of Hardcopy
  - Displaying characters on output
  - Output streams to buffered asynchronous
- Ephemeral-object garbage collector
- Introduction to Symbolics
- Contents of a Loading a
- Physical Connection to the Using the Terminal Program with the
- QFILE user-server
- Compiler Tools and Their SCL and Common Lisp



- Summary of Help Functions in `si:`
  - Arpanet
- Functions, Variables, and Macros for `sys:%beep`
  - Now Works on 3600-family Consoles That Support Digital Audio RN-68
  - Digital Audio Facilities 7-317
  - Digital Audio Facilities 7-319
  - Digital Audio Facilities 7-329
  - Digital Audio Facilities 7-321
  - Digital Audio Parameters 7-329
  - `digit-char-p` function 2-270
  - dimensions 2-235, 2-247
  - Direct-dial telephone network 9-15
  - Direct Access Bidirectional File Streams 5-116
  - Direct Access File Streams 5-115
  - Direct Access File Streams 5-10
  - Direct Access Output File Streams 5-116
  - Direct connection type 9-108
  - direction 9-144
  - direction 9-144
  - `:direction` message 5-13
  - `:direction` file-opening option 5-91
  - `:direction` option for `open` 5-222, 5-228, 8-43, 8-48
  - `:direction` option for `tape:make-stream` 5-269
  - `:direction` option for `with-open-file` 5-91
  - `:direction` stream option for `net:define-server` 9-51
- Effect of Character Set Translation on
  - Window size in the receive
  - Window size in the transmit
- Absolute branch format
  - Binary format
  - Cardinal format
- Carriage return format
- Conditional format
- Continuation format
- Date and time format
- Decimal format
- Escape format
- Exponential format
- Fixed-point format
- Floating-point format
- Free format
- Fresh line format
- Hexadecimal format
- Indentation format
- Indirection format
- Iteration format
- Justification format
- Keyboard character format
- Lowercase format
- Lozenge format
- Octal format
- Ordinal format
- Page separator format
- Plural format
- Radix
- Relative branch format
- Roman numeral format
  - SCL and `^E`
  - SCL and `^G`
  - SCL and `^T`
- Slashification format
  - Space format
  - Tabulation format
  - Tilde format
  - Time format
- directive 5-35
- directive 5-31
- directive 5-36
- directive 5-34
- directive 5-36
- directive 5-35
- directive 5-42
- directive 5-31
- directive 5-41
- directive 5-32
- directive 5-32
- directive 5-32
- directive 5-30
- directive 5-34
- directive 5-32
- directive 5-41
- directive 5-34
- directive 5-37
- directive 5-39
- directive 5-33
- directive 5-34
- directive 5-34
- directive 5-31
- directive 5-36
- directive 5-34
- directive 5-35
- directive 5-36
- directive 2-644
- directive 2-644
- directive 2-644
- directive 5-30
- directive 5-36
- directive 5-35
- directive 5-34
- directive 5-42

Time interval format	directive	5-42
Time-of-day format	directive	5-42
User-function format	directive	5-41
~> format	Directive	5-41
~< format	Directive	5-34
~\$ format	Directive	5-32
~% format	Directive	5-34
~& format	Directive	5-34
~* format	Directive	5-35
~<Cr> format	Directive	5-35
~< format	Directive	5-39
~? format	Directive	5-34
~@* format	Directive	5-35
~@T format	Directive	5-36
~a format	Directive	5-30
~B format	Directive	5-31
~c format	Directive	5-33
~d format	Directive	5-31
~e format	Directive	5-32
~f format	Directive	5-32
~G format	Directive	5-35
~o format	Directive	5-31
~P format	Directive	5-35
~Q format	Directive	5-41
~R format	Directive	5-36
~s format	Directive	5-30
~T format	Directive	5-35
~X format	Directive	5-32
~[Str0;Str1;...;Strn] format	Directive	5-36
~\Date\ format	Directive	5-42
~\Datime\ format	Directive	5-42
~\Time-Interval\ format	Directive	5-42
~\Time\ format	Directive	5-42
~_ format	Directive	5-41
~{Str} format	Directive	5-37
~  format	Directive	5-34
~- format	Directive	5-34
SCL and format function	directives	2-644
~( and ~) format	Directives	5-34
Accessing	Directories	4-45
CLM: Accessing	Directories	5-117
Editing	Directories	2-645
Functions for Accessing	directories	3-144
DIRECTORIES-ONLY QFILE DIRECTORY	Directories	5-117
option		9-188
Files and	Directories Used by the Mailer	6-113
>dump-maps	directory	0-6
>repatriations	directory	0-38
Backup dump tape	directory	0-10
Create	Directory	3-131
Creating a	Directory	3-131
Display	Directory	3-132
Displaying the Contents of a	Directory	3-132
Edit	directory	1-159
Example of Creating a	Directory	3-131
File	directory	5-117
Home	directory	5-163
List contents of a	directory	3-131
Listing Files in a	Directory	3-131
Opening and Closing a	Directory	5-232
Root	directory	1-208, 5-215
Show Directory/View	Directory	3-132
Sys:distribution;	directory	0-18, 0-19
Sys: l-ucode; logical	directory	1-210, 5-217
Directory Completion	Directory	5-122, 5-161

- Display
- Clean
- Create
- Edit
- Show
- View
- :deleted** option for **fs:**
- :noerror** option for **fs:**
- fs:**
- Show
- fs:**
- Create
- Edit
- Expunge
- Show
- Show FEP
- QFILE
- File system editor
- File types of the patch
- Patch
- Tape
- SCL and
- X= date
- fs:**
- :no-extra-info** option for **fs:**
- :sorted** option for **fs:**
- Maclisp
- fs:directory-link-opaque-dirlist** instead of **fs:**
- => link indicator in
- How to Interpret
- Wildcard
- FEP
- fs:**
- New Message to Error Flavor **fs:**
- fs:**
- DELETED QFILE
- DIRECTORIES-ONLY QFILE
- FAST QFILE
- NO-EXTRA-INFO QFILE
- QFILE
- Directory Pathnames and
- :relative** relative
- Site
- FSEdit [Create Inferior
- [Create Inferior
- Applying Arbitrary Functions to Files in
- Changing File Properties in
- Comparing Recent Versions of Files in
- Copying and Renaming Files in
- Default Pathnames in
- Deleting Multiple File Versions in
- Entering
- Finding Files That Have Not Been Backed up in
- :directory** message 5-145
- Directory (c-X c-D) Zmacs command 4-45
- Directory (m-X) Zmacs command 3-136
- Directory (m-X) Zmacs command 3-131
- Directory (m-X) Zmacs command 3-144
- Directory (m-X) Zmacs command 3-132
- Directory (m-X) Zmacs command 3-132, 4-45
- directory-list** 5-117
- directory-list** 5-117
- directory-list** function 5-117
- :directory-pathname** message 2-549, RN-39
- Directory/View Directory 3-132
- directory-already-exists** flavor 2-550
- Directory Command 1-19
- Directory Command 1-20
- Directory Command 1-22
- Directory command 1-35, 1-200
- Directory Command 1-36
- Directory Data Format 9-186
- directory display 5-236
- :directory** FEP file property 5-227, 8-48
- directory file 4-236
- Directory File 4-234
- directory file 0-6
- directory** function 2-645
- Directory generic pathname component 5-149
- directory last expunged indicator 5-236
- directory-link-opaque-dirlist** instead of **fs:directory-**
- list example 5-132
- directory-list** 5-117
- directory-list** 5-117
- directory** function 5-201
- directory-list** example 5-132
- directory listings 5-236
- Directory Listings 5-236
- Directory Mapping 5-155
- :directory** method of **fs:pathname** 5-166
- directory name 5-222, 8-43
- directory-not-empty** flavor 2-552
- directory-not-found** RN-39
- directory-not-found** flavor 2-549
- DIRECTORY option 9-188
- DIRECTORY option 9-188
- DIRECTORY option 9-188
- DIRECTORY option 9-188
- Directory Options 9-188
- :directory-pathname-as-file** method of
- fs:pathname** 5-144
- Directory Pathnames and Directory Pathnames as
- Files 5-142
- Directory Pathnames as Files 5-142
- Directory QFILE Command 9-185
- directory specifier syntax in logical pathnames 5-186
- Directory TOPS-20 pathname component 5-183
- directory translation 5-195
- :directory-wild-p** method of **fs:pathname** 5-173
- Directory] Command 5-234
- Directory] File System Editor menu item 5-233
- Dired 3-153
- Dired 3-149
- Dired 3-150
- Dired 3-150
- Dired 3-147
- Dired 3-151
- Dired 3-144
- Dired 3-152

Getting Out of Dired 3-147  
 Hardcopying From Dired 1-108, 3-268  
 Loading a File In Dired 3-148  
 Marking Files for Deletion In Dired 3-150  
 Marking Files to Be Hardcopied In Dired 3-153  
 Moving Around In Dired 3-149  
 Online Documentation for Dired 3-148  
 Overview of Dired 3-144  
 Protecting Files From Being Deleted In Dired 3-152  
 Protecting Files From Being Reaped In Dired 3-152  
 Setting Generation Retention Count on Files In Dired 3-152  
 Viewing and Editing File Contents in Dired 3-149  
 Viewing File Attributes in Dired 3-149  
 Dired Abort 3-148  
 Dired Commands 3-145, 3-146  
 Dired Delete 3-151  
 Dired Exit 3-148  
**dired** function 1-159  
 Dired Help 3-148  
 Dired Menu 3-148, 3-149  
 Dired Srccom 3-150  
 Dired Undelete 3-151  
 Dired (m-X) Zmacs command 3-144, 4-45  
 Dired Apply Function 3-153  
 ! Dired command 3-153  
 \* Dired command 3-152  
 , Dired command 3-149  
 = Dired command 3-150  
 ? Dired command 3-148  
 A Dired command 3-153  
 ABORT Dired command 3-148  
 C Dired command 3-150  
 c-D Dired command 3-151  
 c-K Dired command 3-151  
 c-N Dired command 3-149  
 c-P Dired command 3-149  
 D Dired command 3-151  
 E Dired command 3-150  
 END Dired command 3-148  
 HELP Dired command 3-148  
 K Dired command 3-151  
 P Dired command 1-108, 3-153, 3-268  
 Q Dired command 3-148  
 R Dired command 3-150  
 RUBOUT Dired command 3-151  
 SPACE Dired command 3-149  
 U Dired command 3-151  
 V Dired command 3-150  
 Dired Command Summary 3-146  
 Dired Complement No Reap Flag 3-152  
 The Dired Display 3-144  
 Updating the Dired Display 3-145  
 Dired Edit File 3-150  
 Dired Hardcopy File 1-108, 3-153, 3-268  
 Dired Mode in Zmacs 3-144  
 Dired move point 3-149  
 Dired Next Undumped 3-153  
 Dired Reverse Undelete 3-151  
 Dired View File 3-150  
**dis:depseudo-system** special form 0-16, 0-25  
**dis:load-distribution-tape** function 0-87  
**Disable** Commands 1-20  
**mailer:** **disable** function 6-111  
**netl:** **disable** function 9-142  
**:disable** message 9-212  
**:disable-services** initialization list 8-71

- Disable all character set translation in ASCII files 5-91
- Show Disabled Services Command 1-35
- Disable Services Command 1-20
- :disable-services** option for **add-initialization** 8-67
- Disable special treatment of Rubout in ASCII files 5-91
- Enabling and disabling of floating-point traps 2-535
- disassemble** function 1-179, 2-302, 4-104
- Disassemble (m-X) Zmacs command 4-104
- :discard-current-record** message to input tape streams 5-273
- Disembodied property list 2-67
- Disk 0-43, 5-239
- disk 1-201
- Disk address 8-29
- Disk Arrays 8-31, 8-35
- Disk blocks 8-29
- Disk dismount 1-201, 1-213
- Disk drives 1-214, 8-29
- Disk error 2-538
- Disk Events 8-32
- Disk latency 8-50
- Disk mount 1-201, 1-213
- Disk pack 8-29
- Disk pages 8-29
- Disk Performance 8-50
- Disk read 8-35
- Disk resetting 1-201, 1-213
- Disk streams 5-221, 8-42
- Disk switching 1-201, 1-213
- Disk Transfers 8-35
- Disk Types 1-214
- Disk unit 8-29
- Disk write 8-35
- si:** **disk-array** resource 8-31
- sys:** **disk-error** flavor 2-538
- si:** **disk-event** resource 8-32
- Show Disk-label command 1-200
- sys:** **disk-read** function 8-36
- disk-save** function 0-46
- World load disk-saves 0-48, 1-182
- Add Disk-type command 1-201
- Set Disk-type command 1-201
- Clear Disk-types command 1-201
- sys:** **disk-write** function 8-36
- Block number field in disk address 8-29
- Translate relative file block number into disk address 5-225, 8-46
- Unit number field in disk address 8-29
- Disk and FEP File System Utilities 8-58
- si:** **disk-array-area** variable 8-31
- si:** **disk-array-block-count** function 8-31
- Number of disk blocks disk array can contain 8-31
- si:** **disk-array-checkwords** function 8-31
- Default area to allocate disk arrays 8-31
- Bytes available in a disk block 8-29
- Data cells available in a disk block 8-29
- si:** **disk-block-length-in-bytes** variable 8-30
- Disk block not found 8-40
- Number of disk blocks disk array can contain 8-31
- D2257 disk drive 1-214
- M2284 disk drive 1-214
- M2351 disk drive 1-214
- Maxtor XT-1140 disk drive 1-214
- T306 disk drive 1-214
- Multiple disk drives 1-213

- Disk drive support 1-214
- Disk Error Codes 8-33, 8-39
- sys:** **\*disk-error-codes\*** constant 8-39
- Disk Error Conditions 8-38
- sys:** **%disk-error-device-check** constant 8-39
- sys:** **%disk-error-ecc** constant 8-40
- :disk-event** method of **si:** **disk-error-event** 8-38
- :error-type** method of **si:** **disk-error-event** 8-39
- :flushed-transfer-count** method of **si:** **disk-error-event** 8-39
- si:** **disk-error-event** flavor 8-38
- Disk Error Handling 8-36
- Storing disk error information 8-32
- Disk Error Meters 8-41
- Peek utility for disk error meters 8-41
- sys:** **%disk-error-misc** constant 8-40
- sys:** **%disk-error-not-ready** constant 8-39
- sys:** **%disk-error-overflow** constant 8-40
- sys:** **%disk-error-search** constant 8-40
- sys:** **%disk-error-seek** constant 8-40
- sys:** **%disk-error-select** constant 8-39
- sys:** **%disk-error-state-machine** constant 8-40
- Disk Error Variables 8-38
- Disk Event Accessor Functions 8-33
- si:** **disk-event-count** function 8-33
- si:** **disk-event-enq-task** function 8-33
- si:** **disk-event-error-cylinder** function 8-34
- si:** **disk-event-error-dcw** function 8-35
- si:** **disk-event-error-flushed-transfer-count** function 8-34
- si:** **disk-event-error-head** function 8-34
- si:** **disk-event-error-sector** function 8-34
- si:** **disk-event-error-string** function 8-34
- si:** **disk-event-error-type** function 8-33, 8-36
- si:** **disk-event-error-unit** function 8-34
- si:** **:disk-event** method of **si:disk-error-event** 8-38
- si:** **disk-event-size** function 8-33
- si:** **disk-event-suppress-error-recovery** function 8-34, 8-36
- si:** **disk-event-task-done-p** function 8-33
- Disk event tasks 8-32
- Disk event tasks currently allocated 8-33
- Disk event tasks that can be concurrently allocated 8-33
- Saving messages in Disk File Names for Zmail 6-94
- disk files 6-39
- Disk Format command 1-201
- Disk Handling Commands 1-213
- Disk label comments 1-209, 5-216
- Disk label information 1-200, 1-213
- Reducing disk latency 8-53
- Minimum disk latency for transfers 8-50
- :disk** option for **si:sb-on** 8-80
- Disk page number (DPN) 8-29
- Examples of High Disk Performance 8-52
- Disk Restore command 1-201
- Disk Restore command and software installation 0-87
- Formatting disks 1-201
- si:** **disk-sector-data-size32** variable 8-30
- Disk sequence break 8-80
- Why Can't I Write Out Files When I Have Free Disk Space? 1-229
- Instructions for Managing Disk Space on the 3640 0-55
- :block** disk stream 5-222, 8-43
- :input** disk stream 5-222, 8-43
- :output** disk stream 5-222, 8-43
- :probe** disk stream 5-222, 8-43
- Disk stream messages 5-224, 8-45

- :hang-p** keyword for block
  - Block
  - Bldirectional
  - Block
  - Block mode
  - Input and Output
  - Operating on
    - 3600-family
    - 3600-family
    - Buffering
  - Grouping related
  - Synchronizing
  - Overlapping
  - Setting
  - Initializing a
  - Mounting a
    - Multiple
    - Disk
- Change to **define-prompt-and-read-type**
  - CLM: Standard
- Adjusting the FED
- Center-dot character in TOPS-20 pathname
- Customizing Command Processor
- Debugger Commands for Information
- Display status of file system
  - Documentation
  - Error
  - FED
- File system editor directory
  - Inspection Pane
- Selecting a FED Character From the [Show Font]
  - The Dired
  - The Filter Creation
  - Universe Creation
  - Universe Selection
  - Updating the
  - Updating the Dired
  - Zmail
- sys:**
  - Set
  - FUNCTION Key:
    - How Windows
    - Messages to
    - Subject or Text Zmail
    - Entering the
      - [Edit]
      - [Retry]
    - Zmail: Help
    - How Windows
- disk stream messages 8-53
- disk stream messages 5-226, 8-47
- disk streams 5-222, 5-226, 8-43, 8-47
- Disk Streams 5-226, 8-47
- disk streams 5-221, 8-42
- Disk Streams 5-226, 8-46
- Disk Streams 5-224, 8-45
- Disk System Definitions and Constants 8-29
- Disk System User Interface 8-29
- disk transfers 8-31
- disk transfers 8-36
- disk transfers 8-32
- disk transfers with computation 8-50
- disk type 1-201, 1-213
- Disk Unit 8-58
- Disk Unit 8-58
- Disk Units 1-213
- dismount 1-201, 1-213
- Dismount command 1-201
- Dispatch Functions RN-59
- Dispatching Macro Character Syntax 2-644
- dispatch** special form 2-182
- displace** function 2-371
- Displaced Arrays 2-239, 2-241, 2-248, 9-198
- :displaced-conformality** option for **make-array** 2-241
- :displaced-index-offset** option for **make-array** 2-240, 2-241
- Displaced macro expansions 2-371
- :displaced-to** option for **make-array** 2-239, 2-241
- Displacing Macros 2-371
- Display 3-255
- display 5-183
- Display 1-166
- Display 4-265
- display 1-185, 4-303
- display 1-122
- Display 1-193, 4-255
- display 3-225
- display 5-236
- Display 4-299
- Display 3-233
- Display 3-144
- Display 6-60
- Display 6-64
- Display 6-64
- display 7-303
- Display 3-145
- display 6-13
- Display Debugger 4-80
- Display Directory 3-132
- Display text 3-34
- display-notification** function 7-128
- display-notifications** function 7-127
- Display-string command 1-201
- Display and Hardcopy Commands 1-141
- Display argument list 3-47, 3-48
- Display Characters 7-108
- Display Characters on Windows 7-111
- display column heading 1-57
- Display Debugger From the Debugger 4-265
- Display Debugger menu item 4-80
- Display Debugger menu item 4-80
- Display Directory (c-X c-D) Zmacs command 4-45
- Displayed Automatically 6-5
- Display Graphic Output 7-118
- Displaying Fonts 1-75

- Displaying Characters in the Font in FED 3-233
  - Displaying characters on output devices 2-268, RN-16
  - Displaying data structures 7-303
  - Displaying Help Messages in the Input Editor 5-66, 7-34
  - Displaying multiple values of a function 7-308
  - Displaying Notifications 7-127
  - Displaying previous keystrokes 3-46
  - Displaying Prompts in the Input Editor 5-65, 7-33
  - Displaying pruned topics 1-121
  - Displaying the Contents of a Directory 3-132
  - Displaying the Next Possibility 3-110
  - Displaying the Next Possibility 3-110
  - Displaying the Next Screen 3-55
  - Displaying the Previous Screen 3-56
  - display in the Document Examiner 1-129
  - display-item-list** function 7-19, 7-283, RN-57
  - Display menu item 6-60
  - Display menu item 6-61
  - Display menu item 6-81
  - Display menu item 6-61
  - Display menu item 6-64
  - Display menu item 6-60
  - Display menu item 6-64
  - Display menu item 6-60
  - Display menu item 6-64
  - Display menu item 6-61
  - Display menu item 6-61
  - Display menu item 6-60
  - Display menu item 6-81
  - Display Next Screen and Previous Screen RN-47
  - Displays 3-263
  - Displays 4-68
  - Display status of active processes 1-185, 4-303
  - Display status of areas 1-185, 4-303
  - Display status of file system display 1-185, 4-303
  - Display status of hostat 1-185, 4-303
  - Display status of window area 1-185, 4-303
  - Display system information 4-304
  - Disposition (m-X) Zmail command 6-42
  - Distinguishing Characters From Blips RN-22
  - distributed in patch tape format 0-87
  - Distributing a new world to other machines 0-87
  - distributing FEP files 0-15
  - Distributing transportable systems and libraries 0-15
  - Distribution Copier 0-18
  - Distribution Dumper 0-19
  - Distribution Loader 0-17
  - Distribution Mapper 0-18
  - distribution; directory 0-18, 0-19
  - distribution tape 0-18
  - distribution tape 0-87
  - Distribution Tapes 0-16
  - Distribution Tape Subsystem 0-15
  - divide-by-zero** flavor 2-479, 2-534
  - Division 2-102, 2-103
  - division 2-93
  - Division by zero error 2-534
  - divisor 2-105
  - dlet\*** special form 2-133
  - dlet** special form 2-133
  - D message status 1-57, 6-55
  - [Do it] 7-241, 7-247, 7-251
  - do\*-named** special form 2-192
  - do\*** special form 2-191
- Receiving and
    - Example of
    - Documentation
    - si:**
      - [Abort] Filter Creation
      - [And] Filter Creation
      - [Before] Filter Creation
      - [Close] Filter Creation
      - [Current] Universe Creation
      - [Done] Filter Creation
      - [Loaded] Universe Creation
      - [New filter] Filter Selection
      - [New universe] Universe Selection
      - [Not] Filter Creation
      - [Or] Filter Creation
      - [Sample] Filter Creation
      - [Unseen] Filter Selection
    - SCROLL and m-SCROLL Now
    - Mousing on the FED List Fonts and Show Font
    - Other
  - Show Draft
  - Installing new releases
  - Transporting and
    - Sys:
      - Copied
      - Copying
      - Loading sources from a
      - Description of
    - sys:**
    - Integer
    - Greatest common



- What to
  - Hardcopy Private
  - Load Private
  - Read Private
  - Save Private
- Browsing
- Clarification of **gc-on** Printed
  - CLM:
    - Function
    - Installing
    - Long
  - Looking up
  - Mouse
  - Online
  - SCL
  - Show
  - Status line
- Use of Fonts in the Zmail Command
  - Documentation Conventions 1-235
  - Documentation database 1-119
  - Documentation display 1-122
  - documentation** function 2-302, 2-322, 4-39, 4-42
  - :documentation** keyword 7-269
  - Documentation keywords 1-120
  - Documentation overview 1-120, 1-127
  - Documentation record 1-119
  - Documentation strings 4-39, 4-42
  - Documentation (an Overview) 1-122
  - Documentation (c-sh-D) Zmacs command 4-39, 4-42
  - Documentation (m-sh-D) Zmacs command 4-39, 4-42
  - :documentation-topic** command processor argument type 7-48
  - documentation** as **setf** argument 2-639
  - Documentation binary file 1-119
  - Documentation Changes RN-2
  - Documentation Command 1-35
  - Documentation concept record 1-119
  - documentation database 1-121
  - Documentation Database 1-121
  - Documentation database installation 1-121
  - Documentation display in the Document Examiner 1-129
  - Documentation find commands 1-120, 1-122
  - documentation for commands 3-45
  - Documentation for Dired 3-148
  - documentation for prefixes 3-45
  - documentation** function 2-645
  - documentation index files 1-121
  - documentation item 6-61
  - Documentation Line 1-5, 3-57, 6-5, 6-15, 6-67, 6-75, 7-156, 7-207, 7-211, 7-259
  - Documentation Line 6-5
  - Documentation Line in Zmacs 3-57
  - Documentation Lookup Commands 1-122
  - Documentation Map RN-4
  - :documentation** menu item option 7-211, 7-224
  - :documentation** menu item type 7-311
  - Documentation Notation Conventions 1-231
- SCL and
  - Release 6.0
  - Show
- Pruning the Topics Pruned From the
  - Online
  - Online
  - Online
  - SCL and
  - Loading
  - Zmail
  - Mouse
- Zmail: Mouse
  - Mouse
- Release 5.0 to Release 6.0

- Documentation object record 1-119
- :documentation** Option for **defflavor** 2-441, 2-449, 4-141
- :documentation** specification for **tv:choose-variable-values** 7-259
- documentation string 4-129
- Documentation string functions 2-302, 2-322
- Documentation System 1-119
- Documentation topic name 1-119, 1-120
- Documentation topic type 1-119, 1-120
- documentation window 7-311
- Document Examiner 1-133
- Document Examiner 1-129
- Document Examiner 3-40
- Document Examiner 1-119, 1-133
- Document Examiner 1-119
- Document Examiner 1-127
- Document Examiner RN-52
- Document Examiner 1-121
- Document Examiner 1-134
- Document Examiner, Editor, and Command Processor 1-122
- Document Examiner Actions 1-130, 1-131, 1-132
- Document Examiner and Editor 1-123
- Document Examiner command menu 1-133
- Document Examiner Command Pane 1-133
- Document Examiner Command Pane Actions 1-133
- Document Examiner List of Bookmarks 1-132
- Document Examiner List of Current Candidates 1-131
- Document Examiner menu item 1-126
- Document Examiner menu item 1-123
- Document Examiner menu item 1-127, 1-133
- Document Examiner menu item 1-122
- Document Examiner menu item 1-127, 1-133
- Document Examiner menu item 1-125, 1-133
- Document Examiner Private Documents 1-136
- Document Examiner Viewer 1-129
- Document Examiner viewers 1-129
- Document Examiner Window 1-129
- document name 1-136
- :document-proceed-type** message 2-517
- :document-proceed-type** method of **condition** 2-529
- Documents 1-136
- :document-special-command** message 2-526
- DOD Internet 9-15
- do-external-symbols** special form 2-609
- doing loop** keyword 2-212
- dolist** special form 2-193
- do-local-symbols** special form 2-609
- do loop** keyword 2-212
- domain-addressing formats 6-95
- Domain Addressing 6-95
- Domains 3-106
- Domains in Zmacs 3-106
- [Don't Save] Save-Exit menu item 6-17
- Done bit 9-131
- Done bit 9-131
- [Done] Filter Creation Display menu item 6-60
- :do-not-echo** option 5-63, 7-31
- :dont-delete** FEP file property 5-227, 8-48
- :dont-delete-flag-set** flavor 2-552
- \*dont-reply-to\*** variable 6-90
- :dont-reply-to-mailing-lists:** Site Object Attribute 9-20
- tv: dont-select-with-mouse-mixin** flavor 7-100
- Mouse
- Using the Online
- Mouse
- Completion in the Documentation display in the
- Entering HELP in the
- Introduction to the
- Lookup Commands Available in the
- New Feature in Release 6.0: the
- Recovering From a Stuck
- Repositioning Text in the
- Lookup Commands Available in the
- Lookup Commands Available in the
- [Find]
- [Find (R)]
- [Select]
- [Show]
- [Show (M)]
- [Show (R)]
- Multiple
- Private
- Document Examiner Private
- Internet RFC822
- Zmail Support for Internet
- Introduction to Tag Tables and Search
- Tag Tables and Search
- Receive
- Transmit
- fs:**
- zwei:**
- tv:**

- do** special form 2-167, 2-189, 2-359
- Dot (.) in symbols 2-357
- dotimes** special form 2-192
- Dotted list 2-25, 2-41
- Dotted pair 1-227
- Double quotes 9-24
- Double-arrow character 5-185
- Double-arrow character in logical pathnames for **nil** 5-186
- cl:** **double-float** format 2-23
- :double-float** returned by **typep** 2-9
- Double-floats 2-4, 2-22, 2-89
- Double-quote character strings 1-233
- sys:** **double-float-p** function 2-8
- Double-precision floating-point numbers 2-89
- sl:** **doublequote** syntax description 2-34
- Sending press files to Chaosnet Powering
  - Dover printer 9-128
  - Dover Printer Protocol 9-128
  - down 1-201
  - Down Line 3-63, 3-81
  - Down List 3-66
  - Down Comment Line (m-N) Zmacs command 4-23
  - downfrom loop** keyword 2-207, 2-225
  - Down in Zmacs 3-166
  - Down Nesting Levels 3-66
  - Down Real Line 1-50, 3-26, 3-63, 3-81
  - Down to Lisp Comment on Next Line in Zmacs 3-172
  - downto loop** keyword 2-207, 2-225
  - Downward funargs 2-139
  - sys:** **downward-funarg** declaration 2-139, 2-141, 2-313
  - sys:** **downward-function** declaration 2-139, 2-140, 2-312
  - The **sys:downward-function** and **sys:downward-function** Declarations 2-140
  - The **sys:downward-function** and **sys:downward-function** Declarations 2-140
  - dpb** function 2-117
  - dpit-logo:** Printer Object Attribute 9-18
  - (DPN) 8-29
  - sys:** **%dpn-unit** constant 8-30
  - sys:** **%dpn-page-num** constant 8-30
  - Draft files 6-39
  - Save Draft as Msg Zmail Menu Item 6-41
  - Show Draft Disposition (m-X) Zmail command 6-42
  - Zmail Draft File Facility 6-39
  - [Continue (R)] Draft File Zmail Menu Item 6-39
  - Restore Draft File Zmail Menu Item 6-39
  - Save Draft File Zmail Menu Item 6-39
  - Write Draft File Zmail Menu Item 6-39
  - Zmail Draft Message Facility 6-41
  - Reply with Draft Messages Zmail Command 6-42
  - [Continue (R)] Draft Message Zmail Menu Item 6-41
  - Saving and Restoring Zmail Message Drafts 6-39
  - sys:** **:draw-char** method of **tv:sheet** 7-121
  - sys:** **%draw-line** function 7-126
  - sys:** **%draw-rectangle** function 7-126
  - :draw-rectangle** message 7-118
  - sys:** **:draw-rectangle** method of **tv:sheet** 7-124
  - sys:** **%draw-triangle** function 7-126
  - Draw a cubic spline 3-259
  - Draw a line 3-259
  - :draw-circle** method of **tv:graphics-mixin** 7-124
  - :draw-circular-arc** method of **tv:graphics-mixin** 7-124
  - :draw-closed-curve** method of **tv:graphics-mixin** 7-124
  - :draw-cubic-spline** 7-125
  - :anticyclic** boundary condition for

- :clamped** boundary condition for
- :cyclic** boundary condition for
- :relaxed** boundary condition for
- Moving the drawing 3-246, 3-259
- Scrolling the drawing 3-255
- Drawing characters 7-108
- Drawing pane 3-227, 3-262
- Drawing a character 3-227
- drawing characters 3-235
- drawing characters 3-235
- Drawing Characters and Strings on Windows 7-121
- Drawing Characters in FED with the Mouse 3-235
- Drawing characters with the mouse 3-235
- drawing command 3-236
- drawing help 3-243
- Drawing Horizontally and/or Vertically in FED 3-255
- Drawing Horizontally and/or Vertically in FED 3-255
- Drawing Horizontally in FED 3-250
- Drawing Horizontally in FED 3-250
- Drawing in FED 3-235
- Drawing in FED 3-255
- Drawing in FED 3-243
- Drawing in FED 3-246
- Drawing in FED 3-255
- drawing in the gray plane 3-239, 3-260
- Drawing Into a FED Register 3-241
- Drawing Lines and Curves in FED 3-246
- Drawing Lines on Windows 7-122
- Drawing Onto Arrays 7-126
- Drawing on unprepared sheet error 2-537
- Drawing Pane 3-227
- drawing pane 3-256
- Drawing Pane 3-262
- Drawing Pane 3-256
- Drawing Pane 3-256
- drawing pane 3-256, 3-259
- drawing pane 3-262
- Drawing Pane Menu 3-228
- Drawing past edge of screen error 2-537
- Drawing pictures onto arrays 7-118
- Drawing Points on Windows 7-120
- Drawing Polygons and Circles on Windows 7-124
- Drawings in FED 3-243, 3-259
- Drawings in FED 3-243, 3-259
- Drawings in FED 3-246
- Drawing Splines on Windows 7-125
- Drawing Stripes 4-27
- Drawing Transformation 3-259
- Drawing Vertically in FED 3-250
- Drawing Vertically in FED 3-250
- :draw-line** method of **tv:graphics-mixin** 4-14, 4-116, 7-122
- :draw-lines** method of **tv:graphics-mixin** 7-122
- [Draw Line] Font Editor menu item 3-246, 3-259
- Draw Mode Menu 3-228, 3-235, 3-262
- Draw Mode Menu 3-262
- draw mode menu 3-262
- Font Editor
  - Automatic
  - Moving the
  - Scrolling the
  - Contracting a
  - Stretching a
- Centering the
- Clearing the
- Moving the
- Positioning the
- Move
- Saving a
- Primitives for
  - FED
  - Height and width of the
  - Mousing on the FED
  - Setting the Box Size in the FED
  - Setting the Height and Width of the FED
  - Size of boxes in the
  - Using the mouse in the
- Reflecting
- Rotating
- Stretching and Contracting
  - Program Development:
  - FED Configuration and
  - Contracting a
  - Stretching a
- Mousing on the FED
- Using the mouse in the

- [Clear Points] Font Editor
- [Flip Points] Font Editor
- [Set Points] Font Editor
- sys:**
- sys:**
  - draw mode menu item 3-235
  - draw mode menu item 3-235
  - draw mode menu item 3-235
  - draw-off-end-of-screen** flavor 2-537
  - draw-on-unprepared-sheet** flavor 2-537
  - :draw-point** method of **tv:graphics-mixin** 7-120
  - :draw-regular-polygon** method of **tv:graphics-mixin** 7-125
  - [Draw Spline] Font Editor menu item 3-246, 3-259
  - :draw-string** method of **tv:graphics-mixin** 7-121
  - :draw-triangle** method of **tv:graphics-mixin** 7-124
  - :draw-wide-curve** method of **tv:graphics-mixin** 7-124
- Dribble Files 1-183
- dribble-end** function 1-183
- dribble-start** function 1-183
- dribble** function 2-645
- SCL and
  - D2257 disk drive 1-214
  - M2284 disk drive 1-214
  - M2351 disk drive 1-214
- Maxtor XT-1140 disk drive 1-214
- T306 disk drive 1-214
- Tape
  - Drive ID 0-6
  - Registering a Tape Drive in the Namespace 0-72
  - Disk drives 1-214, 8-29
  - Multiple disk drives 1-213
  - Disk drive support 1-214
- DTE 5-247
- dtp-array** data type 8-12
- dtp-closure** data type 8-12
- dtp-fix** data type 8-12
- dtp-instance** data type 2-467, 8-12
- dtp-list** data type 8-12
- dtp-locative** data type 8-12
- dtp-nil** data type 8-12
- dtp-null** data type 8-12
- dtp-symbol** data type 8-12
- dtp-compiled-function** data type 8-12
- dtp-element-forward** data type 8-12
- dtp-even-pc** data type 8-12
- dtp-extended-number** data type 8-12
- dtp-external-value-cell-pointer** data type 8-12
- dtp-gc-forward** data type 8-12
- dtp-header-forward** data type 8-12
- dtp-header-l** data type 8-12
- dtp-header-p** data type 8-12
- dtp-instance-header** data type 2-467
- dtp-lexical-closure** data type 8-12
- dtp-odd-pc** data type 8-12
- dtp-one-q-forward** data type 8-12
- dtp-select-method** data type 2-467
- Restriction
  - Due to Scope 2-503
  - Dummy parts 7-188
  - dummy description 7-188
  - dummy description 7-188
  - dummy description 7-188
  - Array as pattern in dummy description 7-188
  - List as pattern in dummy description 7-188
  - Symbol as pattern in dummy description 7-188
- Dump map 0-6
- dumparrays** Maclisp function 2-262
- Dump deleted files dump parameter 0-6
- dumped 0-20
- dumped dump parameter 0-6
- Dumper 0-15, 0-25
- dumper 4-309, 4-316
- Selecting system to be
  - Set date
- bin** file

- Carry-tape Distribution
- Giving the Go-ahead to the
  - Dumper 0-30
  - Dumper 0-19
  - Dumper 0-23
  - Dumper Choice Boxes 0-21
  - Dumper Choose Variable Values Menu 0-19
  - Dumper Command Menu 0-22
  - Dumper Systems List 0-20
  - dump-forms-to-file** function 4-331, 5-241
  - dumping 0-20
  - Dumping 0-23
  - dumping 0-20
  - Dumping, Reloading, and Retrieving 0-5
  - Dumping Hash Tables to Files 2-75
  - Dumping individual files 0-15
  - Dumping World Loads 0-20
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - dump parameter 0-6
  - Dumps 0-6
  - dump tape directory 0-10
  - Dump Type dump parameter 0-6
  - [Dump] File System Maintenance menu item 0-39
  - [Dump] File System Maintenance menu item 0-39
  - Duplicate Messages m-X Zmail Command 6-56
  - Duplicate Msgs (m-X) Zmail command 6-68
  - Dynamic closures 2-303, 2-305, 2-331
  - Dynamic scope 2-126
  - Dynamic space 8-117
  - dynamic-....menu** 7-237
  - dynamic-....menu** 7-237
  - Dynamically RN-55
  - Dynamic Breakpoints and Stepping Through Compiled Code 4-267
  - Dynamic Closure-manipulating Functions 2-335
  - Dynamic Closure? 2-331
  - Dynamic Closures 2-333
  - Dynamic Closures 2-295
  - dynamic columns 7-236
  - Dynamic Item List Menus 7-203, 7-235
  - Dynamic Item List Menus 7-236
  - dynamic-item-list-mixin** flavor 7-235
  - Dynamic Item List Mixins 7-235
  - Dynamic Menu Example 7-237
  - Dynamic Menus 7-237
  - Dynamic Menus 7-237
  - dynamic-momentary-menu** flavor 7-236
  - dynamic-momentary-window-hacking-menu** flavor 7-236
  - dynamic-multicolumn-mixin** 7-237
  - dynamic-multicolumn-mixin** flavor 7-236
  - dynamic-pop-up-abort-on-deexpose-command-menu flavor 7-236
  - dynamic-pop-up-command-menu** flavor 7-236
- sys:**
  - 3600 FEP files selected for Problems During Systems selected for
  - Append to tape
    - Comment
    - Consolidate from
    - Dump deleted files
    - Dump Type
    - Leave option to Tape when done
    - Offline option to Tape when done
      - Pathnames
      - Person operating
    - Query option to Tape when done
      - Restart pathname
    - Rewind option to Tape when done
      - Set date dumped
      - Tape Host
      - Tape Reel ID
      - Tape when done
        - Performing Backup
  - [Complete Incremental Delete Delete
- :item-list-pointer** Init option for tv:
  - :update-item-list** method of tv:
    - Input Editor Options Now Specified
    - Debugger Commands for
  - What is a
    - Examples of the Use of Functions and Multiple
  - Instantiable
    - tv:
  - Init-plist Option for Messages to
    - tv:
    - tv:
- :column-spec-list** Init option for tv:
  - tv:
  - tv:
  - tv:

**tv:** **dynamic-pop-up-menu** flavor 7-236  
 Dynamic variable binding 8-3  
 c-X D Zmacs command 3-144  
 HELP D Zmacs command 1-51, 3-14, 3-45  
 D Zmail command 6-68  
 D Zmail Kbd Command 6-55

**E**

Entering Zmacs with SELECT  
 SELECT  
 Call Last Kbd Macro (c-X)  
 Zmacs  
 Entering Zmacs with  
 Left  
 Top  
 Drawing past  
 Bottom  
 Top  
 Set  
 Left and Right  
 Entering Zmacs with **zwei:**  
**zwei:**  
 [Tree  
 Init File Form:  
 Init File Form:  
 Multiple  
 The Zmacs  
 Zmacs Command:  
 The Zmacs  
**si:**  
 Dired

**E**

E 1-47, 3-12  
 E 1-47, 3-12, 3-40, 4-9  
 E) Zmacs command 4-64  
**each loop** keyword 2-207, 2-222  
 Echo Area 3-19  
 Echo Area's Minibuffer 3-19  
 Echo character input 5-75  
 Echoing 3-19  
 Echoing arguments 3-24  
**ed** 1-48, 3-12  
**ed** function 1-48, 1-158, 3-12  
 edge of menu 7-298  
 edge of menu 7-298  
 edge of screen error 2-537  
 Edge of the FED Character Box 3-237  
 Edge of the FED Character Box 3-237  
 edge parameters 7-296  
**:edges-from** init option for **tv:menu** 7-296  
**:edges-from** init option for  
**tv:essential-window** 4-116, 7-164  
**:edges** init option for **tv:menu** 7-296  
**:edges** init option for **tv:sheet** 7-163  
**:edges** method of **tv:sheet** 7-167  
 Edges of the FED Character Box 3-237  
 E Dired command 3-150  
 Edit Commands 1-20  
 Edit directory 1-159  
**edit-functions** 1-48, 3-13  
**edit-functions** function 1-48, 3-13  
 edit any] File System Maintenance menu item 0-39,  
 5-231  
 Edit Buffers (m-X) Zmacs command 3-118  
 Edit Buffers on c-X c-B 1-169, 3-215  
 Edit Buffers on m-X 1-169, 3-216  
 Edit Callers (m-X) Zmacs command 4-44  
 Edit Callers (m-X) Zmacs command 4-44  
 Edit Callers Commands 3-183  
 Edit Changed Definitions (m-X) Zmacs  
 command 4-56  
 Edit Changed Definitions Of Buffer (m-X) Zmacs  
 command 4-56  
 Edit Combined Methods 2-472  
 Edit Combined Methods (m-X) Zmacs  
 command 4-142  
 Edit Compiler Warnings (m-X) Zmacs  
 command 4-79, 4-321  
 Edit Definition (m-.) Zmacs command 4-40, 4-141,  
 4-142  
 Edit Definition Command 1-20  
 Edit Definition Commands 3-180  
 Edit Directory (m-X) Zmacs command 3-144  
 Edit Directory Command 1-20  
**edit-fep-label** function 8-58  
 Edit File 3-150  
 Edit File Command 1-21  
 Edit File Warnings (m-X) Zmacs command 4-321

**E**

	Edit Font Command	1-21
	[Edit Font] Font Editor menu item	3-230, 3-260
[Tree	edit Homedir] File System Maintenance menu item	0-39, 5-231
Lisp Input	Editing	4-77
	Editing Buffers	3-118
	Editing Code	4-56
	Editing directories	3-144
	Editing a character	3-227
	Editing a Command	1-14
	Editing a File	3-32
	Editing a Namespace Object	1-117
Writing and	Editing Code	4-7
	Editing Existing Files	3-32
Viewing and	Editing File Contents in Dired	3-149
	Editing Lisp Programs in Zmacs	3-169
Introduction to	Editing Lisp Programs in Zmacs	3-170
	Editing message mode	1-57
Zmacs Major	Editing Modes	3-156
	Editing objects in the namespace database	9-22
	Editing terminal input	1-101, 5-53, 7-21
	Editing the definition of a function	1-48, 1-158, 3-12
Zmail Commands for	Editing the Recipient List	6-45
	Editing the source code of a function	1-48, 1-158, 3-12
	Editing Your Input	1-101
Locating Source Code to	Editing Zmail Messages	6-71
	Edit in Zmacs	3-180
	<b>:edit</b> message to	
	<b>zwei:standalone-editor-frame</b>	7-381
Zmacs Command:	Edit Methods	2-471
	Edit Methods (m-X) Zmacs command	4-65, 4-142
	Edit Namespace Object	0-73
	<b>edit-namespace-object</b> function	9-22
<b>tv:</b>	Edit Namespace Object Command	1-21, 9-22
Displaying Help Messages in the Input	Editor	5-66, 7-34
Displaying Prompts in the Input	Editor	5-65, 7-33
Entering the File System	Editor	3-40, 5-231
Entering Zwei	editor	1-158
Evaluation and the	Editor	4-75
Example of Setting Fonts in the Input	Editor	1-79
Examples of Use of the Input	Editor	5-66, 7-34
File System	Editor	5-231
Font	Editor	3-219
Hardcopying From the File System	Editor	1-108, 3-268
Input	editor	1-101, 5-53, 5-59, 5-60, 5-61, 5-62, 5-63, 5-64, 7-21, 7-27, 7-28, 7-29, 7-30, 7-31, 7-32
Invoking the Input	Editor	5-54, 7-22
Lisp Listeners and <b>break</b> Loops Catch Trivial Errors in the Input	Editor	RN-66
Lookup Commands Available in an	Editor	1-128
Lookup	Commands Available in the Document Examiner and	
Namespace	Editor	1-123
Reading function to use input	editor	9-22
Setting Fonts in the Input	editor	5-57, 7-25
Using the File System	Editor	1-78
	Editor	5-232
	Editor buffers	6-13
	Editor package	2-615
	Lookup Commands Available in the Document Examiner, Editor, and Command Processor	1-122
	<b>:editor-command</b> option	5-64, 7-32
Font	Editor Basic Concepts	3-227
I/O from	editor buffers	7-377
Stream Facility for	Editor Buffers	7-377
	Editor buffer streams	7-377



- / Font Editor command 3-261
- ? Font Editor command 3-260
- ABORT Font Editor command 3-261
- B Font Editor command 3-255
- c-C Font Editor command 3-260
- c-REFRESH Font Editor command 3-261
- c-R Font Editor command 3-260
- c-W Font Editor command 3-260
- C Font Editor command 3-234, 3-261
- c-m-Y input editor command 4-77
- D Font Editor command 3-255, 3-260
- E Font Editor command 3-243, 3-259
- F Font Editor command 3-260
- G Font Editor command 3-260
- HELP Font Editor command 3-260
- H Font Editor command 3-255, 3-259
- m-Y input editor command 4-77
- M Font Editor command 3-260
- m-sh-A input editor command 1-122
- m-sh-D editor command 1-122
- m-sh-F input editor command 1-122
- m-sh-V input editor command 1-122
- Q Font Editor command 3-260
- REFRESH Font Editor command 3-261
- S Font Editor command 3-260
- V Font Editor command 3-253, 3-260
- \ Font Editor command 3-261
- Viewing the Editor Command History 3-73
- New Input Editor Commands: PAGE, COMPLETE, c-? RN-61
- File system editor directory display 5-236
- . Font Editor drawing command 3-236
- [Clear Points] Font Editor draw mode menu item 3-235
- [Flip Points] Font Editor draw mode menu item 3-235
- [Set Points] Font Editor draw mode menu item 3-235
- Command Loop Input Editor Example 5-56, 7-24
- Input Editor Font Commands 1-79
- Entering the Editor From the Debugger 4-264
- New Input Editor Help Options RN-63
- Tools for Compiling Code From the Editor Into Your World 4-316
- Editor major mode for file 5-109
- Editor major modes 5-153
- Overview of the Editor Menu 3-49
- The Editor Menu 3-49
- Editor Menu Commands 3-49
- [Abort Send] Editor menu item 6-42
- [Add In Gray] Font Editor menu item 3-240, 3-260
- [Center View] Font Editor menu item 3-255, 3-259
- [Clear Gray] Font Editor menu item 3-239, 3-260
- [Close] File System Editor menu item 5-233
- [Configure] Font Editor menu item 3-227, 3-256, 3-259
- [Create Inferior Directory] File System Editor menu item 5-233
- [Create Link] File System Editor menu item 5-233
- [Decache] File System Editor menu item 5-233
- [Delete (immediate)] File System Editor menu item 5-233
- [Delete] File System Editor menu item 5-233
- [Draw Line] Font Editor menu item 3-246, 3-259
- [Draw Spline] Font Editor menu item 3-246, 3-259
- [Edit Font] Font Editor menu item 3-230, 3-260
- [Edit Properties] File System Editor menu item 5-233
- [Edit] File System Editor menu item 5-233
- [Erase All] Font Editor menu item 3-239, 3-243, 3-259
- [EXIT] Font Editor menu item 3-260
- [Expunge] File System Editor menu item 5-233
- [Gray Char] Font Editor menu item 3-239, 3-260
- [Grid Size] Font Editor menu item 3-256, 3-259
- [Hardcopy] File System Editor menu item 5-233

- [HELP] Font Editor menu item 3-260
- [Link Transparencies] File System Editor menu item 5-233
- [List Fonts] Font Editor menu item 3-230, 3-260
- [Load] File System Editor menu item 5-233
- [Move Black] Font Editor menu item 3-238, 3-259
- [Move Gray] Font Editor menu item 3-239, 3-260
- [Move View] Font Editor menu item 3-255, 3-259
- [New Properties] File System Editor menu item 5-233
- [Open] File System Editor menu item 5-233
- [Read File] Font Editor menu item 3-258, 3-260
- [Reflect] Font Editor menu item 3-243, 3-259
- [Rename Char] Font Editor menu item 3-234, 3-260
- [Rename] File System Editor menu item 5-233
- [Rotate] Font Editor menu item 3-243, 3-259
- [Save Char] Font Editor menu item 3-234, 3-260
- [Selective Open] File System Editor menu item 5-233
- [Send Msg] Editor menu item 6-42
- [Set Sample] Font Editor menu item 3-253, 3-260
- [Show Font] Font Editor menu item 3-227, 3-233, 3-234, 3-260
- [Stretch] Font Editor menu item 3-259
- [Swap Gray] Font Editor menu item 3-239, 3-260
- [Undelete] File System Editor menu item 5-233
- Using the mouse with [List Fonts] Font Editor menu item 3-263
- Using the mouse with [Show Font] Font Editor menu item 3-234, 3-263
- [View Properties] File System Editor menu item 5-233
- [View] File System Editor menu item 5-233
- [Wildcard Delete] File System Editor menu item 5-233
- [Write File] Font Editor menu item 3-258, 3-260
- Using the mouse with Font Editor menus 3-228
- Input Editor Messages to Interactive Streams 5-70, 7-38
- Correspondence of Canonical Types and Editor Modes 5-153
- New Optional Arguments to **:initial-input** Input Editor Option RN-67
- Input Editor Options 5-59, 7-27
- New Input Editor Options RN-63
- Input Editor Options Now Specified Dynamically RN-55
- The Input **:editor** output format style 5-46
- Setting Editor Program Interface 5-53, 7-21
- Wraparound Lines in the Editor Variables in Init Files 1-167, 3-213
- Zmacs Editor Window 3-54
- Editor Window 3-17
- Editor Window's Buffer 3-17
- Editor Window's Cursor and Point 3-17
- Editor Window's Timeout 3-17
- Editor Window and the Buffer 3-54
- The Editor Windows 7-381
- Making Standalone Editor Works 1-101, 5-53, 7-21
- How the Input [Edit Properties] Command 5-234
- FSEdit [Edit Properties] File System Editor menu item 5-233
- [Tree edit root] File System Maintenance menu item 0-39, 5-231
- [Bury] Edit Screen menu item 7-86
- [Move Window] Edit Screen menu item 7-76
- [Edit Screen] System menu item 4-66, 4-129, 7-75, 7-76, 7-175
- FSEdit [Edit] Command 5-235
- [Active Structure] [Edit] Display Debugger menu item 4-80
- [Edit] File System Editor menu item 5-233
- [Edit] Maintenance Operations menu item 0-39
- [Edit] System menu item 4-9
- E exponential representation 2-14, 2-94
- Effect of Character Set Translation on Direct Access File Streams 5-10
- Effect of compiler on variables 2-126
- Format effectors 5-5, 7-108
- Side Effects 2-212
- Effects of Slashification on Printing 2-13

- E Font Editor command 3-243, 3-259
  - EFTP protocol 9-128
  - EIA RS-232 protocol 5-243
  - :eject-page** method of
    - si:make-hardcopy-stream** 3-274
  - Elapsed Time in 60ths of a Second 7-356
  - Elapsed Time in Microseconds 7-357
  - Electric Pl1 Mode 3-157
  - Electric Shift Lock in Lisp Mode 1-170, 3-214
  - Electric Shift Lock Mode (m-X) Zmacs
    - command 4-12
  - element 2-325
  - elements 2-236
  - elements 2-236
  - elements 2-236
  - elements 2-41
  - Elements 3-74
  - elements 2-244
  - elements 2-244
  - Elements 3-74
  - Elements out-of-bounds 2-541
  - elements from list 2-150
  - elements in arrays 2-238, 2-247
  - elements into list 2-150
  - Elements of the **tv:choose-variable-values-keyword**
    - Property 7-270
  - elements to be printed 2-18
  - Eliminate record of changes 9-28
  - else loop** keyword 2-216
  - :empty-p** method of **si:heap** 2-78
  - Enable** Commands 1-21
  - enable** function 6-112
  - enable** function 9-142
  - :enable** message 9-212
  - :enable-services** initialization list 8-71
  - Enable 9-211
  - Enable bit 9-131
  - Enable bit 9-131
  - Enable bit 9-131
  - Enabled events 8-80
  - enable-serial-terminal** function 9-69
  - Enable Services Command 1-22
  - :enable-services** option for **add-initialization** 8-67
  - Enabling and disabling of floating-point traps 2-535
  - si: encapsulate** macro 2-326
  - Encapsulated medium 9-44
  - si: encapsulated-definition** debugging info alist
    - element 2-325
  - si: encapsulated-function** variable 2-325
  - Encapsulation interface 9-203
  - Encapsulation mechanism 2-523
  - encapsulation interface 9-206
  - Encapsulations 2-297, 2-325
  - Encapsulations 2-329
  - si: encapsulation-standard-order** variable 2-327
  - Enclose character in lozenge 5-34
  - Encoded mouse clicks 7-151
  - time: encode-universal-time** function 7-367
  - encoding 7-311
  - Encoding keyboard input 5-5
  - Encrypted: Field 6-36
  - Encrypting and Decrypting the Buffer 3-120
  - Encrypting Zmail Messages 1-67
  - encryption 1-67
  - Encrypt Text 1-67
  - END 1-140
- Zmacs
    - Init File Form:
  - si:encapsulated-definition** debugging info alist
    - Bit size of array
    - Character strings as array
    - Integers as array
    - List
    - Retrieving History
    - Returning array
    - Storing into array
    - Using the Mouse on History
  - Removing
    - Active
    - Inserting
  - Maximum number of list
  - mailer:**
  - neti:**
  - Initialization, Reset, and
    - Receive Interrupt
    - Timer Interrupt
    - Transmit Interrupt
  - neti:**
  - si:**
  - si:**
  - si:**
  - Chaosnet UNC
  - Rename-within
    - si:**
  - time:**
  - Mouse button
  - Zmail
  - NBS
  - Zmail

- Goto End 1-50, 3-26, 3-70
- Mark End 3-92
  - End character 2-32
  - END command 1-62, 1-67, 6-42
  - END completion command 1-52, 3-14
  - END Converse command 1-71, 6-102
  - END Dired command 3-148
  - Ending a Keyboard Macro 3-200
  - Ending the QFILE Transfer 9-155
- QFILE EOF Ending the Transfer with QFILE 9-155
  - End Kbd Macro Zmacs command 3-199
- Adding to the Marking a Region From Here to Moving to Logical
  - End of an Array 2-251
  - End of Buffer 3-92
  - end of buffer 3-70
  - end of data 9-118
  - End-of-data: Chaosnet Software Protocol 9-118
  - End of Definition 3-67
  - end-of-file** flavor 2-536
  - End-of-file marker 5-12
- Read past the
  - end-of-file error 2-536
  - End-of-file on input streams 5-75
  - End of File packet 9-118
  - End of Line 1-50, 3-26, 3-63, 3-81
- EOF
  - end of line 7-113
  - end of line 7-113
  - :end-of-line-exception** 7-108
  - :end-of-page-exception** 7-108
  - end-of-tape** flavor 2-556, 5-277
- tape:
  - End of Topic 1-134
  - end of window 7-113
  - end of window 7-113
  - :end** option for **zwei:open-editor-stream** 7-378
  - :end** option for **zwei:with-editor-stream** 7-378
- Endtests 2-214, 2-221
- END Zmacs minibuffer command 4-8
- End Zmail Command 6-38
- Additional Character Object Enhancements RN-15
  - Enter a breakpoint loop 1-180
  - Entering Commands 1-9, 1-10
  - Entering Converse 3-40
  - Entering Debugger 2-532
  - Entering Dired 3-144
  - Entering Inspector 3-40
  - Entering Lisp 3-40
  - Entering Notifications 3-40
  - Entering Peek 3-40
  - Entering Terminal 3-40
  - Entering Zmacs 3-12, 3-40, 4-9
  - Entering Zmail 3-40
  - Entering and Exiting Zmail 6-17
  - Entering and Leaving FED 3-225
  - Entering and Leaving the Inspector 1-189, 4-295
  - Entering Document Examiner 3-40
  - Entering File System Editor 3-40
  - Entering Flavor Examiner 3-40
  - Entering the Debugger 1-192, 4-255
  - Entering the Debugger by Causing an Error 1-193, 4-255
  - Entering the Debugger with m-SUSPEND 1-194, 4-256
  - Entering the Debugger with the **dbg** Function 1-194, 4-256
  - Entering the Display Debugger From the Debugger 4-265
  - Entering the Editor From the Debugger 4-264
  - Entering the File System Editor 5-231
- Introduction to Entering Zmacs 1-47, 3-12

- More Ways to Constraint frame configuration
  - Line item
  - Mouse-sensitive
  - :function** line item
  - :string** line item
  - :symeval** line item
  - :value** line item
  - Compiled object code as line item
  - Lambda expression as line item
  - Named-lambda expression as line item
  - Symbol line item
  - :mouse-item** line item
  - :mouse** line item
- Amplitude
- Customizing the Zmacs
  - Customizing Your How to Create an MDL programming
  - Overview of Customizing the Zmacs
- Lisp
  - CLM: Other
- Lexical
  - Basic Text Formatting
  - Specifying compiler
- chaos:**
  - QFILE
- Waiting for Acknowledgement of the QFILE Marks and
  - Diagnostic test for
  - Loop
  - Hashing on
- :area** init option for **si:**
- :growth-factor** init option for **si:**
- :rehash-before-cold** init option for **si:**
- :size** init option for **si:**
- si:**
- Entering Zmacs with **ed** 1-48, 3-12
- Entering Zmacs with SELECT E 1-47, 3-12
- Entering Zmacs with the Mouse 1-48, 3-12
- Entering Zmacs with **zwei:edit-functions** 1-48, 3-13
- Entering Zwei editor 1-158
- Enter mail mode recursively 6-45
- Enter Minibuffer Responses 3-51
- entity 7-179
- Entrance and Exit 2-212
- entries 7-307, 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry 7-308
- entry attribute 7-311
- entry attribute 7-311
- :entrycond** option for **trace** 4-92, 4-277
- :entry** option for **trace** 4-92, 4-277
- :entryprint** option for **trace** 4-92, 4-277
- Enumerate text 3-34
- :enumeration** command processor argument type 7-48
- envelopes 7-324
- &environment** RN-39
- Environment 3-193
- Environment 1-161
- Environment 3-33
- environment 2-205
- Environment 3-194
- Environment stack 8-3, 8-5
- environment* argument for macro-expander functions 2-138
- environment features list 1-184
- Environment Inquiries 2-645
- &environment** Lambda-list Keyword 2-311, 2-374, RN-39
- Environment Objects and Arguments 2-138
- Environments 3-34
- environments 4-329
- :eof** message 5-18
- :eof** operation 9-137
- eof-op** variable 9-159
- EOF Ending the Transfer with QFILE 9-155
- EOF End of File packet 9-118
- EOF Packet on Writing with QFILE 9-177
- EOF Packets 9-162
- Ephemeral GC 8-119
- Ephemeral-object Garbage Collection 8-119
- Ephemeral-object Garbage Collection in Release 6.0 RN-51
- ephemeral-object garbage collector 0-87
- ephemeral-object garbage collector diagnostics 0-87
- epilogue 2-205, 2-212
- eq** 2-75
- eq** function 2-10, 2-89
- eq-hash-table** 2-71
- eq-hash-table** 2-71
- eq-hash-table** 2-71
- eq-hash-table** 2-71
- eq-hash-table** flavor 2-71
- eq!** function 2-10

- eq** versus Hashing on
  - si:** SCL and **:rehash-threshold** init option for **si:** **si:** Matrices and Systems of Linear Simultaneous linear Data Circuit Terminating Data Terminal
- equal** 2-10, 2-11
- equal** 2-75
- equal** function 2-11
- equal-hash** function 2-75
- equal-typeep** function 2-638
- equal-hash-table** 2-72
- equal-hash-table** flavor 2-72
- Equations 2-258
- equations 2-258
- Equipment 5-247
- Equipment 5-247
- Equivalence sign character in ITS pathnames 5-185
- Equivalence sign character in logical pathnames for quoting 5-186
- equivalent macro definitions for special forms 2-638
- eq** versus **equal** 2-10, 2-11
- Erase character 7-113, 7-114
- Erase line 7-114
- Erase messages 7-113
- Erase string 7-114
- Erase window 7-114
- [Erase All] Font Editor menu item 3-239, 3-243, 3-259
- Erase backward to start of line 3-82
- Erase to end of line 7-113
- Erase to end of window 7-113
- Erasing text 1-145, 3-76
- Erasing Text 1-53, 3-28
- Erasing Text 1-53, 3-28
- Erasing Text 1-53, 3-28
- error 2-538
- error 2-534
- error 2-537
- error 2-537
- error 2-537
- Error 1-193, 4-255
- error 2-535
- error 2-536
- Error 6-24
- error 2-538
- error 2-534
- error 2-534
- Error 6-24
- error 2-537
- error 2-536
- error 2-535
- error 2-536
- error 2-537
- error 2-537
- error 2-538
- error 2-538
- error 2-533
- error 2-533
- error 2-534
- Error conditions 2-482, 8-4
- Error Display 1-193, 4-255
- error** flavor 2-482, 2-529, 2-532, 4-133
- error** function 2-482, 2-503
- Error object 2-529
- Error recovery 3-42
- Error-correcting protocol 9-44
- error-output** variable 5-22
- error-restart** special form 2-501, 2-513, 2-514
- Error bit 9-131
- Error Codes 8-33, 8-39
- Error Codes 9-193
- Error Conditions 8-38
- CRC
- Disk
- QFILE
- Disk
- Description of Introduction to Summary of Disk Division by zero Drawing on unprepared sheet Drawing past edge of screen Entering the Debugger by Causing an Exponent overflow Exponent underflow Garbage on Screen After Zmail Illegal redefinition Invalid type code Logarithm of nonpositive number No Response After Zmail Read-only Read past the end-of-file Singular matrix operation Square root of a negative number Stack group state Stack overflow Storage allocation Throw tag Unbound closure variable Unbound instance variable Undefined function

- Flow and Error Control: Chaosnet Software Protocol 9-11
- :error** deexposed timeout action 7-82
- :error-disposition** option for **net:define-server** 9-51
- :error** file-opening option 5-91
- New Message to Error Flavor **fs:directory-not-found** RN-39
- Tape Error Flavors 5-277
- New Stream Handling Error Flavors: **sys:stream-closed** and **sys:network-stream-closed** RN-38
- New Array Error Flavor: **sys:array-wrong-number-of-subscripts** RN-38
- New Error Flavor: **sys:read-premature-end-of-symbol** RN-38
- Disk Error Handling 8-36
- Passing packet Error Handling in the Command Processor 1-15
- Storing disk error information 9-117
- Proceeding From the error information 8-32
- Disk Error in the Debugger: Resume 4-261
- Peek utility for disk Error logging code 2-494
- Disk Error message stream 5-22
- Peek utility for disk Error Meters 8-41
- Disk error meters 8-41
- Peek utility for disk **:error** option for **open** 5-93, 5-99
- Peek utility for disk **:error** option for **trace** 4-92, 4-98, 4-276
- Peek utility for disk **errorp** function 2-9, 2-504
- Automatic error recovery 8-34
- QFILE Error Responses 9-192
- Automatic **error-restart-loop** special form 2-501, 2-513, 2-514, 4-129
- Arithmetic Errors 2-479
- Array errors 2-534
- bitbit** Errors 2-540
- Checking for Package Name-conflict errors 2-537
- Eval Errors 2-593
- Evaluator errors 2-542
- File-system errors 2-542
- File creation Errors 2-544
- File deletion errors 2-550
- File lookup errors 2-551
- File property errors 2-548
- File rename errors 2-551
- Function-calling Errors 2-539
- Instance variable errors 2-538
- Introduction to Package Name-conflict Errors 2-593
- Invalid contents in cell errors 2-533
- Invalid file operation errors 2-550
- Invalid pathname syntax errors 2-550
- Lisp Errors 2-533
- Location Errors 2-534
- Login errors 2-547
- Network Errors 2-554, 9-210
- Package Name-conflict Errors 2-593
- Pathname Errors 2-553
- Protection-violation errors 2-549
- Resolving Package Name-conflict Errors 2-595
- SCL and file lookup errors 2-645
- Signalling Errors 2-502
- Tape Errors 2-556
- Unbound variable errors 2-533
- QFILE Errors and Asynchronous Marks 9-191
- Recovering From Errors and Stuck States 1-43
- The Debugger: Recovering From Errors and Stuck States 1-44
- Interning Errors Based on **sys:package-error** 2-542
- Syntax errors in read functions 2-543
- Errors inside Lisp printer 2-543
- Lisp Listeners and **break** Loops Catch Trivial Errors in the Input Editor RN-66

- Miscellaneous System
- Errors Involving Lisp Printed Representations 2-543
  - Errors Not Categorized by Base Flavor 2-536
  - :error** symbol in **:if-exists** option for **open** 5-222, 8-43
  - :error** symbol in **:if-locked** option for **open** 5-222, 8-43
  - :error** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- [Server
- Errors] File System Maintenance menu item 0-39
  - :error-type** method of **sl:disk-error-event** 8-39
- Disk
- Error Variables 8-38
- Zmail
- Error Window 6-24
  - [Error] **trace** menu item 4-92, 4-98
  - ESC character 2-32
  - ESCAPE 1-140
  - Escape format directive 5-41
  - ESCAPE Inspector command 4-300
- tv:**
- \*escape-keys\*** and **tv:\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
  - Escaping from prompts 3-42
  - essential-mouse** 7-152
  - essential-mouse** 7-153
  - essential-mouse** 7-152
  - essential-set-edges** 7-167
  - essential-set-edges** 7-167
  - essential-set-edges** 7-167
  - essential-set-edges** 7-166
  - essential-set-edges** 7-167
  - essential-set-edges** 7-166
  - essential-window** 7-107
  - essential-window** 4-116, 7-164
  - essential-window** 4-116, 7-107
  - essential-window** 4-116, 7-164
  - essential-window** 4-116, 7-164
  - essential-window-with-typeout-mixin** 7-174
  - Establishing Handlers 2-487
  - Establishing a connection 9-103, 9-114, 9-134, 9-142
  - Establishing Handlers 2-488
  - Establishment: Chaosnet Software Protocol 9-114
  - :estimated-length** option for **open** 5-222, 8-43
  - ESTIMATED-LENGTH QFILE OPEN option 9-166
- Chaosnet
- Ether 9-96
  - Ether Contention 9-99
  - Ethernet 9-37
  - Ethernet attributes 9-213
- Interfacing to
- Ethernets 9-212
  - &eval** RN-28
  - Eval Errors 2-542
  - eval** function 2-159
  - eval-when** 4-310
  - :eval-when** option for **defstruct** 2-385, 2-391
  - eval-when** special form 4-314
  - :eval** Constraint Size Specification 7-188
  - :eval-form** option for **prompt-and-read** 7-59
  - :eval-form-or-end** option for **prompt-and-read** 7-59
  - :eval-form tv:choose-variable-values** variable type 7-259, RN-59
  - evalhook** 2-123, 2-159, 4-289
  - evalhook** function 4-289
  - evalhook** variable 4-289
- Changes to
- evalhook** and **applyhook** RN-11
  - evalhook** and lexical scoping RN-11
  - :eval-inside-yourself** message 2-454
  - &eval** Lambda-list Keyword 2-310
  - :eval** menu item type 7-210, 7-311



- Evaluate Minibuffer 3-175
- Evaluate Region 3-175
- Evaluate And Exit 3-175
- Evaluate and Replace Into Buffer (m-X) Zmacs
  - command 3-104, 3-175, 4-75
- Evaluate Buffer (m-X) Zmacs command 3-175, 4-75
- Evaluate Changed Definitions (m-X) Zmacs
  - command 3-175, 4-75
- Evaluate Changed Definitions of Buffer (m-X) Zmacs
  - command 3-175
- Evaluate Changed Definitions Of Buffer (m-sh-E)
  - Zmacs command 4-75
- Evaluate Into Buffer (m-X) Zmacs command 3-175, 4-75
- Evaluate Minibuffer (m-ESCAPE) Zmacs
  - command 4-75
- Evaluate Region (c-sh-E) Zmacs command 4-75
- Evaluate Region (m-X) Zmacs command 3-175
- Evaluate Region Verbose 3-175
- Evaluating code 4-69, 4-75, 4-94
- Evaluating a Form in the Debugger 4-259
- Evaluating a Function Form 2-151
- Evaluating and Compiling Lisp Programs in Zmacs 3-174
- Overview of Evaluating and Compiling Lisp Programs in Zmacs 3-174
- Compiling and Evaluating Forms From FED 3-261
- Evaluating Lisp 4-69
- Evaluating Lisp Code 4-75
- Evaluating Lisp Programs in Zmacs 3-174
- Evaluation 2-121, 2-123
- Evaluation 2-159
- Evaluation 2-123
- Evaluation 2-363
- Evaluation 4-260
- Evaluation 4-287
- Evaluation commands 3-175
- Evaluation and the Editor 4-75
- Evaluation in loops 2-212
- evaluation in macro definitions 2-345
- Evaluation of special functions 2-303
- Evaluation of Top-level Forms 4-314
- Evaluator 2-303
- Evaluator errors 2-542
- :even Constraint Size Specification 7-188
- even number 2-97
- evenp function 2-97
- Event 2-479
- Event Accessor Functions 8-33
- Events 8-32
- events 8-80
- event tasks 8-32
- event tasks currently allocated 8-33
- event tasks that can be concurrently allocated 8-33
- every function 2-64
- Examine Functions 2-322
- Examiner 1-133
- Examiner 1-129
- Examiner 3-40
- Examiner 3-40
- Examiner 1-191, 2-475
- Examiner 1-119, 1-133
- Examiner 1-119
- Examiner 1-127
- Examiner RN-52
- Examiner 1-121
- How Programs Completion in the Document
- Documentation display in the Document
- Entering Document
- Entering Flavor
- Flavor
- HELP in the Document
- Introduction to the Document
- Lookup Commands Available in the Document
- New Feature in Release 6.0: the Document
- Recovering From a Stuck Document

Repositioning Text in the Document Examiner 1-134  
 Lookup Commands Available in the Document Examiner, Editor, and Command Processor 1-122  
 Document Examiner Actions 1-130, 1-131, 1-132  
 Lookup Commands Available in the Document Examiner and Editor 1-123  
 Document Examiner command menu 1-133  
 Document Examiner Command Pane 1-133  
 Document Examiner Command Pane Actions 1-133  
 Document Examiner List of Bookmarks 1-132  
 Document Examiner List of Current Candidates 1-131  
 [Find (R)] Document Examiner menu item 1-123  
 [Find] Document Examiner menu item 1-126  
 [Show (M)] Document Examiner menu item 1-127, 1-133  
 [Show] Document Examiner menu item 1-122  
 Document Examiner Private Documents 1-136  
 Document Examiner Viewer 1-129  
 Multiple Document Examiner viewers 1-129  
 Document Examiner Window 1-129  
 Examining a Compiled Code File 4-300  
 Examining Stack Frames with Debugger Backtrace  
 Commands 4-262  
 Examining the Current Stack Frame in the  
 Debugger 4-262  
 Examining the Lisp World 1-179  
 Examining the Stack 2-494  
 Examining the Stack 2-495  
 Examining values of instance variables 4-267  
 Examining Zmacs Buffers 3-116  
 example 9-44  
 example 9-44  
 example 5-132  
 example 9-44  
 Example 7-342  
 example 8-7  
 example 5-130  
 Example 5-56, 7-24  
 Example 6-61  
 Example 7-237  
 example 5-130, 5-132, 5-134  
 example 5-130  
 example 5-133, 5-134  
**fs:directory-link-opaque-dirlist** instead of **fs:directory-list**  
 example 5-132  
 Mode Line Example 3-21  
 Mouse-sensitive Areas Example 7-286  
 Non-real-time Synthesis Example 7-343  
 Pathname wildcard example 5-132  
 Playing Large Pieces Example 7-344  
 Polyphony Example 7-347  
**prompt-and-read (:pathname :visible-default)** example 5-130, 5-132, 5-133, 5-134  
 Sawtooth Wave Example 7-341  
 Sine Wave Example 7-339  
 Square Wave Example 7-341  
 Standard Momentary Menu Example 7-219  
 Sticky pathname defaults example 5-133  
 Text example 3-37  
**:translate-wild-pathname** message to **fs:pathname** example 5-132  
**tv:basic-mouse-sensitive-items** Example 7-284  
**tv:choose-variable-values** Type Definition Example 7-271  
**tv:choose-variable-values-window** Example 7-276  
**tv:command-menu** Example 7-231  
**tv:margin-choice-mixin** Example 7-290  
**tv:momentary-multiple-menu** Example 7-243  
**tv:multiple-choice** Example 7-255  
**tv:multiple-choose** Menu Example 7-253  
**tv:multiple-menu-choose** Example 7-248  
**tv:multiple-menu-choose-menu** Example 7-249

- tv:pop-up-menu** Example 7-226
- User Options Example 7-268
- Example text 3-34
- Loop Indentor Example 1 3-163
- Geometry Example 1: a Multicolumned Menu 7-215
- Example 1 of Making Tables Using Keyboard Macros 3-206
- Example 1 of Writing and Saving Keyboard Macros 3-201
- Example 1 of Zmacs Notation Conventions 3-9
- tv:momentary-menu** Example 1: Simple Momentary Menu 7-223
- Loop Indentor Example 2 3-163
- Geometry Example 2: Retrieving Geometry Information 7-216
- tv:momentary-menu** Example 2: Item List as Init-plist Option 7-224
- Example 2 of Making Tables Using Keyboard Macros 3-206
- Example 2 of Writing and Saving Keyboard Macros 3-202
- Example 2 of Zmacs Notation Conventions 3-9
- tv:momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
- Example 3 of Zmacs Notation Conventions 3-9
- tv:momentary-menu** Example 4: Using the Mouse Buttons 7-225
- Simple Example: Interfacing to the Network System 9-200
- Example: Serial I/O 5-257
- Example of a Handler 2-481
- Example of a Search String for HELP A 3-46
- Example of a Source Compare 3-125
- Example of a Tag Tables Replacement Operation 3-106
- Example of Attribute-manipulating Commands 3-138
- Example of Calling the Last Keyboard Macro 3-200
- Example of Commands to Mark Regions by Paragraphs 3-92
- Example of Creating a Directory 3-131
- An Example of **defstruct-define-type** 2-409
- Example of Displaying the Next Possibility 3-110
- Example of Filling Text with Auto Fill Minor Mode 3-195
- Example of Finding Out What a Zmacs Command Does 3-44
- Example of Installing and Deinstalling a Macro 3-204
- Example of Listing Buffers 3-118
- Example of Listing Variables by Matching a String 3-211
- Example of Negative Numeric Arguments with Motion Commands 3-60
- Example of Numeric Arguments 3-24
- Example of Numeric Arguments with Motion Commands 3-60
- Example of Setting Fonts in the Input Editor 1-79
- An Example of Stack Groups 8-7
- Example of the m-. Command 3-181
- Example of the Need for Packages 2-560
- An Example Path Definition 2-229
- Pathname examples 5-129
- Tape Spec Merging Examples 0-30
- tv:choose-variable-values** Examples 7-264
- Zmacs Notation Conventions and Examples 3-9
- Examples of Copying a File Into Another 3-134
- Examples of High Disk Performance 8-52
- Examples of Simple Lambda Lists 2-154
- Examples of Specifications of Panes and Constraints 7-185
- Examples of Specifications of Panes and Constraints Before Release 6.0 7-196

- Examples of Symbol Sharing Among Packages 2-589
  - Examples of the Use of Dynamic Closures 2-333
  - Examples of Use of the Input Editor 5-66, 7-34
  - Examples of Using the Audio Facilities 7-339
  - Exchange Lines 3-82
  - Exchange Regions 3-94
  - Exchange Sexps 3-79
  - Exchange Words 3-78
  - Exclamation point (!) line continuation indicator 3-23, 3-54
  - Exclusive or 2-113
  - Exclusive-or alu function 7-119
  - :execute** message 7-212, 7-311
  - :execute** method of **tv:menu** 7-223
  - Executing 7-212
  - Executing a menu item 7-212
  - Execution 4-275
  - Execution 4-280
  - execution of functions 8-85
  - Existence of Audio 7-330
  - Existing Buffer 3-120
  - Existing Code 4-35
  - Existing Files 3-114
  - Existing Files 3-32
  - existing system to a new major release 0-87
  - Exit 4-266
  - Exit 3-148
  - Exit 2-212
  - Exit 3-175
  - exit bit 2-523
  - :exitbreak** option for **trace** 4-92, 4-98, 4-276
  - Exit choice box 7-262
  - exit code 2-205, 2-212
  - :exitcond** option for **trace** 4-92, 4-276
  - Exit control structures 2-175
  - exit control structures 2-175
  - exit from marked frame message 2-523
  - Exiting From the Debugger: Abort 4-261
  - Exiting the Inspector 1-189, 4-295
  - Exiting Zmail 6-17
  - :exit** option for **trace** 4-92, 4-277
  - :exitprint** option for **trace** 4-92, 4-277
  - Exits 2-183
  - Exits 2-639
  - Exits 2-197
  - [EXIT] Font Editor menu item 3-260
  - [Exit] Inspector menu item 4-104, 4-298
  - [Exit] Profile Mode menu item 1-171, 6-57
  - exp** function 2-106
  - expand-range** function 8-62
  - Expanded character set 2-277
  - expanded to Lisp functions 2-355
  - Expander function 2-144
  - Expand Expression (c-sh-M) Zmacs command 4-100
  - Expand Expression All (m-X) Zmacs command 4-100
  - Expand Expression All Now Bound to m-sh-M RN-47
  - Expanding Macros 4-100
  - Expanding Into Many Forms 2-360
  - Expanding Lisp Expressions in Zmacs 3-179
  - Expand Macros 2-375
  - Expansion RN-11
  - Expansion 2-368
  - expansions 2-371
  - :experimental** system status 4-251
- Choosing and
    - Tracing Function
    - Untracing Function
    - Asynchronous
    - Testing for the
  - Reading a File Into an
    - Finding Out About
    - Buffer Flags for
    - Editing
    - Upgrading an
  - Debugger Commands That Trap on Frame
    - Dired
    - Entrance and
    - Evaluate And
    - Trap on
  - Loop
    - Nonlocal
    - Break on
  - Entering and
    - Blocks and
    - CLM: Blocks and
    - Nonlocal
  - meter:**
  - Macros
    - Macro
    - Macro
    - Macro
  - Macros
    - Functions to
    - Changes to Macro
    - Functions Used During
    - Displaced macro

- Zmail
- Push Pop Point
- Expiration-date: Field 6-37
- Explicit (m-SPACE) Zmacs command 4-59
- explode** function 5-89
- explodec** function 5-89
- exploden** function 5-89
- Exponent overflow 2-94
- Exponent underflow 2-94
- Floating-point
- Exponent Characters 2-22
- Exponential notation 2-14
- Exponential format directive 5-32
- exponential representation 2-94
- D
- E
- exponential representation 2-14, 2-94
- Exponentiation 2-105
- Exponent overflow error 2-535
- Exponent underflow error 2-536
- :export** RN-32
- export** function 2-593, 2-611
- Export, and Shadow Symbols 2-611
- Exporting symbols 2-573, 2-589, 2-593, 2-611, 2-613
- Exporting Symbols 2-573
- :export-instance-variables** RN-31
- :export-instance-variables** Option for **defflavor** 2-441, 2-448
- :export** option for **defpackage** 2-573
- :export** Option for **defpackage** and **make-package** 2-599, 2-602
- :export** option for **defstruct** 2-385, 2-386, RN-32
- :export** option for **make-package** 2-573
- :export** proceed type 2-619
- :expose-p** init option for **tv:menu** 7-296
- Exposed windows 7-79, 7-86
- :expose** deexposed typeout action 7-82
- :expose** message to windows 7-79
- :expose** method of **tv:menu** 7-299
- :expose-near** method of **tv:essential-set-edges** 7-167
- :expose-p** init option for **tv:essential-window** 4-116, 7-107
- Exposing windows 7-167, 7-296
- Exposing menu window 7-223
- Exposure 7-79
- Exposure and Output 7-82
- Expression 3-79
- Expression 3-79
- Expression 3-79
- Expression 3-65, 3-79
- Expression 3-65
- Expression (c-sh-M) Zmacs command 4-100
- Expression All (m-X) Zmacs command 4-100
- Expression All Now Bound to m-sh-M RN-47
- expression as line item entry 7-308
- expression as line item entry 7-308
- Expression in Zmacs 3-165
- :expression** option for **prompt-and-read** 7-59
- :expression-or-end** option for **prompt-and-read** 7-59
- Expressions 3-91
- Expressions 3-79
- Expressions 3-79
- Expressions 3-66
- expressions 2-30
- Expressions 3-79
- Expressions in loop constructs 2-206
- Expressions in Zmacs 3-179
- Expressions in Zmacs 3-178
- :expression tv:choose-variable-values** variable
- Screen Arrays and Window
- Deleting the Current Lisp
- Deleting the List Containing the Current Lisp
- Deleting the Previous Lisp
- Description of Motion by Lisp
- Motion by Lisp
- Macro Expand
- Macro Expand
- Macro Expand
- Lambda
- Named-lambda
- Reindenting
- Commands to Mark Regions by Lisp
- Deleting and Transposing Lisp
- Introduction to Deleting and Transposing Lisp
- Motion Among Top-level
- Reader macro for infix
- Transposing Lisp
- Expanding Lisp
- Parenthesizing Lisp

type 7-259, RN-59  
**expr** MacIisp type 2-305  
**\*expr** special form 4-325  
**expt** function 2-105  
**Expunge** Commands 1-22  
 Expunge/Save/Kill menu 6-46  
 [Expunge All FS] Maintenance Operations menu  
 item 0-39  
 X- date directory last expunged indicator 5-236  
 Expunge Directory Command 1-22  
 Expunge QFILE Command 9-183  
 FSEdit [Expunge] Command 5-234  
 [Expunge] File System Editor menu item 5-233  
 Expunging collection 6-80  
 LMFS Deletion, Saving, and Versions 5-209  
 Expunging, Killing, and Renaming Zmail  
 Messages 6-81  
 Expunging deleted messages 1-67  
 Expunging mail buffers 6-68, 6-80, 6-81  
 Extended commands 1-49, 3-6, 3-7, 3-45  
 Extended Command 3-7  
 Any Finding Out What an Extended Command Does 3-45  
 Extended command key bindings 3-46  
 Extended Commands 1-49, 3-7  
 Extended Commands (m-X Commands) 1-84  
 Introduction to Zmacs Completion for  
 SCL and Symbolics Common Lisp  
 :**extension** option for **make-plane** 2-261  
 Extensions 2-635  
 Extensions to **defstruct** 2-409  
 External Symbols 2-570, 2-571, 2-573  
 External-only Packages and Locking 2-626  
 Multics external arrays 2-262  
 :**external** colon mode 2-601, 2-603  
 :**external-only** Option for **defpackage** and  
**make-package** 2-600, 2-603  
 :**external-symbol-not-found** 2-619  
 :**string** message to **sys:** **external-symbol-not-found** 2-619  
**sys:** **external-symbol-not-found** flavor 2-619  
 Specifying Internal and External Symbols in Packages 2-585  
 External value cell 2-331  
 Extracting cdr-code 8-22  
 Extracting data type field 8-22  
 Extracting pointer field 8-21  
 Extracting value from chosen item 7-223  
 Extract position field of a byte specifier 2-116  
 Extract size field of a byte specifier 2-116  
 Extra Features of Arrays 2-238  
 Extra paging space 1-212, 5-219  
 Allocating Extra Paging Space 0-44, 5-240  
 :**extra-width** init option for  
**tv:choose-variable-values** 7-263  
 c-X E Zmacs command 3-200  
 E Zmail command 6-81

## F

FUNCTION F 1-141  
 SELECT F 3-40  
 File System F (Kbd) Zmail Command 6-29  
 Set Fill Column (c-X) (F) 1-187  
 Combining Choice F) Zmacs command 4-12  
 Customizable facilities 7-205  
 Customizing Hardcopy facilities 7-205  
 Digital Audio Facilities 1-174, 3-271  
 Examples of Using the Audio Facilities 7-317  
 Facilities 7-339

## F

- Hash table facilities 2-59
- Help facilities 1-83
- Introduction to the Digital Audio Facilities 7-319
- Introduction to the Menu Facilities 7-207
- Lisp Primitives for the Digital Audio Facilities 7-329
- List of Choice Facilities 7-203
- Microcode Support for the Digital Audio Facilities 7-321
- Modifying the Choice Facilities 7-206
- Overview of the Choice Facilities 7-203
- Standard facilities 7-205
- Standard and Customizable Facilities 7-205
- The Choice Facilities 7-203
- Using the Remote Login Facilities 9-69
- Window System Choice Facilities 7-201
- Help facilities, FEP command completion 1-85
- Lisp Facilities for Finding Out About Lisp 1-88
- Help facilities reference material 1-83
- Choice Facilities Use the Flavor System 7-205
- Comma character in backquote facility 2-345
- FEP channel facility 5-261
- Introduction to the System Facility 4-189
- Patch Facility 4-231
- Read-time conditionalization facility 2-29
- System facility 4-189
- The Choose Variable Values Facility 7-257
- The Margin Choice Facility 7-289
- The Mouse-sensitive Items Facility 7-279
- The Multiple Choice Facility 7-251
- The Multiple Menu Choose Facility 7-247
- The Serial I/O Facility 5-243
- The User Option Facility 7-266
- User option facility 7-203
- Zmail Draft File Facility 6-39
- Zmail Draft Message Facility 6-41
- New Facility: Heaps RN-36
- Stream Facility for Editor Buffers 7-377
- FOR facility in Interlisp 2-205
- Hasharray facility of Interlisp 2-69
- Request for *N* longs failed. 1-44, 1-199
- Miscellaneous file operations failures 2-552
- Miscellaneous Operations Failures 2-552
- Request Failures Based on **fs:file-request-failure** 2-546
- Flavor **false** function 2-164
- PC Metering on the 3600 Families 2-451
- Family 8-61
- :fasd-form** message 2-465, 4-331, 5-241
- Fasdump 4-331, 5-241
- :fasload** simple transformation 4-201
- :fasload** Transformation of **defsystem** 4-209
- fast-aref** instruction 2-255
- fast-aset** instruction 2-255
- chaos:** **fast-answer-string** function 9-136
- FAST QFILE DIRECTORY option 9-188
- Fast Where Am I 3-47
- Fat Strings RN-23
- Page fault 8-77
- Zmail **fboundp** function 2-564
- Add Fcc: Field 6-35
- sys:** Fcc Field Zmail Command 6-37
- FUNCTION** **fcelling** function 2-112
- SELECT** F command 9-21
- F command 0-35, 5-213
- sys:** **define** function 2-297, 2-316
- definedp** function 2-321
- define-file-pathname** variable 2-319
- definition** function 2-322

- sys:**
- Arpanet INR/INS attention-getting **definition-location** function 2-322
- Conversions for the Polyphony feature 9-125
- Polyphony Feature 7-337
- The Polyphony feature 7-319
- CLM: the "Program" Feature 7-324
- Previously Undocumented Feature" 2-639
- New Feature: Array Registers RN-37
- New Feature: Window Graying RN-61
- New Feature in Release 6.0: Symbolics Common Lisp RN-45
- New Feature in Release 6.0: the Command Processor RN-61
- New Feature in Release 6.0: the Document Examiner RN-52
- SCL and **ieee-floating-point** feature name 2-645
- Optimizer feature of the compiler 4-327
- New Features Described in Tools and Techniques 4-4
- New Features in Lisp in Release 6.0 RN-31
- New Features in Networks in Release 6.0 RN-75
- New Features in the User Interface in Release 6.0 RN-61
- New Features in Utilities in Release 6.0 RN-51
- New Features in Zmacs in Release 6.0 RN-48
- SCL and keywords in the **\*features\*** list 2-644
- Lisp environment features list 1-184
- Extra Features Not Supported by Zmail 6-96
- SCL and Features of Arrays 2-238
- The Beep **\*features\*** variable 2-645
- Centering the Drawing in Feature **sys:%beep** 7-327
- Clearing the Drawing in FED 3-255
- Contracting a Drawing Horizontally in FED 3-243
- Contracting a Drawing Vertically in FED 3-250
- Creating a New Font in FED 3-250
- Displaying Characters in the Font in FED 3-230
- Drawing in FED 3-233
- Drawing Lines and Curves in FED 3-235
- Entering and Leaving FED 3-246
- Evaluating Forms From FED 3-225
- Mouse Sensitivities in FED 3-225
- Moving the Drawing Horizontally and/or Vertically in FED 3-261
- Moving the Drawing in FED 3-262
- Positioning the Drawing in FED 3-255
- Reflecting Drawings in FED 3-255
- Rotating Drawings in FED 3-243, 3-259
- Scrolling the Drawing Horizontally and/or Vertically in FED 3-243, 3-259
- Selecting a Character in FED 3-255
- Selecting a Font in FED 3-233
- Stretching a Drawing Horizontally in FED 3-230
- Stretching a Drawing Vertically in FED 3-250
- Stretching and Contracting Drawings in FED 3-250
- Transformations on Characters in FED 3-246
- FED display 3-225
- FED Menus 3-228
- (fed) Lisp Listener command 3-225
- FED, the Subsystem 3-227
- FED Character Box 3-227
- FED Character Box 3-238
- FED Character Box 3-237
- FED Character Box 3-238
- FED Character Box 3-237
- FED Character Box 3-237
- Viewing and Altering a Character in the FED Character Box 3-237
- What the Lines Mean in the FED Character Box 3-237
- Selecting a FED Character by Creating a New Character 3-233
- Selecting a FED Character by Renaming Characters 3-234
- Selecting a FED Character From the Character Select



- Menu 3-233
- Selecting a FED Character From the [Show Font] Display 3-233
- FED Character Select Menu 3-229
- Mousing on the FED Character Select Pane 3-263
- Selecting a FED Character with the C Command 3-233
- FED Command List 3-259
- Outside FED Command Menu 3-229
- FED Configuration and Drawing Transformation 3-259
- Adjusting the FED Display 3-255
- Mousing on the FED Drawing Pane 3-227
- Setting the Box Size in the FED Drawing Pane 3-262
- Setting the Height and Width of the FED Drawing Pane 3-256
- Mousing on the FED Drawing Pane 3-256
- Reading FED Draw Mode Menu 3-262
- Reading and Writing FED Files 3-257
- Writing FED Files 3-258
- Mousing on the FED Font Parameters Menu 3-229
- Getting Things Into the FED Font Parameters Menu 3-263
- Merging Characters with the FED Gray Plane 3-239
- The FED Gray Plane 3-240
- FED Gray Plane 3-239
- FED Gray Plane Menu Items 3-260
- Mousing on the FED Keyboard-only Commands 3-261
- The FED List Fonts and Show Font Displays 3-263
- FED Menu and Keyboard Commands 3-259
- FED Nonmouse Cursor 3-236
- FED Outside World Interface Menu Items 3-260
- FED Prompt Pane 3-228
- Retrieving the Contents of a FED Register 3-241
- Saving a Drawing Into a FED Register 3-241
- Mousing on the FED Register Pane 3-229, 3-241, 3-263
- Retrieving the Black Plane While Manipulating FED Register Pane 3-263
- Saving Characters and Pieces of Characters in FED Registers 3-241
- Mousing on the FED Registers 3-241
- The FED Registers 3-241
- FED Sample Pane 3-227
- Drawing Characters in FED Sample Pane 3-262
- Debugging in the FED Sample String 3-253
- Halting the FED Status Pane 3-229
- Hints on Using the FED with the Mouse 3-235
- Introduction to the FEP 1-197, RN-1
- Resetting the FEP 1-222
- FEP 1-201
- FEP 1-197
- FEP 1-197
- FEP 1-44, 1-199
- FEP Commands 1-200
- FEP files 0-16
- FEP host 5-222, 8-43
- FEP resetting 1-201
- FEP version 1-197
- LOAD file type (FEP) 1-209, 5-215
- MIC file type (FEP) 1-208, 5-215
- FEP, HELP key 1-85
- Questions About the FEP0:>lmfs.file file 1-209, 5-216
- FEP and LMFS 1-229
- FEP channel facility 5-261
- FEP Command Completion 1-85
- FEP command completion 1-85
- FEP commands 1-197
- Commonly Used FEP Commands 1-200
- Less Common FEP Commands 1-201
- Show FEP configuration files 1-209, 5-215
- FEP Directory Command 1-36
- FEP directory name 5-222, 8-43

Increase size of  
 Initializing a  
 How Do I Create a  
 Load  
 :author  
 :creation-date  
 :directory  
 :dont-delete  
 :length  
 :truename  
 Accessing  
 Copying  
 Naming of  
 Renaming  
 Transporting and distributing  
 3600  
 Writing  
 How LMFS Uses the  
 Verifying a  
 Disk and  
 >DIR  
 FEP  
 FILE  
 FLOD  
 FSPT  
 LOAD  
 MIC  
 PAGE  
 [List  
 Abbreviated  
 Changes to the  
 Acknowledgement packet header  
**%arg-desc-interpreted** numeric argument descriptor  
**%arg-desc-max-args** numeric argument descriptor  
**%arg-desc-min-args** numeric argument descriptor  
**%arg-desc-quoted** numeric argument descriptor  
**%arg-desc-rest-arg** numeric argument descriptor  
 Cc  
 Cdr-code  
 Chan\_state channel blockvector  
 Chan\_sta\_rxav channel blockvector  
 Chan\_sta\_rxw channel blockvector  
 Chan\_sta\_txwa channel blockvector  
 Chan\_sta\_txw channel blockvector  
 FEP FEP file type 5-228, 8-49  
 FEP file 5-224, 8-45  
 FEP File 8-52  
 FEP File? 1-229  
 Fep file command 1-201  
 FEP File Comment Properties 1-209, 5-216  
 FEP file data map 5-225, 8-46  
 FEP File Locks 5-228, 8-48  
 FEP filename format 5-222, 8-43  
 FEP file properties 1-209, 5-216, 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP file property 5-227, 8-48  
 FEP Files 5-222, 8-43  
 FEP Files 8-53  
 FEP Files 5-222, 8-43  
 FEP Files 1-212, 5-219  
 FEP files 0-15  
 FEP files selected for dumping 0-20  
 FEP Files to Tape 8-59  
 FEP file system 1-200, 5-221, 8-42  
 FEP File System 1-209, 5-216  
 FEP File System 8-59  
 FEP File System Overview 1-208, 5-215  
 FEP File System Pathnames 5-176  
 FEP File System Utilities 8-58  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP file type 5-228, 8-49  
 FEP File Types 5-228, 8-49  
 FEP FS Root] File System Maintenance menu  
 item 0-39  
 FEP input 1-197  
 FEP in Release 6.0 RN-77  
 FEP Show Status Command Output 1-217  
 FEP software version 1-200  
**fferror** flavor 2-532  
**fferror** function 2-482, 2-504  
**ffexpr** Maclisp type 2-305  
**\*ffexpr** special form 4-325  
**ffloor** function 2-111  
 F Font Editor command 3-260  
 FH QFILE token 9-160  
 field 9-106, 9-111, 9-117  
 field 2-324  
**%%arg-desc-interpreted** numeric argument descriptor  
 field 2-324  
 field 2-324  
 field 2-324  
 field 2-324  
 field 2-324  
 field 1-62  
 field 2-56  
 field 9-144  
 field 9-144  
 field 9-144  
 field 9-144  
 field 9-144  
 field 9-144

- Character objects code field 2-265, RN-14
- Character objects device-font number field RN-16
- Character objects font field 2-265, RN-14
- Character objects style field 2-265, RN-14
- Character objects subindex field RN-16
- Count packet header field 9-106
- Destination Address packet header field 9-106
- Destination Index packet header field 9-106
- Destroying cdr-code field 8-22
- Destroying data type field 8-22
- Destroying pointer field 8-22
- Extracting data type field 8-22
- Extracting pointer field 8-21
- Forwarding-count field 9-108
- %%kbd-mouse-button** field 7-151
- Opcode pkt header field 9-138
- Operation packet header field 9-106
- Packet Number packet header field 9-106
- References field 6-35
- Resent-by field 6-35
- Resent-date field 6-35
- Resent-to field 6-35
- Source Address packet header field 9-106
- Source Index packet header field 9-106
- Subject field 1-62
- To field 1-62
- Translating pathname type field 5-151
- Zmail Backward-references: Field 6-36
  - Zmail Bcc: Field 6-35
  - Zmail Bfcc: Field 6-35
  - Zmail Cc: Field 6-35
  - Zmail Date: Field 6-35
  - Zmail Encrypted: Field 6-36
  - Zmail Expiration-date: Field 6-37
  - Zmail Fcc: Field 6-35
  - Zmail Fonts: Field 6-36
- Zmail Forward-references: Field 6-36
  - Zmail From: Field 6-35
- Zmail Included Messages: Field 6-35
- Zmail Included References: Field 6-36
  - Zmail In-reply-to: Field 6-36
  - Zmail Message-id: Field 6-37
- Zmail Redistributed-by: Field 6-36
- Zmail Redistributed-date: Field 6-36
- Zmail Redistributed-to: Field 6-36
  - Zmail Reply-to: Field 6-37
  - Zmail Sender: Field 6-36
  - Zmail Subject: Field 6-36
  - Zmail To: Field 6-35
- Block number field in disk address 8-29
- Unit number field in disk address 8-29
- Text field in Zmail messages 6-11
- Extract position field of a byte specifier 2-116
- Extract size field of a byte specifier 2-116
- Altering Zmail Header Fields 6-37
  - Character Fields 2-269
  - %%kbd** fields 5-5
  - Packet header fields 9-106, 9-114
  - Pruning header fields 6-69
  - Referencing byte fields 8-21
- The Device-font and Subindex Derived Fields 2-268
  - Using Byte Fields and **defstruct** 2-399
  - Derived fields for characters 2-268, RN-16
  - Header fields in Zmail messages 6-11, 6-85
  - Memory word field variables 8-18
  - Add Cc Field Zmail Command 6-37

Add Fcc	Field Zmail Command	6-37
Add From	Field Zmail Command	6-38
Add In-reply-to	Field Zmail Command	6-38
Add Subject	Field Zmail Command	6-38
Add to	Field Zmail Command	6-37
>BAD-BLOCKS.FEP	<b>fifth</b> function	2-46
>DISK-LABEL.FEP	file	5-228, 8-49
>FREE-PAGES.FEP	file	5-228, 8-49
>fspt.fspt	file	0-35, 5-213
>SEQUENCE-NUMBER.FEP	file	5-228, 8-49
Add region to patch	file	3-186, 4-238
Appending a Region to a	File	3-124
Changing the Properties of a	File	3-133
Compiled	file	2-579
Compiling and Loading a	File	4-73
Creating a	File	1-55, 3-32, 4-9
Creating an Init	File	3-213
Current mail	file	1-57
Defaulting an Output File Pathname From an Input	File	5-132
Default mail	file	6-11, 6-12
Default move-destination	file	6-70
Delete	file	5-104
Dired Edit	File	3-150
Dired Hardcopy	File	1-108, 3-153, 3-268
Dired View	File	3-150
Documentation binary	file	1-119
Editing a	File	3-32
Editor major mode for	file	5-109
Examining a Compiled Code	File	4-300
FEP0:>lmts.file	file	1-209, 5-216
File types of the patch directory	file	4-236
File types of the system version-directory	file	4-236
Find	File	3-30
Hardcopying a	File	3-133
How to Create an Init	File	1-164
Increase size of FEP	file	5-224, 8-45
Init	file	5-163
Initializing a FEP	File	8-52
Install patch	file	3-190, 4-242
ITS init	file	5-185
Lmts.file	file	0-35, 5-213
Logging in Without Processing Your Init	File	1-164
Mail	file	1-64
Moving a Zmail Message to a	File	6-70
Namespace descriptor	file	0-87
Naming a	File	3-121
Paging	file	1-201, 1-209, 5-216
Patch	file	4-231
Patch Directory	File	4-234
Prepending a Region to a	File	3-124
Primary mail	file	1-64, 6-46
Print	file	5-105
Program source	file	5-108
Rename	file	5-103
Save	File	3-30, 3-121
Saving a	File	3-31
Saving terminal interactions in	file	1-183
Saving the Buffer Contents to the	File	3-121
Saving the Mail	File	1-67
Sys:site;Logical-host.Translations	File	4-218
Sys:site;system-name.system	file	4-218, 4-217
Sysdcl	file	2-598
System	file	4-217
System declaration	file	2-598, 2-621, 4-218
System Version-directory	File	4-233

- Tape directory file 0-6
- TOPS-20 init file 5-183
- Translations file 4-218
- True name of file 5-107
- Undelete specified file 5-104
- Viewing a File 3-132
- Viewing the Properties of a File 3-133
- Visit File 3-120
- Wallpaper file 1-183
- Write File 3-30, 3-121
- Writing the Buffer Contents to a File 3-121
- File attributes 3-137, 6-96
- File buffers 3-122
- File contents 1-200, 1-213
- File directory 5-117
- File flags 3-114
- File Lookup 2-548
- File Options 6-93
- File properties 5-117, 5-204, 5-233, 9-186
- FILE protocol 9-125
- file** Service 9-56
- File specification 5-151
- File System RN-1
- File versions 3-114
- File (c-X c-F) Zmacs command 4-9
- File (m-X) Zmacs command 3-124
- File (m-X) Zmacs command 4-73
- File (m-X) Zmacs command 3-134, 5-105, 5-153
- File (m-X) Zmacs command 3-135
- File (m-X) Zmacs command 3-33, 3-38, RN-49
- File (m-X) Zmacs command 3-124, 4-63
- File (m-X) Zmacs command 4-73
- File (m-X) Zmacs command 3-124
- File (m-X) Zmacs command 3-136
- File (m-X) Zmacs command 3-133, 5-153
- File (m-X) Zmacs command 3-143, 4-10
- File (m-X) Zmacs command 3-132
- File (m-X) Zmacs command 3-132
- File (m-X) Zmail Command 6-45
- File (m-X) Zmail command 6-95
- file-declaration** function 4-325
- file-declare** function 4-325
- file-error** flavor 2-545
- file-locked** flavor 2-552
- file-opening option 5-91
- file-opening option 5-91
- file-opening option 5-91
- file-properties** function 5-105, 5-119
- File-system Errors 2-544
- file-system** package 2-615
- file:** Service 9-56
- File? 1-229
- file-access-path** message 5-225, 8-46
- File access paths 9-55
- File Access Protocol 9-125
- file alist 6-77, 6-81
- file-already-exists** flavor 2-550
- File and Buffer Attributes 3-140
- file and buffer attributes 3-143
- %file-asynchronous-mark-opcode** variable 9-159
- file attribute 3-141, 3-143, 5-109
- file attribute 3-141, 3-143, 5-109
- file attribute 5-109
- file attribute 3-142, 3-143, 5-109
- file attribute 5-109
- file attribute 3-142, 3-143
- Find
- Append To
- Compile
- Copy
- Delete
- Format
- Insert
- Load
- Prepend To
- Reap
- Rename
- Set Patch
- Show
- View
- Insert
- Select Arbitrary Format Mail
- compiler:**
- compiler:**
- fs:**
- fs:**
- :character**
- :direction**
- :error**
- fs:**
- How Do I Create a FEP
- Chaosnet
- Filter-mail
- fs:**
- Other Set Commands for
- Set commands for
- fs:**
- Backspace
- Base
- Fonts
- Lowercase
- Mode
- Nofill

- Package file attribute 5-109
- Patch-File file attribute 3-143, 5-109
- Tab-Width file attribute 3-143
- fs:** **file-attribute-bindings** function 5-111
- File Attribute Checking 3-138
- File Attribute Descriptions 3-141
- File attribute list 2-579
- Buffer and file attribute list 5-109
- Parser for File Attribute Lists 4-10, 5-109
- Parsing file attribute lists 5-109
- Warnings about file attribute lists 3-138
- Reading file attributes 5-111
- User-defined file attributes 5-109
- File attributes as pathname properties 5-138
- Viewing File Attributes in Dired 3-149
- Buffer and File Attributes in Zmacs 3-137
- File backup flag 3-153
- File block number 5-221, 5-226, 8-42, 8-47
- file block number into disk address 5-225, 8-46
- Translate relative File Buffers Command 1-30
- Save File Buffers (m-X) RN-47
- Save All Files (m-X) Renamed to Save file characters 2-268, RN-17
- %%ch-** byte specifiers and File Command 1-16
- Compile File Command 1-18
- Copy File Command 1-20
- Delete File Command 1-21
- Edit File Command 1-21
- Hardcopy File Command 1-23
- Load File Command 1-26
- Load Fep file command 1-201
- Rename File Command 1-29
- Show File Command 1-36, 1-200
- Undelete File Command 1-41
- FEP File Comment Properties 1-209, 5-216
- Viewing and Editing File Contents in Dired 3-149
- file-control-lifetime:** Host Object Attribute 9-11
- File creation errors 2-550
- FEP file data map 5-225, 8-46
- File deletion errors 2-551
- Filed message property 1-57
- file dumper 4-309, 4-316
- bin** File Facility 6-39
- Zmail Draft FILE FEP file type 5-228, 8-49
- \$** character do not reap file flag 5-236
- BABYL mail file format 6-95
- RMAIL mail file format 6-95, 6-96
- TENEX mail file format 6-95, 6-96
- UNIX mail file format 6-95, 6-96
- VAX/VMS mail file format 6-95
- Standard mail file formats 6-95
- Supported file formats 3-258
- Mail File Formats for Zmail 6-95
- Carry-tape file groups 0-32
- QFILE file handle 9-155
- \* descriptor file indicator 9-24
- changes** descriptor file indicator 9-24
- version** descriptor file indicator 9-24
- Loading a File in Dired 3-148
- Find File in Fundamental Mode (m-X) Zmacs command 3-122
- Inserting a File Into a Buffer 3-124
- Reading a File Into a New Buffer 3-120
- Reading a File Into an Existing Buffer 3-120
- Copying a File Into Another 3-134
- Examples of Copying a File Into Another 3-134
- Re-reading a File Into the Buffer 3-121
- sys:** **file-local-declarations** variable 4-324

- FEP File Locks 5-228, 8-48
- Patch file logical pathname translation 5-196
- fs:**
  - file-lookup-error** flavor 2-548
  - File lookup errors 2-548
  - file lookup errors 2-645
  - file manipulation 5-201
  - File Manipulation Commands 3-131
  - File Manipulation Commands 3-131
  - file name 5-151
  - Filename 5-127
  - Filename completion 5-117
  - File Name (m-X) Zmacs command 3-122
  - File name conventions 5-127
  - filename format 5-222, 8-43
  - Filename From the User 5-129
  - file names 6-94
  - file names 6-94
  - file names 4-236
  - file names 6-94
  - file names 6-94
  - file names 6-94
  - file names 6-94
  - file names 6-94
  - File Names 3-114
  - File Names for Zmail 6-94
  - File Naming Conventions 5-200
  - file not backed up flag 5-236
  - file-not-found** flavor 2-548
  - %file-notification-opcode** variable 9-159
  - File Not to Create New Files 1-168, 3-214
  - file-open-for-output** flavor 2-553
  - file-opening option 5-91
  - file-opening option 5-91
  - file operation errors 2-550
  - file-operation-failure** flavor 2-481, 2-546
  - file operations failures 2-552
  - [File options] Profile Mode menu item 6-78
  - :file-or-files** option for **tape:carry-dump** 0-31
  - File packet 9-118
  - File Partitions RN-80
  - File Pathname From an Input File 5-132
  - filepos-out-of-range** flavor 2-552
  - Filepos QFILE Command 9-179
  - Filepos QFILE Command Byte Size Problem 9-179
  - file properties 1-209, 5-216, 5-227, 8-48
  - File Properties (m-X) Zmacs command 3-133
  - File Properties (m-X) Zmacs command 3-133
  - File Properties in Dired 3-149
  - file property 5-117
  - file property 5-227, 8-48
  - file property 5-117
  - file property 5-117
  - file property 5-117
  - file property 5-227, 8-48
  - file property 5-227, 8-48
  - file property 5-227, 8-48
  - file property 5-227, 8-48
  - file property 5-117
  - file property 5-117
  - file property 5-117
  - file property 5-117
  - file property 5-117
  - file property 5-227, 8-48
  - file-property-bindings** function 5-111
  - File property errors 2-551
  - File Protocol (QFILE) 9-153
  - file-read-property-list** function 5-111
  - File rename errors 2-551
- SCL and Maclisp
- Overview of Zmacs
- Zmacs
- Host-independent
- Set Visited
- FEP
- Getting a
- Complied
- Default mail
- Format of patch
- Inbox
- Other mail
- Renamed inbox
- Source
- Zmacs Buffer and
- Disk
- Init
- character
- fs:**
- Init File Form: Setting Find
- fs:**
- :byte-size**
- :preserve-dates**
- Invalid
- fs:**
- Miscellaneous
- EOF End of
- Warning Against Deleting LMFS
- Defaulting an Output
- fs:**
- The
- FEP
- Change
- View
- Changing
- :author**
- :author** FEP
- :block-size**
- :byte-size**
- :creation-date**
- :creation-date** FEP
- :directory** FEP
- :dont-delete** FEP
- :length** FEP
- :length-in-blocks**
- :length-in-bytes**
- :not-backed-up**
- :reference-date**
- :truename** FEP
- fs:**
- Chaosnet
- fs:**

Request Failures Based on <b>fs:</b>	<b>file-request-failure</b> 2-546
<b>fs:</b>	<b>file-request-failure</b> flavor 2-546
	File restore format 1-201
	Files 3-30, 5-91, 5-125
Accessing	Files 5-91
Accessing FEP	Files 5-222, 8-43
Arrays in compiled code	files 4-331, 5-241
Association of buffers with	files 3-30
Attribute lists in	files 4-10
BFD	files 7-140
Binary	files 0-31, 2-613
Buffer Flags for Existing	Files 3-114
Buffer Flags for New	Files 3-115
Changes	files 9-24
Changes to Patch	Files RN-52
Character	files 0-31
Commands for manipulating	files 3-131
Compiled code objects in compiled code	files 4-331, 5-241
Configuration	files 1-198, 1-209, 5-215
Converting site	files 0-87
Copying	files 3-150, 5-105
Copying Buffers and	Files 4-63
Copying FEP	Files 8-53
Creating and Manipulating	Files 1-47
Creating and Saving Buffers and	Files 3-30
Creating Links to	Files 3-135
Customizing Zmacs in Init	Files 3-213
Deleting	Files 3-135
Description of Creating and Saving Buffers and	Files 3-30
Directory Pathnames and Directory Pathnames as	Files 5-142
Disable all character set translation in ASCII	files 5-91
Disable special treatment of Rubout in ASCII	files 5-91
Draft	files 6-39
Dribble	Files 1-183
Dumping Hash Tables to	Files 2-75
Dumping individual	files 0-15
Editing Existing	Files 3-32
FEP	files 0-16
FEP configuration	files 1-209, 5-215
File Types of Lisp Source and Compiled Code	Files 4-318
Finding Backup Copies of	Files 0-12
Header	Files 9-146
Hints for Using Keywords, Mail Collections, and Mail	Files 6-81
Inbox	Files 6-11, 6-12
Individual Patch	Files 4-235
Init	files 1-155, 1-161, 3-213, 4-12, 4-64
Init File Form: Setting Find File Not to Create New	Files 1-168, 3-214
Instances in compiled code	files 4-331, 5-241
Introduction to Customizing Zmacs in Init	Files 3-213
Lisp Machine Namespace Server	Files 9-24
Lists in compiled code	files 4-331, 5-241
Loading	Files 5-108
Loading documentation index	files 1-121
Loading text	files 5-109
Log	files 9-24
Mail	Files 6-11
Mailer forwarding	files 6-113
Multiple reel tape	files 1-201
Names of Patch	Files 4-236
Namespace Database Changes	Files 9-26
Namespace database descriptor	files 9-24
Namespace Database Log	Files 9-26
Namespace Database Object	Files 9-25
Naming of	Files 5-127
Naming of FEP	Files 5-222, 8-43
Numbers in compiled code	files 4-331, 5-241



- Object files 9-24
- Organization of Patch Files 4-235
- Pathname Messages: Naming of Files 5-165
- Putting Data in Compiled Code Files 4-331, 5-241
- Reading and Writing FED Files 3-257
- Reading FED Files 3-257
- Reading font files 3-258
- Relative Pathnames: Files 5-149
- Renaming Files 3-133, 3-150
- Renaming FEP Files 1-212, 5-219
- Renaming LMFS files 5-176
- Repatriating files 0-38
- Saving a List of Mail Files 6-78
- Saving messages in disk files 6-39
- SCL and Common Lisp Files 2-635
- Selecting mail files 6-77
- Selecting Zmail Mail Buffers and Files 6-77
- Setting Editor Variables in Init Files 1-167, 3-213
- Setting Key Bindings in Init Files 1-168, 3-215
- Setting Mode Hooks in Init Files 1-170, 3-214
- Special-purpose Stream Operations for Files 5-20
- Summary of Creating and Saving Buffers and Files 3-30
- Symbols in compiled code files 4-331, 5-241
- Syntax and Base Attributes in Source Files RN-9
- System source files 4-231
- Tools for Compiling Files 4-317
- Translation files 0-87
- Transporting and distributing FEP files 0-15
- Types of Patch Files 4-233
- Using the mouse with List Files 3-131
- Vnn-debug.flod files 1-222
- Writing FED Files 3-258
- Writing font files 3-258
- Zmacs Customization in Init Files 1-167
- List Files (m-X) Zmacs command 3-131
- Comparing Files and Buffers in Zmacs 3-125
- Listing Zmail Buffers, Mail Files and Collections 6-77
- Files and Directories Used by the Mailer 6-113
- Transferring source files between hosts 0-15
- Dump deleted files dump parameter 0-6
- PDP-10 file server 5-91
- File server computer 5-127
- Access files on network file servers 9-125
- Remote file servers 5-91
- TOPS-20 file servers 5-91
- Special Files for Creating Connections 9-147
- Marking Files for Deletion in Dired 3-150
- Protecting Files From Being Deleted in Dired 3-152
- Protecting Files From Being Reaped in Dired 3-152
- Setting Variables in Init Files Has Changed RN-10
- Listing Files in a Directory 3-131
- Applying Arbitrary Functions to Files in Dired 3-153
- Comparing Recent Versions of Files in Dired 3-150
- Copying and Renaming Files in Dired 3-150
- Setting Generation Retention Count on Files in Dired 3-152
- Manipulating Buffers and Files in Zmacs 3-113
- Overview of Working with Buffers and Files in Zmacs 3-114
- Working with Buffers and Files in Zmacs 3-114
- Recompiling Source Files Is Recommended RN-9
- Save All Files (m-X) Renamed to Save File Buffers (m-X) RN-47
- Snapshot files on a local LMFS 0-15
- Access files on network file servers 9-125
- Adding a Spare World Load as LMFS File Space 1-212, 5-219
- 3600 FEP files selected for dumping 0-20
- Finding Files That Have Not Been Backed up in Dired 3-152

Marking	Files That MacIisp Must Compile 4-329
Sending press	Files to Be Hardcopied in Dired 3-153
Writing	files to Dover printer 9-128
Writing FEP	files to tape 0-31
	Files to Tape 8-59
	File Stream Operations 5-113
Bidirectional	file streams 5-115
Direct Access	File Streams 5-115
Direct Access Bidirectional	File Streams 5-116
Direct Access Output	File Streams 5-116
Effect of Character Set Translation on Direct Access	File Streams 5-10
Messages to	file streams 5-113
	Files Using <b>defwrapper</b> Forms Must Be Recompiled in Release 6.0 RN-28
Why Can't I Write Out	Files When I Have Free Disk Space? 1-229
Association of	files with buffers 3-30
Hardcopy	files with multiple fonts 3-273
FEP	file system 1-200, 5-221, 8-42
How LMFS Uses the FEP	File System 1-209, 5-216
Lisp Machine	File System 5-203
Manipulating the local	file system 0-39
Restoring a	file system 1-201
Shared	file system 5-127
VAX/VMS	file system 6-96
Verifying a FEP	File System 8-59
	File System (F) 1-187
Display status of	file system display 1-185, 4-303
	File System Editor 5-231
Entering the	File System Editor 3-40, 5-231
Hardcopying From the	File System Editor 1-108, 3-268
Using the	File System Editor 5-232
	File system editor directory display 5-236
[Close]	File System Editor menu item 5-233
[Create Inferior Directory]	File System Editor menu item 5-233
[Create Link]	File System Editor menu item 5-233
[Decache]	File System Editor menu item 5-233
[Delete]	File System Editor menu item 5-233
[Delete (Immediate)]	File System Editor menu item 5-233
[Edit]	File System Editor menu item 5-233
[Edit Properties]	File System Editor menu item 5-233
[Expunge]	File System Editor menu item 5-233
[Hardcopy]	File System Editor menu item 5-233
[Link Transparencies]	File System Editor menu item 5-233
[Load]	File System Editor menu item 5-233
[New Properties]	File System Editor menu item 5-233
[Open]	File System Editor menu item 5-233
[Rename]	File System Editor menu item 5-233
[Selective Open]	File System Editor menu item 5-233
[Undelete]	File System Editor menu item 5-233
[View]	File System Editor menu item 5-233
[View Properties]	File System Editor menu item 5-233
[Wildcard Delete]	File System Editor menu item 5-233
Changes to the	File System in Release 6.0 RN-71
Improvements to the	File System in Release 6.0 RN-71
	File System Maintenance Commands 0-39
[Complete Dump]	File System Maintenance menu item 0-39
[Flush Free Buffer]	File System Maintenance menu item 0-39
[Flush Typeout]	File System Maintenance menu item 0-39
[Free Records]	File System Maintenance menu item 0-39
[HELP]	File System Maintenance menu item 0-39
[Incremental Dump]	File System Maintenance menu item 0-39
[Lisp Window]	File System Maintenance menu item 0-39
[Lst FEP FS Root]	File System Maintenance menu item 0-39
[Maintenance]	File System Maintenance menu item 0-39
[Print Herald]	File System Maintenance menu item 0-39
[QUIT]	File System Maintenance menu item 0-39

- [Reload/Retrieve] File System Maintenance menu item 0-10, 0-39
- [Salvage] File System Maintenance menu item 0-39
- [Server Errors] File System Maintenance menu item 0-39
- [Server Shutdown] File System Maintenance menu item 0-39
- [Tree edit any] File System Maintenance menu item 0-39, 5-231
- [Tree edit Homedir] File System Maintenance menu item 0-39, 5-231
- [Tree edit root] File System Maintenance menu item 0-39, 5-231
- Free Records: File System Maintenance Program 0-37
- FEP File System Overview 1-208, 5-215
- FEP File System Maintenance Program 0-37
- FEP File System Overview 1-208, 5-215
- FEP File system partition table 0-35, 5-213
- FREE-SPACE-DESCRIPTION File System Pathnames 5-176
- SETTABLE-PROPERTIES file system property 9-186
- Pathnames on Supported Host file system property 9-186
- Disk and FEP File Systems 5-174
- [Close All] File System Utilities 8-58
- [Mail] File system version number 9-26
- QFILE Files] Maintenance Operations menu item 0-39
- Chaosnet files] Profile Mode menu item 6-77, 6-78
- si: File Transfer Philosophy 9-154
- >DIR FEP File Transfer Protocol 9-153
- bin \*file-transformation-function\* variable 4-229
- FEP FEP file type 5-228, 8-49
- FILE FEP file type 4-318
- FLOD FEP file type 5-228, 8-49
- FSPT FEP file type 5-228, 8-49
- LOAD FEP file type 5-228, 8-49
- MIC FEP file type 5-228, 8-49
- PAGE FEP file type 5-228, 8-49
- LOAD file type (FEP) 1-209, 5-215
- MIC file type (FEP) 1-208, 5-215
- fs: \*file-type-mode-alist\* variable 3-198, 5-153
- FEP File Types 5-228, 8-49
- System file types 0-20
- File Types and Zmacs Major Modes 3-198
- File Types of Lisp Source and Compiled Code
- Files 4-318
- File types of the patch directory file 4-236
- File types of the system version-directory file 4-236
- File Users: Defining Protocols 9-55
- file versions 3-150
- File Versions in Dired 3-151
- Comparing \*file-versions-kept\* variable 3-135
- Deleting Multiple File Warnings (m-X) Zmacs command 4-321
- zwei: File with a Buffer 3-122
- Edit File with QFILE 9-155
- Associating a File Zmacs command 1-55, 3-31, 3-32
- Opening a File Zmacs command 3-31
- Find File Zmacs command 1-55, 3-32
- Save File Zmail Menu Item 6-39
- Write File Zmail Menu Item 6-39
- [Continue (R)] Draft File Zmail Menu Item 6-39
- Restore Draft File Zmail Menu Item 6-39
- Save Draft File Zmail Menu Item 6-39
- Write Draft File] Font Editor menu item 3-258, 3-260
- [Read] File] Font Editor menu item 3-258, 3-260
- [Write] file] Map over Move menu item 6-81
- [Find] file] Zmail menu item 6-77
- [Find] file] Zmail Select menu item 6-77
- [Read/Create] fill 7-179
- Constraint frame configuration Fill Paragraph 3-95
- Fill pointer 2-238, 2-247, 7-330
- Fill Region 3-95
- :fill-p init option for tv:menu 7-214, 7-296
- :fill-p method of tv:menu 7-214

- math:**
  - fill-pointer** function 2-245
  - fill-2d-array** function 2-260
  - fillarray** function 2-252
  - Fill Column 3-196
  - Fill Column (c-X F) Zmacs command 4-12
  - Filled format 7-213, 7-214, 7-296
  - :filled-elements** message 2-73
  - Filling a Region 3-94
  - Filling Text with Auto Fill Minor Mode 3-195
  - Fill in Text Mode 1-170, 3-214
  - Fill Long Comment (m-X) Zmacs command 4-23
  - Fill Minor Mode 3-195
  - Fill Mode 3-142, 3-143, 3-196
  - Fill Mode (m-X) Zmacs command 4-12
  - sys:**
    - fill-pointer-not-fixnum** flavor 2-540
    - :fill-pointer** option for **make-array** 2-241
    - Fill Prefix 3-95
  - filter 6-49
  - Filter menus 6-60
  - Filter-keyword alist 6-75
  - Filter-mail file alist 6-77, 6-81
  - Filter-universe Alist 6-73
  - Filter Creation Display 6-60
  - The
    - [Abort] Filter Creation Display menu item 6-60
    - [And] Filter Creation Display menu item 6-61
    - [Before] Filter Creation Display menu item 6-81
    - [Close] Filter Creation Display menu item 6-61
    - [Done] Filter Creation Display menu item 6-60
    - [Not] Filter Creation Display menu item 6-61
    - [Or] Filter Creation Display menu item 6-61
    - [Sample] Filter Creation Display menu item 6-60
  - Defining a
    - Filter Example 6-61
    - Filters 6-58, 6-59
  - Creating Zmail
    - Filters 6-60
  - Mail collection
    - filters 6-58
  - Predefined
    - filters 6-59
  - Satisfying
    - filters 6-58
  - Saving Zmail
    - Filters 6-63
  - Selecting Zmail
    - Filters 6-59
  - User-defined
    - filters 6-59
    - [Filters (M)] Zmail Profile Mode command 6-73
  - [New filter]
    - Filter Selection Display menu item 6-60
  - [Unseen]
    - Filter Selection Display menu item 6-81
  - zwei:**
    - \*filter-summary-window-fraction\*** variable 6-92
  - [By individual
    - filters] Map over Move menu item 6-80
    - [Filters] Profile Mode menu 6-75
    - [Filters] Profile Mode menu item 6-63, 6-77
  - [New
    - filter] Filter Selection Display menu item 6-60
    - [Filter] Message Summary Line menu item 6-79
  - finally loop** keyword 2-212
  - [Find (M)] 1-124, 1-133
  - [Find (R)] 1-133
  - Find* Commands 1-22
  - Find File 3-30
  - [Find (R)] Document Examiner menu item 1-123
- si:**
  - find-comtab** function 7-53
  - find-all-symbols** function 2-606
  - Find Any Candidates 1-123
- lmfs:**
  - find-backup-copies** function 0-12
  - :find-by-item** method of **si:heap** 2-78
  - :find-by-key** method of **si:heap** 2-78
- Documentation
  - find commands 1-120, 1-122
  - :finder** option for **defresource** 8-132
  - Find File (c-X c-F) Zmacs command 4-9
  - Find File In Fundamental Mode (m-X) Zmacs command 3-122

- Init File Form: Setting **fs:**
  - Find File Not to Create New Files 1-168, 3-214
  - find-file-with-type** function 5-164
  - Find File Zmacs command 1-55, 3-31, 3-32
  - [Find file] Map over Move menu item 6-81
  - [Find file] Zmail menu item 6-77
  - Finding a command processor command table 7-53
  - Finding a Handler 2-501
  - Finding a Server Description 9-214
  - Finding Backup Copies of Files 0-12
  - Finding Files That Have Not Been Backed up in Dired 3-152
  - Finding Out About Existing Code 4-35
  - Finding Out About Flavors 1-87, 3-218
  - Finding Out About Lisp 1-88
  - Finding Out About Lisp 1-86, 3-217
  - Finding Out About the State of Buffers 1-86, 3-217
  - Finding Out About the State of Zmacs 1-86, 3-217
  - Finding Out About Zmacs Commands 3-44
  - Finding Out About Zmacs Commands 3-46
  - Finding Out About Zmacs Commands 3-44
  - Finding Out About Zmacs Commands with HELP 3-44
  - Finding Out About Zmacs Variables 3-210
  - Finding Out What an Extended Command Does 3-45
  - Finding Out What a Prefix Command Does 3-45
  - Finding Out What a Zmacs Command Does 3-44
  - Finding Out What a Zmacs Command Does 3-44
  - Finding Out What You Have Typed 3-46
  - Finding Out Why Your Machine Crashed 1-214
  - Finding Paths to Hosts 9-44
  - Finding source code 3-170
  - Finding the right command 3-45
  - Find Initial Substring Candidates 1-124
- Zmacs Commands for Lisp Facilities for
- Zmacs Commands for
- Zmacs Commands for
- Zmacs Commands for
- More HELP Commands for Overview of
- Example of
- netl:** **find-network-interfaces** function 9-204
- net:** **find-object-from-property-list** function 9-30
- net:** **find-object-named** function 9-29
- net:** **find-objects-from-property-list** function 9-30
- net:** **find-paths-to-protocol-on-host** function 9-41
- net:** **find-paths-to-service** function 9-41
- net:** **find-paths-to-service-on-host** function 9-41
- net:** **find-path-to-protocol-on-host** function 9-41
- net:** **find-path-to-service-on-host** function 9-41
- net:** **find-position-in-list** function 2-60
- net:** **find-position-in-list-equal** function 2-61
- Find String (m-X) Zmail command 6-49, 6-67
- [Find String] Map over menu item 6-67, 6-80
- %find-structure-extent** function 8-17
- %find-structure-header** function 8-16
- %find-structure-leader** function 8-17
- Find Symbol Command 1-22
- Find Table of Contents 1-125
- Functions That
  - Find the Home Package of a Symbol 2-607
  - Find Unbalanced Parentheses (m-X) Zmacs command 3-48, 4-26
  - Find Whole Word Candidates 1-126
  - [Find] 1-133
  - [Find] Document Examiner menu item 1-126
  - FINGER protocol 9-126
  - net:** **finger-location** variable 9-135
  - net:** **finger-location:** Host Object Attribute 9-9
  - net:** **finger-all-lispms** function 9-135
  - net:** **finger-local-lispms** function 9-135
  - :finish** 5-113
  - :finish** message 5-18, 5-114
  - :finish** operation 9-137
  - chaos:** **finish-conn** function 9-139

- %finish-function-call** special form 8-23
- Finishing-choices 7-251
- Finish Patch (m-X) 3-190, 4-242
- Finish QFILE Command 9-178
- :finish-timeout** method of
  - sl:interactive-stream** 5-71, 7-39
- first** function 2-46
- Going Back to First Indented Character in Zmacs 3-165
- first loop** keyword 2-207
- firstn** function 2-53
- :first** option for **add-initialization** 8-67
- fix** function 2-107
- audio:** **fix-sample** function 7-336
- audio:** **fix** argument to **typep** 2-9
- audio:** **fix-channel-float** function 7-336
- Fixed-point numbers 2-7
- Fixed-point format directive 5-32
- Fixed-width fonts 3-222, 7-108, 7-144
- Fixed-width* Font Attribute 3-222, 7-144
- Fixed bridge connection type 9-108
- Init File Form: Fixing White Space for Kill/Yank Commands 1-168, 3-214
- sys:** **%fixnum** function 8-14
- :fixnum-array** Option for **deconstruct** is Obsolete RN-28
- fixnum loop** data-type keyword 2-219
- time:** **fixnum-microsecond-time** function 7-357
- :fixnum** option for **with-open-file** 5-91
- fixnump** function 2-8
- :fixnum** returned by **typep** 2-9
- Fixnums 2-4, 2-89
- fixp** function 2-7
- audio:** **fix-polyphonic-wave-table-entry** function 7-337
- fixr** function 2-108
- ! character file not backed up
- \$ character do not reap file
- Dired Complement No Reap
  - File backup
  - Modification
  - More
  - Output hold
  - Right margin character
  - Clearing the Trap-on-exit
  - Setting the Trap-on-exit
  - Toggling the Trap-on-exit
- +
  - File
  - Status
- Synchronization
  - Buffer
  - Buffer
- SCL and **zl:sl:**
  - \*flag-wrong-type-strings\*** 2-637, 2-642
  - Flashing the screen 5-19
  - flashy-scrolling-mixin** flavor 7-175
  - flatc** function 5-89
  - flatsize** function 5-89
  - flavor 2-451
  - flavor 2-532
  - Flavor 2-468
  - flavor 2-482, 2-529, 2-531, 4-133
  - flavor 2-540
  - flavor 2-501, 2-511, 2-529, 2-532
  - flavor 2-532
  - flavor 2-525
  - flavor 2-482, 2-529, 2-532, 4-133
  - flavor 2-532
- tv:**
- Base
- break**
- Changing a
  - condition**
  - dbg:bad-array-mixin**
  - dbg:debugger-condition**
  - dbg:proceedable-ferror**
  - dbg:special-commands-mixin**
  - error**
  - ferror**

<b>fquery</b>	flavor	7-57
<b>fs:access-error</b>	flavor	2-549
<b>fs:change-property-failure</b>	flavor	2-551
<b>fs:circular-link</b>	flavor	2-552
<b>fs:correctable-login-problems</b>	flavor	2-547
<b>fs:create-directory-failure</b>	flavor	2-550
<b>fs:create-link-failure</b>	flavor	2-551
<b>fs:creation-failure</b>	flavor	2-550
<b>fs:data-error</b>	flavor	2-546
<b>fs:delete-failure</b>	flavor	2-551
<b>fs:device-not-found</b>	flavor	2-549
<b>fs:directory-already-exists</b>	flavor	2-550
<b>fs:directory-not-empty</b>	flavor	2-552
<b>fs:directory-not-found</b>	flavor	2-549
<b>fs:dont-delete-flag-set</b>	flavor	2-552
<b>fs:file-error</b>	flavor	2-545
<b>fs:file-locked</b>	flavor	2-552
<b>fs:file-already-exists</b>	flavor	2-550
<b>fs:file-lookup-error</b>	flavor	2-548
<b>fs:file-not-found</b>	flavor	2-548
<b>fs:file-open-for-output</b>	flavor	2-553
<b>fs:file-operation-failure</b>	flavor	2-481, 2-546
<b>fs:filepos-out-of-range</b>	flavor	2-552
<b>fs:file-request-failure</b>	flavor	2-546
<b>fs:host-not-available</b>	flavor	2-546
<b>fs:inconsistent-options</b>	flavor	2-552
<b>fs:incorrect-access-to-directory</b>	flavor	2-549
<b>fs:incorrect-access-to-file</b>	flavor	2-549
<b>fs:invalid-password</b>	flavor	2-547
<b>fs:invalid-wildcard</b>	flavor	2-550
<b>fs:invalid-byte-size</b>	flavor	2-552
<b>fs:invalid-operation-for-directory</b>	flavor	2-550
<b>fs:invalid-operation-for-link</b>	flavor	2-550
<b>fs:invalid-pathname-component</b>	flavor	2-553
<b>fs:invalid-pathname-syntax</b>	flavor	2-550
<b>fs:invalid-property-value</b>	flavor	2-551
<b>fs:link-target-not-found</b>	flavor	2-549
<b>fs:login-problems</b>	flavor	2-547
<b>fs:login-required</b>	flavor	2-548
<b>fs:multiple-file-not-found</b>	flavor	2-548
<b>fs:network-lossage</b>	flavor	2-547
<b>fs:no-file-system</b>	flavor	2-546
<b>fs:no-more-room</b>	flavor	2-552
<b>fs:not-available</b>	flavor	2-553
<b>fs:not-enough-resources</b>	flavor	2-547
<b>fs:not-logged-in</b>	flavor	2-548
<b>fs:parse-pathname-error</b>	flavor	2-553
<b>fs:pathname</b>	flavor	5-153
<b>fs:pathname-error</b>	flavor	2-553
<b>fs:rename-failure</b>	flavor	2-551
<b>fs:rename-across-directories</b>	flavor	2-551
<b>fs:rename-across-hosts</b>	flavor	2-551
<b>fs:rename-to-existing-file</b>	flavor	2-551
<b>fs:undefined-logical-pathname-translation</b>	flavor	2-554
<b>fs:unimplemented-option</b>	flavor	2-552
<b>fs:unknown-operation</b>	flavor	2-547
<b>fs:unknown-property</b>	flavor	2-551
<b>fs:unknown-user</b>	flavor	2-547
<b>fs:unknown-pathname-host</b>	flavor	2-553
<b>fs:wildcard-not-allowed</b>	flavor	2-550
<b>fs:wrong-kind-of-file</b>	flavor	2-550
<b>lgp:basic-lgp-stream</b>	flavor	4-124
List valid init-options for	flavor	5-104
<b>math:singular-matrix</b>	flavor	2-535
Message to an object of some	flavor	2-461

Miscellaneous System Errors Not Categorized by Base

	Flavor	2-536
	Mixin	flavor 2-451
	<b>net:network</b>	flavor 9-206
	<b>parse-ferror</b>	flavor 2-543
	Removing	flavor 2-437
<b>si:coroutine-bidirectional-stream</b>	flavor	5-28
<b>si:coroutine-input-stream</b>	flavor	5-28
<b>si:coroutine-output-stream</b>	flavor	5-28
<b>si:disk-error-event</b>	flavor	8-38
<b>si:eq-hash-table</b>	flavor	2-71
<b>si:equal-hash-table</b>	flavor	2-72
<b>si:interactive-stream</b>	flavor	7-3
<b>si:process</b>	flavor	8-95
<b>si:property-list-mixin</b>	flavor	2-473
<b>si:serial-hdlc-stream</b>	flavor	5-263
<b>si:simple-process</b>	flavor	8-95
<b>si:vanilla-flavor</b>	flavor	2-453, 4-142
<b>sys:abort</b>	flavor	2-502, 2-526, 2-532, 4-129
<b>sys:area-overflow</b>	flavor	2-537
<b>sys:arithmetic-error</b>	flavor	2-534
<b>sys:array-has-no-leader</b>	flavor	2-540
<b>sys:array-wrong-number-of-dimensions</b>	flavor	2-540
<b>sys:array-wrong-number-of-subscripts</b>	flavor	2-541
<b>sys:bad-array-type</b>	flavor	2-540
<b>sys:bad-connection-state</b>	flavor	2-555
<b>sys:bad-data-type-in-memory</b>	flavor	2-534
<b>sys:bitbit-array-fractional-word-width</b>	flavor	2-537
<b>sys:bitbit-destination-too-small</b>	flavor	2-537
<b>sys:call-trap</b>	flavor	2-523
<b>sys:cell-contents-error</b>	flavor	2-533
<b>sys:connection-closed</b>	flavor	2-555
<b>sys:connection-error</b>	flavor	2-555
<b>sys:connection-lost</b>	flavor	2-556
<b>sys:connection-refused</b>	flavor	2-555
<b>sys:connection-closed-locally</b>	flavor	2-555
<b>sys:connection-no-more-data</b>	flavor	2-556
<b>sys:cons-in-fixed-area</b>	flavor	2-538
<b>sys:disk-error</b>	flavor	2-538
<b>sys:divide-by-zero</b>	flavor	2-479, 2-534
<b>sys:draw-off-end-of-screen</b>	flavor	2-537
<b>sys:draw-on-unprepared-sheet</b>	flavor	2-537
<b>sys:end-of-file</b>	flavor	2-536
<b>sys:external-symbol-not-found</b>	flavor	2-619
<b>sys:fill-pointer-not-fixnum</b>	flavor	2-540
<b>sys:float-divide-by-zero</b>	flavor	2-535
<b>sys:float-divide-zero-by-zero</b>	flavor	2-536
<b>sys:float-inexact-result</b>	flavor	2-536
<b>sys:floating-exponent-overflow</b>	flavor	2-535
<b>sys:floating-exponent-underflow</b>	flavor	2-536
<b>sys:floating-point-exception</b>	flavor	2-535
<b>sys:float-invalid-compare-operation</b>	flavor	2-536
<b>sys:float-invalid-operation</b>	flavor	2-536
<b>sys:host-not-responding</b>	flavor	2-555
<b>sys:host-not-responding-during-connection</b>	flavor	2-555
<b>sys:host-stopped-responding</b>	flavor	2-555
<b>sys:instance-variable-pointer-out-of-range</b>	flavor	2-538
<b>sys:instance-variable-zero-referenced</b>	flavor	2-538
<b>sys:invalid-function</b>	flavor	2-542
<b>sys:local-network-error</b>	flavor	2-554
<b>sys:name-conflict</b>	flavor	2-619
<b>sys:negative-sqrt</b>	flavor	2-536
<b>sys:network-error</b>	flavor	2-554
<b>sys:network-resources-exhausted</b>	flavor	2-554
<b>sys:network-stream-closed</b>	flavor	2-556
<b>sys:no-action-mixin</b>	flavor	2-532
<b>sys:non-positive-log</b>	flavor	2-534



<b>sys:number-array-not-allowed</b>	flavor	2-541
<b>sys:package-error</b>	flavor	2-542, 2-619
<b>sys:package-locked</b>	flavor	2-543, 2-619
<b>sys:package-not-found</b>	flavor	2-542, 2-619
<b>sys:parse-error</b>	flavor	2-543
<b>sys:pdl-overflow</b>	flavor	2-537
<b>sys:print-not-readable</b>	flavor	2-543
<b>sys:read-error</b>	flavor	2-544
<b>sys:read-end-of-file</b>	flavor	2-544
<b>sys:read-l1st-end-of-file</b>	flavor	2-544
<b>sys:read-premature-end-of-symbol</b>	flavor	2-544, RN-38
<b>sys:read-string-end-of-file</b>	flavor	2-544
<b>sys:redefinition</b>	flavor	2-538
<b>sys:region-table-overflow</b>	flavor	2-538
<b>sys:remote-network-error</b>	flavor	2-554
<b>sys:stream-closed</b>	flavor	2-536
<b>sys:subscript-out-of-bounds</b>	flavor	2-541
<b>sys:throw-tag-not-seen</b>	flavor	2-538
<b>sys:too-few-arguments</b>	flavor	2-539
<b>sys:too-many-arguments</b>	flavor	2-539
<b>sys:unbound-symbol</b>	flavor	2-533
<b>sys:unbound-variable</b>	flavor	2-533
<b>sys:unbound-closure-variable</b>	flavor	2-533
<b>sys:unbound-instance-variable</b>	flavor	2-533
<b>sys:unclaimed-message</b>	flavor	2-542
<b>sys:undefined-function</b>	flavor	2-534
<b>sys:undefined-keyword-argument</b>	flavor	2-542
<b>sys:unknown-address</b>	flavor	2-554
<b>sys:unknown-host-name</b>	flavor	2-554
<b>sys:unknown-locf-reference</b>	flavor	2-534
<b>sys:unknown-self-reference</b>	flavor	2-534
<b>sys:virtual-memory-overflow</b>	flavor	2-537
<b>sys:write-in-read-only</b>	flavor	2-537
<b>sys:wrong-stack-group-state</b>	flavor	2-537
<b>sys:wrong-type-argument</b>	flavor	2-539
<b>sys:zero-args-to-select-method</b>	flavor	2-539
<b>tape:end-of-tape</b>	flavor	2-556, 5-277
<b>tape:mount-error</b>	flavor	2-556, 5-277
<b>tape:tape-error</b>	flavor	2-556, 5-277
<b>tape:tape-device-error</b>	flavor	2-556, 5-277
The Basic Choose Variable Values	Flavor	7-272
The Basic Multiple Choice	Flavor	7-254
<b>tv:abstract-dynamic-item-list-mixin</b>	flavor	7-235
<b>tv:any-tyl-mixin</b>	flavor	4-129
<b>tv:autoexposing-more-mixin</b>	flavor	7-116
<b>tv:basic-frame</b>	flavor	7-100, 7-177
<b>tv:basic-menu</b>	flavor	7-220
<b>tv:basic-choose-variable-values</b>	flavor	7-272
<b>tv:basic-constraint-frame</b>	flavor	7-175
<b>tv:basic-momentary-menu</b>	flavor	7-220
<b>tv:basic-mouse-sensitive-items</b>	flavor	7-280
<b>tv:basic-multiple-choice</b>	flavor	7-254
<b>tv:basic-scroll-bar</b>	flavor	7-175
<b>tv:basic-scroll-window</b>	flavor	7-305
<b>tv:bordered-constraint-frame</b>	flavor	7-177
<b>tv:bordered-constraint-frame-with-shared-io-buffer</b>	flavor	7-178
<b>tv:borders-mixin</b>	flavor	7-170
<b>tv:box-blinker</b>	flavor	7-150
<b>tv:changeable-name-mixin</b>	flavor	7-173
<b>tv:character-blinker</b>	flavor	7-150
<b>tv:choose-variable-values-pane</b>	flavor	7-272
<b>tv:choose-variable-values-window</b>	flavor	7-272
<b>tv:command-menu</b>	flavor	7-231, 7-293
<b>tv:command-menu-abort-on-deexpose-mixin</b>	flavor	7-230
<b>tv:command-menu-mixin</b>	flavor	7-230, 7-293
<b>tv:command-menu-pane</b>	flavor	7-231

<b>tv:constraint-frame</b>	flavor	7-177
<b>tv:constraint-frame-with-shared-to-buffer</b>	flavor	7-178
<b>tv:delayed-redisplay-label-mixin</b>	flavor	7-173
<b>tv:dont-select-with-mouse-mixin</b>	flavor	7-100
<b>tv:dynamic-item-list-mixin</b>	flavor	7-235
<b>tv:dynamic-momentary-menu</b>	flavor	7-236
<b>tv:dynamic-momentary-window-hacking-menu</b>	flavor	7-236
<b>tv:dynamic-multicolumn-mixin</b>	flavor	7-236
<b>tv:dynamic-pop-up-abort-on-deexpose-command-menu</b>	flavor	7-236
<b>tv:dynamic-pop-up-command-menu</b>	flavor	7-236
<b>tv:dynamic-pop-up-menu</b>	flavor	7-236
<b>tv:flashy-scrolling-mixin</b>	flavor	7-175
<b>tv:graphics-mixin</b>	flavor	4-116, 7-118
<b>tv:gray-deexposed-inferiors-mixin</b>	flavor	7-93
<b>tv:gray-unused-areas-mixin</b>	flavor	7-93
<b>tv:hollow-rectangular-blinker</b>	flavor	7-150
<b>tv:hysteretic-window-mixin</b>	flavor	7-158
<b>tv:ibeam-blinker</b>	flavor	7-150
<b>tv:label-mixin</b>	flavor	7-171
<b>tv:line-truncating-mixin</b>	flavor	7-117
<b>tv:list-mouse-buttons-mixin</b>	flavor	4-129
<b>tv:margin-choice-mixin</b>	flavor	7-289
<b>tv:margin-scroll-mixin</b>	flavor	7-175
<b>tv:margin-space-mixin</b>	flavor	7-169
<b>tv:menu</b>	flavor	7-213, 7-221, 7-293, 7-295, 7-299
<b>tv:menu-highlighting-mixin</b>	flavor	7-241
<b>tv:minimum-window</b>	flavor	7-105
<b>tv:momentary-menu</b>	flavor	7-221, 7-293
<b>tv:momentary-multiple-menu</b>	flavor	7-242
<b>tv:momentary-window-hacking-menu</b>	flavor	7-221
<b>tv:mouse-sensitive-text-scroll-window</b>	flavor	7-174
<b>tv:multiple-choice</b>	flavor	7-254
<b>tv:multiple-menu</b>	flavor	7-242
<b>tv:multiple-menu-choose-menu</b>	flavor	7-249
<b>tv:multiple-menu-choose-menu-mixin</b>	flavor	7-248
<b>tv:multiple-menu-mixin</b>	flavor	7-241
<b>tv:no-screen-managing-mixin</b>	flavor	7-87
<b>tv:pane-mixin</b>	flavor	7-100, 7-176
<b>tv:pane-no-mouse-select-mixin</b>	flavor	7-100, 7-177
<b>tv:pop-up-menu</b>	flavor	7-221
<b>tv:pop-up-multiple-menu-choose-menu</b>	flavor	7-249
<b>tv:process-mixin</b>	flavor	4-129, 7-94
<b>tv:rectangular-blinker</b>	flavor	7-149
<b>tv:scroll-window</b>	flavor	7-305
<b>tv:scroll-mouse-mixin</b>	flavor	7-311
<b>tv:scroll-window-with-timeout</b>	flavor	7-305
<b>tv:select-mixin</b>	flavor	7-99
<b>tv:select-relative-mixin</b>	flavor	7-99
<b>tv:sheet</b>	flavor	4-116, 4-133
<b>tv:show-partially-visible-mixin</b>	flavor	7-87
<b>tv:stream-mixin</b>	flavor	7-108, 7-118, 7-132
<b>tv:temporary-choose-variable-values-window</b>	flavor	7-273
<b>tv:temporary-multiple-choice-window</b>	flavor	7-254
<b>tv:temporary-timeout-window</b>	flavor	7-174
<b>tv:text-scroll-window</b>	flavor	7-174
<b>tv:text-scroll-window-empty-gray-hack</b>	flavor	7-174
<b>tv:top-box-label-mixin</b>	flavor	7-173
<b>tv:top-label-mixin</b>	flavor	7-173
<b>tv:truncatable-lines-mixin</b>	flavor	7-117
<b>tv:truncating-window</b>	flavor	7-117
<b>tv:truncating-lines-mixin</b>	flavor	7-108, 7-117
<b>tv:timeout-window</b>	flavor	7-174
<b>tv:timeout-window-with-mouse-sensitive-items</b>	flavor	7-174
<b>tv&gt;window</b>	flavor	4-112, 4-116, 7-105
<b>tv&gt;window-pane</b>	flavor	7-177

- tv:window-hacking-menu-mixin** flavor 7-220
- tv:window-with-typeout-mixin** flavor 7-174
  - Vanilla Flavor 2-453
  - Zmacs Command: Describe Flavor 2-471
- zwei:standalone-editor-frame** flavor 7-381
  - Flavor Examiner 1-191, 2-475
  - Flavor Families 2-451
  - Flavor Functions 2-435
  - Flavor (m-X) Zmacs command 4-141
  - Describe
    - si: \*flavor-compilations\*** variable 2-440
    - si: flavor-allowed-init-keywords** function 2-439, 4-144
    - si: flavor-allows-init-keyword-p** function 2-439
  - :case
    - flavor combination 2-520
    - si: \*flavor-compile-trace\*** variable 2-440
    - si: flavor-default-init-get** function 2-440
    - si: flavor-default-init-putprop** function 2-440
    - si: flavor-default-init-remprop** function 2-440
  - Entering Flavor Examiner 3-40
  - New Message to Error Flavor **fs:directory-not-found** RN-39
  - Condition
    - flavor hierarchy 2-482
    - Flavor inheritance mechanism 2-482
    - :flavor-name** option for **prompt-and-read** 7-59, RN-58
  - The Flavor Network of **tv:menu** 7-293
- compiler:make-obsolete** Now Makes a
  - Basic flavors 7-205
  - Closure and flavors 2-423
  - Combining flavors 2-431, 2-461
  - Condition Flavors 2-482
  - Conditions as instances of flavors 2-479
  - Creating flavors 2-428
  - Creating a Set of Condition Flavors 2-486
  - Creating instances of flavors 2-430
  - Defining flavors 2-428
  - Functions for Creating Flavors 2-428
  - General Information on Flavors 4-141
  - Implementation of Flavors 2-467
  - Init keywords for flavors 4-144
  - Instance variables of combined flavors 2-431
  - Instantiable flavors 7-205
  - Instantiable, Basic, and Mixin Flavors 7-205
  - Instantiable Choose Variable Values Flavors 7-272
  - Instantiable Multiple Choice Menu Flavors 7-254
  - Instantiable Multiple Menu Choose Flavors 7-249
  - Margin item flavors 7-168
  - Mixin flavors 7-205
  - Mixing Flavors 2-431
  - Modifying flavors 2-438, 2-468
  - Process Flavors 8-95
  - Simple Use of Flavors 2-425
  - Tape Error Flavors 5-277
  - Tree of flavors 2-431
  - Zmacs Commands for Flavors 2-471
  - Zmacs Commands for Finding Out About Flavors 1-87, 3-218
  - Functions, Flavors, and Messages for Window Graying 7-92
  - Ordering Flavors, Methods, and Wrappers 2-467
  - Overview of Window Flavors and Messages 7-103
  - Window Flavors and Messages 7-103
  - Flavors and SCL 2-635
  - Programming Aids for Flavors and Windows 4-141
  - Using Flavors and Windows 4-111
  - :flavor** serial I/O parameter 5-253
  - Flavors for LGP Output 4-124
  - Flavors for Panes and Frames 7-176

- Condition
  - Flavors of Basic Windows 7-105
  - Flavors Reference 2-529
  - Flavors Related to Window Selection 7-99
- New Stream Handling Error
  - Flavors: **sys:stream-closed** and **sys:network-stream-closed** RN-38
  - Base Flavor: **sys:arithmetic-error** 2-534
  - New Array Error Flavor:
    - sys:array-wrong-number-of-subscripts** RN-38
  - Base Flavor: **sys:cell-contents-error** 2-533
  - Base Flavor: **sys:floating-point-exception** 2-535
  - New Flavor: **sys:float-invalid-compare-operation** RN-38
  - New Error Flavor: **sys:read-premature-end-of-symbol** RN-38
- Choice Facilities Use the Introduction to the Message Passing in the Objects and the Using the
  - Flavor System 7-205
  - Flavor System 2-417
  - Flavor System 2-421, 2-423
  - Flavor System 2-417
  - Flavor System 2-425
  - Flavor system messages 2-453
  - Flavor system storing functions 2-297
  - flet**, **labels**, and **macrolet** Special Forms 2-142
  - flet** special form 2-142
  - Flip 8-117
  - [Flip Points] Font Editor draw mode menu item 3-235
  - float** function 2-108
- audio:** **float-sample** function 7-336
- audio:** **:float** argument to **typep** 2-9
- sys:** **float-channel-fix** function 7-336
- sys:** **float-divide-by-zero** flavor 2-535
- sys:** **float-divide-zero-by-zero** flavor 2-536
- sys:** **float-inexact-result** flavor 2-536
- Floating-point infinity 2-14, 2-22
- Floating-point numbers 2-4, 2-7, 2-94
- floating-point conditions 2-535
- Floating-point Exponent Characters 2-22
- Floating-point format directive 5-32
- Floating-point Infinity RN-41
- Floating-point Numbers 2-22
- Floating-point Numbers RN-36
- Floating-point Representation 2-94
- floating-point traps 2-535
- floating-exponent-overflow** flavor 2-535
- floating-exponent-underflow** flavor 2-536
- floating point 5-46
- floating-point-exception** 2-535
- floating-point-exception** flavor 2-535
- floating-point numbers 2-89
- Floating-point Numbers 2-14
- floating-point numbers 2-89
- float-invalid-compare-operation** RN-38
- float-invalid-compare-operation** flavor 2-536
- float-invalid-operation** flavor 2-536
- floatp** function 2-7
- audio:** **float-polyphonic-wave-table-entry** function 7-337
- FLOD FEP file type 5-228, 8-49
- Flonum arrays 2-262
- %flonum** function 8-13
- :flonum-array** Option for **defstruct** is Obsolete RN-28
- flonum loop** data-type keyword 2-219
- flonump** function 2-8
- floor** function 2-108
- Flow-control 9-111
- Flow and Error Control: Chaosnet Software Protocol 9-111
- Flow of Control 2-173, 2-175
- Using the RESUME key with
  - The Reader Now Accepts How the Reader Recognizes New Functions for Converting Numbers to IEEE
  - Enabling and disabling of
    - sys:**
    - Print number in Base Flavor: **sys:**
    - sys:**
    - Double-precision Printed Representation of Single-precision New Flavor: **sys:**
    - sys:**
    - sys:**

- :flushed-transfer-count** method of **sl:disk-error-event** 8-39
  - [Flush Free Buffer] File System Maintenance menu item 0-39
  - :flush** method of **sl:process** 8-93
  - [Flush Timeout] File System Maintenance menu item 0-39
  - fmakunbound** function 2-564
  - :fn1** method of **fs:its-pathname** 5-186
  - :fn2** method of **fs:its-pathname** 5-186
  - :follow-p** init option for **tv:blinker** 7-148
  - follow-cell-forwarding** function 8-15
  - follow-structure-forwarding** function 8-15
  - font 7-108, 7-140
  - Current font 1-75, 1-174, 3-223, 3-271, 7-142
  - Default font 1-75, 1-174, 3-223, 3-271, 7-142
  - fonts:cptfont** font 7-140
  - fonts:hl10** font 7-140
  - fonts:hl10b** font 7-140
  - fonts:hl12i** font 7-140
  - fonts:medfnb** font 7-140
  - fonts:medfnt** font 7-140
  - fonts:tr10i** font 7-140
  - fonts:tr8** font 7-140
  - Selecting a font 3-260
  - Font attributes 3-221, 7-143
  - Font characters 7-103
  - Font descriptor 7-140
  - Font Editor 3-219
  - Font information 2-236, 2-277
  - Font map 7-108, 7-140
  - Font names 7-140, 7-145
  - Font number 5-5
  - font-baseline** function 7-145
  - :font-map** init option for **tv:menu** 7-222, 7-296
  - :font-map** init option for **tv:sheet** 7-142
  - :font-map** method of **tv:sheet** 7-141
  - font-name** function 7-145
  - Font Attribute 3-222, 7-144
  - Font Attribute 3-223
  - Font Attribute 3-221, 7-143
  - Font Attribute 3-222, 7-144
  - Font Attribute 7-145
  - Font Attribute 3-222, 7-144
  - Font Attribute 3-222, 7-144
  - Font Attribute 3-222, 7-144
  - Font Attributes 3-223, 7-145
  - Font Basic Concepts 3-221
  - font-blinker-height** function 7-146
  - font-blinker-width** function 7-146
  - font change indicators 1-69
  - font-char-height** function 7-145
  - font-chars-exist-table** function 7-146
  - font-char-width** function 7-145
  - font-char-width-table** function 7-145
  - Font Command 1-21
  - Font Command 1-36
  - font** command processor argument type 7-48
  - Font Commands 1-79
  - Font Commands 1-81
  - Font Displays 3-263
  - Font Editor Basic Concepts 3-227
  - ] Font Editor command 3-261
  - [ Font Editor command 3-261
  - / Font Editor command 3-261
  - ? Font Editor command 3-260
  - ABORT Font Editor command 3-261
  - B Font Editor command 3-255
- Baseline*
  - Char-exists Table*
  - Character Height*
  - Character Width*
  - Chars-exist-table*
  - Fixed-width*
  - Left Kern*
  - Blinker Width and Blinker Height*
- ^F
- Edit
  - Show
  - Input Editor
  - Zmacs
  - Mousing on the FED List Fonts and Show

C Font Editor command 3-234, 3-261  
 c-C Font Editor command 3-260  
 c-R Font Editor command 3-260  
 c-REFRESH Font Editor command 3-261  
 c-W Font Editor command 3-260  
 D Font Editor command 3-255, 3-260  
 E Font Editor command 3-243, 3-259  
 F Font Editor command 3-260  
 G Font Editor command 3-260  
 H Font Editor command 3-255, 3-259  
 HELP Font Editor command 3-260  
 M Font Editor command 3-260  
 Q Font Editor command 3-260  
 REFRESH Font Editor command 3-261  
 S Font Editor command 3-260  
 V Font Editor command 3-253, 3-260  
 \ Font Editor command 3-261  
 . Font Editor drawing command 3-236  
 [Clear Points] Font Editor draw mode menu item 3-235  
 [Flip Points] Font Editor draw mode menu item 3-235  
 [Set Points] Font Editor draw mode menu item 3-235  
 [Add in Gray] Font Editor menu item 3-240, 3-260  
 [Center View] Font Editor menu item 3-255, 3-259  
 [Clear Gray] Font Editor menu item 3-239, 3-260  
 [Configure] Font Editor menu item 3-227, 3-256, 3-259  
 [Draw Line] Font Editor menu item 3-246, 3-259  
 [Draw Spline] Font Editor menu item 3-246, 3-259  
 [Edit Font] Font Editor menu item 3-230, 3-260  
 [Erase All] Font Editor menu item 3-239, 3-243, 3-259  
 [EXIT] Font Editor menu item 3-260  
 [Gray Char] Font Editor menu item 3-239, 3-260  
 [Grid Size] Font Editor menu item 3-256, 3-259  
 [HELP] Font Editor menu item 3-260  
 [List Fonts] Font Editor menu item 3-230, 3-260  
 [Move Black] Font Editor menu item 3-238, 3-259  
 [Move Gray] Font Editor menu item 3-239, 3-260  
 [Move View] Font Editor menu item 3-255, 3-259  
 [Read File] Font Editor menu item 3-258, 3-260  
 [Reflect] Font Editor menu item 3-243, 3-259  
 [Rename Char] Font Editor menu item 3-234, 3-260  
 [Rotate] Font Editor menu item 3-243, 3-259  
 [Save Char] Font Editor menu item 3-234, 3-260  
 [Set Sample] Font Editor menu item 3-253, 3-260  
 [Show Font] Font Editor menu item 3-227, 3-233, 3-234, 3-260  
 [Stretch] Font Editor menu item 3-259  
 [Swap Gray] Font Editor menu item 3-239, 3-260  
 Using the mouse with [List Fonts] Font Editor menu item 3-263  
 Using the mouse with [Show Font] Font Editor menu item 3-234, 3-263  
 [Write File] Font Editor menu item 3-258, 3-260  
 Using the mouse with Font Editor menus 3-228  
 Character objects font field 2-265, RN-14  
 Reading font files 3-258  
 Writing font files 3-258  
 Font indexing table 7-146  
**font-indexing-table** function 7-146  
 Creating a New Font in FED 3-230  
 Displaying Characters in the Font in FED 3-233  
 Selecting a Font in FED 3-230  
**:font** init option for **tv:character-blinker** 7-150  
 Font in the Attribute List 1-80  
**font-left-kern-table** function 7-146  
**:font-list** option for **prompt-and-read** 7-59, RN-58  
**:font-list tv:choose-variable-values** variable  
 type 7-259  
**:font** menu item option 7-211, 7-224  
 Font Messages to Windows 7-141

- FED
  - Mousing on the FED
  - Using the mouse in the
    - Font numbers and character objects 2-267, RN-15
    - :font** option for **prompt-and-read** 7-59, RN-58
    - Font Parameters menu 3-229
    - Font Parameters Menu 3-229
    - Font Parameters Menu 3-263
    - Font Parameters menu 3-263
    - font-raster-height** function 7-146
    - font-raster-width** function 7-146
    - Fonts 7-103, 7-216
    - :fonts** 3-274
    - Fonts 3-221, 7-143
    - Fonts RN-16
    - Fonts 1-75
    - fonts 3-222, 7-108, 7-144
    - Fonts 7-145
    - fonts 3-273
    - Fonts 1-75
    - Fonts 1-75, 3-221, 7-140
    - fonts 1-174, 3-271
    - Fonts 1-78
    - Fonts 1-75
    - Fonts 3-223, 7-142
    - Fonts 7-140
    - Fonts 7-140
    - fonts 3-222, 7-108, 7-144
    - Fonts Attribute 3-141
    - fonts** package 2-615, 7-140
    - Fonts (m-X) 1-80
    - Fonts (m-X) Zmacs command 1-75, 1-174, 3-223, 3-271, 7-142
    - Fonts (m-X) Zmacs command 3-141, 3-143, 4-10
    - fonts:cptfont** font 1-75, 1-174, 3-223, 3-271, 7-142
    - Fonts: Field 6-36
    - fonts:hl10** font 7-140
    - fonts:hl10b** font 7-140
    - fonts:hl12i** font 7-140
    - fonts:medfnb** font 7-140
    - fonts:medfnt** font 7-140
    - fonts:tr10i** font 7-140
    - fonts:tr8** font 7-140
    - Fonts? 1-75
    - Fonts and Show Font Displays 3-263
    - Fonts file attribute 5-109
    - Fonts in the Documentation 1-231
    - Fonts in the Input Editor 1-79
    - Fonts in the Input Editor 1-78
    - Fonts in Zmacs 1-79
    - Fonts in Zmail Messages 1-69
    - Fonts] Font Editor menu item 3-230, 3-260
    - Fonts] Font Editor menu item 3-263
    - font-widths-file**: Printer Object Attribute 9-18
    - Font with Set Fonts (m-X) 1-80
    - Font] Display 3-233
    - Font] Font Editor menu item 3-230, 3-260
    - Font] Font Editor menu item 3-227, 3-233, 3-234, 3-260
    - Font] Font Editor menu item 3-234, 3-263
    - @foot text formatting command 3-37
    - :force-output** message 5-18
    - :force-output** messages 5-113
    - :force-output** operation 9-137
    - :force-output** message to output tape streams 5-273
    - :force-output** serial I/O parameter 5-251, 5-253
    - :force-redisplay** message 7-377
    - :force-kbd-input** message 7-132
- Attributes of TV
  - Device
  - Displaying
  - Fixed-width
  - Format of TV
- Hardcopy files with multiple
  - How to Change
  - Introduction to
  - Personal default
  - Setting
- Standard Lisp Machine
  - Standard TV
  - TV
  - Using TV
  - Variable-width
- Setting the Zmacs Font with Set
  - List
  - Set
  - Zmail
- What Are
  - Mousing on the FED List
  - Use of
  - Example of Setting
    - Setting
    - Setting
  - [List
  - Using the mouse with [List
  - [List
  - Setting the Zmacs
  - Selecting a FED Character From the [Show
    - [Edit
    - [Show
  - Using the mouse with [Show

- Chaos:
    - Using Zmail in Wait
- Evaluating a Function
- make-array** No Longer Accepts Obsolete SCL and **#S** macro
- The Audio Wrapping
  - Audio Command
  - BABYL mail file
  - Block restore
  - cl:double-float**
  - cl:long-float**
  - cl:short-float**
  - cl:single-float**
  - Columnar
  - FEP filename
  - File restore
  - Filled
  - Image restore
  - Installing new releases distributed in patch tape
  - ITS header
  - Minibuffer Response
  - Network header
  - QFILE Command and Response
  - QFILE Directory Data
  - Record
  - RFC733 header
  - RMAIL mail file
  - Sample
  - TENEX mail file
  - UNIX mail file
  - VAX/VMS mail file
- :force-rescan** method of **si:interactive-stream** 5-71, 7-39
- Forcing keyboard input 7-103
- Foreground processes 6-11
- Foreign packet 9-129
- :foreign-host** message 9-212
- foreign-state connection state 9-136
- Foreign connection state 9-121
- Foreign-protocol-mode Connections 9-149
- Foreign Protocols in Chaosnet 9-129
- Forever Process State 6-23
- Forgetting objects remembered by a resource 8-135
- for loop** keyword 2-207
- Form 2-151
- Form RN-28
- form 2-642
- Form 7-330
- Form character 2-32
- :form-only** command processor mode 1-165
- :form-preferred** command processor mode 1-165
- Formal parameters 2-151
- Format 7-322
- format 6-95
- format 1-201
- format 2-23
- format 2-23
- format 2-23
- format 2-23
- format 2-23
- format 7-214, 7-296
- format 5-222, 8-43
- format 1-201
- format 7-213, 7-214, 7-296
- format 1-201
- format 0-87
- format 6-35
- Format 3-51
- format 6-35
- Format 9-158
- Format 9-186
- Format 9-24
- format 6-35
- format 6-95, 6-96
- Format 7-322
- format 6-95, 6-96
- format 6-95, 6-96
- format 6-95
- Format effectors 5-5, 7-108
- format** function 5-29, 5-87
- format** package 2-615
- Format text 3-34
- :format-args** 2-504
- :format-string** 2-504
- format:breakline** macro 5-48
- format:deformat** special form 5-42
- format:ochar** function 5-46
- format:ofloat** function 5-46
- format:onum** function 5-45
- format:oprint** function 5-46
- format:osting** function 5-46
- format:outfmt** macro 5-45
- format:output** macro 5-45
- format:pad** macro 5-47
- format:plural** function 5-47
- format:print-list** function 5-44
- format:** Printer Object Attribute 9-17
- format:tab** function 5-47



	Format Buffer (m-X) Zmacs command	3-33, 3-38, RN-49
Disk	Format command	1-201
Zmacs	Format Commands	3-38
	Format Conventions for Zmall Commands	6-3
Absolute branch	format directive	5-35
Binary	format directive	5-31
Cardinal	format directive	5-36
Carriage return	format directive	5-34
Conditional	format directive	5-36
Continuation	format directive	5-35
Date and time	format directive	5-42
Decimal	format directive	5-31
Escape	format directive	5-41
Exponential	format directive	5-32
Fixed-point	format directive	5-32
Floating-point	format directive	5-32
Free	format directive	5-30
Fresh line	format directive	5-34
Hexadecimal	format directive	5-32
Indention	format directive	5-41
Indirection	format directive	5-34
Iteration	format directive	5-37
Justification	format directive	5-39
Keyboard character	format directive	5-33
Lowercase	format directive	5-34
Lozenge	format directive	5-34
Octal	format directive	5-31
Ordinal	format directive	5-36
Page separator	format directive	5-34
Plural	format directive	5-35
Relative branch	format directive	5-35
Roman numeral	format directive	5-36
Slashification	format directive	5-30
Space	format directive	5-36
Tabulation	format directive	5-35
Tilde	format directive	5-34
Time	format directive	5-42
Time Interval	format directive	5-42
Time-of-day	format directive	5-42
User-function	format directive	5-41
^-	format Directive	5-41
^-	format Directive	5-34
^-	format Directive	5-32
^-	Format Directive	5-34
^-	format Directive	5-34
^-	format Directive	5-35
^-	format Directive	5-39
^-<Cr>	format Directive	5-35
^-?	format Directive	5-34
^-@*	format Directive	5-35
^-@T	format Directive	5-36
^-a	format Directive	5-30
^-B	format Directive	5-31
^-c	format Directive	5-33
^-d	format Directive	5-31
^-e	format Directive	5-32
^-f	format Directive	5-32
^-G	format Directive	5-35
^-o	format Directive	5-31
^-P	format Directive	5-35
^-Q	format Directive	5-41
^-R	format Directive	5-36
^-s	format Directive	5-30
^-T	format Directive	5-35
^-X	format Directive	5-32

- [*Str0*;*Str1*;*...*;*Strn*] **format** Directive 5-36
- ~\Date\ **format** Directive 5-42
- ~\Datetime\ **format** Directive 5-42
- ~\Time-Interval\ **format** Directive 5-42
- ~\Time\ **format** Directive 5-42
- **format** Directive 5-41
- ~ {*Str*} **format** Directive 5-37
- ~| **format** Directive 5-34
- ~| **format** Directive 5-34
- ~( and ~) **format** Directives 5-34
- Format File (m-X) Zmacs command 3-33, 3-38, RN-49
- SCL and **format** function directives 2-644
- Select Arbitrary Format Mail File (m-X) Zmail command 6-95
- Format of audio commands 7-322
- Format of patch file names 4-236
- Format of **trace** Output 4-279
- Format of TV Fonts 7-145
- Controlling the **format:onum** 5-45
- :commas** option for **format:onum** 5-45
- :signed** option for **format:onum** 5-45
- Format Region (m-X) Zmacs command 3-33, 3-38, RN-49
- Conversions Between Sample Formats 7-335
- Date formats 7-353, 7-359, 7-361
- Internet RFC822 domain-addressing formats 6-95
- Menu formats 7-213
- Print formats 9-17
- Standard mail file formats 6-95
- Supported file formats 3-258
- Time formats 7-353, 7-359, 7-361
- Zmail Header Formats 6-35
- Data Formats: Chaosnet Software Protocol 9-107
- Mail File Formats for Zmail 6-95
- :editor** output format style 5-46
- :read** output format style 5-46
- :sall** output format style 5-46
- :terpri** option for **format:tab** 5-47
- :unit** option for **format:tab** 5-47
- Formatted Output 5-29
- Formatted Output to Character Streams 2-644
- Formatted print of function definitions 1-180, 5-51
- Formatted Text 3-33
- Producing Formatted Text 3-33
- Formatting disks 1-201
- Formatting functions 5-44
- Formatting Characters 3-23
- Inserting formatting command 3-34
- @b text formatting command 3-34
- @i text formatting command 3-34
- @t text formatting command 3-34
- @# text formatting command 3-37
- @\* text formatting command 3-37
- @. text formatting command 3-37
- @= text formatting command 3-37
- @> text formatting command 3-37
- @blankspace text formatting command 3-37
- @caption text formatting command 3-37
- @foot text formatting command 3-37
- @note text formatting command 3-37
- @tabclear text formatting command 3-37
- @tabdivide text formatting command 3-37
- @tabset text formatting command 3-37
- @\ text formatting command 3-37
- @` text formatting command 3-37
- Basic Text Formatting Commands 3-37
- How to Use Formatting Commands 3-36
- Zmacs text formatting commands 3-37
- Basic Text Formatting Environments 3-34

- 269 **:minpad** option for
- :padchar** option for
- :tab-period** option for
- Introduction to Text
- Three New Zmacs Commands for
- Zmacs Commands for
  - Special
  - Evaluating a
  - The
  - The "General List"
- apply** and **funcall** No Longer Work for Special
- CLM: Type Declaration for
- Controlling the Evaluation of Top-level
- Defining special
- flet**, **labels**, and **macrolet** Special
- Function-defining Special
- How the Stream Compiler Handles Top-level
- Macros Expanding Into Many
- Notation Conventions for Macros and Special
- SCL and equivalent macro definitions for special
- Some Functions and Special
- Special
  - Package Functions, Special
  - New Special
  - Special
  - Special
  - Functions and Special
  - Special
  - New Special
  - New Special
  - Special
  - Special
  - Special
  - Evaluating
- Specifying Default
- Files Using **defwrapper**
- Default
- New Special
- Interaction of Some Common Special
- Zmacs
  - Delete
  - Zmail
  - FWD
  - zwei:**
  - zwei:**
  - zwei:**
  - zwei:**
  - Packet
- formatting functions 5-44
- formatting functions 5-44
- formatting functions 5-44
- Formatting in Zmacs 3-33
- Formatting Lisp Code 5-51
- Formatting Text RN-49
- Formatting Text 3-33
- Form for Declaring a Named Constant 2-135
- Form in the Debugger 4-259
- Form of a Menu Item 7-208
- Form of Item 7-210
- Forms RN-27
- Forms 2-640
- Forms 4-314
- forms 2-362
- Forms 2-142
- Forms 2-305
- Forms 4-310
- Forms 2-360
- Forms 1-232
- forms 2-638
- Forms 2-159
- forms 2-303
- Forms, and Variables 2-597
- Forms: **left** and **left\*** RN-37
- forms and lexical scoping RN-11
- Forms for Binding Variables 2-128
- Forms for Constant Values 2-161
- Forms for Defining Special Variables 2-134
- Forms for Destructuring RN-40
- Forms for Lexical Scoping RN-11
- Forms for Receiving Multiple Values 2-167
- Forms for Sequencing 2-164
- Forms for Setting Variables 2-128
- Forms From FED 3-261
- Forms in a Top-level **progn** Are Top-level to the
- Compiler RN-28
- Forms in Lambda Lists 2-155
- Forms Must Be Recompiled in Release 6.0 RN-28
- forms of lambda-list parameters 2-151
- Forms of qualified names 2-585
- Forms: **tv:with-mouse-and-buttons-grabbed**,
- tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
- Forms with Multiple Values 2-169
- Fortran Mode 3-156
- Forward 1-50, 3-26
- Forward 1-53, 3-28, 3-76
- Forward Character 3-61
- Forward List 3-65
- Forward Page 3-69
- Forward Paragraph 1-50, 3-26, 3-68
- Forward Sentence 3-62
- Forward Sexp 3-65
- Forward Word 1-50, 3-26, 3-61
- Forward (m-X) Zmail Command 6-29
- Forward-references: Field 6-36
- Forward a request for connection packet 9-114
- Forwarded connection 9-114
- \*forwarded-add-subject\*** variable 6-85
- \*forwarded-message-begin\*** variable 6-91
- \*forwarded-message-end\*** variable 6-91
- Forwarded message property 1-57
- \*forwarded-message-separator\*** variable 6-91
- forwarding 9-108
- Forwarding count 9-106
- Forwarding messages 6-80



- dbg:** **frame-next-nth-open-frame** function 2-497
- dbg:** **frame-next-open-frame** function 2-496
- dbg:** **frame-number-of-locals** function 2-498
- dbg:** **frame-number-of-spread-args** function 2-497
- dbg:** **frame-out-to-interesting-active-frame** function 2-497
- Constraint
  - frame pane 7-179
  - dbg:** **frame-previous-active-frame** function 2-496
  - dbg:** **frame-previous-interesting-active-frame** function 2-496
  - dbg:** **frame-previous-open-frame** function 2-496
  - dbg:** **frame-real-function** function 2-497
  - dbg:** **frame-real-value-disposition** function 2-498
- Frames 7-103, 7-175
- Bordered constraint
  - frames 7-176
  - Clearing the Trap-on-exit Flag for the Current and All Outer Frames 4-266
  - Constraint frames 7-175, 7-179, 7-188
- Flavors for Panes and Messages to Frames 7-176
- Sections in constraint
  - Frames 7-187
  - frames 7-188
  - Setting the Trap-on-exit Flag for the Current and All Outer Frames 4-266
- Stacking in constraint
  - frames 7-188
  - Frames and Panes 7-95
- dbg:** **frame-self-value** function 2-498
- :layout** Constraint Frame Specification 7-180
- :sizes** Constraint Frame Specification 7-182
- Examining Stack
  - Frames with Debugger Backtrace Commands 4-262
  - dbg:** **frame-total-number-of-args** function 2-497
- The Iteration
  - Framework 2-221
  - Free buffer 0-37
  - Free reference 2-126
  - [Flush Free Buffer] File System Maintenance menu item 0-39
- QFILE
  - free channel 9-153
- Why Can't I Write Out Files When I Have
  - Free Disk Space? 1-229
  - Free format directive 5-30
  - Freeing packets 9-205
  - freeing Chaosnet storage resources 8-131
  - freeing window system storage resources 8-131
  - :free-list-size** option for **defresource** 8-132
  - Free pool of packets 9-202
  - Free record map 0-37
  - Free Records: File System Maintenance Program 0-37
  - [Free Records] File System Maintenance menu item 0-39
- Captured
  - free reference 2-126
  - FREE-SPACE-DESCRIPTION file system property 9-186
- audio:**
  - :french** day-of-the-week-representation 7-370
  - frequency-polyphonic-increment** function 7-337
  - :fresh-line** message 5-15
  - :fresh-line** option for **fquery** 7-56
  - Fresh line format directive 5-34
  - :fresh-line** method of **tv:stream-mixin** 7-112
- Zmail
  - From: Field 6-35
  - from loop** keyword 2-207, 2-225
  - Front-end Processor 1-197, 5-221, 8-42
- sys:**
  - fround** function 2-113
  - fs** package 2-615
  - fs:%file-asynchronous-mark-opcode** variable 9-159
  - fs:%file-notification-opcode** variable 9-159
  - fs:access-error** 2-549
  - fs:access-error** flavor 2-549

**fs:add-logical-pathname-host** 5-197  
**fs:change-file-properties** function 5-105, 5-119  
**fs:change-property-failure** 2-551  
**fs:change-property-failure** flavor 2-551  
**fs:circular-link** flavor 2-552  
**fs:close-all-files** function 5-107  
**fs:complete-pathname** function 5-120, 5-158  
**fs:copy-pathname-defaults** function 5-162  
**fs:correctable-login-problems** flavor 2-547  
**fs:create-directory-failure** flavor 2-550  
**fs:create-link-failure** flavor 2-551  
**fs:creation-failure** 2-550  
**fs:creation-failure** flavor 2-550  
**fs:data-error** flavor 2-546  
**fs:default-pathname** example 5-130, 5-132, 5-134  
**fs:default-pathname** function 5-162  
**fs:\*default-pathname-defaults\*** example 5-130  
**fs:\*default-pathname-defaults\*** variable 5-148  
**fs:define-canonical-type** special form 5-163  
**fs:define-file-protocol** macro 9-55  
**fs:delete-failure** 2-551  
**fs:delete-failure** flavor 2-551  
**fs:describe-pathname** function 5-165  
**fs:describe-logical-host** function 5-196  
**fs:device-not-found** flavor 2-549  
**fs:directory-list** function 5-117  
**fs:directory-already-exists** flavor 2-550  
**fs:directory-not-empty** flavor 2-552  
**fs:directory-not-found** RN-39  
**fs:directory-not-found** flavor 2-549  
**fs:dont-delete-flag-set** flavor 2-552  
**fs:file-error** flavor 2-545  
**fs:file-locked** flavor 2-552  
**fs:file-properties** function 5-105, 5-119  
**fs:file-already-exists** flavor 2-550  
**fs:file-attribute-bindings** function 5-111  
**fs:file-lookup-error** flavor 2-548  
**fs:file-not-found** flavor 2-548  
**fs:file-open-for-output** flavor 2-553  
**fs:file-operation-failure** flavor 2-481, 2-546  
**fs:filepos-out-of-range** flavor 2-552  
**fs:file-property-bindings** function 5-111  
**fs:file-read-property-list** function 5-111  
**fs:file-request-failure** 2-546  
**fs:file-request-failure** flavor 2-546  
**fs:\*file-type-mode-alist\*** variable 3-198, 5-153  
**fs:find-file-with-type** function 5-164  
**fs:host-not-available** flavor 2-546  
**fs:inconsistent-options** flavor 2-552  
**fs:incorrect-access-to-directory** flavor 2-549  
**fs:incorrect-access-to-file** flavor 2-549  
**fs:init-file-pathname** function 5-163  
**fs:invalid-password** flavor 2-547  
**fs:invalid-wildcard** flavor 2-550  
**fs:invalid-byte-size** flavor 2-552  
**fs:invalid-operation-for-directory** flavor 2-550  
**fs:invalid-operation-for-link** flavor 2-550  
**fs:invalid-pathname-component** flavor 2-553  
**fs:invalid-pathname-syntax** 2-550  
**fs:invalid-pathname-syntax** flavor 2-550  
**fs:invalid-property-value** flavor 2-551  
**fs:\*its-uninteresting-types\*** variable 5-186  
**fs:\*known-types\*** variable 5-149  
**fs:link-target-not-found** flavor 2-549  
**fs:load-pathname-defaults** variable 5-149  
**fs:login-problems** flavor 2-547

New Message to Error Flavor

Request Failures Based on



FSEdit [Create Inferior Directory] Command 5-234  
 FSEdit [Create Link] Command 5-234  
 FSEdit [Decache] Command 5-235  
 FSEdit [Delete (Immediate)] Command 5-233  
 FSEdit [Delete] Command 5-233  
 FSEdit [Edit Properties] Command 5-234  
 FSEdit [Edit] Command 5-235  
 FSEdit [Expunge] Command 5-234  
 FSEdit [Hardcopy] Command 5-235  
 FSEdit [Link Transparencies] Command 5-235  
 FSEdit [Load] Command 5-236  
 FSEdit [New Property] Command 5-234  
 FSEdit [Open] Command 5-234  
 FSEdit [Rename] Command 5-233  
 FSEdit [Selective Open] Command 5-235  
 FSEdit [Undelete] Command 5-233  
 FSEdit [View Properties] Command 5-233  
 FSEdit [View] Command 5-234  
 FSEdit [Wildcard Delete] Command 5-233  
**fset** function 2-3, 2-564  
**fset-carefully** function 2-321  
**fsignal** function 2-482, 2-504, 2-517  
**fs:its-pathname** 5-186  
**fs:its-pathname** 5-186  
**fs:logical-pathname** 5-199  
**fs:logical-pathname** 5-199  
**fs:pathname** 5-166  
**fs:pathname** 5-166  
**fs:pathname** 5-173  
**fs:pathname** 5-166  
**fs:pathname** 5-144  
**fs:pathname** 5-173  
**fs:pathname** 5-171  
**fs:pathname** 5-172  
**fs:pathname** 5-171  
**fs:pathname** 5-165  
**fs:pathname** 5-166  
**fs:pathname** 5-173  
**fs:pathname** 5-167  
**fs:pathname** 5-167  
**fs:pathname** 5-167  
**fs:pathname** 5-170  
**fs:pathname** 5-168  
**fs:pathname** 5-168  
**fs:pathname** 5-169  
**fs:pathname** 5-170  
**fs:pathname** 5-168  
**fs:pathname** 5-168  
**fs:pathname** 5-168  
**fs:pathname** 5-169  
**fs:pathname** 5-171  
**fs:pathname** 5-172  
**fs:pathname** 5-144  
**fs:pathname** 5-172  
**fs:pathname** 5-172  
**fs:pathname** 5-166  
**fs:pathname** 5-166  
**fs:pathname** 5-166  
**fs:pathname** 5-166  
**fs:pathname** 5-166  
**fs:pathname** 5-172  
**fs:pathname** 5-171  
**fs:pathname** 5-171  
**fs:pathname** 5-171  
**fs:pathname** 5-171  
**fs:pathname** 5-171  
**fs:pathname** 5-171

**:fn1** method of  
**:fn2** method of  
**:back-translated-pathname** method of  
**:translated-pathname** method of  
**:canonical-type** method of  
**:device** method of  
**:device-wild-p** method of  
**:directory** method of  
**:directory-pathname-as-file** method of  
**:directory-wild-p** method of  
**:generic-pathname** method of  
**:getl** method of  
**:get** method of  
**:host** method of  
**:name** method of  
**:name-wild-p** method of  
**:new-device** method of  
**:new-directory** method of  
**:new-name** method of  
**:new-pathname** method of  
**:new-type** method of  
**:new-version** method of  
**:new-canonical-type** method of  
**:new-default-pathname** method of  
**:new-raw-device** method of  
**:new-raw-directory** method of  
**:new-raw-name** method of  
**:new-raw-type** method of  
**:parse-truename** method of  
**:pathname-match** method of  
**:pathname-as-directory** method of  
**:plist** method of  
**:putprop** method of  
**:raw-device** method of  
**:raw-directory** method of  
**:raw-name** method of  
**:raw-type** method of  
**:remprop** method of  
**:string-for-directory** method of  
**:string-for-dired** method of  
**:string-for-editor** method of  
**:string-for-host** method of  
**:string-for-printing** method of  
**:string-for-wholine** method of



- :system-type** method of
- :translate-wild-pathname** message to
- :translate-wild-pathname** method of
- :translate-wild-pathname-reversible** message to
- :type** method of
- :types-for-canonical-type** method of
- :type-wild-p** method of
- :version** method of
- :version-wild-p** method of
- :wild-p** method of
- :translate-wild-pathname** message to
- fs:pathname** 5-168
- fs:pathname** 5-192
- fs:pathname** 5-173
- fs:pathname** 5-192
- fs:pathname** 5-166
- fs:pathname** 5-169
- fs:pathname** 5-173
- fs:pathname** 5-166
- fs:pathname** 5-173
- fs:pathname** 5-172
- fs:pathname** example 5-132
- FSPT 0-35, 5-213
- FSPT FEP file type 5-228, 8-49
- FS Root] File System Maintenance menu item 0-39
- fsymeval** function 2-3, 2-564
- FS] Maintenance Operations menu item 0-39
- fruncate** function 2-112
- ftype** declaration 2-640
- full-gc** function 8-116, 8-128
- :full-rubout** option 5-59, 7-27
- :full-gc** option for **add-initialization** 8-116
- fun** function 4-268
- funargs** 2-139
- funargs** 2-139
- Funargs and Lexical Closure Allocation 2-139, 2-140, 2-141, 2-312, 2-313
- Funargs Supported in Release 6.0 RN-10
- funcall** function 2-160
- funcall-macro** and lexical scoping RN-12
- :funcall** Constraint Size Specification 7-188
- :funcall-inside-yourself** message 2-454
- :funcall** menu item type 7-210, 7-311
- funcall** No Longer Work for Special Forms RN-27
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** 9-215
- funcall-server-internal-function** function 9-214, 9-216
- :funcall-with-self** menu item type 7-210
- function 2-100
- function 2-99
- function 2-99
- function 2-102
- function 2-102
- function 2-100
- function 2-100
- function 2-101
- function 2-101
- function 2-102
- function 2-103
- function 2-104
- function 2-104
- function 2-104
- function 2-105
- %32-bit-difference** function 2-119, RN-33
- %32-bit-plus** function 2-119, RN-33
- function 2-99
- function 2-99
- function 2-98
- function 2-98
- function 2-98
- function 2-101
- add-initialization** function 8-67

<b>add1</b>	function	2-104
<b>adjust-array-size</b>	function	2-249
Advising a	Function	4-281
<b>allocate-resource</b>	function	8-135
<b>allocate_pkt</b>	function	9-144
<b>alloc</b>	function	2-244
<b>alpha-char-p</b>	function	2-270
<b>alphalessp</b>	function	2-292
<b>alphanumericp</b>	function	2-270
And alu	function	7-120
And-with-complement alu	function	7-119
<b>ap-1</b>	function	2-244
<b>ap-2</b>	function	2-245
<b>ap-leader</b>	function	2-245
<b>append</b>	function	2-51, 2-56
<b>apply</b>	function	2-8, 2-151, 2-159
<b>applyhook</b>	function	4-291
<b>apropos</b>	function	1-178, 4-38
<b>ar-1</b>	function	2-244
<b>ar-2</b>	function	2-244
<b>area-name</b>	function	8-106
<b>%area-number</b>	function	8-106
<b>aref</b>	function	2-235, 2-244, 2-277
<b>arg</b>	function	2-165
<b>arglist</b>	function	2-302, 2-323, 4-43
<b>args-info</b>	function	2-324
<b>%args-info</b>	function	2-325
<b>*array</b>	function	2-263
<b>array-#-dims</b>	function	2-247
<b>array-dimensions</b>	function	2-247
<b>array-grow</b>	function	2-249
<b>array-leader</b>	function	2-245
<b>array-length</b>	function	2-246
<b>array-pop</b>	function	2-252
<b>array-push</b>	function	2-251
<b>array-type</b>	function	2-246
<b>array-types</b>	function	2-237
<b>array-active-length</b>	function	2-247
<b>array-bits-per-element</b>	function	2-238
<b>arraycall</b>	function	2-262, 2-263
<b>array-column-major-index</b>	function	2-248
<b>array-dimension-n</b>	function	2-247
<b>arraydims</b>	function	2-247
<b>array-displaced-p</b>	function	2-248
<b>array-element-size</b>	function	2-238
<b>array-elements-per-q</b>	function	2-238
<b>array-has-leader-p</b>	function	2-248
<b>array-in-bounds-p</b>	function	2-248
<b>array-indexed-p</b>	function	2-248
<b>array-indirect-p</b>	function	2-248
<b>array-leader-length</b>	function	2-249
<b>arrayp</b>	function	2-8, 2-69
<b>array-push-extend</b>	function	2-251
<b>array-push-portion-extend</b>	function	2-251
<b>as-1</b>	function	2-244
<b>as-2</b>	function	2-244
<b>ascii</b>	function	2-293
<b>ascii-code</b>	function	2-274
<b>ascii-to-char</b>	function	2-274
<b>ascii-to-string</b>	function	2-290
<b>aset</b>	function	2-235, 2-244
<b>ash</b>	function	2-115
<b>ass</b>	function	2-65
<b>assoc</b>	function	2-65, 8-67
<b>assq</b>	function	2-64
<b>atan</b>	function	2-107

<b>atan2</b>	function	2-107
<b>atom</b>	function	2-7
<b>audio:audio-index</b>	function	7-331
<b>audio:audio-limit</b>	function	7-331
<b>audio:audio-room</b>	function	7-331
<b>audio:audio-start</b>	function	7-335
<b>audio:audio-stop</b>	function	7-335
<b>audio:audio-push-audio-stop</b>	function	7-331
<b>audio:fix-sample</b>	function	7-336
<b>audio:fix-channel-float</b>	function	7-336
<b>audio:fix-polyphonic-wave-table-entry</b>	function	7-337
<b>audio:float-sample</b>	function	7-336
<b>audio:float-channel-fix</b>	function	7-336
<b>audio:float-polyphonic-wave-table-entry</b>	function	7-337
<b>audio:frequency-polyphonic-increment</b>	function	7-337
<b>audio:modify-audio-command-arg</b>	function	7-332
<b>audio:polyphonic-wave-table-entry-channels</b>	function	7-337
<b>audio:push-array-of-audio-samples</b>	function	7-333
<b>audio:push-audio-jump</b>	function	7-331
<b>audio:push-audio-load-voice</b>	function	7-331
<b>audio:push-audio-polyphony</b>	function	7-332
<b>audio:push-audio-zero-flag</b>	function	7-331
<b>audio:reserve-audio-flags</b>	function	7-334
<b>audio:sample-channels</b>	function	7-336
<b>audio:sample-add-fix</b>	function	7-336
<b>audio:sample-add-float</b>	function	7-336
<b>audio:sample-add-sample</b>	function	7-336
<b>audio:wait-for-audio-flag</b>	function	7-335
<b>beep</b>	function	5-88
<b>bigp</b>	function	2-8
<b>bind</b>	function	8-23
<b>bit-test</b>	function	2-114
<b>bitbit</b>	function	2-254
<b>boole</b>	function	2-114
<b>both-case-p</b>	function	2-270
<b>boundp</b>	function	2-562
<b>boundp-in-closure</b>	function	2-336
<b>breakon</b>	function	2-523, 4-98
<b>bug</b>	function	1-159, 2-524, 4-264
<b>butlast</b>	function	2-53
<b>byte</b>	function	2-116
<b>byte-position</b>	function	2-116
<b>byte-size</b>	function	2-116
<b>caaar</b>	function	2-42, 2-43
<b>caaddr</b>	function	2-42, 2-43
<b>caaar</b>	function	2-42, 2-43
<b>caadar</b>	function	2-42, 2-44
<b>caaddr</b>	function	2-42, 2-44
<b>caadr</b>	function	2-42, 2-43
<b>caar</b>	function	2-42, 2-43
<b>cadaar</b>	function	2-42, 2-44
<b>cadadr</b>	function	2-42, 2-44
<b>cadar</b>	function	2-42, 2-43
<b>caddar</b>	function	2-42, 2-44
<b>caddr</b>	function	2-42, 2-43
<b>cadr</b>	function	2-42, 2-43
<b>call</b>	function	2-161
Calling the Server	Function	9-214
<b>car</b>	function	2-42, 2-83
<b>car-location</b>	function	2-45
<b>cdaaar</b>	function	2-42, 2-44
<b>cdaadr</b>	function	2-42, 2-44
<b>cdaar</b>	function	2-42, 2-43
<b>cdadar</b>	function	2-42, 2-44
<b>cdaddr</b>	function	2-42, 2-44

<b>cdadr</b>	function	2-42, 2-43
<b>cdar</b>	function	2-42, 2-43
<b>cddaar</b>	function	2-42, 2-44
<b>cddadr</b>	function	2-42, 2-44
<b>cddar</b>	function	2-42, 2-43
<b>cdddar</b>	function	2-42, 2-44
<b>cddddr</b>	function	2-42, 2-44
<b>cdddr</b>	function	2-42, 2-43
<b>cddr</b>	function	2-42, 2-43
<b>cdr</b>	function	2-42, 2-83
<b>ceiling</b>	function	2-109
<b>change-instance-flavor</b>	function	2-436
<b>chaos:accept</b>	function	9-136
<b>chaos:add-contact-name-for-protocol</b>	function	9-54
<b>chaos:answer</b>	function	9-136
<b>chaos:answer-string</b>	function	9-136
<b>chaos:assure-enabled</b>	function	9-142
<b>chaos:close-conn</b>	function	9-134
<b>chaos:connect</b>	function	9-134
<b>chaos:conn-finished-p</b>	function	9-139
<b>chaos:data-available</b>	function	9-140
<b>chaos:fast-answer-string</b>	function	9-136
<b>chaos:finish-conn</b>	function	9-139
<b>chaos:get-pkt</b>	function	9-139
<b>chaos:get-next-pkt</b>	function	9-140
<b>chaos:host-data</b>	function	9-141
<b>chaos:host-up</b>	function	9-135
<b>chaos:interrupt-function</b>	function	9-140
<b>chaos:listen</b>	function	9-136
<b>chaos:make-stream</b>	function	9-137
<b>chaos:may-transmit</b>	function	9-139
<b>chaos:notify</b>	function	9-135
<b>chaos:notify-local-lispms</b>	function	1-72, 6-103, 9-135
<b>chaos:open-foreign-connection</b>	function	9-134
<b>chaos:pkt-link</b>	function	9-141
<b>chaos:pkt-nbytes</b>	function	9-138
<b>chaos:pkt-opcode</b>	function	9-138
<b>chaos:pkt-string</b>	function	9-139
<b>chaos:print-conn</b>	function	9-141
<b>chaos:print-pkt</b>	function	9-141
<b>chaos:print-all-pkts</b>	function	9-141
<b>chaos:read-pkts</b>	function	9-140
<b>chaos:reject</b>	function	9-136
<b>chaos:remove-conn</b>	function	9-134
<b>chaos:return-pkt</b>	function	9-139
<b>chaos:send-pkt</b>	function	9-139
<b>chaos:send-string</b>	function	9-139
<b>chaos:send-unc-pkt</b>	function	9-139
<b>chaos:set-pkt-string</b>	function	9-139
<b>chaos:simple</b>	function	9-134
<b>chaos:state</b>	function	9-136
<b>chaos:status</b>	function	9-141
<b>chaos:wait</b>	function	9-137
<b>chaos_accept</b>	function	9-143
<b>chaos_ans</b>	function	9-143
<b>chaos_assign</b>	function	9-143
<b>chaos_close</b>	function	9-143
<b>chaos_deassign</b>	function	9-143
<b>chaos_eof</b>	function	9-144
<b>chaos_finish</b>	function	9-144
<b>chaos_force_out</b>	function	9-143
<b>chaos_in_char</b>	function	9-143
<b>chaos_in_pkt</b>	function	9-144
<b>chaos_isn</b>	function	9-143
<b>chaos_out_char</b>	function	9-143
<b>chaos_out_pkt</b>	function	9-144

<b>chaos_rfc</b>	function	9-142
<b>chaos_sout</b>	function	9-143
<b>chaos_state</b>	function	9-145
<b>chaos_wait</b>	function	9-145
<b>chaos_wait_til</b>	function	9-145
<b>chaos_xmit_room</b>	function	9-144
<b>char#</b>	function	2-271
<b>char&lt;</b>	function	2-271
<b>charz</b>	function	2-271
<b>char-bit</b>	function	2-269
<b>char-bits</b>	function	2-269
<b>char-code</b>	function	2-269
<b>char-downcase</b>	function	2-272
<b>char-equal</b>	function	2-271
<b>char-flipcase</b>	function	2-273
<b>char-greaterp</b>	function	2-272
<b>char-int</b>	function	2-272
<b>char-lessp</b>	function	2-271
<b>char-name</b>	function	2-273
<b>char-standard</b>	function	2-275
<b>char-subindex</b>	function	2-269
<b>char-upcase</b>	function	2-272
<b>char&lt;</b>	function	2-271
<b>char=</b>	function	2-270
<b>char&gt;</b>	function	2-271
<b>character</b>	function	2-272
<b>char-device-font</b>	function	2-269
<b>char-mouse-button</b>	function	2-273
<b>char-mouse-n-clicks</b>	function	2-274
<b>char-not-equal</b>	function	2-271
<b>char-not-greaterp</b>	function	2-272
<b>char-not-lessp</b>	function	2-272
<b>char-to-ascii</b>	function	2-274
<b>choose-gc-parameters</b>	function	8-115
<b>choose-user-options</b>	function	7-266, 7-267
<b>circular-list</b>	function	2-50
<b>cis</b>	function	2-107, RN-35
<b>clear-resource</b>	function	8-135
<b>CLM: Type Conversion</b>	Function	2-637
<b>close</b>	function	5-103
<b>closure</b>	function	2-305, 2-335
<b>closure-alist</b>	function	2-335
<b>closure-function</b>	function	2-335
<b>closure-variables</b>	function	2-336
<b>closurep</b>	function	2-9, 2-335
<b>clrhash</b>	function	2-74
<b>clrhash-equal</b>	function	2-74
<b>code-char</b>	function	2-270
<b>compile</b>	function	4-307, 4-319
<b>compiler:compile-file</b>	function	4-73, 4-307, 4-317
<b>compiler:compile-file-load</b>	function	4-73, 4-318
<b>compiler:file-declaration</b>	function	4-325
<b>compiler:file-declare</b>	function	4-325
<b>compiler:function-defined</b>	function	4-325
<b>compiler:function-referenced</b>	function	4-325
<b>compiler:load-compiler-warnings</b>	function	4-321
<b>complex</b>	function	2-108, RN-34
<b>complexp</b>	function	2-8, RN-35
<b>conjugate</b>	function	2-101, RN-35
<b>cons</b>	function	2-45, 2-56
<b>cons-in-area</b>	function	2-45, 8-103
<b>continue-whopper</b>	function	2-463
<b>copy-closure</b>	function	2-336
<b>copy-readtable</b>	function	2-33
<b>copyalist</b>	function	2-50
<b>copy-array-contents</b>	function	2-253

<b>copy-array-contents-and-leader</b>	function	2-253
<b>copy-array-portion</b>	function	2-253
<b>copyf</b>	function	5-105
<b>copylist</b>	function	2-50, 2-56
<b>copylist*</b>	function	2-50
<b>copysymbol</b>	function	2-567
<b>copytree</b>	function	2-50
<b>copytree-share</b>	function	2-50
<b>cos</b>	function	2-106
<b>cosd</b>	function	2-107
<b>cosh</b>	function	2-107, RN-35
<b>cp-off</b>	function	1-16
<b>cp-on</b>	function	1-16
<b>cursorpos</b>	function	5-88
<b>%data-type</b>	function	8-16
<b>data-type</b>	function	8-12
<b>dbg</b>	function	1-194, 4-98, 4-256
<b>dbg:arg</b>	function	4-267
<b>dbg:condition-handled-p</b>	function	2-509, 2-510
<b>dbg:decode-micro-pc</b>	function	1-215
<b>dbg:frame-active-p</b>	function	2-497
<b>dbg:frame-arg-value</b>	function	2-498
<b>dbg:frame-local-value</b>	function	2-498
<b>dbg:frame-next-active-frame</b>	function	2-496
<b>dbg:frame-next-interesting-active-frame</b>	function	2-496
<b>dbg:frame-next-nth-active-frame</b>	function	2-496
<b>dbg:frame-next-nth-interesting-active-frame</b>	function	2-496
<b>dbg:frame-next-nth-open-frame</b>	function	2-497
<b>dbg:frame-next-open-frame</b>	function	2-496
<b>dbg:frame-number-of-locals</b>	function	2-498
<b>dbg:frame-number-of-spread-args</b>	function	2-497
<b>dbg:frame-out-to-interesting-active-frame</b>	function	2-497
<b>dbg:frame-previous-active-frame</b>	function	2-496
<b>dbg:frame-previous-interesting-active-frame</b>	function	2-496
<b>dbg:frame-previous-open-frame</b>	function	2-496
<b>dbg:frame-real-function</b>	function	2-497
<b>dbg:frame-real-value-disposition</b>	function	2-498
<b>dbg:frame-self-value</b>	function	2-498
<b>dbg:frame-total-number-of-args</b>	function	2-497
<b>dbg:fun</b>	function	4-268
<b>dbg:get-frame-function-and-args</b>	function	2-495
<b>dbg:invoke-restart-handlers</b>	function	2-516
<b>dbg:loc</b>	function	4-267
<b>dbg:print-frame-locals</b>	function	2-499
<b>dbg:print-function-and-args</b>	function	2-499
<b>dbg:val</b>	function	4-268
<b>deallocate-resource</b>	function	8-135
<b>deallocate-whole-resource</b>	function	8-135
<b>deallocate_pkt</b>	function	9-144
<b>debugging-info</b>	function	2-302, 2-323
<b>del</b>	function	2-62
<b>del-if</b>	function	2-64
<b>delete</b>	function	2-61
<b>delete-initialization</b>	function	8-69
<b>deletf</b>	function	5-104
<b>del-if-not</b>	function	2-64
<b>delq</b>	function	2-61
<b>denominator</b>	function	2-108, RN-34
<b>deposit-byte</b>	function	2-117
<b>deposit-field</b>	function	2-117
<b>describe</b>	function	1-178, 2-69, 4-35, 4-104
<b>describe-area</b>	function	8-106
<b>describe-defstruct</b>	function	2-384
<b>describe-flavor</b>	function	2-440, 4-141
<b>describe-package</b>	function	2-612
<b>describe-system</b>	function	4-249

<b>dfloat</b>	function	2-108
<b>difference</b>	function	2-101
<b>digit-char</b>	function	2-273
<b>digit-char-p</b>	function	2-270
<b>dired</b>	function	1-159
Dired Apply	Function	3-153
<b>dis:load-distribution-tape</b>	function	0-87
<b>disassemble</b>	function	1-179, 2-302, 4-104
<b>disk-save</b>	function	0-46
<b>displace</b>	function	2-371
<b>display-notifications</b>	function	7-127
Displaying multiple values of a	function	7-308
<b>documentation</b>	function	2-302, 2-322, 4-39, 4-42
<b>dpb</b>	function	2-117
<b>dribble-end</b>	function	1-183
<b>dribble-start</b>	function	1-183
<b>dumparrays</b>	MacIisp function	2-262
<b>ed</b>	function	1-48, 1-158, 3-12
Editing the definition of a	function	1-48, 1-158, 3-12
Editing the source code of a	function	1-48, 1-158, 3-12
Entering the Debugger with the	Function	1-194, 4-256
<b>eq</b>	function	2-10, 2-89
<b>eq1</b>	function	2-10
<b>equal</b>	function	2-11
<b>error</b>	function	2-482, 2-503
<b>errorp</b>	function	2-9, 2-504
<b>eval</b>	function	2-159
<b>evalhook</b>	function	4-289
<b>evenp</b>	function	2-97
<b>every</b>	function	2-64
Exclusive-or	alu function	7-119
<b>exp</b>	function	2-106
Expander	function	2-144
<b>explode</b>	function	5-89
<b>explodec</b>	function	5-89
<b>exploden</b>	function	5-89
<b>export</b>	function	2-593, 2-611
<b>expt</b>	function	2-105
<b>false</b>	function	2-164
<b>fboundp</b>	function	2-564
<b>fdefine</b>	function	2-297, 2-316
<b>fdefinedp</b>	function	2-321
<b>fdefinition</b>	function	2-322
<b>ferror</b>	function	2-482, 2-504
<b>fifth</b>	function	2-46
<b>fill-pointer</b>	function	2-245
<b>fillarray</b>	function	2-252
<b>find-all-symbols</b>	function	2-606
<b>find-position-in-list</b>	function	2-60
<b>find-position-in-list-equal</b>	function	2-61
<b>%find-structure-extent</b>	function	8-17
<b>%find-structure-header</b>	function	8-16
<b>%find-structure-leader</b>	function	8-17
<b>first</b>	function	2-46
<b>firstn</b>	function	2-53
<b>fix</b>	function	2-107
<b>fixnump</b>	function	2-8
<b>fixp</b>	function	2-7
<b>fixr</b>	function	2-108
<b>flatc</b>	function	5-89
<b>flatsize</b>	function	5-89
<b>flavor-allows-init-keyword-p</b>	function	2-439
<b>float</b>	function	2-108
<b>floatp</b>	function	2-7
<b>flonump</b>	function	2-8
<b>floor</b>	function	2-108

<b>fmakunbound</b>	function	2-564
<b>follow-cell-forwarding</b>	function	8-15
<b>follow-structure-forwarding</b>	function	8-15
<b>font-baseline</b>	function	7-145
<b>font-name</b>	function	7-145
<b>font-blinker-height</b>	function	7-146
<b>font-blinker-width</b>	function	7-146
<b>font-char-height</b>	function	7-145
<b>font-chars-exist-table</b>	function	7-146
<b>font-char-width</b>	function	7-145
<b>font-char-width-table</b>	function	7-145
<b>font-indexing-table</b>	function	7-146
<b>font-left-kern-table</b>	function	7-146
<b>font-raster-height</b>	function	7-146
<b>font-raster-width</b>	function	7-146
<b>format</b>	function	5-29, 5-87
<b>format:ochar</b>	function	5-46
<b>format:ofloat</b>	function	5-46
<b>format:onum</b>	function	5-45
<b>format:oprint</b>	function	5-46
<b>format:ostring</b>	function	5-46
<b>format:plural</b>	function	5-47
<b>format:print-llist</b>	function	5-44
<b>format:tab</b>	function	5-47
<b>forward-value-cell</b>	function	8-15
<b>fourth</b>	function	2-46
<b>fquery</b>	function	7-56
<b>fs:change-file-properties</b>	function	5-105, 5-119
<b>fs:close-all-files</b>	function	5-107
<b>fs:complete-pathname</b>	function	5-120, 5-158
<b>fs:copy-pathname-defaults</b>	function	5-162
<b>fs:default-pathname</b>	function	5-162
<b>fs:describe-pathname</b>	function	5-165
<b>fs:describe-logical-host</b>	function	5-196
<b>fs:directory-list</b>	function	5-117
<b>fs:file-properties</b>	function	5-105, 5-119
<b>fs:file-attribute-bindings</b>	function	5-111
<b>fs:find-file-with-type</b>	function	5-164
<b>fs:init-file-pathname</b>	function	5-163
<b>fs:make-pathname</b>	function	5-145, 5-162
<b>fs:make-logical-pathname-host</b>	function	5-197
<b>fs:make-pathname-defaults</b>	function	5-162
<b>fs:merge-pathnames</b>	function	5-157
<b>fs:merge-pathnames-and-set-defaults</b>	function	5-158
<b>fs:multiple-file-plists</b>	function	5-119
<b>fs:parse-pathname</b>	function	5-156
<b>fs:pathname-plist</b>	function	5-165
<b>fs:pathname-attribute-list</b>	function	5-111
<b>fs:read-attribute-list</b>	function	5-109, 5-111
<b>fs:set-default-pathname</b>	function	5-163
<b>fs:set-logical-pathname-host</b>	function	5-198
<b>fs:user-homedir</b>	function	5-163
<b>fset</b>	function	2-3, 2-564
<b>fset-carefully</b>	function	2-321
<b>fsignal</b>	function	2-482, 2-504, 2-517
<b>fsymeval</b>	function	2-3, 2-564
<b>funcall</b>	function	2-160
<b>function-cell-location</b>	function	2-564
<b>functionp</b>	function	2-8
<b>fundefine</b>	function	2-322
<b>gc-immediately</b>	function	8-116
<b>gc-off</b>	function	8-116
<b>gc-on</b>	function	8-115, RN-80
<b>gc-status</b>	function	8-124
<b>gcd</b>	function	2-105
<b>gensym</b>	function	2-357, 2-567



<b>get</b>	function	2-68
<b>get-pname</b>	function	2-565
<b>getchar</b>	function	2-292
<b>getcham</b>	function	2-293
<b>get-flavor-handler-for</b>	function	2-439
<b>get-handler-for</b>	function	2-439, 4-142
<b>gethash</b>	function	2-74
<b>gethash-equal</b>	function	2-74
<b>get!</b>	function	2-68
<b>globalize</b>	function	2-613
<b>g-l-p</b>	function	2-236, 2-250
<b>graphic-char-p</b>	function	2-270
<b>greaterp</b>	function	2-98
<b>grindf</b>	function	2-302
<b>grind-top-level</b>	function	5-51
<b>halpart</b>	function	2-115
<b>haulong</b>	function	2-115
<b>hostat</b>	function	1-183, 9-123, 9-141
<b>ignore</b>	function	2-164
<b>imagpart</b>	function	2-108, RN-35
<b>implode</b>	function	2-293
<b>import</b>	function	2-573, 2-593, 2-611
<b>Inclusive-or alu</b>	function	7-119
<b>initializations</b>	function	8-69
<b>inspect</b>	function	1-179, 1-189, 4-104, 4-295
<b>instantiate-flavor</b>	function	2-435
<b>int-char</b>	function	2-272
<b>intern</b>	function	2-571, 2-593, 2-605
<b>intern-local</b>	function	2-593, 2-605
<b>intern-soft</b>	function	2-605
<b>intern-local-soft</b>	function	2-606
<b>intersection</b>	function	2-62
<b>isqrt</b>	function	2-106
<b>Keys with No</b>	Function	1-147
<b>keywordp</b>	function	2-607
<b>last</b>	function	2-48
<b>ldb</b>	function	2-116
<b>ldb-test</b>	function	2-117
<b>ldiff</b>	function	2-54
<b>length</b>	function	2-46
<b>lessp</b>	function	2-99
<b>lexpr-funcall</b>	function	2-160
<b>lexpr-send</b>	function	2-160, 2-430
<b>lexpr-continue-whopper</b>	function	2-463
<b>lexpr-send-if-handles</b>	function	2-431
<b>lisp-reinitialize</b>	function	1-151
<b>list</b>	function	2-48, 2-56, 7-313
<b>list*</b>	function	2-49, 2-56
<b>list*-in-area</b>	function	2-49
<b>listarray</b>	function	2-252, 4-35
<b>list-array-leader</b>	function	2-253
<b>listf</b>	function	5-123
<b>listify</b>	function	2-166
<b>list-in-area</b>	function	2-49, 2-56
<b>listp</b>	function	2-7
<b>lms:find-backup-copies</b>	function	0-12
<b>lms:rename-local-file-tool</b>	function	5-176
<b>load</b>	function	4-73, 5-108
<b>load-byte</b>	function	2-117
<b>load-patches</b>	function	4-245
<b>load-and-save-patches</b>	function	0-46, 4-246
<b>loadarrays</b>	MacLisp function	2-262
<b>locate-in-closure</b>	function	2-335
<b>locate-in-instance</b>	function	2-440
<b>location-boundp</b>	function	2-85
<b>location-contents</b>	function	2-84

<b>location-makunbound</b>	function	2-84
<b>locativep</b>	function	2-9
<b>log</b>	function	2-106
<b>logand</b>	function	2-113
<b>%logdpp</b>	function	2-118
<b>Logical and</b>	function	2-178
<b>Logical or</b>	function	2-179
<b>login</b>	function	1-156, 8-71
<b>logior</b>	function	2-113
<b>%logldb</b>	function	2-117
<b>lognot</b>	function	2-114
<b>logout</b>	function	1-157, 8-71
<b>logxor</b>	function	2-113
<b>lower-case-p</b>	function	2-270
<b>lsh</b>	function	2-114
<b>Maclisp allfiles</b>	function	5-201
<b>Maclisp crunit</b>	function	5-201
<b>Maclisp default</b>	function	5-201
<b>Maclisp directory</b>	function	5-201
<b>Maclisp mergef</b>	function	5-201
<b>Maclisp namelist</b>	function	5-201
<b>Maclisp namestring</b>	function	5-201
<b>Maclisp open</b>	function	5-91
<b>Maclisp status homedir</b>	function	5-201
<b>Maclisp status udir</b>	function	5-201
<b>Maclisp truename</b>	function	5-201
<b>Maclisp uread</b>	function	5-201
<b>macroexpand</b>	function	2-375
<b>macroexpand-1</b>	function	2-375
<b>mail</b>	function	1-159
<b>mailer:disable</b>	function	6-111
<b>mailer:enable</b>	function	6-112
<b>mailer:hardcopy-all-mail</b>	function	6-112
<b>mailer:hardcopy-all-mail-for-user</b>	function	6-112
<b>mailer:hardcopy-last-mail</b>	function	6-112
<b>mailer:hardcopy-last-mail-for-user</b>	function	6-112
<b>mailer:hardcopy-new-mail</b>	function	6-112
<b>mailer:hardcopy-new-mail-for-user</b>	function	6-112
<b>mailer:land</b>	function	6-111
<b>mailer:launch</b>	function	6-111
<b>mailer:relaunch</b>	function	6-111
<b>mailer:start</b>	function	6-111
<b>mailer:stop</b>	function	6-111
<b>mailer:update-options</b>	function	6-112
<b>mailer:update-forwarding-tables</b>	function	6-112
<b>mailer:update-mailbox-tables</b>	function	6-112
<b>make-area</b>	function	8-104
<b>make-array</b>	function	2-235, 2-241, 8-31
<b>make-char</b>	function	2-270
<b>make-condition</b>	function	2-505
<b>make-heap</b>	function	2-77
<b>make-instance</b>	function	2-430
<b>make-list</b>	function	2-49, 2-56
<b>make-package</b>	function	2-601
<b>make-plane</b>	function	2-261
<b>%make-pointer</b>	function	8-16
<b>make-process</b>	function	8-85
<b>make-symbol</b>	function	2-566, 2-573
<b>make-system</b>	function	4-79, 4-217, 4-221, 4-307
<b>make-array-into-named-structure</b>	function	2-405
<b>make-broadcast-stream</b>	function	5-23
<b>make-equal-hash-table</b>	function	2-72
<b>make-hash-table</b>	function	2-72
<b>make-mouse-char</b>	function	2-274
<b>%make-pointer-offset</b>	function	8-16
<b>make-stack-group</b>	function	8-5

<b>make-syn-stream</b>	function	5-23
<b>maknam</b>	function	2-293
<b>makunbound</b>	function	2-562
<b>makunbound-globally</b>	function	2-562
<b>makunbound-in-closure</b>	function	2-336
<b>map</b>	function	2-202
<b>map-resource</b>	function	8-135
<b>mapatoms</b>	function	2-608
<b>mapatoms-all</b>	function	2-608, 2-625
<b>mapc</b>	function	2-202
<b>mapcan</b>	function	2-203
<b>mapcar</b>	function	2-202
<b>mapcon</b>	function	2-203
<b>maphash</b>	function	2-74
<b>maphash-equal</b>	function	2-74
<b>maplist</b>	function	2-202
<b>mask-field</b>	function	2-117
<b>math:decompose</b>	function	2-259
<b>math:determinant</b>	function	2-259
<b>math:fill-2d-array</b>	function	2-260
<b>math:invert-matrix</b>	function	2-259
<b>math:list-2d-array</b>	function	2-260
<b>math:multiply-matrices</b>	function	2-258
<b>math:solve</b>	function	2-259
<b>math:transpose-matrix</b>	function	2-259
<b>max</b>	function	2-100
<b>mem</b>	function	2-60
<b>memass</b>	function	2-65
<b>member</b>	function	2-60
<b>memq</b>	function	2-59
<b>meter:expand-range</b>	function	8-62
<b>meter:function-range</b>	function	8-63
<b>meter:function-name-with-escapes</b>	function	8-63
<b>meter:list-functions-in-bucket</b>	function	8-62
<b>meter:make-pc-array</b>	function	8-61
<b>meter:map-over-functions-in-bucket</b>	function	8-63
<b>meter:monitor-all-functions</b>	function	8-61
<b>meter:monitor-between-functions</b>	function	8-62
<b>meter:print-functions-in-bucket</b>	function	8-62
<b>meter:range-of-bucket</b>	function	8-62
<b>meter:report</b>	function	8-62
<b>meter:setup-monitor</b>	function	8-62
<b>meter:start-monitor</b>	function	8-62
<b>meter:stop-monitor</b>	function	8-62
<b>mexp</b>	function	2-369, 4-100
<b>min</b>	function	2-100
<b>minus</b>	function	2-101
<b>minusp</b>	function	2-97
<b>mod</b>	function	2-104
<b>mouse-char-p</b>	function	2-273
<b>name-char</b>	function	2-273
<b>named-structure-invoke</b>	function	2-405
<b>named-structure-p</b>	function	2-405
<b>named-structure-symbol</b>	function	2-405
<b>nbutlast</b>	function	2-53, 2-252
<b>nconc</b>	function	2-52, 2-56
<b>ncons</b>	function	2-45, 2-56
<b>ncons-in-area</b>	function	2-45
<b>neq</b>	function	2-10
<b>net:abort-service-access-path-future</b>	function	9-43
<b>net:continue-service-access-path-future</b>	function	9-42
<b>net:find-object-from-property-list</b>	function	9-30
<b>net:find-object-named</b>	function	9-29
<b>net:find-objects-from-property-list</b>	function	9-30
<b>net:find-paths-to-protocol-on-host</b>	function	9-41
<b>net:find-paths-to-service</b>	function	9-41

<b>net:find-paths-to-service-on-host</b>	function	9-41
<b>net:find-path-to-protocol-on-host</b>	function	9-41
<b>net:find-path-to-service-on-host</b>	function	9-41
<b>net:finger-all-lispms</b>	function	9-135
<b>net:finger-local-lispms</b>	function	9-135
<b>net:get-connection-for-service</b>	function	9-51
<b>net:invoke-service-access-path</b>	function	9-41
<b>net:invoke-service-on-host</b>	function	9-40
<b>net:note-server-closed</b>	function	9-217
<b>net:note-server-established</b>	function	9-214, 9-217
<b>net:remote-login-on</b>	function	9-70
<b>net:service-access-path-future-connected-p</b>	function	9-42
<b>net:set-site</b>	function	0-83
<b>net:start-service-access-path-future</b>	function	9-42
<b>neti:allocate-packet-buffer</b>	function	9-197
<b>neti:ask-terminal-parameters</b>	function	9-69
<b>neti:change-server-error-disposition</b>	function	9-55
<b>neti:deallocate-packet-buffer</b>	function	9-197
<b>neti:disable</b>	function	9-142
<b>neti:enable</b>	function	9-142
<b>neti:enable-serial-terminal</b>	function	9-69
<b>neti:find-network-interfaces</b>	function	9-204
<b>neti:funcall-server-internal-function</b>	function	9-214, 9-216
<b>neti:get-sub-packet</b>	function	9-199
<b>neti:get-sub-packet-maybe-copying</b>	function	9-200
<b>neti:map-packet-buffers</b>	function	9-202
<b>neti:maybe-packet-buffer-panic</b>	function	9-203
<b>neti:most-desirable-service-access-path</b>	function	9-42
<b>neti:packet-being-transmitted</b>	function	9-202
<b>neti:packet-buffer-panic</b>	function	9-203
<b>neti:prune-namespace-changes-file</b>	function	9-28
<b>neti:read-object-file-and-update</b>	function	9-28
<b>neti:reset</b>	function	9-142
<b>neti:server-function</b>	function	9-216
<b>neti:server-argument-descriptions</b>	function	9-216
<b>neti:server-medium-type</b>	function	9-216
<b>neti:server-number-of-arguments</b>	function	9-216
<b>neti:server-property-list</b>	function	9-216
<b>neti:server-protocol-name</b>	function	9-214, 9-216
<b>neti:set-terminal-parameters</b>	function	9-69
<b>neti:translate-hosts.text-file</b>	function	9-28
<b>neti:write-hosts.text-file</b>	function	9-28
<b>nintersection</b>	function	2-62
<b>nleft</b>	function	2-53
<b>nlistp</b>	function	2-7
<b>not</b>	function	2-12
<b>note-private-patch</b>	function	3-192, 4-244
<b>nreconc</b>	function	2-53
<b>nreverse</b>	function	2-51, 2-56
<b>nsublis</b>	function	2-56
<b>nsubst</b>	function	2-55
<b>nsubstring</b>	function	2-240, 2-278
<b>nsymbolp</b>	function	2-7
<b>nth</b>	function	2-47
<b>nthcdr</b>	function	2-48
<b>null</b>	function	2-12
<b>number-into-array</b>	function	2-281
<b>numberp</b>	function	2-7
<b>numerator</b>	function	2-108, RN-34
<b>nunion</b>	function	2-62
<b>oddp</b>	function	2-97
<b>open</b>	function	5-97, 5-222, 8-43
<b>operation-handled-p</b>	function	2-431
<b>%p-dpb</b>	function	8-21
<b>%p-ldb</b>	function	8-21
<b>%p-pointer</b>	function	8-21

<b>package-cell-location</b>	function	2-607
<b>package-external-symbols</b>	function	2-611
<b>package-shadowing-symbols</b>	function	2-612
<b>package-used-by-list</b>	function	2-610, 2-625
<b>package-use-list</b>	function	2-610
<b>pairlis</b>	function	2-66
<b>parse-ferror</b>	function	2-504
<b>parse-number</b>	function	2-281
<b>parse_host</b>	function	9-142
<b>%p-cdr-code</b>	function	8-22
<b>%p-contents-as-locative</b>	function	8-20
<b>%p-contents-as-locative-offset</b>	function	8-20
<b>%p-contents-offset</b>	function	8-20
<b>%p-data-type</b>	function	8-22
<b>%p-dpb-offset</b>	function	8-21
<b>peek</b>	function	4-304
<b>phase</b>	function	2-107, RN-35
<b>pkg-goto</b>	function	2-597, 4-16
<b>pkg-kill</b>	function	2-603
<b>pkg-load</b>	function	2-625
<b>pkg-name</b>	function	2-607
<b>pkg-add-relative-name</b>	function	2-582, 2-610
<b>pkg-contained-in</b>	function	2-625
<b>pkg-create-package</b>	function	2-626
<b>pkg-debug-copy</b>	function	2-625
<b>pkg-delete-relative-name</b>	function	2-582, 2-610
<b>pkg-find-package</b>	function	2-607
<b>pkg-refname-alist</b>	function	2-625
<b>pkg-super-package</b>	function	2-625
<b>plane-aref</b>	function	2-261
<b>plane-aset</b>	function	2-262
<b>plane-default</b>	function	2-261
<b>plane-extension</b>	function	2-261
<b>plane-origin</b>	function	2-261
<b>plane-ref</b>	function	2-261
<b>plane-store</b>	function	2-262
<b>%p-ldb-offset</b>	function	8-21
<b>plist</b>	function	2-565, 4-38
<b>plus</b>	function	2-100
<b>plisp</b>	function	2-97
<b>%pointer</b>	function	8-16
<b>%pointer-difference</b>	function	8-16
<b>%pop</b>	function	8-24
<b>Presetting a</b>	function	8-75
<b>prin1</b>	function	5-87
<b>prin1-then-space</b>	function	5-87
<b>princ</b>	function	2-585, 5-87
<b>print</b>	function	5-87
<b>print-herald</b>	function	0-85
<b>print-notifications</b>	function	1-182
<b>print-sends</b>	function	1-73, 1-182, 6-104
<b>print-compiler-warnings</b>	function	4-321
<b>print-disk-label</b>	function	0-45, 1-209, 5-216
<b>print-system-modifications</b>	function	4-250
<b>probef</b>	function	5-107
<b>process-disable</b>	function	8-97
<b>process-enable</b>	function	8-97
<b>process-lock</b>	function	8-83
<b>process-name</b>	function	8-97
<b>process-preset</b>	function	8-97
<b>process-reset</b>	function	8-97
<b>process-sleep</b>	function	8-79
<b>process-unlock</b>	function	8-83
<b>process-wait</b>	function	8-77, 8-79
<b>process-whostate</b>	function	8-98
<b>process-allow-schedule</b>	function	8-77, 8-79

<b>process-initial-form</b>	function	8-97
<b>process-initial-stack-group</b>	function	8-97
<b>process-reset-and-enable</b>	function	8-97
<b>process-run-function</b>	function	8-86
<b>process-run-restartable-function</b>	function	8-87
<b>process-run-temporary-function</b>	function	8-87
<b>process-stack-group</b>	function	8-97
<b>process-wait-argument-list</b>	function	8-97
<b>process-wait-forever</b>	function	8-79
<b>process-wait-function</b>	function	8-75, 8-97
<b>process-wait-with-timeout</b>	function	8-79
<b>prompt-and-read</b>	function	4-133, 7-59
<b>property-cell-location</b>	function	2-565
<b>%p-store-cdr-code</b>	function	8-22
<b>%p-store-contents</b>	function	8-20
<b>%p-store-contents-offset</b>	function	8-20
<b>%p-store-data-type</b>	function	8-22
<b>%p-store-pointer</b>	function	8-22
<b>%p-store-tag-and-pointer</b>	function	8-20
<b>%push</b>	function	8-24
<b>puthash</b>	function	2-74
<b>puthash-equal</b>	function	2-74
<b>putprop</b>	function	2-68
<b>qreply</b>	function	1-73, 6-104
<b>qsend</b>	function	1-72, 1-160, 6-104
<b>quotient</b>	function	2-102
<b>random</b>	function	2-118
<b>rass</b>	function	2-66
<b>rassoc</b>	function	2-66
<b>rassq</b>	function	2-65
<b>rational</b>	function	2-108, RN-34
<b>rationalp</b>	function	2-8, RN-34
<b>read</b>	function	2-13, 2-56, 5-73, 5-76, RN-55
<b>read-command</b>	function	7-42
<b>read-expression</b>	function	5-78, 7-6
<b>read-form</b>	function	5-78, 7-7
<b>read-and-eval</b>	function	5-81, 7-9
<b>readch</b>	function	5-84
<b>read-command-or-form</b>	function	7-41
<b>read-delimited-string</b>	function	5-83
<b>readfile</b>	function	5-109
<b>read-for-top-level</b>	function	5-77, RN-55
<b>read-from-string</b>	function	5-84
<b>readline</b>	function	5-81, RN-55
<b>readline-trim</b>	function	5-81, RN-55
<b>readline-no-echo</b>	function	5-82, 7-9
<b>readline-or-nil</b>	function	5-82, RN-55
<b>readlist</b>	function	5-85
<b>read-or-character</b>	function	5-80, 7-9
<b>read-or-end</b>	function	5-80, 7-9, RN-55
<b>realpart</b>	function	2-108, RN-34
<b>*rearray</b> Maclisp	function	2-262
<b>recompile-flavor</b>	function	2-438
<b>record-source-file-name</b>	function	2-317, 2-319
<b>%region-number</b>	function	8-106
<b>rem</b>	function	2-62
<b>rem-if</b>	function	2-64
<b>remainder</b>	function	2-103
<b>remhash</b>	function	2-74
<b>remhash-equal</b>	function	2-74
<b>rem-if-not</b>	function	2-63
<b>remob</b>	function	2-573, 2-593, 2-606
<b>remove</b>	function	2-62
<b>remprop</b>	function	2-69
<b>remq</b>	function	2-62
<b>renamef</b>	function	5-103

- reset-initializations** function 8-69
- reset-user-options** function 7-267
- rest1** function 2-47
- rest2** function 2-47
- rest3** function 2-47
- rest4** function 2-47
- return-array** function 2-250
- return-list** function 2-185
- Return from **typeof** function 2-642
- reverse** function 2-51
- room** function 8-129
- rot** function 2-115
- round** function 2-111
- rplaca** function 2-54, 2-56, 2-83, 2-236
- rplacd** function 2-54, 2-56, 2-83, 2-236
- samepnamep** function 2-293, 2-565
- sassoc** function 2-66
- sassq** function 2-66
- SCL and **:rehash-size** keyword to **make-hash-table** function 2-641
- SCL and **:rehash-threshold** keyword to **make-hash-table** function 2-641
- SCL and **:replace** keyword for **delete-duplicates** function 2-640
- SCL and **:test** keyword to **make-hash-table** function 2-641
- SCL and **array-row-major-index** function 2-642
- SCL and **compile-file** function 2-645
- SCL and **decode-universal-time** function 2-645
- SCL and **defsetf** function 2-639
- SCL and **describe** function 2-645
- SCL and **directory** function 2-645
- SCL and **documentation** function 2-645
- SCL and **dribble** function 2-645
- SCL and **equal-typep** function 2-638
- SCL and **functionp** function 2-638
- SCL and **get-macro-character** function 2-644
- SCL and **make-concatenated-stream** function 2-643
- SCL and **make-echo-stream** function 2-643
- SCL and **mismatch** function 2-641
- SCL and **parse-namestring** function 2-644
- SCL and **parse-pathname** function 2-644
- SCL and **proclaim** function 2-640
- SCL and **push** function 2-641
- SCL and **pushnew** function 2-641
- SCL and **read-char** function 2-643
- SCL and **read-delimited-list** function 2-644
- SCL and **read-from-string** function 2-643
- SCL and **require** function 2-640
- SCL and **return** function 2-639
- SCL and **return-from** function 2-639
- SCL and **set-macro-character** function 2-644
- SCL and **set-syntax-from-char** function 2-643
- SCL and **standard-char-p** function 2-640
- SCL and **substitute** function 2-640
- SCL and **substitute-if** function 2-640
- SCL and **substitute-if-not** function 2-640
- SCL **coerce** function 2-637
- second** function 2-46
- send** function 2-160, 2-430
- send-if-handles** function 2-431
- set** function 2-561
- set-globally** function 2-561
- Set all bits alu function 7-119
- setarg** function 2-166
- set-character-translation** function 2-34
- set-char-bit** function 2-269
- set-in-closure** function 2-335
- set-in-instance** function 2-439

setplist	function	2-565
setsyntax	function	2-36
set-syntax-#-macro-char	function	2-27, 2-36
set-syntax-from-char	function	2-34
set-syntax-from-description	function	2-34
set-syntax-macro-char	function	2-26, 2-35
setsyntax-sharp-macro	function	2-36
set-system-status	function	4-251
seventh	function	2-47
shadow	function	2-574, 2-593, 2-612
shadowing-import	function	2-573, 2-574, 2-593, 2-611
si:advise-1	function	4-283
si:area-predicate-all-areas	function	8-108
si:area-predicate-areas-with-objects	function	8-108
si:checksum-band	function	0-52
si:compare-band	function	0-53
si:create-comtab	function	7-53
si:data-types	function	8-13
si:delete-comtab	function	7-53
si:describe-resource	function	8-136
si:describe-system-versions	function	0-85
si:disk-array-block-count	function	8-31
si:disk-array-checkwords	function	8-31
si:disk-event-count	function	8-33
si:disk-event-enq-task	function	8-33
si:disk-event-error-cylinder	function	8-34
si:disk-event-error-dcw	function	8-35
si:disk-event-error-flushed-transfer-count	function	8-34
si:disk-event-error-head	function	8-34
si:disk-event-error-sector	function	8-34
si:disk-event-error-string	function	8-34
si:disk-event-error-type	function	8-33, 8-36
si:disk-event-error-unit	function	8-34
si:disk-event-size	function	8-33
si:disk-event-suppress-error-recovery	function	8-34, 8-36
si:disk-event-task-done-p	function	8-33
si:display-item-list	function	7-19, 7-283, RN-57
si:edit-fep-label	function	8-58
si:equal-hash	function	2-75
si:find-comtab	function	7-53
si:flavor-allowed-init-keywords	function	2-439, 4-144
si:flavor-default-init-get	function	2-440
si:flavor-default-init-putprop	function	2-440
si:flavor-default-init-remprop	function	2-440
si:full-gc	function	8-116, 8-128
si:function-spec-get	function	2-322
si:function-spec-putprop	function	2-322
si:get-release-version	function	4-250
si:get-site-option	function	9-31
si:get-system-version	function	0-85, 4-249
si:hardcopy-from-stream	function	3-274
si:hardcopy-text-file	function	3-273
si:install-microcode	function	0-49, 1-210, 5-217
si:lisp-top-level	function	1-151
si:lisp-top-level1	function	1-151
si:login-to-sys-host	function	0-83
si:loop-tassoc	function	2-228
si:loop-tequal	function	2-228
si:loop-tmember	function	2-228
si:loop-named-variable	function	2-229
si:machine-model	function	1-224
si:make-coroutine-bidirectional-stream	function	5-27
si:make-coroutine-input-stream	function	5-27
si:make-coroutine-output-stream	function	5-27
si:make-hardcopy-stream	function	3-274, 4-126
si:make-process-queue	function	8-84



<b>si:make-serial-stream</b>	function	5-252
<b>si:map-over-areas</b>	function	8-109
<b>si:map-over-objects</b>	function	8-111
<b>si:map-over-objects-in-area</b>	function	8-111
<b>si:map-over-objects-in-region</b>	function	8-110
<b>si:map-over-regions</b>	function	8-110
<b>si:map-over-regions-of-area</b>	function	8-109
<b>si:map-system-files</b>	function	4-252
<b>si:mount-disk-unit</b>	function	8-58
<b>si:null-stream</b>	function	5-25
<b>si:parse-host</b>	function	9-31
<b>si:patch-loaded-p</b>	function	4-250
<b>si:patch-system-pathname</b>	function	4-237, RN-52
<b>si:print-list</b>	function	5-73
<b>si:print-object</b>	function	5-73
<b>si:print-fep-filesystem</b>	function	8-59
<b>si:print-login-history</b>	function	0-48, 1-182
<b>si:print-system-status-warning</b>	function	0-85
<b>si:process-dequeue</b>	function	8-84
<b>si:process-enqueue</b>	function	8-84
<b>si:process-queue-locker</b>	function	8-84
<b>si:random-initialize</b>	function	2-119
<b>si:random-create-array</b>	function	2-119
<b>si:read-recursive</b>	function	2-27
<b>si:read-fep-label</b>	function	8-58
<b>si:receive-band</b>	function	0-50
<b>si:region-predicate-all-regions</b>	function	8-108
<b>si:region-predicate-copyspace</b>	function	8-109
<b>si:region-predicate-list</b>	function	8-108
<b>si:region-predicate-not-stack-list</b>	function	8-109
<b>si:region-predicate-structure</b>	function	8-108
<b>si:rename-within-new-definition-maybe</b>	function	2-329
<b>si:resequence-fep-filesystem</b>	function	8-59
<b>si:reset-process-queue</b>	function	8-84
<b>si:return-disk-event-task</b>	function	8-33
<b>si:sb-on</b>	function	8-77, 8-80
<b>si:set-default-hardcopy-device</b>	function	1-174, 3-271
<b>si:set-process-wait</b>	function	8-96
<b>si:set-screen-hardcopy-device</b>	function	1-174, 3-271
<b>si:set-system-file-properties</b>	function	4-252
<b>si:show-configuration</b>	function	1-200, 1-224
<b>si:system-version-info</b>	function	4-249
<b>si:transmit-band</b>	function	0-51
<b>si:unadvise-1</b>	function	4-283
<b>si:unbin-file</b>	function	4-300
<b>si:unencapsulate-function-spec</b>	function	2-328
<b>si:verify-fep-filesystem</b>	function	8-59
<b>si:wait-for-disk-done</b>	function	8-33
<b>si:wait-for-disk-event</b>	function	8-33
<b>si:wait-for-disk-event-task</b>	function	8-33
<b>si:write-fep-label</b>	function	8-58
<b>signal</b>	function	2-482, 2-503, 2-517, 4-112, 4-133
<b>signum</b>	function	2-106
<b>sin</b>	function	2-106
<b>sind</b>	function	2-106
<b>sinh</b>	function	2-107, RN-35
<b>sixth</b>	function	2-47
<b>some</b>	function	2-64
<b>sort</b>	function	2-56, 2-79
<b>sortcar</b>	function	2-81
<b>sort-grouped-array</b>	function	2-81
<b>sort-grouped-array-group-key</b>	function	2-81
<b>sqrt</b>	function	2-106
<b>stable-sort</b>	function	2-81
<b>stable-sortcar</b>	function	2-81
<b>%stack-frame-pointer</b>	function	8-22

<b>stack-group-preset</b>	function	8-6
<b>stack-group-resume</b>	function	8-4, 8-6
<b>stack-group-return</b>	function	8-4, 8-6
<b>step</b>	function	4-94, 4-287
Stepper	function	7-315
<b>store-conditional</b>	function	8-17
<b>store-array-leader</b>	function	2-245
<b>stream-copy-until-eof</b>	function	5-87
<b>stream-default-handler</b>	function	5-24
<b>string</b>	function	2-278
<b>string&gt;</b>	function	2-282
<b>string&lt;</b>	function	2-282
<b>string≥</b>	function	2-283
<b>string-append</b>	function	2-279
<b>string-compare</b>	function	2-285
<b>string-downcase</b>	function	2-285
<b>string-equal</b>	function	2-283
<b>%string-equal</b>	function	2-284
<b>string-flipcase</b>	function	2-286
<b>string-greaterp</b>	function	2-284
<b>string-length</b>	function	2-278
<b>string-lessp</b>	function	2-284
<b>string-nconc</b>	function	2-279
<b>string-nreverse</b>	function	2-280
<b>string-pluralize</b>	function	2-280
<b>string-reverse</b>	function	2-280
<b>string-search</b>	function	2-288
<b>string-trim</b>	function	2-280
<b>string-upcase</b>	function	2-285
<b>string&lt;</b>	function	2-282
<b>%string =</b>	function	2-283
<b>string =</b>	function	2-282
<b>string&gt;</b>	function	2-282
<b>string-capitalize-words</b>	function	2-286
<b>string-exact-compare</b>	function	2-283
<b>string-left-trim</b>	function	2-280
<b>string-nconc-portion</b>	function	2-279
<b>string-not-equal</b>	function	2-284
<b>string-not-greaterp</b>	function	2-284
<b>string-not-lessp</b>	function	2-284
<b>stringp</b>	function	2-8
<b>string-reverse-search</b>	function	2-288
<b>string-reverse-search-char</b>	function	2-287
<b>string-reverse-search-exact</b>	function	2-287
<b>string-reverse-search-exact-char</b>	function	2-286
<b>string-reverse-search-not-char</b>	function	2-288
<b>string-reverse-search-not-exact-char</b>	function	2-287
<b>string-reverse-search-not-set</b>	function	2-290
<b>string-reverse-search-set</b>	function	2-289
<b>string-right-trim</b>	function	2-280
<b>%string-search-char</b>	function	2-289
<b>string-search-char</b>	function	2-287
<b>string-search-exact</b>	function	2-287
<b>string-search-exact-char</b>	function	2-286
<b>%string-search-exact-char</b>	function	2-287
<b>string-search-not-char</b>	function	2-287
<b>string-search-not-exact-char</b>	function	2-286
<b>string-search-not-set</b>	function	2-289
<b>string-search-set</b>	function	2-289
<b>string-to-ascii</b>	function	2-290
<b>structure-forward</b>	function	8-14
<b>%structure-total-size</b>	function	8-17
<b>sub1</b>	function	2-104
<b>sublis</b>	function	2-55
<b>subrp</b>	function	2-8
<b>subset</b>	function	2-63

subset-not	function	2-63
subst	function	2-55
substring	function	2-278
swaphash	function	2-74
swaphash-equal	function	2-74
sxhash	function	2-59, 2-76
symbol-package	function	2-573, 2-607
symbolp	function	2-7
symeval	function	2-3, 2-561
symeval-globally	function	2-562
symeval-in-closure	function	2-335
symeval-in-instance	function	2-439
symeval-in-stack-group	function	8-6
sys:%1d-alloc	function	2-246
sys:%1d-aref	function	2-246
sys:%1d-aset	function	2-246
sys:%block-store-cdr-and-contents	function	8-22
sys:%block-store-tag-and-pointer	function	8-22
sys:%change-list-to-cons	function	8-13
sys:%draw-line	function	7-126
sys:%draw-rectangle	function	7-126
sys:%draw-triangle	function	7-126
sys:%fixnum	function	8-14
sys:%flonum	function	8-13
sys:%instance-flavor	function	8-13
sys:%pointer-lessp	function	8-16
sys:%pointerp	function	8-15
sys:%pointer-type-p	function	8-15
sys:%p-store-cdr-and-contents	function	8-21
sys:%p-store-cdr-type-and-pointer	function	8-21
sys:%p-structure-offset	function	8-20
sys:%string-compare	function	2-285
sys:%string-exact-compare	function	2-283
sys:%unsynchronized-device-read	function	8-23
sys:array-column-span	function	8-18
sys:disk-read	function	8-36
sys:disk-write	function	8-36
sys:display-notification	function	7-128
sys:double-float-p	function	2-8
sys:dump-forms-to-file	function	4-331, 5-241
sys:fceiling	function	2-112
sys:fdefinition-location	function	2-322
sys:ffloor	function	2-111
sys:fround	function	2-113
sys:ftruncate	function	2-112
sys:function-parent	function	2-319
sys:halt	function	1-223
sys:make-stack-array	function	8-28
sys:page-in-area	function	8-25
sys:page-in-array	function	8-25
sys:page-in-region	function	8-25
sys:page-in-structure	function	8-24
sys:page-in-words	function	8-25
sys:page-out-area	function	8-26
sys:page-out-array	function	8-25
sys:page-out-region	function	8-26
sys:page-out-structure	function	8-25
sys:page-out-words	function	8-26
sys:read-character	function	5-76, 7-5
sys:reset-temporary-area	function	8-107
sys:sg-previous-stack-group	function	8-5
sys:single-float-p	function	2-8
tailp	function	2-61
tan	function	2-106
tand	function	2-107, RN-33
tanh	function	2-107, RN-35

<b>tape:carry-dump</b>	function	0-31
<b>tape:carry-list</b>	function	0-34
<b>tape:carry-load</b>	function	0-32
<b>tape:copy-tape</b>	function	0-18
<b>tape:make-stream</b>	function	5-269
<b>tape:write-fep-files-to-tape</b>	function	0-20, 8-59
<b>terpri</b>	function	5-87
The Optional Constraint	Function	7-262
The Standard Choose Variable Values	Function	7-262
The Standard Multiple Choice	Function	7-252
The Standard Multiple Menu Choose	Function	7-247
The <b>tape:make-stream</b>	Function	5-269
The Top-level	Function	4-126
<b>third</b>	function	2-46
<b>*throw</b>	function	2-200
<b>time</b>	function	7-356
<b>time-difference</b>	function	7-356
<b>time-increment</b>	function	7-356
<b>time-lessp</b>	function	7-356
<b>time:daylight-savings-p</b>	function	7-369
<b>time:daylight-savings-time-p</b>	function	7-369
<b>time:day-of-the-week-string</b>	function	7-370
<b>time:decode-universal-time</b>	function	7-367
<b>time:encode-universal-time</b>	function	7-367
<b>time:fixnum-microsecond-time</b>	function	7-357
<b>time:get-time</b>	function	7-355
<b>time:get-universal-time</b>	function	7-355
<b>time:initialize-timebase</b>	function	7-369
<b>time:leap-year-p</b>	function	7-369
<b>time:microsecond-time</b>	function	7-357
<b>time:month-length</b>	function	7-369
<b>time:month-string</b>	function	7-370
<b>time:parse</b>	function	7-361
<b>time:parse-interval-or-never</b>	function	7-365
<b>time:parse-present-based-universal-time</b>	function	7-362, RN-65
<b>time:parse-universal-time</b>	function	7-362
<b>time:parse-universal-time-relative</b>	function	7-362, RN-65
<b>time:print-date</b>	function	7-359
<b>time:print-time</b>	function	7-359
<b>time:print-brief-universal-time</b>	function	7-359
<b>time:print-current-date</b>	function	7-359
<b>time:print-current-time</b>	function	7-359
<b>time:print-interval-or-never</b>	function	7-365
<b>time:print-universal-date</b>	function	7-359
<b>time:print-universal-time</b>	function	7-359
<b>time:read-calendar-clock</b>	function	7-355
<b>time:read-interval-or-never</b>	function	7-365
<b>time:set-calendar-clock</b>	function	7-355
<b>time:set-local-time</b>	function	7-355
<b>time:timezone-string</b>	function	7-371
<b>time:verify-date</b>	function	7-370
<b>time-elapsed-p</b>	function	7-356, RN-65
<b>times</b>	function	2-102
<b>true</b>	function	2-164
<b>truncate</b>	function	2-110
<b>tv:add-function-key</b>	function	7-135
<b>tv:add-select-key</b>	function	7-137
<b>tv:add-to-system-menu-create-menu</b>	function	7-239
<b>tv:add-to-system-menu-programs-column</b>	function	7-239
<b>tv:back-convert-constraints</b>	function	7-195
<b>tv:choose-variable-values</b>	function	4-126, 4-133, 7-262
<b>tv:choose-variable-values-process-message</b>	function	7-274
<b>tv:defaulted-multiple-menu-choose</b>	function	7-248
<b>tv:edit-namespace-object</b>	function	9-22
<b>tv:key-state</b>	function	7-132, 7-161
<b>tv:key-test</b>	function	7-161

<b>tv:make-blinker</b>	function	4-133, 7-147
<b>tv:make-window</b>	function	4-112, 4-121, 4-126, 4-129, 7-107, 7-305
<b>tv:make-sheet-bit-array</b>	function	7-121
<b>tv:menu-choose</b>	function	7-212, 7-219
<b>tv:mouse-buttons</b>	function	7-158
<b>tv:mouse-input</b>	function	7-157
<b>tv:mouse-wait</b>	function	7-155
<b>tv:mouse-wakeup</b>	function	7-152
<b>tv:mouse-button-encode</b>	function	7-156
<b>tv:mouse-set-blinker-cursorpos</b>	function	7-152
<b>tv:mouse-y-or-n-p</b>	function	7-220
<b>tv:multiple-choose</b>	function	7-252
<b>tv:multiple-menu-choose</b>	function	7-247
<b>tv:notify</b>	function	7-127
<b>tv:scroll-maintain-list</b>	function	7-315
<b>tv:scroll-parse-item</b>	function	7-307, 7-311
<b>tv:select-or-create-window-of-flavor</b>	Function	7-240
<b>tv:set-default-window-size</b>	function	7-165
<b>tv:set-screen-background-gray</b>	function	7-92
<b>tv:set-screen-deexposed-gray</b>	function	7-92
<b>tv:sheet-following-blinker</b>	function	4-133, 7-149
<b>tv:turn-off-sheet-blinkers</b>	function	7-149
<b>tv:wait-for-mouse-button-down</b>	function	7-156
<b>tv:wait-for-mouse-button-up</b>	function	7-156
<b>tyi</b>	function	5-77
<b>tyipeek</b>	function	5-84
<b>tyo</b>	function	5-87
<b>typep</b>	function	2-9, 2-335, 2-403, 2-576, 2-597, 4-141
<b>unbreakon</b>	function	2-524, 4-98
<b>uncompile</b>	function	2-316, 4-319
<b>undefflavor</b>	function	2-437
<b>undefun</b>	function	2-322
<b>undelef</b>	function	5-104
<b>unexport</b>	function	2-593, 2-611
<b>union</b>	function	2-62
<b>unuse-package</b>	function	2-593, 2-611
<b>upper-case-p</b>	function	2-270
<b>uptime</b>	function	1-183
<b>use-package</b>	function	2-571, 2-593, 2-610
<b>value-cell-location</b>	function	2-563
<b>values</b>	function	2-167
<b>values-list</b>	function	2-167
<b>viewf</b>	function	5-105
<b>what-files-call</b>	function	1-178, 4-38
<b>where-is</b>	function	1-178, 2-571, 2-612, 2-625, 4-38
<b>who-calls</b>	function	1-177, 4-38
<b>write-user-options</b>	function	7-268
<b>xcons</b>	function	2-45, 2-56
<b>xcons-in-area</b>	function	2-45
<b>yes-or-no-p</b>	function	7-55
<b>y-or-n-p</b>	function	7-55
<b>zerop</b>	function	2-97
<b>zwei:add-bug-recipient</b>	function	6-31
<b>zwei:edit-functions</b>	function	1-48, 3-13
<b>zwei:open-editor-stream</b>	function	7-377
<b>zwei:qsend-off</b>	function	1-72, 6-103
<b>zwei:qsend-on</b>	function	1-72, 6-103
<b>zwei:save-all-files</b>	function	1-158, 1-182
<b>\</b>	function	2-103
<b>\\</b>	function	2-105
<b>~</b>	function	2-105
<b>~\$</b>	function	2-105
	FUNCTION A	1-141
	Function abbreviation	2-28
	FUNCTION B	1-141
	FUNCTION C	1-141

- FUNCTION c-M 1-141
- FUNCTION c-Q 1-108, 1-141, 3-268
- Function calling 8-3
- Function cell 2-3
- FUNCTION commands 7-135, 7-137
- Function compiler 4-309, 4-315
- Function Documentation 3-47
- FUNCTION F 1-141
- FUNCTION H 1-141
- FUNCTION HELP 1-83
- FUNCTION Key 1-140, 7-135, 7-137
- FUNCTION M 1-141
- FUNCTION m-Q 1-108, 1-141, 3-268
- FUNCTION O 1-141
- FUNCTION Q 1-108, 1-141, 1-174, 3-268, 3-271
- FUNCTION REFRESH 1-141
- Function renaming 2-329
- FUNCTION RUBOUT 1-141
- Function Specs 2-297
- Function-calling Errors 2-539
- Function-calling Subprimitives 8-23
- compiler:**
  - tv:** **function-defined** function 4-325
  - sys:** Function-defining Special Forms 2-305
  - sys:** **\*function-keys\*** variable 7-137
  - sys:** **function-parent** declaration 2-312
  - sys:** **function-parent** function 2-319
- Using the **sys:** **function-parent** Declaration 2-319
- meter:** **function-range** function 8-63
- compiler:** **function-referenced** function 4-325
- New Function: **array-column-major-index** RN-37
- New Function: **array-push-portion-extend** RN-37
- New Function: **change-instance-flavor** RN-31
- New Function: **conjugate** RN-35
- New Function: **copytree-share** RN-37
- New Function: **location-contents** RN-36
- New Function: **string-nconc-portion** RN-38
- New Function: **tand** RN-33
- What is a Function? 2-297
- CLM: What the Read Function Accepts 2-643
- FUNCTION A command 6-23
- &functional** RN-28
- Functional arguments 2-139
- Functional objects 2-423
- global:** **functional-alist** and lexical scoping RN-12
- Function Apropos (m-X) Zmacs command 4-41
- FUNCTION c-T command 6-23
- function-cell-location** function 2-564
- The Function Cell of a Symbol 2-563
- FUNCTION CLEAR INPUT 1-141
- Function Data Type 2-4
- The Compiled function definitions 1-180, 5-51
- Formatted print of Function Definitions 2-300
- Simple function directives 2-644
- SCL and **format** function error 2-534
- Undefined Function Execution 4-275
- Tracing Function Execution 4-280
- Untracing FUNCTION F command 9-21
- Function for Evaluation 2-159
- Evaluating a Function Form 2-151
- FUNCTION H command 1-183, 9-141
- :function** init-plist option 7-262
- :function** init option for
  - tv:basic-choose-variable-values** 7-274
- :function** init option for
  - tv:choose-variable-values** 7-263
- Functions for Function Invocation 2-159

- FUNCTION Key: Display and Hardcopy
  - Commands 1-141
- FUNCTION Key: Recovering From Stuck States 1-143
- FUNCTION Key: Selection and Notification
  - Commands 1-142
- Index of Function Keys 1-139
- SELECT and FUNCTION Keys 7-135
  - tv:\*escape-keys\*** and **tv:\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
  - Special function keys character representation 5-5
  - Length of **:function** line item 7-308
  - Width of **:function** line item 7-308
  - :function** line item entry 7-308
  - :function** list item keyword 7-313
- meter:** **function-name-with-escapes** function 8-63
- New Function **note-private-patch** Adds Private Patch to Your World RN-53
- Compiled function object 4-309
  - :function** option for **tv:choose-variable-values** 4-133
  - functionnp** function 2-8
  - functionp** function 2-638
  - Function Produces 2-644
  - Function-referenced-but-never-defined Warnings 4-324
- Functions 2-297, 4-40
  - functions 5-44
  - functions 5-44
  - functions 5-44
  - functions 2-418
  - Access functions 2-147
  - Accessor functions 2-379, 2-401
- 269 **:minpad** option for formatting
- :padchar** option for formatting
- :tab-period** option for formatting
- Abstract-operation functions 2-418
  - Access functions 2-147
  - Accessor functions 2-379, 2-401
- Adding new keywords to initialization functions 8-67
- Advice to functions 4-281
  - Alu functions 7-108, 7-118, 7-119
- Arguments to functions 2-323
  - Arrays as functions 2-235
  - Arrays used as functions 2-305
- Asynchronous execution of functions 8-85
  - Basic Array Functions 2-241
- Byte Manipulation Functions 2-115
  - Cdr storing functions 2-297
- Change to **define-prompt-and-read-type** Dispatch Functions RN-59
  - CLM: By-position Constructor Functions 2-642
  - CLM: Pathname Functions 2-644
  - CLM: Time Functions 2-645
  - Compiled functions 2-303, 2-305, 4-69
  - Connection interrupt functions 9-140
  - Cross-host translation functions 5-145
  - Debugger Functions 4-267
  - Debugging info alist functions 2-302, 2-323, 2-325
  - Defining functions 2-297, 2-300, 2-305
  - Definitions of functions 2-316, 4-329
  - Degrees in trigonometric functions 2-106
  - Disk Event Accessor Functions 8-33
  - Documentation string functions 2-302, 2-322
  - Dynamic Closure-manipulating Functions 2-335
  - environment* argument for macro-expander functions 2-138
  - Evaluation of special functions 2-303
    - Flavor Functions 2-435
  - Flavor system storing functions 2-297
    - Formatting functions 5-44
  - Frame-manipulating functions 2-494
  - Handler-list searching functions 2-510
    - Hardcopy Functions 3-273
  - Hash Table Functions 2-73
  - How Programs Examine Functions 2-322
- SCL and **functionnp** function 2-638
- CLM: What the Print Function Produces 2-644
- Function-referenced-but-never-defined Warnings 4-324
- Functions 2-297, 4-40
  - functions 5-44
  - functions 5-44
  - functions 5-44
  - functions 2-418
  - Access functions 2-147
  - Accessor functions 2-379, 2-401
  - functions 8-67
  - functions 4-281
  - functions 7-108, 7-118, 7-119
  - functions 2-323
  - functions 2-235
  - functions 2-305
  - functions 8-85
  - Functions 2-241
  - Functions 2-115
  - functions 2-297
  - Functions RN-59
  - Functions 2-642
  - Functions 2-644
  - Functions 2-645
  - functions 2-303, 2-305, 4-69
  - functions 9-140
  - functions 5-145
  - Functions 4-267
  - functions 2-302, 2-323, 2-325
  - functions 2-297, 2-300, 2-305
  - functions 2-316, 4-329
  - functions 2-106
  - Functions 8-33
  - functions 2-302, 2-322
  - Functions 2-335
  - functions 2-138
  - functions 2-303
  - Functions 2-435
  - functions 2-297
  - functions 5-44
  - functions 2-494
  - functions 2-510
  - Functions 3-273
  - Functions 2-73
  - Functions 2-322

- In-line coded functions 2-351
- Input Functions 5-75
- Internal functions 1-234
- Internal Time Functions 7-369
- Interpreted functions 2-303, 2-304, 4-69
- Kinds of Functions 2-303
- Lambda functions 2-304
- Locate functions 2-147
- Maclisp-compatible String-manipulation Functions 2-292
- Macro-expander functions 2-368
- Macros expanded to Lisp functions 2-355
- Mailer Functions 6-111
- Names of functions 2-297
- Namespace System Functions 9-29
- Namespace System Administrative Functions 9-28
- New Reading Functions RN-61
- New Time Functions RN-65
- New Transcendental Functions RN-35
- Notation Conventions for Functions 1-231
- Numeric Functions 2-97
- Open coded functions 2-351
- Operations the User Can Perform on Functions 2-302
- Other Kinds of Functions 2-305
- Other Process Functions 8-97
- Output Functions 5-87
- Pathname Functions 5-156
- Printed representation of functions 2-297
- Proceedable condition functions 2-521
- Purpose of functions 2-339
- Quick Summary of Mouse Functions 1-149
- Radians in trigonometric functions 2-106
- Redefining functions 2-318
- Reference Description of Help Functions 1-88
- Restart handler functions 2-514
- Select-method functions 2-305
- Server functions 9-136
- sl:digested-lambda** functions 2-297, 2-300, 2-304, 2-305
- Signalling functions 2-482, 2-503
- Slashification-related output functions 5-89
- Some Utility Functions 1-158
- Special functions 2-303
- Stack Group Functions 8-5
- Stack groups used as functions 2-305
- String Comparison and String Searching Functions RN-23
- subst** functions 2-351
- Substitutable Functions 2-351
- Symbols used as functions 2-297
- Synchronization Functions 8-32
- Syntax errors in read functions 2-543
- Tools for Compiling Single Functions 4-318
- Transcendental Functions 2-106
- Trigonometric functions 2-106
- tv:basic-mouse-sensitive-items** Messages and Functions 7-283
- Update functions 2-147
- Utility Functions 1-182
- Functions, Flavors, and Messages for Window Graying 7-92
- Package Functions, Special Forms, and Variables 2-597
- Functions, Variables, and Macros for Digital Audio 7-329
- compiler: functions-defined** variable 4-324
- compiler: functions-referenced** variable 4-325
- New Functions: **%32-bit-plus** and **%32-bit-difference** RN-33
- Functions and Dynamic Closures 2-295
- functions and lexical scoping 2-138
- Macro-expander



- Some Functions and Special Forms 2-159
- Functions and Special Forms for Constant Values 2-161
- SCL sequence and list functions and two-argument predicates 2-641
- Area Functions and Variables 8-104
- Herald Functions and Variables 0-85
- Site-related Functions and Variables 0-83
- Functions for Accessing Directories 5-117
- Functions for Altering User Option Variables 7-267
- Functions for Compatibility with Maclisp Lexprs 2-165
- New Functions for Converting Non-integral Numbers to Integers RN-36
- New Functions for Converting Numbers to Floating-point Numbers RN-36
- Functions for Creating Coroutine Streams 5-27
- Functions for Creating Flavors 2-428
- Server functions for datagram protocols 9-215
- Functions for Defining User Option Variables 7-267
- Functions for Function Invocation 2-159
- Functions for identifying callers 1-177
- Input Functions for Interactive Streams 7-5
- Readable Functions for Maclisp Compatibility 2-36
- Handler Functions for Named Structures 2-403
- Character and String Functions for Old-Zetalisp/New-Zetalisp Compatibility RN-24
- Functions for Passing Messages 2-430
- New Function **si:map-system-files** Operates on a Declared System RN-53
- New Function **si:set-system-file-properties** Operates on a Declared System RN-53
- Summary of Help Functions in Different Contexts 1-86
- Summary of Character and String Compatibility Functions in Release 6.0 RN-18
- Common Lisp Functions Not Included RN-23
- Storing functions on property lists 2-297
- Mapping functions over areas 8-108
- Mapping functions over objects 8-108
- Mapping functions over regions 8-108
- Basic definition of the function spec 2-297, 2-325
- si:** **function-spec-get** function 2-322
- function** special form 2-162
- SCL and **function** special form 2-638
- function-spec** option for **prompt-and-read** 7-59, RN-58
- si:** **function-spec-putprop** function 2-322
- :method** function specs 2-316
- Defining function specs 2-297
- \*Function-Specs-to-Edit-n\*** buffer 1-48, 3-13
- :handler** function spec type 2-297
- :internal** function spec type 2-297
- :location** function spec type 2-297
- :method** function spec type 2-297
- :property** function spec type 2-297
- :within** function spec type 2-297
- Symbol function spec type 2-297
- Functions That Change Characters Into Macro Characters 2-35
- Functions That Change Character Syntax 2-34
- Functions That Create New Readtables 2-33
- Functions That Find the Home Package of a Symbol 2-607
- Functions That Import, Export, and Shadow Symbols 2-611
- Functions That Map Names to Symbols 2-605
- Functions That Operate on a System 4-251
- Functions That Operate on Locatives 2-84
- Functions That Operate on Named Structures 2-405

Applying Arbitrary  
   Applying  
   Compiled  
   Debugger  
   Reading  
   Advising One  
   Zmacs  
   Find File In  
   Creating a  
   Service  
   c-X

Functions that return multiple values 2-167  
 Functions to Expand Macros 2-375  
 Functions to Files in Dired 3-153  
 functions to list items 2-201  
 function storage area 8-107  
 functions to return values in current stack  
   frame 4-267  
 Functions Used During Expansion 2-368  
 Functions used inside the Debugger 4-267  
 function to use input editor 5-57, 7-25  
 Function Within Another 4-285  
 Fundamental Conditions 2-531  
 Fundamental Mode 3-156  
 Fundamental Mode (m-X) Zmacs command 3-122  
 Fundamental Mode Buffer 3-122  
 Fundamental Zmail Techniques 6-57  
**fundefine** function 2-322  
 Futures 9-42  
 FWD Forward a request for connection packet 9-114  
 F Zmacs command 3-30, 3-196

**G**

Open Get Register (c-X  
   Controlling  
   Ephemeral-object  
   Incremental  
   Nonincremental  
   Overview of  
   Principles of  
   Storage Requirements for  
   Ephemeral-object  
   Controlling the  
 Diagnostic test for ephemeral-object  
   Hash Tables and the  
   Operation of the  
   Output messages from the  
   Status of  
 Strategy for Unattended Operation with the  
   The  
   Using the  
   When and How to Use the  
   Ephemeral-object  
   Printing  
   Protocol-translating  
   Chaosnet Arpanet  
   Ephemeral  
   Clarification of  
   **si:**

**G**

G) Zmacs command 4-63  
 Gamma character 2-32  
 Garbage Collection 8-124  
 Garbage Collection 8-119  
 garbage collection 8-113  
 garbage collection 8-113  
 Garbage Collection 1-105, 8-114  
 Garbage Collection 8-113  
 Garbage Collection 8-122  
 Garbage Collection in Release 6.0 RN-51  
 garbage collector 8-115  
 garbage collector 0-87  
 Garbage Collector 2-75  
 Garbage Collector 8-117  
 garbage collector 8-124  
 garbage collector 8-124  
 Garbage Collector 8-128  
 Garbage Collector 8-113, 8-131  
 Garbage Collector 8-114  
 Garbage Collector 1-105  
 garbage collector diagnostics 0-87  
 Garbage collector process state 8-124  
 Garbage collector run bar 8-124  
 garbage collector statistics 8-124  
 Garbage collector warnings 8-124  
 Garbage on Screen After Zmail Error 6-24  
 gateway 9-129  
 Gateway host 9-37  
 Gateway server 9-127  
**gateway-pseudonet** network type 9-15  
**:gateway-pseudonet** network type 9-44  
 Gateway Protocol 9-127  
 Gateways 9-37, 9-108  
 gc 8-119  
**gc-immediately** function 8-116  
**gc-off** function 8-116  
**gc-on** function 8-115, RN-80  
**gc-on** variable 8-116  
**gc-on** Printed Documentation RN-80  
**\*gc-parameters\*** variable 8-115  
**gc-status** function 8-124  
 Gc-status Output 1-105, 8-124

**G**

- si: **gc-area-reclaim-report** variable 8-125
  - Halt GC Command 1-23
  - Start GC Command 1-40, 1-106
  - gcd** function 2-105
  - si: **gc-flip-inhibit-time-until-warning** variable 8-128
  - si: **gc-flip-minimum-ratio** variable 8-126
  - si: **gc-flip-ratio** variable 8-126
  - :gc** option for **make-area** 8-104, 8-107
  - si: **gc-process-background-priority** variable 8-128
  - si: **gc-process-foreground-priority** variable 8-128
  - si: **gc-process-immediate-reclaim-priority** variable 8-127
  - si: **gc-reclaim-ephemeral-immediately** variable 8-127
  - si: **gc-reclaim-immediately** variable 8-127
  - si: **gc-reclaim-immediately-if-necessary** variable 8-127
  - si: **gc-report-stream** variable 8-125
  - Show GC Status Command 1-37
  - si: **gc-warning-interval** variable 8-126
  - si: **gc-warning-ratio** variable 8-126
  - si: **gc-warning-threshold** variable 8-126
- Advanced General-purpose Stream Operations 5-11
- Basic General-purpose Stream Operations 5-13
- General Arguments: Starting Servers 9-214
- General Blinker Operations 7-147
- General Information-giving Zmacs Commands 3-46
- General Information on Flavors 4-141
- General Information on Networks 9-1
- Generalized Variables 2-147
- CLM: Generalized Variables 2-639
- Decrementing generalized variables 2-149
- Incrementing generalized variables 2-149
- Locating generalized variables 2-147
- Updating generalized variables 2-147
- The "General List" Form of Item 7-210
- tv:momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
- zwei:** **\*generate-in-reply-to-field\*** variable 6-88
- :generate-xon-xoff** serial I/O parameter 5-253
- Setting Generation Retention Count on Files in Dired 3-152
- Generator 2-333
- Seed for random number generator 2-118
- Generator coroutines 8-7
- Generic datagrams 9-44
- Generic operations 4-112
- Generic Pathnames 5-149
- Generic protocols 9-44
- :generic-pathname** message to pathnames 5-149
- :generic-pathname** method of **fs:pathname** 5-171
- Generic byte streams 9-44
- The Lisp Machine Generic Network System 9-37
- Generic Operations on Objects 2-421
- Device generic pathname component 5-149
- Directory generic pathname component 5-149
- Host generic pathname component 5-149
- Type generic pathname component 5-149
- Version generic pathname component 5-149
- Generic pathname operations 9-55
- gensym** function 2-357, 2-567
- Manipulating column geometry 7-215
- Geometry Messages 7-214
- Geometry Example 1: a Multicolumned Menu 7-215
- Geometry Example 2: Retrieving Geometry Information 7-216
- Geometry Example 2: Retrieving Geometry Information 7-216
- Geometry Init-plist Options 7-213

- :geometry** init option for **tv:menu** 7-214, 7-296
- :geometry** method of **tv:menu** 7-214
- The Geometry of a Menu 7-213
- :german** day-of-the-week-representation 7-370
- get** function 2-68
- :get** message 2-473, 5-227, 8-48, 9-32
- :get-hash** message 2-72
- chaos:** **get-pkt** function 9-139
- time:** **get-pname** function 2-565
- time:** **get-time** function 7-355
- getchar** function 2-292
- getcharn** function 2-293
- net:** **get-connection-for-service** function 9-51
- net:** **get-flavor-handler-for** function 2-439
- dbg:** **get-frame-function-and-args** function 2-495
- dbg:** **get-handler-for** function 2-439, 4-142
- dbg:** **:get-handler-for** message 2-454
- gethash** function 2-74
- gethash-equal** function 2-74
- Get I/O buffer 7-231
- Zmail: Get Inbox 1-64
- [Get inbox] Zmail menu item 6-12, 6-46
- getl** function 2-68
- :getl** message 2-473
- :getl** method of **fs:pathname** 5-172
- SCL and **get-macro-character** function 2-644
- get** method of **fs:pathname** 5-171
- :get** method of **si:serial-stream** 5-252
- chaos:** **get-next-pkt** function 9-140
- chaos:** **:get-output-buffer** message 5-21
- chaos:** **:get-pane** method of **tv:basic-constraint-frame** 7-187
- Open Get Register (c-X G) Zmacs command 4-63
- si:** **get-release-version** function 4-250
- si:** **get-site-option** function 9-31
- neti:** **get-sub-packet** function 9-199
- neti:** **get-sub-packet-maybe-copying** function 9-200
- si:** **get-system-version** function 0-85, 4-249
- si:** **:gettable-instance-variables** Option for **defflavor** 2-441, 2-485, 4-113
- Getting Help 1-83
- Getting Started 1-1, 4-9
- Getting a Filename From the User 5-129
- Getting and Setting the Time 7-355
- Getting a Window to Use 7-105
- Getting Fancy with Zmail 1-67
- Getting Help in Zmacs 3-41
- Getting Information About an Array 2-246
- Getting Information About a System 4-249
- Getting new mail 1-64
- Getting Out of Dired 3-147
- Getting Out of Keystroke Prefixes 3-42
- Getting Out of Minibuffer Prompts 3-42
- Getting Out of Prefixes and Prompts 3-42
- Getting Out of the Debugger in Zmail 6-23
- Getting Out of Trouble 3-42
- Getting Out of Trouble in Zmail 6-23
- Getting Started in Zmacs 3-11
- Getting Text Back 3-43
- Getting Things Into Gray with [Gray Char] 3-239
- Getting Things Into Gray with [Swap Gray] 3-239
- Getting Things Into the FED Gray Plane 3-239
- time:** **get-universal-time** function 7-355
- G Font Editor command 3-260
- Giving the Go-ahead to the Dumper 0-23
- global** package 2-615

- Global symbols 2-571
  - Global variables 2-126, 8-3
  - Global-name 1-112, 9-4, 9-29
  - global:functional-alist** and lexical scoping RN-12
  - global** in Release 6.0 RN-24
  - globalize** function 2-613
  - global line attribute 7-313
  - global line attribute 7-311
  - global line attribute 7-311
  - Global line attributes 7-307
  - Globally named objects 1-113, 9-5
  - global** Package 2-571
  - Global Replacements in Zmacs 3-102
  - Global Replacements in Zmacs 3-102
  - Global Replacements in Zmacs 3-103
  - Global translation rules 5-189
  - global variable 3-141, 3-143
  - global variable 3-141, 3-143
  - Global Variable Declarations RN-27
  - g-l-p** function 2-236, 2-250
  - \*gmsgs-other-switches\*** variable 6-91
  - gmsgs** Service for ITS Users 6-95
  - Go-ahead to the Dumper 0-23
  - Goal Column 3-63
  - Goal Column and the Motion Commands 3-63
  - Goal Column for Real Line Commands 1-168, 3-214
  - Going Back to First Indented Character in Zmacs 3-165
  - go** special form 2-187, 2-189
  - go** special form 2-639
  - Goto Beginning 1-50, 3-26, 3-70
  - Goto End 1-50, 3-26, 3-70
  - Goto-less programming 2-194
  - Governing the Passing of Multiple Values 2-639
  - gprint** package 2-633
  - Grabbing the mouse 7-151, 7-154
  - Granularity 5-269
  - Granularity tape spec parameter 0-26
  - graphic-lisp system 0-87
  - Graphical objects and text intermingled 7-279
  - graphic-char-p** function 2-270
  - graphic input device 3-227
  - Graphic Output 7-118
  - Graphic Output of the Sample Program 4-185
  - Graphic Output to Windows 7-118
  - Graphics 7-103
  - Graphics characters 5-5
  - Graphics coordinates 7-118
  - Graphics messages 7-118
  - graphics-mixin** 7-124
  - graphics-mixin** 7-124
  - graphics-mixin** 7-124
  - graphics-mixin** 7-125
  - graphics-mixin** 7-123
  - graphics-mixin** 7-122
  - graphics-mixin** 7-125
  - graphics-mixin** 7-125
  - graphics-mixin** 4-14, 4-116, 7-122
  - graphics-mixin** 7-122
  - graphics-mixin** 7-120
  - graphics-mixin** 7-125
  - graphics-mixin** 7-121
  - graphics-mixin** 7-124
  - graphics-mixin** 7-124
  - graphics-mixin** 7-120
  - graphics-mixin** flavor 4-116, 7-118
- Symbols Added to or Removed From
    - :leader**
    - :mouse**
    - :mouse-self**
  - The Making Querying While Making Querying While Making Multiple
    - ibase**
    - zwei:\*set-attribute-update-list\*** Interpreter Caches
  - zwei:**
    - Zmail
    - Giving the Set
  - Init File Form: Setting
  - SCL and
  - CLM: Rules
    - SCL
  - Installing the
  - Mouse as a How Windows Display
    - :draw-circle** method of **tv:**
    - :draw-circular-arc** method of **tv:**
    - :draw-closed-curve** method of **tv:**
    - :draw-cubic-spline** method of **tv:**
    - :draw-curve** method of **tv:**
    - :draw-dashed-line** method of **tv:**
    - :draw-filled-in-circle** method of **tv:**
    - :draw-filled-in-sector** method of **tv:**
    - :draw-line** method of **tv:**
    - :draw-lines** method of **tv:**
    - :draw-point** method of **tv:**
    - :draw-regular-polygon** method of **tv:**
    - :draw-string** method of **tv:**
    - :draw-triangle** method of **tv:**
    - :draw-wide-curve** method of **tv:**
    - :point** method of **tv:**
    - tv:**

- Getting Things Into Gray with
    - :gray-array-for-inferiors** init option for **tv:**
    - :gray-array-for-inferiors** method of **tv:**
    - :set-gray-array-for-inferiors** method of **tv:**
  - Functions, Flavors, and Messages for Window
    - New Feature: Window
    - Window
    - Window
      - Clear
    - Getting Things Into the FED
    - Merging Characters with the FED
      - Move drawing in the
      - The FED
    - FED
      - :gray-array-for-unused-areas** init option for **tv:**
      - :gray-array-for-unused-areas** method of **tv:**
      - :set-gray-array-for-unused-areas** method of **tv:**
      - tv:**
        - Getting Things Into
        - Getting Things Into
    - Getting Things Into Gray with [Swap
      - [Add in
      - [Clear
      - [Move
      - [Swap
  - Reading Integers in Bases
    - Current stack
    - Description
    - Presetting the stack
    - Running stack
    - Stack
    - Stack
    - Operating on a
      - An Example of Stack
      - Carry-tape file
    - Input/Output in Stack
    - Resuming of Stack
    - Stack
      - Switching stack
      - Stack
      - Stack
      - Stack
- Gray plane 3-228, 3-239
- tv:**
  - \*gray-arrays\*** variable 7-92
  - :gray-array-for-inferiors** init option for **tv:gray-deexposed-inferiors-mixin** 7-93
  - :gray-array-for-inferiors** method of **tv:gray-deexposed-inferiors-mixin** 7-93
  - :gray-array-for-unused-areas** init option for **tv:gray-unused-areas-mixin** 7-93
  - :gray-array-for-unused-areas** method of **tv:gray-unused-areas-mixin** 7-93
- [Gray Char] 3-239
- [Gray Char] Font Editor menu item 3-239, 3-260
- gray-deexposed-inferiors-mixin** 7-93
- gray-deexposed-inferiors-mixin** 7-93
- gray-deexposed-inferiors-mixin** 7-93
- gray-deexposed-inferiors-mixin** flavor 7-93
- Graying 7-92
- Graying RN-61
- Graying 7-90
- Graying Specifications 7-91
- gray plane 3-239, 3-260
- Gray Plane 3-239
- Gray Plane 3-240
- gray plane 3-239, 3-260
- Gray Plane 3-239
- Gray Plane Menu 3-228
- Gray Plane Menu Items 3-260
- gray-unused-areas-mixin** 7-93
- gray-unused-areas-mixin** 7-93
- gray-unused-areas-mixin** 7-93
- gray-unused-areas-mixin** flavor 7-93
- Gray with [Gray Char] 3-239
- Gray with [Swap Gray] 3-239
- Gray] 3-239
- Gray] Font Editor menu item 3-240, 3-260
- Gray] Font Editor menu item 3-239, 3-260
- Gray] Font Editor menu item 3-239, 3-260
- Gray] Font Editor menu item 3-239, 3-260
- greaterp** function 2-98
- Greater Than 10 2-21
- Greatest common denominator 2-105
- Greatest common divisor 2-105
- [Grid Size] Font Editor menu item 3-256, 3-259
- grindef** function 2-302
- grindef** special form 1-180, 5-51
- grind-top-level** function 5-51
- group 8-3
- group 7-188
- group 8-3
- group 8-3
- group bindings 8-3
- Grouped Arrays 2-401
- Group Functions 8-5
- Grouping related disk transfers 8-36
- Group of Zmail Messages 6-80
- Groups 8-7
- groups 0-32
- Groups 8-7
- Groups 8-4
- Groups 2-303, 8-3
- groups 8-4
- group state error 2-537
- groups used as functions 2-305
- group switch 8-3
- :grow** message 5-224, 8-45
- Grow Window 3-129

Standard Variable Bindings Now  
 Committed  
 Software Installation  
 Zmail Reference

**:growth-factor** init option for **sl:eg-hash-table** 2-71  
 Guarantee Consistent Behavior in Break and  
 Debugging Loops RN-42  
 guess 8-122  
 Guide 0-87  
 Guide 6-1  
 G Zmail command 1-64, 6-46

## H

## H

## H

FUNCTION  
 Hostat  
 Mark Whole (c-X)

H 1-141  
 (H) 1-188  
 H) Zmacs command 4-63  
 h-F Move Forward Over Address Zmail  
 Command 6-45  
 h-K Kill Address Zmail Command 6-45  
 h-RUBOUT Kill Previous Address Zmail  
 Command 6-45  
 h-T Transpose Address Zmail Command 6-45  
**:hack-fonts** option for  
**zwei:open-editor-stream** 7-378  
**:hack-fonts** option for  
**zwei:with-editor-stream** 7-378  
**halpart** function 2-115  
**:half-period** init option for **tv:blinker** 7-149  
**:half-period** method of **tv:blinker** 7-149  
 Half-period of a blinker 7-146  
 Half-wavelength 7-327  
 Halt command 1-201  
 Halt Commands 1-23  
**sys:** **halt** function 1-223  
 Halt GC Command 1-23  
 Halting 1-45  
 Halting the FEP 1-201  
 Halt Machine Command 1-23  
 Hand-Down character 2-32  
 Hand-Left character 2-32  
 Hand-Right character 2-32  
 Hand-Up character 2-32  
 QFILE file  
 handle 9-155  
**:handle-condition** message 2-511  
**:handle-asynchronous-character** method of  
**sl:interactive-stream** 7-17  
**:handle-condition-p** message 2-511  
**:handle-mouse** method of  
**tv:essential-mouse** 7-152  
 Handler 2-479  
 handler 2-197  
 Handler 2-481  
 Handler 2-501  
 handler 5-11  
 Handler-list searching functions 2-510  
 Handler? 2-487  
 handler functions 2-514  
 Handler Functions for Named Structures 2-403  
**:handler** function spec type 2-297  
 handler object 2-511  
 handlers 2-487  
 handlers 2-481  
 handlers 2-488, 2-501, 2-502  
 Handlers 2-487  
 handlers 2-501, 2-502  
 Establishing  
 Interactive  
 Proceeding with **condition-bind** Handlers 2-487  
 handlers 2-501, 2-511  
 Handlers 2-520

- Reference Material: Establishing
- Reference Material: Restart
  - Restart
  - Search rule for invoking Default
- Reference Material: Default
  - Application:
- Reference Material: Application:
  - Invoking Restart
  - Disk Error
  - ITS character
- Overview and Definitions of Signalling and
  - Disk
  - Introduction to Signalling and New Stream
- Error
  - Serial Stream
- Marking Files to Be
  - Commands for Producing
  - How to Get
- mailer:**
- mailer:**
- FUNCTION Key: Display and
  - Other
  - Printing and
- :default-font** keyword to **si:**
- :header-font** keyword to **si:**
- si:**
- Checking the Status of
  - Customizing
  - Dired
- si:**
- si:**
- mailer:**
- mailer:**
- mailer:**
- mailer:**
- si:**
- FSEdit
- Handlers 2-488
- Handlers 2-514
- handlers 2-501, 2-513, 4-80
- handlers 2-501, 2-509
- Handlers and Complex Modularity 2-509
- Handlers and Complex Modularity 2-510
- Handlers Examining the Stack 2-494
- Handlers Examining the Stack 2-495
- Handlers Manually 2-516
- Handling 8-36
- handling 5-5
- Handling 2-479
- Handling Commands 1-213
- Handling Conditions 2-479
- Handling Error Flavors: **sys:stream-closed** and **sys:network-stream-closed** RN-38
- Handling in the Command Processor 1-15
- Handling of Xon - Xoff Characters RN-80
- Handling the Mouse 7-151
- :hang-p** keyword for block disk stream messages 8-53
- Hardcopied in Dired 3-153
- Hardcopy 1-107, 3-267
- Hardcopy 1-107
- Hardcopy* Commands 1-23
- Hardcopy Functions 3-273
- hardcopy** Service 9-56
- Hardcopy System 3-265
- hardcopy-status** Service 9-58
- hardcopy-all-mail** function 6-112
- hardcopy-all-mail-for-user** function 6-112
- Hardcopy Buffer (m-X) Zmacs command 1-107, 3-119, 3-267
- Hardcopy Commands 1-141
- Hardcopy Commands 3-269
- Hardcopy Commands 3-267
- \*hardcopy-default-fonts\*** 1-174, 3-271
- \*hardcopy-default-fonts\*** 1-174, 3-271
- \*hardcopy-default-fonts\*** variable 1-174, 3-271
- Hardcopy Devices 1-109, 3-269
- hardcopy-device-status** Service 9-57
- Hardcopy Facilities 1-174, 3-271
- Hardcopy File 1-108, 3-153, 3-268
- Hardcopy File Command 1-23
- Hardcopy files with multiple fonts 3-273
- hardcopy-from-stream** function 3-274
- Hardcopying a File 3-133
- Hardcopying a Region 3-94
- Hardcopying From Dired 1-108, 3-268
- Hardcopying From the File System Editor 1-108, 3-268
- Hardcopying From the System Menu 1-107, 3-267
- Hardcopying From Zmacs 1-107, 3-267
- Hardcopying From Zmail 1-108, 3-268
- Hardcopying the Buffer 3-119
- Hardcopying the Screen 1-108, 3-268
- Hardcopying Zmail Messages 6-70
- hardcopy-last-mail** function 6-112
- hardcopy-last-mail-for-user** function 6-112
- hardcopy-new-mail** function 6-112
- hardcopy-new-mail-for-user** function 6-112
- Hardcopy Private Document 1-136
- hardcopy-text-file** function 3-273
- [Hardcopy] Command 5-235
- [Hardcopy] File System Editor menu item 5-233
- [Hardcopy] Zmail menu item 1-108, 3-268, 6-70



- Hardware resetting 1-201
- Hardware/microcode debugger 0-54
- Hardware Description for Serial I/O 5-247
- Hardware in the Site's Namespace 0-71
- Hardware Programming Information 9-131
- Hardware Protocol 9-95
- Hardware Protocols 9-98
- hardware resetting 1-201
- Hash Primitive 2-75
- Hash Tables 2-69, 2-75
- hash-elements loop** iteration path 2-224
- Hasharray facility of Interlisp 2-69
- Hashing 2-75
- Hashing on **eq** 2-75
- Hashing on **equal** 2-75
- :hash-inherited-symbols** Option for **defpackage** and **make-package** 2-600, 2-603
- Hash table considerations while using multiprocessing 2-69
- Hash table facilities 2-59
- Hash Table Functions 2-73
- Hash table keys 2-69
- hash table keys 2-69
- hash table keys 2-69
- Hash Table Messages 2-72
- Hash Tables 2-641
- Hash Tables 2-71
- Hash Tables and Loop Iteration 2-75
- Hash Tables and the Garbage Collector 2-75
- Hash Tables or Heaps 2-224
- Hash Tables or Heaps RN-42
- Hash Tables to Files 2-75
- haulong** function 2-115
- H command 1-183, 9-141
- h-c-upper-left** command 1-44, 1-198, 1-199
- HDLC Serial I/O 5-263
- Header Files 9-146
- header-font**: Printer Object Attribute 9-17
- header field 9-106, 9-111, 9-117
- header field 9-106
- header field 9-106
- header field 9-106
- header field 9-138
- header field 9-106
- header field 9-106
- header field 9-106
- header field 9-106
- Header Fields 6-37
- header fields 9-106, 9-114
- header fields 6-69
- Header fields in Zmail messages 6-11, 6-85
- :header-font** keyword to **sl:\*hardcopy-default-fonts\*** 1-174, 3-271
- header format 6-35
- header format 6-35
- header format 6-35
- Header Formats 6-35
- header information 2-239
- headers 6-45
- Headers window 1-67
- headers of yanked messages 6-86
- Headers Zmail Command 6-45
- \*header-window-nlines\*** variable 6-92
- heading 1-57
- heading 3-37
- heap** 2-78
- Registering Users and Chaosnet Chaosnet Chaosnet Details of Chaosnet Tape
- Hardware resetting 1-201
- Hash Primitive 2-75
- Hash Tables 2-69, 2-75
- hash-elements loop** iteration path 2-224
- Hasharray facility of Interlisp 2-69
- Hashing 2-75
- Hashing on **eq** 2-75
- Hashing on **equal** 2-75
- :hash-inherited-symbols** Option for **defpackage** and **make-package** 2-600, 2-603
- Hash table considerations while using multiprocessing 2-69
- Hash table facilities 2-59
- Hash Table Functions 2-73
- Hash table keys 2-69
- hash table keys 2-69
- hash table keys 2-69
- Hash Table Messages 2-72
- Hash Tables 2-641
- Hash Tables 2-71
- Hash Tables and Loop Iteration 2-75
- Hash Tables and the Garbage Collector 2-75
- Hash Tables or Heaps 2-224
- Hash Tables or Heaps RN-42
- Hash Tables to Files 2-75
- haulong** function 2-115
- H command 1-183, 9-141
- h-c-upper-left** command 1-44, 1-198, 1-199
- HDLC Serial I/O 5-263
- Header Files 9-146
- header-font**: Printer Object Attribute 9-17
- header field 9-106, 9-111, 9-117
- header field 9-106
- header field 9-106
- header field 9-106
- header field 9-138
- header field 9-106
- header field 9-106
- header field 9-106
- Header Fields 6-37
- header fields 9-106, 9-114
- header fields 6-69
- Header fields in Zmail messages 6-11, 6-85
- :header-font** keyword to **sl:\*hardcopy-default-fonts\*** 1-174, 3-271
- header format 6-35
- header format 6-35
- header format 6-35
- Header Formats 6-35
- header information 2-239
- headers 6-45
- Headers window 1-67
- headers of yanked messages 6-86
- Headers Zmail Command 6-45
- \*header-window-nlines\*** variable 6-92
- heading 1-57
- heading 3-37
- heap** 2-78
- Objects as Trees as
- CLM: Creating
- loop** iteration Over
- loop** Now Supports iteration Over Dumping
- FUNCTION
- Acknowledgement packet Count packet
- Destination Address packet Destination Index packet Opcode pkt Operation packet
- Packet Number packet Source Address packet Source Index packet
- Altering Zmail Packet Pruning
- ITS Network RFC733 Zmail Array Delete useless
- Prune c-X Y Prune Yanked
- zwei**: Subject or Text Zmail display column Text
- :clear** method of **sl**:

- :delete-by-item** method of **si**: **heap** 2-78
- :delete-by-key** method of **si**: **heap** 2-78
- :describe** method of **si**: **heap** 2-78
- :empty-p** method of **si**: **heap** 2-78
- :find-by-item** method of **si**: **heap** 2-78
- :find-by-key** method of **si**: **heap** 2-78
- :insert** method of **si**: **heap** 2-79
- :remove** method of **si**: **heap** 2-79
- :top** method of **si**: **heap** 2-79
- heap-elements loop** iteration path 2-224
- Heaps 2-77
- Heaps 2-224
- Heaps RN-42
- Heaps 2-78
- Heaps RN-36
- Heaps and Loop Iteration 2-79
- height 3-223, 7-145
- Character height 3-221, 3-227, 3-238, 7-143, 7-145, 7-146
- Inside height 7-213
- Line height 3-221, 7-108, 7-143, 7-162
- Maximum height 7-213
- Raster height 7-146
- Height and width of the drawing pane 3-256
- Height and Width of the FED Drawing Pane 3-256
- Height Font Attribute 3-221, 7-143
- Height Font Attributes 3-223, 7-145
- :height** init option for **tv:ibeam-blinker** 7-150
- :height** init option for **tv:menu** 7-296
- :height** init option for **tv:rectangular-blinker** 7-149
- :height** init option for **tv:sheet** 7-163
- Height of the FED Character Box 3-238
- HELP 1-144, 3-44
- help 3-243
- Help 4-261
- Help 3-148
- HELP 3-44
- HELP 1-83
- Help 1-83
- HELP 3-14
- Help 1-51, 3-14
- Help 3-51
- HELP 1-83
- Help 3-14
- [Help (M)] 1-133
- Help character 2-32
- Help Command 1-24
- Help Commands 1-24
- Help facilities 1-83
- HELP key 1-51, 1-83, 1-197, 3-14, 3-44, 6-5
- :help-function** option for **fquery** 7-56
- HELP: Program Development Tools and Techniques 4-7
- HELP ? Zmacs command 1-51, 3-14
- HELP A 3-46
- Help and Quit 1-188
- HELP A Zmacs command 1-51, 3-14, 3-45
- HELP Commands for Finding Out About Zmacs Commands 3-46
- Help Command Summary 3-217
- HELP completion command 1-52, 3-14
- HELP C Zmacs command 1-51, 3-14, 3-45
- HELP Debugger command 4-264, 4-271
- HELP Dired command 3-148
- Help Displayed Automatically 6-5
- HELP D Zmacs command 1-51, 3-14, 3-45
- Help facilities, FEP command completion 1-85
- loop** Iteration Over Hash Tables or
- loop** Now Supports Iteration Over Hash Tables or
- Messages to
- New Facility:
- Blinker
- Character
- Inside
- Line
- Maximum
- Raster
- Setting the
- Character
- Blinker Width and Blinker
- Character
- Automatic drawing
- Debugger
- Dired
- Finding Out About Zmacs Commands with
- FUNCTION
- Getting
- Introduction to
- Introduction to Zmacs
- Minibuffer Response
- SELECT
- Zmacs
- More
- Zmacs
- Zmail:

- Online
  - System Conventions and Reference Description of Summary of
  - Getting FEP, Zmail:
  - Peek
  - Displaying New Input Editor
  - Show
  - [Print
  - Marking a Region From
  - Marking a Region From
  - Translation
  - Condition
  - Condition flavor
  - Examples of
  - Release 6.0: Introduction and System Conventions and Helpful
  - What
  - Buffer
  - Command
  - Kill
  - Viewing the Editor Command
  - Viewing the Kill
  - Yanking in the command
  - Yanking in the kill
  - Zmacs Buffer
  - Retrieving
- Help facilities reference material 1-83
- HELP Font Editor command 3-260
- Help for Zmail 6-5
- Helpful Hints 1-227
- Help Functions 1-88
- Help Functions in Different Contexts 1-86
- Help in the Command Processor 1-14
- HELP in the Document Examiner 1-119, 1-133
- Help in Zmacs 3-41
- HELP key 1-85
- Help Key 6-5
- HELP L Zmacs command 1-51, 3-14, 3-46
- Help Message 4-303
- Help Messages in the Input Editor 5-66, 7-34
- Help Options RN-63
- HELP or c-? 1-52, 3-14
- HELP SPACE Zmacs command 1-51, 3-14
- HELP Stepper command 4-94
- HELP U Zmacs command 1-51, 3-14, 3-46
- HELP V Zmacs command 1-51, 3-14, 3-46, 3-210
- HELP W Zmacs command 3-46
- HELP W Zmacs command 1-51, 3-14
- HELP Zmacs command 4-7, 4-64
- HELP Zmacs minibuffer command 4-8
- [Help] 1-133
- [HELP] File System Maintenance menu item 0-39
- [HELP] Font Editor menu item 3-260
- Herald Command 1-37
- Herald Functions and Variables 0-85
- Herald] File System Maintenance menu item 0-39
- Here to Beginning of Buffer 3-92
- Here to End of Buffer 3-92
- her loop** keyword 2-222
- heuristics for VAX/VMS RN-72
- Hexadecimal format directive 5-32
- H Font Editor command 3-255, 3-259
- hierarchies 2-486
- hierarchy 2-482
- Hierarchy of Windows 7-76
- High Disk Performance 8-52
- Higher-level Chaosnet Protocols 9-123
- :highlighted-items** init option for
  - tv:menu-highlighting-mixin** 7-242
- :highlighted-items** method of
  - tv:menu-highlighting-mixin** 7-243
- :highlighted-values** method of
  - tv:menu-highlighting-mixin** 7-243
- Highlights RN-1
- Hints 1-227
- Hints for Using Array Registers 2-257
- Hints for Using Keywords, Mail Collections, and Mail Files 6-81
- Hints on Using the FEP 1-197
- Hints to Macro Writers 2-357
- his loop** keyword 2-222
- Histories Save 3-72
- History 3-116
- History 1-15, 3-43
- history 3-43, 3-73, 3-75
- History 3-73
- History 3-73
- history 3-15
- history 3-15
- History 3-116
- History list 3-15
- History Elements 3-74

- Using the Mouse on
  - The Inspector
    - fonts:** **hl10** font 7-140
    - fonts:** **hl10b** font 7-140
    - fonts:** **hl12i** font 7-140
  - Output
  - Zmail in Output
  - Output
    - tv:** **hollow-rectangular-blinker** flavor 7-150
- Home directory 5-163
- Home package 2-606
- home-address:** User Object Attribute 9-13
- :home-cursor** method of **tv:sheet** 7-113
- :home-down** method of **tv:sheet** 7-113
- home-host:** User Object Attribute 9-13
- home-phone:** User Object Attribute 9-13
- homedir** function 5-201
- Homedir] File System Maintenance menu item 0-39, 5-231
- Home Package of a Symbol 2-573
- Home Package of a Symbol 2-607
- Hooks in Init Files 1-170, 3-214
- Hopelessly Stuck 6-24
- Horizontal wraparound 7-108
- Horizontally and/or Vertically in FED 3-255
- Horizontally and/or Vertically in FED 3-255
- Horizontally in FED 3-250
- Horizontally in FED 3-250
- Horizontal Space 1-53, 3-28
- :horizontal** stacking description 7-188
- horseshoe character in ITS pathnames 5-185
- :host** 9-21
- host 5-197
- host 4-217
- host 5-222, 8-43
- host 9-37
- Host 0-79
- Host 0-80
- Host 0-80
- host 9-9
- host 9-10
- host 9-10
- host 0-87
- host 5-186
- Host address 9-108
- Host attributes 9-7
- Host object 1-112, 9-4
- Host Status 1-37, 1-183, 9-141
- Host system 6-94
- chaos:** **host-data** function 9-141
- Host-independent file name 5-151
- :host-name** message to tape streams 5-273
- chaos:** **host-up** function 9-135
- host:** Printer Object Attribute 9-17
- host addresses 9-104
- hostat 1-185, 4-303
- Hostat 1-183, 9-141
- Hostat (H) 1-188
- hostat** function 1-183, 9-123, 9-141
- Hostat command 9-123
- :host** command processor argument type 7-48
- Host computer crash 6-12
- Host Determination in Pathnames 5-136
- host-down-state connection state 9-136
- Host dump parameter 0-6

- Pathnames on Supported Host File Systems 5-174
  - host-for-bug-reports**: Site Object Attribute 9-19
  - Host generic pathname component 5-149
  - :host-list** option for **prompt-and-read** 7-59, RN-58
  - :host-list tv:choose-variable-values** variable type 7-259
  - :host** method of **fs:pathname** 5-165
  - host names 9-104
  - host-not-available** flavor 2-546
  - host-not-responding** flavor 2-555
  - host-not-responding-during-connection** flavor 2-555
  - Host Object Attribute 9-8
  - Host Object Attribute 9-9
  - Host Object Attribute 9-11
  - Host Object Attribute 9-9
  - Host Object Attribute 9-9
  - Host Object Attribute 9-8
  - Host Object Attribute 9-7
  - Host Object Attribute 9-11
  - Host Object Attribute 9-9
  - Host Object Attribute 9-9
  - Host Object Attribute 9-10
  - Host Object Attribute 9-11
  - Host Object Attribute 9-10
  - Host Object Attribute 9-7
  - Host Object Attribute 9-7
  - Host Object Attribute 9-10
  - Host Object Attribute 9-8
  - Host Objects 9-7
  - :host** option for **net:define-server** 9-51
  - :host** option for **prompt-and-read** 7-59, RN-58
  - :host** option for server 9-214
  - :host** option for **tape:make-stream** 5-269
  - :host-or-local** option for **prompt-and-read** 7-59, RN-58
  - :host-or-local tv:choose-variable-values** variable type 7-259
  - host-protocol-desirability**: Site Object Attribute 9-19
  - Hosts 1-113, 9-5, 9-37
  - Hosts 9-44
  - hosts 5-188, RN-71
  - hosts 5-196, RN-72
  - Hosts 0-79
  - Hosts 0-72
  - hosts 2-644
  - Hosts 5-196, RN-72
  - hosts 0-15
  - hosts 5-186
  - Hosts Across Physical Hosts 5-196, RN-72
  - Hosts Command 1-37
  - Hosts Connected to the Serial Line 5-265
  - Host status report 1-183, 9-141
  - hosts to physical hosts 5-186
  - host-stopped-responding** flavor 2-555
  - host table 9-108
  - Host Table Protocol 9-127
  - Host tape spec parameter 0-26
  - :host tv:choose-variable-values** variable type 7-259
  - Hour 7-353
  - How Applications Programs Treat Conditions 2-481
  - How Do I Create a FEP File? 1-229
  - How Key Bindings Work: the Comtab 3-208
  - How LMFS Uses the FEP File System 1-209, 5-216
- Symbolic
    - fs:**
    - sys:**
    - sys:**
  - address:**
  - bitmap-printer:**
  - file-control-lifetime:**
  - finger-location:**
  - location:**
  - machine-type:**
  - name:**
  - nickname:**
  - peripheral:**
  - pretty-name:**
  - printer:**
  - print-spooler-options:**
  - server-machine:**
  - service:**
  - short-name:**
  - site:**
  - spooled-printer:**
  - system-type:**
  - Namespace System
- Finding Paths to
    - Logical
    - Multiple physical
  - Namespace Attributes for New
    - Registering
    - SCL and non-null
  - Splitting Logical Hosts Across Physical
    - Transferring source files between
    - Translating logical hosts to physical
      - Splitting Logical
      - Show
  - Using the Terminal Program with
    - Translating logical
      - sys:**
      - ITS
      - Chaosnet

How Programs Examine Functions 2-322  
 How Programs Manipulate Definitions 2-316  
 How Tag Tables Work 3-106  
 How Tape Specs Are Merged 0-27  
 How the Input Editor Works 1-101, 5-53, 7-21  
 How the Inspector Works 1-189, 4-295  
 How the Package System Allows Symbol  
   Sharing 2-569  
 How the Printer Works 2-13  
 How the Reader Recognizes Complex Numbers 2-24  
 How the Reader Recognizes Conses 2-25  
 How the Reader Recognizes Floating-point  
   Numbers 2-22  
 How the Reader Recognizes Integers 2-20  
 How the Reader Recognizes Macro Characters 2-26  
 How the Reader Recognizes Ratios 2-22  
 How the Reader Recognizes Strings 2-25  
 How the Reader Recognizes Symbols 2-24  
 How the Reader Works 2-19  
 How the Stream Compiler Handles Top-level  
   Forms 4-310  
 How to Change Fonts 1-75  
 How to Choose Process Priority Levels 8-87  
 How to Create an Environment 3-33  
 How to Create an Init File 1-164  
 How to Get Hardcopy 1-107  
 How to Interpret Directory Listings 5-236  
 How to Invoke the Compiler 4-307  
 How to Specify Zmacs Variable Settings 3-210  
 How to Use Formatting Commands 3-36  
 How to Use the Debugger 4-259  
 How to Use the Garbage Collector 1-105  
 How to Use the **loop** Indentor 3-163  
 How Windows Display Characters 7-108  
 How Windows Display Graphic Output 7-118  
 How Zmacs Keyboard Macros Work 3-199  
 How Zmacs Minor Modes Work 3-195  
 Hyper bit 5-5  
**:hysteresis** init option for  
   **tv:hysteretic-window-mixin** 7-158  
**:hysteresis** method of  
   **tv:hysteretic-window-mixin** 7-158  
**:hysteresis** init option for **tv:**  
   **:hysteresis** method of **tv:**  
**:set-hysteresis** method of **tv:**  
   **tv:**

When and

SELECT	I 1-189, 3-40, 4-104, 4-295
Buffered serial	I/O 5-251
Hardware Description for Serial	I/O 5-247
HDLC Serial	I/O 5-263
Introduction to Serial	I/O 5-245
Notes on Serial	I/O 5-261
Packet	I/O 9-138, 9-144
Parameters for Serial	I/O 5-253
Simple Example: Serial	I/O 5-257
Stream	I/O 9-137, 9-143
Troubleshooting: Serial	I/O 5-259
	I/O buffers 7-103, 7-132, 7-151, 7-176, 7-275
	I/O Streams 5-11
Get	I/O buffer 7-231
<b>:choice-box</b>	I/O buffer command 7-273
<b>:variable-choice</b>	I/O buffer command 7-273

- I/O buffer commands 7-273
- :raw** I/O buffer property 7-132
- I/O buffer property list 7-132
- Sharing I/O buffers 7-176
- I/O Buffers for Choose Variable Values Windows 7-273
- The Serial I/O Facility 5-243
- I/O from editor buffers 7-377
- SCL I/O operations and streams 2-634
- :ascii-characters** serial I/O parameter 5-253
- :baud** serial I/O parameter 5-253
- :carrier-detect** serial I/O parameter 5-253
- :check-framing-errors** serial I/O parameter 5-253
- :check-over-run-errors** serial I/O parameter 5-253
- :check-parity-errors** serial I/O parameter 5-253
- :clear-to-send** serial I/O parameter 5-253
- :data-terminal-ready** serial I/O parameter 5-253
- :flavor** serial I/O parameter 5-253
- :force-output** serial I/O parameter 5-251, 5-253
- :generate-xon-xoff** serial I/O parameter 5-253
- :input-error-character** serial I/O parameter 5-253
- :input-xoff-character** serial I/O parameter 5-253
- :input-xon-character** serial I/O parameter 5-253
- :mode** serial I/O parameter 5-253
- :number-of-data-bits** serial I/O parameter 5-253
- :number-of-stop-bits** serial I/O parameter 5-253
- :output-xoff-character** serial I/O parameter 5-253
- :output-xon-character** serial I/O parameter 5-253
- :parity** serial I/O parameter 5-253
- :request-to-send** serial I/O parameter 5-253
- :unit** serial I/O parameter 5-253
- :xon-xoff-protocol** serial I/O parameter 5-253
- Reading serial I/O parameters 5-251
- Setting serial I/O parameters 5-251
- Creating a serial I/O stream 5-251
- The Serial I/O Stream 5-251
- Introduction to the I/O System 5-3
- I/O to Strings 2-290
- ibase** variable 2-20, 7-257
- ibase** global variable 3-141, 3-143
- ibeam-blinker** 7-150
- ibeam-blinker** flavor 7-150
- ID 0-6
- ID Command 1-34
- ID dump parameter 0-6
- identifier 2-277
- identifier 2-277
- : character as keyword identifier 2-576
- QFILE transaction identifier 9-153
- Functions for identifying callers 1-177
- Identifying callers of variables 1-177
- Identifying Changed Code 4-56
- Identifying mouse buttons 7-151, 7-156, 7-157
- IEEE Floating-point Representation 2-94
- ieee-floating-point** feature name 2-645
- :if-exists** option for **open** 5-222, 8-43
- :if-exists** option for **open** 5-222, 8-43
- :if-exists** option for **open** 5-222, 8-43
- :if-exists** option for **open** 5-222, 8-43
- IF-EXISTS QFILE OPEN option 9-166
- IF-EXISTS QFILE OPEN option values 9-166
- :if-locked** option for **open** 5-222, 5-228, 8-43, 8-48
- :if-locked** option for **open** 5-222, 8-43
- :if-locked** option for **open** 5-222, 8-43
- :if-locked** option for **open** 5-222, 8-43
- :if-does-not-exist** option for **open** 5-222, 8-43
- :if-does-not-exist** option for **open** 5-222, 8-43
- :error** symbol in
- nil** symbol in
- :overwrite** symbol in
- :error** symbol in
- :share** symbol in
- :create** symbol in

- :error** symbol in
- nil** symbol in
- :new-version** symbol in
- :supersede** symbol in
- :if-does-not-exist** option for **open** 5-222, 8-43
- IF-DOES-NOT-EXIST** QFILE OPEN option 9-166
- :if-exists** option for **open** 5-222, 8-43
- :if-exists** option for **open** 5-222, 8-43
- if-for-lisp** macro 4-329
- if-for-maclisp** macro 4-329
- if-for-maclisp-else-lisp** macro 4-329
- if-in-lisp** macro 4-329
- if-in-maclisp** macro 4-329
- if loop** keyword 2-216
- if** special form 2-177
- ignore** function 2-164
- ignore** variable 4-324
- ignore-errors** special form 2-493
- Ignored arguments 4-324
- Ignoring Case, Style, and Bits 2-271
- Ignoring Case, Style, and Bits 2-283
- Ignoring Case, Style, and Bits 2-287
- illegal* character attributes 2-643
- Illegal redefinition error 2-538
- image 0-46
- Image restore format 1-201
- imaging characters 3-243
- imappart** function 2-108, RN-35
- (immediate) Command 5-233
- (immediate) File System Editor menu item 5-233
- Implementation 9-134
- Implementation 9-146
- Implementation 9-142
- Implementation 9-150
- Implementation of Flavors 2-467
- Implementation of the Namespace System 9-33
- Implementations 9-44
- Implementing protocols 9-51
- implication 7-251
- implication 7-251
- implication 7-251
- implication 7-251
- Implications 7-252
- implode** function 2-293
- import** function 2-573, 2-593, 2-611
- Import, Export, and Shadow Symbols 2-611
- :import-from** option for **defpackage** 2-573
- :import-from** Option for **defpackage** and **make-package** 2-600, 2-602
- :import-from** option for **make-package** 2-573
- Importing symbols 2-573, 2-589, 2-593, 2-611
- Importing and Exporting Symbols 2-573
- :import** option for **defpackage** 2-573
- :import** Option for **defpackage** and **make-package** 2-599, 2-602
- :import** option for **make-package** 2-573
- Improvements to Activity and Window Selection RN-66
- Improvements to Lisp in Release 6.0 RN-40
- Improvements to the File System in Release 6.0 RN-71
- Improvements to the User Interface in Release 6.0 RN-66
- Improvements to **tv:add-function-key** RN-68
- Improvements to Timeout Windows RN-67
- Improvements to Utilities in Release 6.0 RN-52
- Improvements to Zmacs in Release 6.0 RN-47
- In-line coded functions 2-351
- In-progress patch 4-242
- Character Comparisons
- String Comparisons
- String Searching
- SCL and
- Adding patches to Lisp
- Mirror
- FSEdit [Delete
- [Delete
- Chaosnet Lisp Machine
- Chaosnet UNIX
- Chaosnet VAX/VMS
- Software Installation: Chaosnet UNIX
- Off-negative
- Off-positive
- On-negative
- On-positive
- Functions That



- In-progress patch state 3-190, 4-242
- Inactive patches 3-190, 4-242
- Inactive windows 7-76
- Chaos: inactive-state connection state 9-136
- Inbox 1-64, 6-11, 6-46, 6-48
- Zmail: Get Inbox 1-64
- Inbox Files 6-11, 6-12
- Zmail Inboxes 6-12
- Inbox file names 6-94
- Renamed Inbox file names 6-94
- [Get inbox] Zmail menu item 6-12, 6-46
- incl** macro 2-149
- :included-flavors** Option for **defflavor** 2-441, 2-444
- Zmail Included Messages: Field 6-35
- Zmail Included References: Field 6-36
- :include** Option for **defpackage** and **make-package** 2-600, 2-603
- :include** option for **defstruct** 2-385, 2-387
- Inclusive **or** 2-113, 2-179
- Inclusive-or alu function 7-119
- Incoming messages 1-70, 6-101
- String incompatibilities 2-634
- Zetallsp and SCL character incompatibilities 2-265, RN-12
- Zetallsp and SCL string incompatibilities 2-265, RN-12
- Incompatible Changes to Lisp in Release 6.0 RN-9
- Incompatible Changes to Networks in Release 6.0 RN-75
- Incompatible Changes to the User Interface in Release 6.0 RN-55
- Incompatible Changes to Zmacs in Release 6.0 RN-47
- Incompatible Changes to Zmail in Release 6.0 RN-69
- Incomplete Transmission connection state 9-121
- fs:** **inconsistent-options** flavor 2-552
- fs:** **incorrect-access-to-directory** flavor 2-549
- fs:** **incorrect-access-to-file** flavor 2-549
- Audio Wavetable Size Increased From 256 to 1024 Words RN-60
- Increase size of FEP file 5-224, 8-45
- Increment 7-325
- Left increment 7-335
- Right increment 7-335
- incremental** indicator 9-33
- Incremental updates 9-33
- [Incremental Dump] File System Maintenance menu item 0-39
- Incremental garbage collection 8-113
- Zmacs Incremental Search 3-98
- Zmacs Reverse Incremental Search 3-99
- Incremental Search (c-S) Zmacs command 4-57
- Incrementing generalized variables 2-149
- :increment-patch** Option for **make-system** 4-223
- Computing Polyphonic Increments 7-337
- Polyphonic increments 7-337
- Polyphonic wavetable increments 7-337
- Delete Indentation 1-53, 3-28
- Zwei:\*inhibit-fancy-loop indentation RN-47
- Indentation in **loop** Macros 3-162
- Indentation in Zmacs 3-162
- Aligning Indentation in Zmacs 3-165
- Changing Case and Indentation in Zmacs 3-159
- Deleting Indentation in Zmacs 3-166
- New Line with This Indentation in Zmacs 3-166
- Overview of Indentation in Zmacs 3-162
- Going Back to First Indented Character in Zmacs 3-165
- Creating a New Indented Lisp Comment Line in Zmacs 3-172
- Indent For Comment (c-; or m-;) Zmacs

- command 4-23
- Indent For Lisp (TAB or c-m-TAB) Zmacs command 4-26
- Indenting Current Line in Zmacs 3-162
- Indenting for Lisp Comment in Zmacs 3-171
- Indenting New Line in Zmacs 3-164
- Indenting Region in Zmacs 3-165
- Indenting Region Uniformly in Zmacs 3-165
- Indentation format directive 5-41
- Indent New Comment Line (m-LINE) Zmacs command 4-23
- Indent New Line (LINE) Zmacs command 4-26
- Indentor 3-163
- Indentor RN-47
- Indentor 3-162
- Indentor Example 1 3-163
- Indentor Example 2 3-163
- Indent Region (c-m-\) Zmacs command 4-26
- Indent Sexp (c-m-Q) Zmacs command 4-26
- index 9-104
- Index offset 2-240, 2-241
- index files 1-121
- indexing table 7-146
- index loop** keyword 2-222, 2-225
- Index of Function Keys 1-139
- Index of Function Keys 1-139
- Index packet header field 9-106
- Index packet header field 9-106
- Indicator 2-67, 9-24
- indicator 9-24
- indicator 1-112, 9-4
- indicator 9-24
- indicator 9-33
- indicator 3-23, 3-54
- indicator 9-33
- indicator 3-171
- indicator 9-33
- indicator 9-24
- indicator 5-236
- indicator in directory listings 5-236
- indicators 2-67
- Indicators 6-75
- Indicators 1-69
- Indices 9-104
- Indirect Arrays 2-240, 2-241, 2-248
- Indirection 2-240
- Indirection format directive 5-34
- individual files 0-15
- individual filters] Map over Move menu item 6-80
- Individual Patch Files 4-235
- Inexact-result trap 2-535
- Inferior windows 7-78, 7-103
- :inferior-select** message 7-97
- Inferior Directory] Command 5-234
- Inferior Directory] File System Editor menu item 5-233
- Inferiors of windows 7-76, 7-79, 7-86
- Inferior timeout window 7-174
- infinity 2-14, 2-22
- Infinity RN-41
- infix expressions 2-30
- :info** message 5-114
- info alist element 2-325
- Info alist functions 2-302, 2-323, 2-325
- Information 2-239
- Information 4-268
- How to Use the **loop**
- New **loop**
- The **loop**
- Loop
- Loop
- Connection
- Loading documentation
- Font
- Introduction:
- Destination
- Source
- \* descriptor file
- Attribute
- changes** descriptor file
- delete**
- Exclamation point line continuation
- Incremental**
- Semicolon comment
- timestamp**
- version** descriptor file
- X= date directory last expunged
- => link
- Property list
- Topic
- ^F font change
- Addresses and
- Conformal
- Dumping
- [By
- FSEdit [Create
- [Create
- Active
- Floating-point
- The Reader Now Accepts Floating-point
- Reader macro for
- si:encapsulated-definition** debugging
- Debugging
- Array header
- Backtrace

- Chaosnet Hardware Programming Information 9-131
- CLM: Array Information 2-642
- Disk label information 1-200, 1-213
- Display system information 4-304
- Font information 2-236, 2-277
- Passing packet error information 9-117
- Storing disk error Information 8-32
- Zmail Mode Line Information 1-61
- Zmail Reference Information 6-85
- General Information-giving Zmacs Commands 3-46
- Getting Information About an Array 2-246
- Getting Information About a System 4-249
- Information and Control 9-141
- Information Display 4-265
- Debugger Commands for Information on Flavors 4-141
- General Information on Networks 9-1
- RUT Routing Information packet 9-121
- Package Inheritance 2-571, 2-599, 2-602
- Flavor inheritance mechanism 2-482
- INHIBIT-LINKS QFILE OPEN option 9-166
- zwei:** **\*inhibit-background-mail-checks\*** variable 6-86
- zwei:** **\*inhibit-background-saves\*** variable 6-86
- zwei:** **\*inhibit-fancy-loop-indentation** RN-47
- zwei:** **\*inhibit-fancy-loop-indentation\*** 3-162
- inhibit-fdefine-warnings** variable 2-317
- si:** **inhibit-gc-flips** macro 8-125
- inhibit-scheduling-flag** variable 8-78
- inhibit-style-warnings** macro 4-323
- Init file 5-163
- Init files 1-155, 1-161, 3-213, 4-12, 4-64
- Init options 2-425
- :init-keywords** Option for **defflavor** 2-441, 2-442
- List valid init-options for flavor 5-104
- Init-plist 2-425
- :function** init-plist option 7-262
- Init-plist Option for Dynamic Menus 7-237
- Geometry Init-plist Options 7-213
- Useful **tv:menu** Init-plist Options 7-222
- Init-plist Options for **tv:menu** 7-295
- :initable-instance-variables** Option for **defflavor** 2-441, 2-485, 4-124, 4-126
- Creating an Init File 3-213
- How to Create an Init File 1-164
- ITS init file 5-185
- Logging in Without Processing Your Init File 1-164
- TOPS-20 init file 5-183
- Init File Form: Auto Fill in Text Mode 1-170, 3-214
- Init File Form: Balanced Quotation Marks and Asterisks 1-168, 3-215
- Init File Form: c-m-L on the SQUARE Key 1-169, 3-215
- Init File Form: Edit Buffers on c-X c-B 1-169, 3-215
- Init File Form: Edit Buffers on m-X 1-169, 3-216
- Init File Form: Electric Shift Lock in Lisp Mode 1-170, 3-214
- Init File Form: Fixing White Space for Kill/Yank Commands 1-168, 3-214
- Init File Form: m-. on m-(L) 1-169, 3-216
- Init File Form: Ordering Buffer Lists 1-168, 3-213
- Init File Form: Putting Buffers Into Current Package 1-168, 3-213
- Init File Form: Setting Default Major Mode 1-168, 3-213
- Init File Form: Setting Find File Not to Create New Files 1-168, 3-214
- Init File Form: Setting Goal Column for Real Line

- Commands 1-168, 3-214
  - Init File Form: White Space in Lisp Code 1-169, 3-215
  - Init File Naming Conventions 5-200
  - init-file-pathname** function 5-163
  - Init Files 3-213
  - Init Files 3-213
  - Init Files 1-167, 3-213
  - Init Files 1-168, 3-215
  - Init Files 1-170, 3-214
  - Init Files 1-167
  - Init Files Has Changed RN-10
  - :initial-copies** option for **defresource** 8-132
  - :initial-form** method of **si:process** 8-89
  - :initial-input** option 5-61, 7-29
  - :initial-input** Input Editor Option RN-67
  - :initial-offset** option for **defstruct** 2-385, 2-390
  - si:initial-process** variable 8-80
  - si:initial-readtable** variable 1-180, 2-33
  - :initial-status** Option for **defsystem** 4-196
  - :initial-copies** option for **defwindow-resource** 7-107
  - :initial-dimensions** option for **make-plane** 2-261
  - initialization 2-241
  - initialization 8-67
  - initialization keywords 2-425
  - initialization list 8-67
  - initialization, Reset, and Enable 9-211
  - initialization-keywords** variable 8-69
  - initialization code 2-205, 2-212
  - initialization functions 8-67
  - initialization in structures 2-395
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization list 8-71
  - initialization lists 8-71
  - initialization lists 8-71
  - initializations 8-65
  - initializations 8-67
  - initializations 8-67
  - initializations 2-642
  - initializations** function 8-69
  - initialize* Commands 1-24
  - initialize-timebase** function 7-369
  - initialize border parameters 7-222, 7-295
  - initialize Mail Command 1-24
  - initialize Mouse Command 1-24
  - :initializer** option for **defresource** 8-132
  - :initialize-special-commands** message 2-526
  - initialize Time Command 1-24
  - [Initialize] Maintenance Operations menu item 0-39
  - initializing a Disk Unit 8-58
  - initializing a FEP File 8-52
  - initializing instance variables 2-425, 2-435, 2-455
  - initializing Window Size and Position 7-163
  - initially loop** keyword 2-212
  - :initial-origins** option for **make-plane** 2-261
  - initial patch state 3-190, 4-242
  - :initial-stack-group** method of **si:process** 8-89
  - Initial Substring Candidates 1-124
  - :initial-value** keyword for **make-list** 2-49
- fs:**
    - Customizing Zmacs in
    - Introduction to Customizing Zmacs in
    - Setting Editor Variables in
    - Setting Key Bindings in
    - Setting Mode Hooks in
    - Zmacs Customization in
    - Setting Variables in
  - New Optional Arguments to
    - si:**
    - si:**
  - Array
  - Warm boot
    - si:**
  - Loop
    - Adding new keywords to
  - :before-cold**
  - :cold**
  - :disable-services**
  - :enable-services**
  - :login**
  - :logout**
  - :once**
  - :system**
  - :warm**
  - System
  - User-created
  - Introduction to
  - Order of
  - SCL and **defstruct** slot
  - time:**
  - Find

- :initial-value** option for **make-array** 2-241, 8-31
- init keywords for flavors 4-144
- :init** method of **tv:sheet** 4-116, 7-107
- init option 7-132
- :io-buffer** init option 2-519
- :proceed-types** init option 7-274
- :stack-group** init option for **condition** 2-530
- :proceed-types** init option for **si:eq-hash-table** 2-71
- :area** init option for **si:eq-hash-table** 2-71
- :growth-factor** init option for **si:eq-hash-table** 2-71
- :rehash-before-cold** init option for **si:eq-hash-table** 2-71
- :size** init option for **si:eq-hash-table** 2-71
- :rehash-threshold** init option for **si:equal-hash-table** 2-72
- :asynchronous-characters** init option for **si:interactive-stream** 7-17
- :property-list** init option for **si:property-list-mixin** 2-474
- :function** init option for
  - tv:basic-choose-variable-values** 7-274
- :name-font** init option for
  - tv:basic-choose-variable-values** 7-274
- :selected-choice-font** init option for
  - tv:basic-choose-variable-values** 7-275
- :stack-group** init option for
  - tv:basic-choose-variable-values** 7-274
- :string-font** init option for
  - tv:basic-choose-variable-values** 7-275
- :unselected-choice-font** init option for
  - tv:basic-choose-variable-values** 7-275
- :value-font** init option for
  - tv:basic-choose-variable-values** 7-275
- :variables** init option for
  - tv:basic-choose-variable-values** 7-274
- :configuration** init option for **tv:basic-constraint-frame** 7-188
- :configurations** init option for **tv:basic-constraint-frame** 7-179
- :constraints** init option for **tv:basic-constraint-frame** 7-189, 7-196
- :panes** init option for **tv:basic-constraint-frame** 7-179, 7-189, 7-196
- :selected-pane** init option for **tv:basic-constraint-frame** 7-98, 7-187
- :item-type-alist** init option for
  - tv:basic-mouse-sensitive-items** 7-283
- :deselected-visibility** init option for **tv:blinker** 7-148
- :follow-p** init option for **tv:blinker** 7-148
- :half-period** init option for **tv:blinker** 7-149
- :visibility** init option for **tv:blinker** 7-148
- :x-pos** init option for **tv:blinker** 7-148
- :y-pos** init option for **tv:blinker** 7-148
- :border-margin-width** init option for **tv:borders-mixin** 7-171
- :borders** init option for **tv:borders-mixin** 7-170
- :char** init option for **tv:character-blinker** 7-150
- :font** init option for **tv:character-blinker** 7-150
- :extra-width** init option for **tv:choose-variable-values** 7-263
- :function** init option for **tv:choose-variable-values** 7-263
- :label** init option for **tv:choose-variable-values** 7-263
- :margin-choices** init option for **tv:choose-variable-values** 7-263
- :near-mode** init option for **tv:choose-variable-values** 7-263
- :superior** init option for **tv:choose-variable-values** 7-264
- :width** init option for **tv:choose-variable-values** 7-263
- :io-buffer** init option for
  - tv:choose-variable-values-window** 7-275
- :margin-choices** init option for
  - tv:choose-variable-values-window** 7-275
- :io-buffer** init option for **tv:command-menu** 7-231
- :io-buffer** init option for
  - tv:constraint-frame-with-shared-io-buffer** 7-179
- :item-list-pointer** init option for **tv:dynamic-...-menu** 7-237
- :column-spec-list** init option for **tv:dynamic-multicolumn-mixin** 7-237
- :activate-p** init option for **tv:essential-window** 7-107
- :edges-from** init option for **tv:essential-window** 4-116, 7-164

:expose-p	init option for <b>tv:essential-window</b>	4-116, 7-107
:minimum-height	init option for <b>tv:essential-window</b>	4-116, 7-164
:minimum-width	init option for <b>tv:essential-window</b>	4-116, 7-164
:timeout-window	init option for	
	<b>tv:essential-window-with-timeout-mixin</b>	7-174
:gray-array-for-inferiors	init option for	
	<b>tv:gray-deexposed-inferiors-mixin</b>	7-93
:gray-array-for-unused-areas	init option for <b>tv:gray-unused-areas-mixin</b>	7-93
:hysteresis	init option for <b>tv:hysteretic-window-mixin</b>	7-158
:height	init option for <b>tv:ibeam-blinker</b>	7-150
:label	init option for <b>tv:label-mixin</b>	7-172
:margin-choices	init option for <b>tv:margin-choice-mixin</b>	7-290
:space	init option for <b>tv:margin-space-mixin</b>	7-169
:activate-p	init option for <b>tv:menu</b>	7-295
:borders	init option for <b>tv:menu</b>	7-222, 7-295
:bottom	init option for <b>tv:menu</b>	7-295
:character-height	init option for <b>tv:menu</b>	7-295
:character-width	init option for <b>tv:menu</b>	7-295
:columns	init option for <b>tv:menu</b>	7-214, 7-296
:default-font	init option for <b>tv:menu</b>	7-222, 7-296
:edges	init option for <b>tv:menu</b>	7-296
:edges-from	init option for <b>tv:menu</b>	7-296
:expose-p	init option for <b>tv:menu</b>	7-296
:fill-p	init option for <b>tv:menu</b>	7-214, 7-296
:font-map	init option for <b>tv:menu</b>	7-222, 7-296
:geometry	init option for <b>tv:menu</b>	7-214, 7-296
:height	init option for <b>tv:menu</b>	7-296
:inside-height	init option for <b>tv:menu</b>	7-296
:inside-size	init option for <b>tv:menu</b>	7-296
:inside-width	init option for <b>tv:menu</b>	7-297
:item-list	init option for <b>tv:menu</b>	7-222, 7-297
:label	init option for <b>tv:menu</b>	7-222, 7-297
:left	init option for <b>tv:menu</b>	7-297
:minimum-height	init option for <b>tv:menu</b>	7-297
:minimum-width	init option for <b>tv:menu</b>	7-297
:name	init option for <b>tv:menu</b>	7-297
:position	init option for <b>tv:menu</b>	7-297
:reverse-video-p	init option for <b>tv:menu</b>	7-297
:right	init option for <b>tv:menu</b>	7-297
:rows	init option for <b>tv:menu</b>	7-214, 7-297
:screen	init option for <b>tv:menu</b>	7-298
:top	init option for <b>tv:menu</b>	7-298
:vsp	init option for <b>tv:menu</b>	7-222, 7-298
:width	init option for <b>tv:menu</b>	7-298
:x	init option for <b>tv:menu</b>	7-298
:y	init option for <b>tv:menu</b>	7-298
:highlighted-items	init option for <b>tv:menu-highlighting-mixin</b>	7-242
:special-choices	init option for <b>tv:multiple-menu-mixin</b>	7-242
:process	init option for <b>tv:process-mixin</b>	4-129, 7-94
:height	init option for <b>tv:rectangular-blinker</b>	7-149
:width	init option for <b>tv:rectangular-blinker</b>	7-149
:type-alist	init option for <b>tv:scroll-mouse-mixin</b>	7-311
:backspace-not-overprinting-flag	init option for <b>tv:sheet</b>	7-108, 7-117
:blinker-p	init option for <b>tv:sheet</b>	4-116
:bottom	init option for <b>tv:sheet</b>	7-163
:character-height	init option for <b>tv:sheet</b>	7-164
:character-width	init option for <b>tv:sheet</b>	7-164
:cr-not-newline-flag	init option for <b>tv:sheet</b>	7-108, 7-117
:deexposed-typein-action	init option for <b>tv:sheet</b>	7-116
:deexposed-typeout-action	init option for <b>tv:sheet</b>	7-116
:edges	init option for <b>tv:sheet</b>	7-163
:font-map	init option for <b>tv:sheet</b>	7-142
:height	init option for <b>tv:sheet</b>	7-163
:inside-height	init option for <b>tv:sheet</b>	7-163
:inside-size	init option for <b>tv:sheet</b>	7-163
:inside-width	init option for <b>tv:sheet</b>	7-163

- :integral-p** init option for **tv:sheet** 7-164
- :left** init option for **tv:sheet** 7-163
- :more-p** init option for **tv:sheet** 7-115
- :name** init option for **tv:sheet** 7-171
- :position** init option for **tv:sheet** 7-163
- :right** init option for **tv:sheet** 7-163
- :right-margin-character-flag** init option for **tv:sheet** 7-117
- :size** init option for **tv:sheet** 7-163
- :superior** init option for **tv:sheet** 7-107
- :tab-nchars** init option for **tv:sheet** 7-108, 7-117
- :top** init option for **tv:sheet** 7-163
- :vsp** init option for **tv:sheet** 7-116
- :width** init option for **tv:sheet** 7-163
- :x** init option for **tv:sheet** 7-163
- :y** init option for **tv:sheet** 7-163
- Messages and Window position init options 2-529
- Window position init options 7-162
- Window size init options 7-162
- :item-type-alist** INIT pathname type abbreviation 5-180
- tv:margin-choice-mixin** init-plist option 7-280
- tv:momentary-menu** Example 2: Item List as Init-plist Option 7-290
- tv:basic-choose-variable-values** Init-plist Option 7-224
- tv:basic-mouse-sensitive-items** Init-plist Options 7-274
- tv:command-menu** Init-plist Options 7-283
- tv:multiple-menu-mixin** Init-plist Options 7-231
- SCL and Init-plist Options 7-242
- inline** declaration 2-640
- in loop** keyword 2-207, 2-222, 2-225
- :in** option for **fs:complete-pathname** 5-120, 5-158
- :in** option for **with-open-file** 5-91
- Abbreviated FEP input 1-197
- CLEAR INPUT 1-140
- Clear buffered input 5-18
- Echo character input 5-75
- Editing terminal input 1-101, 5-53, 7-21
- Editing Your Input 1-101
- Encoding keyboard input 5-5
- Forcing keyboard input 7-103
- FUNCTION CLEAR INPUT 1-141
- Mouse input 7-151
- Stream input 5-15
- Input editor 1-101, 5-53, 5-59, 5-60, 5-61, 5-62, 5-63, 5-64, 7-21, 7-27, 7-28, 7-29, 7-30, 7-31, 7-32
- Input Functions 5-75
- :input-editor** message 5-19, 5-54, 7-22, RN-56
- :input-wait** RN-62
- :input-wait** message 5-13
- :input-wait** option 5-64, 7-32
- Input/Output in Stack Groups 8-7
- Input and Output Disk Streams 5-226, 8-46
- Input Base Command 1-33
- Input device 3-227
- input device 7-103, 7-151
- :input** disk stream 5-222, 8-43
- Input Editing 4-77
- Input Editor 5-66, 7-34
- Input Editor 5-65, 7-33
- Input Editor 1-79
- Input Editor 5-66, 7-34
- Input Editor 5-54, 7-22
- Lisp Listeners and **break** Loops Catch Trivial Errors in the Input Editor RN-66
- Reading function to use input editor 5-57, 7-25
- Setting Fonts in the Input Editor 1-78
- c-m-Y input editor command 4-77
- m-Y input editor command 4-77

- m-sh-A input editor command 1-122
- m-sh-F input editor command 1-122
- m-sh-V input editor command 1-122
- New Input Editor Commands: PAGE, COMPLETE, c-? RN-61
- Command Loop Input Editor Example 5-56, 7-24
- New Input Editor Font Commands 1-79
- Input Editor Help Options RN-63
- Input Editor Messages to Interactive Streams 5-70, 7-38
- :input-editor** Message to Interactive Streams Replaces **:rubout-handler** RN-55
- :input-editor** method of **si:interactive-stream** 5-70, 7-38
- New Optional Arguments to **:initial-input** Input Editor Option RN-67
- New Input Editor Options 5-59, 7-27
- Input Editor Options RN-63
- Input Editor Options Now Specified Dynamically RN-55
- The Input Editor Program Interface 5-53, 7-21
- How the Input Editor Works 1-101, 5-53, 7-21
- :input-error-character** serial I/O parameter 5-253
- Defaulting an Output File Pathname From an Input File 5-132
- CLM: Input From Character Streams 2-643
- Messages for Input From Interactive Streams 7-11
- Prompting for input from user 7-59
- Messages for Input From Windows 7-132
- Input From Windows 7-134
- Input Functions for Interactive Streams 7-5
- :input-history-default** option 5-62, 7-30
- Stream input messages 7-103
- Input operations on serial streams 5-251
- Input operations on windows 7-75
- Number of input packets available 9-144
- Reading characters from an input stream 5-15
- Tokens in the input stream 2-19
- :input-stream-mode** option for **tape:make-stream** 5-269
- End-of-file on input streams 5-75
- Special-purpose Stream Operations for Buffered Input Streams 5-20
- Windows as Input Streams 7-132
- New Message to Input Streams: **:input-wait** RN-62
- Input stream specification 5-75
- :clear-eof** message to input tape streams 5-273
- :discard-current-record** message to input tape streams 5-273
- :record-status** message to input tape streams 5-273
- :input-wait-handler** option 5-64, 7-32
- :input-xoff-character** serial I/O parameter 5-253
- :input-xon-character** serial I/O parameter 5-253
- CLEAR INPUT Zmacs command 3-82
- CLM: Other Environment Inquiries 2-645
- Arpanet INR/INS attention-getting feature 9-125
- Zmail In-reply-to: Field 6-36
- Add In-reply-to Field Zmail Command 6-38
- :insert-char** method of **tv:sheet** 7-112
- :insert-line** method of **tv:sheet** 7-112
- :insert-string** method of **tv:sheet** 7-112
- Insert Buffer (m-X) Zmacs command 3-124, 4-63
- Insert File (m-X) Zmacs command 3-124, 4-63
- Insert File (m-X) Zmail Command 6-45
- Inserting Characters 3-22
- Inserting Text 3-22
- Inserting a Buffer Into Another Buffer 3-124
- Inserting a File Into a Buffer 3-124
- Inserting and Removing Lisp Comments From Regions in Zmacs 3-173





- Argument RN-41
- Disk Restore command and software installation 0-87
- Documentation database installation 1-121
- Mailer installation 0-61
- Software Installation: Chaosnet UNIX Implementation 9-150
- Software Installation Guide 0-87
- Install Command (m-X) Zmacs command 3-209
- Installed Definition 3-127
- Source Compare Installed Definition 3-128
- Source Compare Merge Installing Chaosnet 0-87
- Installing documentation 0-87
- Installing microcode 0-49, 0-87, 1-210, 5-217
- Installing Printers 0-67
- Installing a Macro on a Key 3-203
- Installing a Mouse Macro 3-203
- Installing an ASCII Print Server on UNIX 0-67
- Installing an ASCII Print Server on VMS 0-68
- Installing and Configuring the Mailer 0-61
- Example of Installing and Deinstalling a Macro 3-204
- Installing layered products 0-87
- Installing new machines 0-87
- Installing New Microcode 0-54
- Installing new releases distributed in patch tape format 0-87
- Installing New Software 0-49
- Installing system sources 0-87
- Installing the graphic-lisp system 0-87
- Installing world loads from other sites 0-87
- Install Macro (m-X) Zmacs command 3-203, 4-64
- Install Mouse Macro (m-X) Zmacs command 4-64
- Install patch file 3-190, 4-242
- Inspecting an. instance 4-299
- instance descriptor 2-467
- instance variables 2-126, 2-418, 2-485, 4-113, 4-124, 4-126
- sys: %instance-flavor function 8-13
- :instance argument to typep 2-9
- Instances 2-303, 2-305, 2-417
- Copying Instances 2-465
- Printed Representation of Instances 2-16
- Instances in compiled code files 4-331, 5-241
- instances of flavors 2-479
- instances of flavors 2-430
- instances of structures 2-395
- tv:item-type-alist instance-variable 7-280
- Unbound instance variable error 2-533
- instance variable errors 2-538
- instance variable out-of-bounds 2-541
- sys: instance-variable-pointer-out-of-range flavor 2-538
- Default values for instance variables 2-431
- Examining values of instance variables 4-267
- initializing instance variables 2-425, 2-435, 2-455
- Value of instance variables 2-439
- instance variables of combined flavors 2-431
- sys: instance-variable-zero-referenced flavor 2-538
- Instantiable flavors 7-205
- Instantiable, Basic, and Mixin Flavors 7-205
- Instantiable Choose Variable Values Flavors 7-272
- Instantiable Command Menus 7-231
- Instantiable Dynamic Item List Menus 7-236
- Instantiable Multiple Choice Menu Flavors 7-254
- Instantiable Multiple Menu Choose Flavors 7-249
- Instantiable Multiple Menus 7-242
- Instantiable Pop-up and Momentary Menus 7-221
- instantiate-flavor function 2-435
- Use #|...|# Instead of #|...|# to Comment Out Lisp

- fs:directory-link-opaque-dirlist**
- fast-aref**
- fast-aset**
- Code RN-79
- instead of **fs:directory-list** example 5-132
- instruction 2-255
- instruction 2-255
- Instructions for Managing Disk Space on the 3640 0-55
- int-char** function 2-272
- Integer arrays 2-262
- Integer denominator 2-93, RN-34
- Integer division 2-93
- Integer iteration 2-192
- Integer numerator 2-93, RN-34
- Integer radix 2-14, 2-20
- :integer** command processor argument type 7-48
- Integer Constraint Size Specification 7-188
- integer loop** data-type keyword 2-219
- :integer** option for **prompt-and-read** 7-59, RN-58
- Integers 2-4, 2-89, 2-93, 7-132
- Integers 2-89
- Integers 2-20
- Binary
- How the Reader Recognizes
- New Functions for Converting Non-integral Numbers to Integers RN-36
- Integers 2-14
- integers 2-277
- Integers Are Desired RN-19
- Integers as array elements 2-236
- Integers in Bases Greater Than 10 2-21
- Integers in Source Code Where Characters Are Desired RN-19
- integer syntax 2-20
- integer syntax 2-20
- :integer tv:choose-variable-values** variable type 7-259, RN-59
- Integral character 2-32
- :integral-p** init option for **tv:sheet** 7-164
- inter-user messages 9-125
- Interacting with Lisp 1-87, 3-218
- Interaction, Processes, and the Mouse 4-129
- Interaction Between **defsystem** Transformations and **make-system** 4-202
- Interaction of Some Common Special Forms with Multiple Values 2-169
- Interaction Pane 4-297
- interactions in file 1-183
- Interaction with Completion and Timeout Windows 1-84
- Interaction with Peek Network Mode 9-213
- :interactive** RN-62
- Interactive handlers 2-501, 2-511
- :interactive** message 5-13, 7-3, RN-62
- Interactive streams 1-101, 5-53, 5-75, 7-1, 7-21
- Interactive Variables 1-151, 1-152
- \*interactive-bindings\*** 1-152
- \*interactive-handlers\*** variable 2-511
- interactive-stream** flavor 7-3
- Interactive-stream Operations for Asynchronous Characters 7-17
- Interactive handler object 2-511
- Interactive Keyboard Macro 3-202
- interactive messages 1-70, 6-101
- interactive messages 9-126
- Interactive message system (Converse) 6-3
- interactive-stream** 7-17
- interactive-stream** 7-11
- interactive-stream** 7-11
- interactive-stream** 7-17
- Printed Representation of
- String representation of
- Use of Characters in Source Code Where
- Reading
- Use of
- Circumflex in
- Underscore in
- Transmitting
- Zmacs Commands for
- The Arrow Window:
- The Inspector
- Saving terminal
- New Message to Streams:
- si:**
- dbg:**
- si:**
- Defining an
- Sending
- Transmitting
- :add-asynchronous-character** method of **si:**
- :any-tyl** method of **si:**
- :any-tyl-no-hang** method of **si:**
- :asynchronous-character-p** method of **si:**

- :asynchronous-characters** Init option for **si:** **Interactive-stream** 7-17
- :clear-input** method of **si:** **Interactive-stream** 7-12
- :finish-typeout** method of **si:** **Interactive-stream** 5-71, 7-39
- :force-rescan** method of **si:** **Interactive-stream** 5-71, 7-39
- :handle-asynchronous-character** method of **si:** **Interactive-stream** 7-17
- :input-editor** method of **si:** **Interactive-stream** 5-70, 7-38
- :item** method of **si:** **Interactive-stream** 7-19, RN-57
- :line-in** method of **si:** **Interactive-stream** 7-12
- :listen** method of **si:** **Interactive-stream** 7-12
- :llst-tyl** method of **si:** **Interactive-stream** 7-12
- :noise-string-out** method of **si:** **Interactive-stream** 5-72, 7-40
- :read-bp** method of **si:** **Interactive-stream** 5-72, 7-40
- :remove-asynchronous-character** method of **si:** **Interactive-stream** 7-18
- :replace-input** method of **si:** **Interactive-stream** 5-71, 7-39
- :rescanning-p** method of **si:** **Interactive-stream** 5-71, 7-39
- :start-typeout** method of **si:** **Interactive-stream** 5-70, 7-38
- :string-in** method of **si:** **Interactive-stream** 7-13
- :string-line-in** method of **si:** **Interactive-stream** 7-14
- :tyl** method of **si:** **Interactive-stream** 7-11
- :tyl-no-hang** method of **si:** **Interactive-stream** 7-12
- :untyl** method of **si:** **Interactive-stream** 7-12
- Input Editor Messages to **Interactive Streams** 5-70, 7-38
- Input Functions for **Interactive Streams** 7-5
- Introduction to **Interactive Streams** 7-3
- Messages for Input From **Interactive Streams** 7-11
- New Optional Argument to **:replace-input** Message to **Interactive Streams** RN-67
- Interactive Streams and Mouse-sensitive Items** 7-19
- Interactive Streams: :clear-window** RN-67
- Interactive Streams: :noise-string-out** RN-63
- Interactive Streams Replaces**
- :rubout-handler** RN-55
- interactive subsystems** 7-176
- Interactive Use** 2-523
- Intercepted Characters** 7-15
- Interchange case in pathnames** 5-145
- Interchange case representation** 5-145
- Interesting Areas** 8-107
- Interesting active frame** 2-494
- Interface** 8-29
- interface** 9-15
- Interface** 9-97
- interface** 9-206
- interface** 9-203
- Interface** 9-205
- Interface** 7-41
- Interface** 5-53, 7-21
- Interface** 7-219
- interface** 9-131
- interface-options:** Printer Object Attribute 9-17
- interface:** Printer Object Attribute 9-17
- Interface between two modules** 2-569
- Interface in Release 6.0** RN-55
- Interface in Release 6.0** RN-66
- Interface in Release 6.0** RN-55
- Interface in Release 6.0** RN-61
- Interface Menu Items** 3-260
- Interfaces** 9-203
- interfaces** 9-210
- interfaces** 2-621
- Interfaces** 9-206
- Interfaces** 2-585
- Interfaces** 9-203
- \*interfaces\*** variable 9-204
- Interface to the Namespace System** 9-29
- Interface to the Namespace System** 9-22
- :add-network** message to **Internal**
- Miscellaneous:**
- Qualified Package Names as**
- Standard Communication with**
- netl:**
- Software**
- User**
- 3600-family Disk System User**
- CCITT Recommendation X.25**
- Chaosnet**
- Chaosnet UNC encapsulation**
- Encapsulation**
- Sending a Packet to an**
- The Command Processor Program**
- The Input Editor Program**
- The Standard Momentary Menu**
- UNIBUS Chaosnet**
- Changes to the User**
- Improvements to the User**
- Incompatible Changes to the User**
- New Features in the User**
- FED Outside World**
- Frame-oriented**
- Issues for**
- New Type for :start-typeout** Message to
- New Message to**
- :input-editor** Message to

- Top-level
  - Interface to Zmail 6-13
  - Interfacing to Ethernet 9-212
  - Interfacing to the Network System 9-195
  - Interfacing to the Network System 9-212
  - Interfacing to the Network System 9-200
  - Interfacing to the Network System 9-211
  - Interfacing to the Service Lookup Mechanism 9-208
- Byte Stream Conventions:
  - Example: Initialization, Reset, and Enable:
    - FOR facility in Hasharray facility of Graphical objects and text
      - Interlisp 2-205
      - Interlisp 2-69
      - Intermingled 7-279
      - intern** function 2-571, 2-593, 2-605
      - intern-local** function 2-593, 2-605
      - intern-soft** function 2-605
      - Internal functions 1-234
      - Internal interfaces 2-621
      - Internal symbols 2-570
      - Internal variables 1-234
- Specifying
  - Internal and External Symbols in Packages 2-585
  - :internal** colon mode 2-601, 2-603
  - :internal** function spec type 2-297
  - Internals 8-1
- Introduction to Zwei System
  - Zwei Internals 7-375
  - Zwei Internals 1-234
  - Zwei Internals 7-373
- defstruct**
  - Internal Structures 2-407
  - Internal Time Functions 7-369
  - Internal value cell 2-331
  - Interned symbol 2-566
  - interned-symbols loop** iteration path 2-225
  - interned-symbols** Path 2-225
- The DOD
  - Internet 9-15
  - Internet protocol 9-129
- Zmail Support for
  - Internet Domain Addressing 6-95
  - internet-domain-name**: Namespace Object Attribute 9-22
  - internet** network type 9-15
  - Internet RFC822 domain-addressing formats 6-95
- Case sensitivity of
  - Interning 2-604
  - interning 2-604
  - Interning Errors Based on **sys:package-error** 2-542
  - Interning of Pathnames 5-138
  - intern-local-soft** function 2-606
  - Interpackage Relations 2-610
- How to
  - Interpret Directory Listings 5-236
  - Interpreted functions 2-303, 2-304, 4-69
- Lexically scoped
  - interpreter 2-137
  - Interpreter Caches Global Variable Declarations RN-27
  - Interpreter Understands Declarations RN-42
- The Receive
  - chaos**: Interrupt Enable bit 9-131
  - Timer Interrupt Enable bit 9-131
  - Transmit Interrupt Enable bit 9-131
  - Connection interrupt functions 9-140
  - :interrupt** method of **sl:process** 8-93
- :change-of-state
  - interrupt reason 9-140
- :input
  - interrupt reason 9-140
- :output
  - interrupt reason 9-140
- Connection
  - Interrupts 9-140
  - intersection** function 2-62
  - Intersection of universes 6-64
  - interval format directive 5-42
  - :interval** option for **zwei:open-editor-stream** 7-378
  - :interval** option for **zwei:with-editor-stream** 7-378
- Reading and Printing Time
  - Intervals 7-365
  - intervals 7-353
- Time
  - Intervals 7-365
  - intervals 7-353

- :interval-string** message to  
**zwei:standalone-editor-frame** 7-381
- into loop** keyword 2-212
- Sharp-sign
  - Introducing reader macros 1-233
- Zmail Tutorial
  - Introduction 1-57
  - Introduction: Processes 8-75
  - Introduction: Chaosnet File Protocol (QFILE) 9-153
  - Introduction: Index of Function Keys 1-139
  - Introduction: Recovering From Errors and Stuck States 1-43
- Release 6.0:
  - Introduction and Highlights RN-1
  - Introduction to Areas 8-103
  - Introduction to Chaosnet 9-95
  - introduction to Completion 3-14
  - Introduction to Converse 1-69, 6-99
  - Introduction to Customizing Zmacs 3-194
  - Introduction to Customizing Zmacs in Init Files 3-213
  - Introduction to Deleting and Transposing Lines 3-81
  - Introduction to Deleting and Transposing Lisp Expressions 3-79
  - Introduction to Deleting and Transposing Words 3-78
  - Introduction to Deleting Sentences 3-83
  - Introduction to Dialnet 9-75
  - Introduction to Editing Lisp Programs in Zmacs 3-170
  - Introduction to Entering Zmacs 1-47, 3-12
  - Introduction to Erasing Text 1-53, 3-28
  - Introduction to Evaluation 2-123
  - Introduction to Flow of Control 2-175
  - Introduction to Fonts 1-75, 3-221, 7-140
  - Introduction to HELP 3-14
  - Introduction to Initializations 8-67
  - Introduction to Inserting Text 1-53, 3-22
  - Introduction to Interactive Streams 7-3
  - Introduction to Keywords 2-575
  - Introduction to LMFS 5-203
  - Introduction to Locating Source Code in Zmacs 3-180
  - Introduction to **loop** 2-205
  - Introduction to Macros 2-339
  - Introduction to Motion by Page 3-69
  - Introduction to Motion by Paragraph 3-68
  - Introduction to Moving the Cursor 1-50, 3-26
  - Introduction to Named Structures 2-403
  - Introduction to Numbers 2-89
  - Introduction to Package Name-conflict Errors 2-593
  - Introduction to Package Names 2-581
  - Introduction to Qualified Package Names 2-584
  - Introduction to Redisplaying the Window 3-55
  - Introduction to Regions 3-86
  - Introduction to Scroll Windows 7-303
  - Introduction to Serial I/O 5-245
  - Introduction to Signalling and Handling Conditions 2-479
  - Introduction to Site Operations 0-3
  - Introduction to Streams 5-11
  - Introduction to Structure Macros 2-379
  - Introduction to Symbolics Common Lisp 2-631
  - introduction to Tag Tables and Search Domains 3-106
  - Introduction to Text Formatting in Zmacs 3-33
  - Introduction to the Compiler 4-307
  - Introduction to the Digital Audio Facilities 7-319
  - Introduction to the Document Examiner 1-119
  - Introduction to the FEP 1-197
  - Introduction to the Flavor System 2-417
  - Introduction to the I/O System 5-3

- A Brief
  - Introduction to the Lisp World 1-151
  - Introduction to the Menu Facilities 7-207
  - Introduction to the Motion Commands 1-51, 3-60
  - Introduction to the Namespace System 1-111, 9-3
  - Introduction to the Organization of the Screen 3-17
  - Introduction to the System Facility 4-189
  - Introduction to the Zmacs Manual 3-3
  - Introduction to Tools and Techniques 4-3
  - Introduction to Using the Mouse 3-57
  - Introduction to Using the Window System 7-73
  - Introduction to Yanking 3-15
  - Introduction to Zmacs 3-6
  - Introduction to Zmacs Commands 1-49, 3-6
  - Introduction to Zmacs Command Tables 3-7
  - Introduction to Zmacs Extended Commands 1-49, 3-7
  - Introduction to Zmacs Help 1-51, 3-14
  - Introduction to Zmacs Keystrokes 1-49, 3-6
  - Introduction to Zwel Internals 7-375
- sys: **invalid-form** and lexical scoping RN-12
- sys: **invalid-function** flavor 2-542
- sys: **invalid-function** and lexical scoping RN-12
- fs: **invalid-password** flavor 2-547
- fs: **invalid-wildcard** flavor 2-550
- fs: **invalid-byte-size** flavor 2-552
- Invalid contents in cell errors 2-533
- Invalid file operation errors 2-550
- sys: **invalid-lambda-list** and lexical scoping RN-12
- fs: **invalid-operation-for-directory** flavor 2-550
- fs: **invalid-operation-for-link** flavor 2-550
- fs: **invalid-pathname-component** flavor 2-553
- fs: **invalid-pathname-syntax** 2-550
- fs: **invalid-pathname-syntax** flavor 2-550
- Invalid pathname syntax errors 2-550
- fs: **invalid-property-value** flavor 2-551
- Invalid type code error 2-534
- :**inverse-list** method combination type 2-455, 2-456
- math: **invert-matrix** function 2-259
- :**inverted-boolean tv:choose-variable-values** variable type 7-259, RN-59
- Invisible packages 2-581, 2-582
- Invisible pointer 2-56
- Invisible pointers 8-12, 8-14
- :**invisible** Option for **make-package** 2-601
- Invocation 2-159
- Functions for Function
  - net: **invoke-multiple-services** macro 9-50
  - net: **invoke-multiple-services** special form 9-43
  - :**invoke** option for **net:define-protocol** 9-50
  - dbg: **invoke-restart-handlers** function 2-516
  - net: **invoke-service-access-path** function 9-41
  - net: **\*invoke-service-automatic-retry\*** variable 9-41
  - net: **invoke-service-on-host** function 9-40
- How to
  - Invoke the Compiler 4-307
  - :**invoke-with-stream-and-close** option for **net:define-protocol** 9-50
  - :**invoke-with-stream** option for **net:define-protocol** 9-50
  - Invoking Mediums 9-209
  - Invoking Services 9-40
  - Invoking Zmacs 1-47, 3-12
  - Invoking a server 9-216
- Search rule for
  - invoking handlers 2-501, 2-509
  - Invoking Restart Handlers Manually 2-516
  - Invoking the Input Editor 5-54, 7-22
  - :**io-buffer** message 7-132
  - :**io-buffer** init option 7-132
  - :**io-buffer** init option for

- tv:choose-variable-values-window** 7-275
    - :lo-buffer** init option for **tv:command-menu** 7-231
    - :lo-buffer** init option for
      - tv:constraint-frame-with-shared-lo-buffer** 7-179
    - :lo-buffer** method of **tv:command-menu** 7-231
    - lo-buffer-output-function** and Binding **tv:kbd-tyl-hook** Are Obsolete RN-56
    - loctl** System Call Commands 9-149
    - lsqrt** function 2-106
    - Issues for Interactive Use 2-523
    - :italian** day-of-the-week-representation 7-370
    - Italics 3-34
    - :item-list** init option for **tv:menu** 7-222, 7-297
    - :item-list** Message to Windows is Obsolete RN-57
    - Itemize text 3-34
    - :item-list** method of
      - tv:basic-mouse-sensitive-items** RN-57
    - tv:**
      - item-list-pointer** variable 7-235
      - :item-list-pointer** init option for
        - tv:dynamic-...-menu** 7-237
      - :item** method of **sl:interactive-stream** 7-19, RN-57
      - :item** method of
        - tv:basic-mouse-sensitive-items** 7-283
  - Applying functions to list items 2-201
  - Associating Actions with Mouse-sensitive Items 7-280
  - CLM: Searching Sequences for Items 2-641
  - Constructing Items 7-307
  - Constructing Line Items 7-307
  - Constructing List Items 7-313
  - FED Gray Plane Menu Items 3-260
  - FED Outside World Interface Menu Items 3-260
  - Interactive Streams and Mouse-sensitive Items 7-19
  - Line Items 7-305
  - List Items 7-305
  - Menu Items 7-208, 7-229, 7-311
  - Mouse-sensitive Items 7-203
  - Mouse sensitivity and line Items 7-311
  - Selecting multiple menu Items 7-241
  - tv:momentary-menu** Example 3: Centered Label and Use of General List
    - Items 7-224
  - Types of Menu Items 7-210
  - Updating list Items 7-315
  - Using the mouse with mouse-sensitive Items 7-281
  - Zmall programming Items 6-60
  - Menu Items and Menu Values 7-229
  - The Mouse-sensitive Items Facility 7-279
  - tv:**
    - item-type-alist** instance-variable 7-280
    - :item-type-alist** init option for
      - tv:basic-mouse-sensitive-items** 7-283
    - :item-type-alist** init-plist option 7-280
  - Iteration 2-175, 2-189, 2-205
  - Iteration 2-75
  - Iteration 2-79
  - Iteration 2-192
  - Iteration 2-193
  - Iteration 2-221
  - Iteration 2-608
  - Iteration 2-225
  - Iteration 2-207
  - Iteration Paths 2-222
  - Iteration variables 2-221
  - Iteration-driving Clauses 2-207, 2-221
  - Iteration format directive 5-37
  - Iteration Framework 2-221
  - Iteration Macro 2-205
  - Iteration Over Hash Tables or Heaps 2-224
- Hash Tables and Loop
- Heaps and Loop
- Integer
- List
- loop**
- Package
- Sequence
- Variable of
- The
- The **loop**
- loop**



**loop** Now Supports  
**array-element loop**  
**array-elements loop**  
**hash-elements loop**  
**heap-elements loop**  
**interned-symbols loop**  
**local-interned-symbols loop**  
 Defining  
 Predefined  
  
**:fn1** method of **fs:**  
**:fn2** method of **fs:**  
  
 Type  
 Version  
 Equivalence sign character in  
 Right horseshoe character in  
**fs:**  
 Zmail **gmsg**s Service for  
 [Do  
  
 iteration Over Hash Tables or Heaps RN-42  
 iteration path 2-225  
 iteration path 2-225, 2-257  
 iteration path 2-224  
 iteration path 2-224  
 iteration path 2-225  
 iteration path 2-225  
 iteration Paths 2-227  
 Iteration Paths 2-225  
 @i text formatting command 3-34  
**it loop** keyword 2-216  
 ITS 5-200, 6-94, 6-95  
 ITS Pathnames 5-185  
**its-pathname** 5-186  
**its-pathname** 5-186  
 ITS character handling 5-5  
 ITS header format 6-35  
 ITS Hostat command 9-123  
 ITS host table 9-108  
 ITS init file 5-185  
**its loop** keyword 2-207, 2-222  
 ITS pathname component 5-185  
 ITS pathname component 5-185  
 ITS pathnames 5-185  
 ITS pathnames 5-185  
**\*its-uninteresting-types\*** variable 5-186  
 ITS Users 6-95  
 [t] 7-241, 7-247, 7-251

## J

Jump To Saved Position (c-X  
 [Search]  
  
 SCL and  
  
 Left  
 Right

## J

J) Zmacs command 4-59  
 Jump menu item 6-67  
 Jump To Saved Position (c-X J) Zmacs  
 command 4-59  
 [Jump] Zmail menu item 6-49, 6-50, 6-58, 6-64,  
 6-67, 6-68  
**:junk-allowed** keyword for **parse-namestring** 2-644  
 Justification format directive 5-39  
 justify 5-46  
 justify 5-46  
 J Zmail command 6-49, 6-67

## J

## K

F  
 M  
  
 c-D Zmail  
 D Zmail  
 U Zmail  
  
**sys:**  
 Start  
 Call Last

## K

**%%kbd** fields 5-5  
 (Kbd) Zmail Command 6-29  
 (Kbd) Zmail Command 6-29  
**%%kbd-** byte specifiers and keyboard  
 characters 2-268, RN-17  
**%%kbd-char** variable 5-6  
**%%kbd-control** variable 5-6  
**%%kbd-hyper** variable 5-7  
**%%kbd-meta** variable 5-6  
**%%kbd-mouse** bit 7-132, 7-151  
**%%kbd-mouse** variable 5-7  
**%%kbd-super** variable 5-6  
 Kbd Command 6-55  
 Kbd Command 6-55  
 Kbd Command 6-56  
**%%kbd-control-meta** variable 5-7  
**kbd-intercepted-characters** variable 7-15  
 Kbd Macro 3-199  
 Kbd Macro (c-X E) Zmacs command 4-64

## K

Name Last	Kbd Macro (m-X) Zmacs command	3-203, 4-64
View	Kbd Macro (m-X) Zmacs command	3-200
	Kbd Macro Query	3-202
End	Kbd Macro Zmacs command	3-199
	:kbd menu item type	7-210, 7-311
	%%kbd-mouse-button field	7-151
	%%kbd-mouse-button variable	5-7
	%%kbd-mouse-n-clicks variable	5-7
sys:	kbd-standard-abort-characters variable	7-16
sys:	kbd-standard-intercepted-characters variable	7-16
sys:	kbd-standard-suspend-characters variable	7-16
Replacing io-buffer-output-function and Binding tv:	kbd-tyi-hook Are Obsolete	RN-56
	K Dired command	3-151
	Keeping Track of Lisp Syntax	4-23
Left	kern	3-222, 7-144, 7-146
Left	Kern Font Attribute	3-222, 7-144
	&key	RN-39
	key	2-502, 2-526
ABORT	key	1-85
FEP, HELP	Key	1-140, 7-135, 7-137
FUNCTION	key	1-198
h-c-upper-left	key	1-51, 1-83, 1-197, 3-14, 3-44, 6-5
HELP	Key	1-169, 3-215
Init File Form: c-m-L on the SQUARE	Key	3-203
Installing a Macro on a	Key	3-40
Leaving Zmacs with the SELECT	key	2-526
RESUME	Key	1-145
RETURN	key	3-22
RUBOUT	Key	1-145, 3-40, 7-137, 7-139
SELECT	key	1-115
SELECT T	Key	3-208
Setting the	key	2-526
SUPER	Key	1-146
TAB	Key	6-5
Zmail: Help	Key (m-X) Zmacs command	4-64
Set	key-state function	7-132, 7-161
tv:	key-test function	7-161
tv:	Key: Display and Hardcopy Commands	1-141
FUNCTION	Key: Recovering From Stuck States	1-143
FUNCTION	Key: Selection and Notification Commands	1-142
FUNCTION	key bindings	3-208
Assign	Key Bindings	3-208
Definition of	key bindings	3-46
Extended command	Key Bindings	3-208
Zmacs	Key Bindings In Init Files	1-168, 3-215
Setting	Key Bindings Work: the Comtab	3-208
How	keyboard	7-103
Reading characters from the	Keyboard	1-7
The	Keyboard character	5-5
	Keyboard communication	1-201
	Keyboard keys	RN-1
	Keyboard Macros	4-64
	Keyboard process	7-132
	Keyboard-only Commands	3-261
FED	Keyboard and Key States	7-160
The	Keyboard as random access device	7-160
	Keyboard character format directive	5-33
%%kbd- byte specifiers and	keyboard characters	2-268, RN-17
FED Menu and	Keyboard Commands	3-259
Encoding	keyboard input	5-5
Forcing	keyboard input	7-103
Calling the Last	Keyboard Macro	3-200
Defining an Interactive	Keyboard Macro	3-202
Definition of a Zmacs	Keyboard Macro	3-199
Ending a	Keyboard Macro	3-200
Example of Calling the Last	Keyboard Macro	3-200

- Naming a Keyboard Macro 3-203
- Starting a Keyboard Macro 3-200
- Viewing a Keyboard Macro 3-200
- Creating New Zmacs Commands with Keyboard Macros 3-199
  - Example 1 of Making Tables Using Keyboard Macros 3-206
  - Example 1 of Writing and Saving Keyboard Macros 3-201
  - Example 2 of Making Tables Using Keyboard Macros 3-206
  - Example 2 of Writing and Saving Keyboard Macros 3-202
  - Making Tables Using Keyboard Macros 3-205
- Procedure for Creating Zmacs Commands with Keyboard Macros 3-199
  - Sort Via Keyboard Macros 3-203
  - Writing and Saving Keyboard Macros 3-201
  - Using Keyboard Macros to Sort 3-203
  - How Zmacs Keyboard Macros Work 3-199
- :keyboard-process** option for **tv:add-function-key** 7-135
- Modifier Key Conventions 1-235
- RETURN key in the minibuffer 3-51
- &key** Lambda-list Keyword 2-310, 2-373
- keys 2-69
- Keys 1-139
  - keys RN-1
  - keys 2-69
  - Keys 7-135
  - keys 1-49, 3-6
  - Keys 2-526
  - keys 7-160
  - keys 2-69
  - keys character representation 5-5
  - Keys Not Currently Used 1-147
  - Keys Reserved for the User 1-7, 1-147
  - Key States 7-160
  - Keystroke Prefixes 3-42
  - Keystrokes 1-49, 3-6
  - Keystrokes 3-87
  - keystrokes 2-526
  - keystrokes 3-46
  - Keystrokes 1-49, 3-6
  - keystrokes 3-46
  - Keys with No Function 1-147
  - key while drawing characters 3-235
  - key while drawing characters 3-235
  - key with floating-point conditions 2-535
  - keyword 7-381
  - keyword 7-269
  - keyword 7-313
  - keyword 2-161
  - keyword 7-313
  - keyword 2-161
  - keyword 5-153
  - keyword 2-207, 2-225
  - Keyword 2-310, 2-373
  - keyword 2-215
  - keyword 2-207, 2-210, 2-216, 2-222
  - keyword 2-212
  - keyword 2-212
  - keyword 2-207
  - Keyword 2-310
  - keyword 2-207, 2-222
  - keyword 2-207, 2-225
  - Keyword 2-310
  - keyword 2-207, 2-225
  - keyword 2-212
  - keyword 2-212
  - keyword 2-212
  - keyword 2-212
- Hash table
- Index of Function
- Keyboard
- Objects as hash table
- SELECT and FUNCTION
- Shift
- Special
- Symbolic names of shift
- Trees as hash table
- Special function
- The Keyboard and Getting Out of
- Creating a Region with Customizing Debugger
- Displaying previous
- Introduction to Zmacs
- List the last sixty
- Using the CONTROL
- Using the META
- Using the RESUME
- \*comtab\***
- :documentation**
- :function** list item
- :optional**
- :pre-process-function** list item
- :spread**
- :wild**
- above loop**
- &allow-other-keys** Lambda-list
- always loop**
- and loop**
- appending loop**
- append loop**
- as loop**
- &aux** Lambda-list
- being loop**
- below loop**
- &body** Lambda-list
- by loop**
- collecting loop**
- collect loop**
- counting loop**
- count loop**

<b>doing loop</b>	keyword	2-212
<b>do loop</b>	keyword	2-212
<b>downfrom loop</b>	keyword	2-207, 2-225
<b>downto loop</b>	keyword	2-207, 2-225
<b>each loop</b>	keyword	2-207, 2-222
<b>else loop</b>	keyword	2-216
<b>&amp;environment</b>	Lambda-list	Keyword 2-311, 2-374, RN-39
<b>&amp;eval</b>	Lambda-list	Keyword 2-310
<b>finally loop</b>	keyword	2-212
<b>first loop</b>	keyword	2-207
<b>fixnum loop</b>	data-type	keyword 2-219
<b>fionum loop</b>	data-type	keyword 2-219
<b>for loop</b>	keyword	2-207
<b>from loop</b>	keyword	2-207, 2-225
<b>her loop</b>	keyword	2-222
<b>his loop</b>	keyword	2-222
<b>if loop</b>	keyword	2-216
<b>index loop</b>	keyword	2-222, 2-225
<b>initially loop</b>	keyword	2-212
<b>in loop</b>	keyword	2-207, 2-222, 2-225
<b>integer loop</b>	data-type	keyword 2-219
<b>into loop</b>	keyword	2-212
<b>it loop</b>	keyword	2-216
<b>its loop</b>	keyword	2-207, 2-222
<b>&amp;key</b>	Lambda-list	Keyword 2-310, 2-373
<b>&amp;list-of</b>	Lambda-list	Keyword 2-310
<b>&amp;local</b>	Lambda-list	Keyword 2-310
<b>maximize loop</b>	keyword	2-212
<b>minimize loop</b>	keyword	2-212
<b>named loop</b>	keyword	2-218
<b>nconcing loop</b>	keyword	2-212
<b>nconc loop</b>	keyword	2-212
<b>never loop</b>	keyword	2-215
<b>nodeclare loop</b>	keyword	2-210
<b>notype loop</b>	data-type	keyword 2-219
<b>number loop</b>	data-type	keyword 2-219
<b>of loop</b>	keyword	2-222, 2-225
<b>on loop</b>	keyword	2-207
<b>&amp;optional</b>	keyword	2-151
<b>&amp;optional</b>	Lambda-list	Keyword 2-309
<b>&amp;quote</b>	Lambda-list	Keyword 2-310
<b>repeat loop</b>	keyword	2-207
<b>&amp;rest</b>	keyword	2-151
<b>&amp;rest</b>	Lambda-list	Keyword 2-309
<b>return loop</b>	keyword	2-216, 2-218
<b>&amp;special</b>	Lambda-list	Keyword 2-310
<b>sum loop</b>	keyword	2-212
<b>summing loop</b>	keyword	2-212
<b>their loop</b>	keyword	2-222
<b>the loop</b>	keyword	2-207, 2-222
<b>then loop</b>	keyword	2-207
<b>thereis loop</b>	keyword	2-215
<b>to loop</b>	keyword	2-207, 2-225
<b>unless loop</b>	keyword	2-216
<b>until loop</b>	keyword	2-214
<b>upfrom loop</b>	keyword	2-207
<b>using loop</b>	keyword	2-222, 2-225
<b>when loop</b>	keyword	2-216
<b>while loop</b>	keyword	2-214
<b>&amp;whole</b>	Lambda-list	Keyword 2-311, 2-374, RN-39
<b>with-key loop</b>	keyword	2-224
<b>with loop</b>	keyword	2-210
	Keyword	comparisons 2-227
	Keyword	Options 7-378
	keyword	package 2-615
	Keyword	parameters 2-151

- defmacro** lambda-list
  - zwei:** Lambda-list
  - :hang-p** keyword for block disk stream messages 8-53
  - &aux** keyword for **defmacro** 2-373
  - &body** keyword for **defmacro** 2-373
  - &list-of** keyword for **defmacro** 2-373
  - &optional** keyword for **defmacro** 2-373
  - &rest** keyword for **defmacro** 2-373
  - SCL and **:replace** keyword for **delete-duplicates** function 2-640
  - :area** keyword for **make-list** 2-49
  - :initial-value** keyword for **make-list** 2-49
  - :describe** keyword for **named-structure-invoke** 2-403, 2-404
  - :print-self** keyword for **named-structure-invoke** 2-403, 2-404
  - :which-operations** keyword for **named-structure-invoke** 2-403, 2-404
  - SCL and **:junk-allowed** keyword for **parse-namestring** 2-644
  - descriptor-file** keyword for **terminal-f-argument** attribute 9-22
  - name** keyword for **terminal-f-argument** attribute 9-7
  - primary-name-server** keyword for **terminal-f-argument** attribute 9-22
  - search-rules** keyword for **terminal-f-argument** attribute 9-21
  - secondary-name-server** keyword for **terminal-f-argument** attribute 9-22
  - :** character as keyword identifier 2-576
  - :keyword-list** option for **prompt-and-read** 7-59, RN-58
  - :keyword-list tv:choose-variable-values** variable type 7-259
- Notation Conventions for Packages and
  - Keyword Names 1-234
  - :keyword** option for **prompt-and-read** 7-59, RN-58
  - keywordp** function 2-607
  - Keyword Parameter's Symbol in Lambda Lists 2-156
  - Keyword Property 7-269
  - Keywords 6-11, 6-13, 6-93, 6-96
  - keywords 2-151, 2-309
  - keywords 1-120
  - keywords 2-425
  - Keywords 2-575
  - Keywords 2-309
  - Keywords 4-222
  - keywords 1-57
  - keywords 2-67
  - keywords 6-80
  - Keywords 6-76
  - Keywords 6-75
  - Keywords 2-576
  - Keywords, Mail Collections, and Mail Files 6-81
  - &**-Keywords Accepted by **defmacro** 2-373
  - Keywords and Values for a Command 1-13
  - keywords for flavors 4-144
  - Keywords in argument lists 2-189
  - keywords in the **\*features\*** list 2-644
  - Keywords menu item 6-75
  - :keywords** option for **deconstruct-define-type** 2-410, 2-412
  - keywords to Initialization functions 8-67
  - Keywords to **make-system** 4-227
  - keywords to messages 6-75
  - Keywords to **typep** RN-33
  - keyword symbol 9-30
  - [Keywords] Map over menu item 6-80
  - [Keywords] Profile Mode menu item 6-75, 6-76, 6-77
  - [Keywords] Zmail menu item 6-58, 6-75
  - keyword to **make-hash-table** function 2-641
  - keyword to **make-hash-table** function 2-641
- SCL and **:rehash-size**
- SCL and **:rehash-threshold**

- SCL and **:test**
- :default-font**
- :header-font**
- Append Next
- Query Replace Last
- keyword to **make-hash-table** function 2-641
- keyword to **si:\*hardcopy-default-fonts\*** 1-174, 3-271
- keyword to **si:\*hardcopy-default-fonts\*** 1-174, 3-271
- Kill 3-75
- Kill 3-104
- Kill commands 1-53, 3-28
- Kill history 3-43, 3-73, 3-75
- Kill Line 1-53, 3-28, 3-81
- Kill Merging 3-75
- Kill Region 1-53, 3-28
- Kill Sentence 1-53, 3-28, 3-83
- Kill Sexp 1-53, 3-28, 3-79
- Kill Word 1-53, 3-28, 3-78
- Kill/Yank Commands 1-168, 3-214
- Kill Address Zmail Command 6-45
- Kill Backward Up List (c-m-X) Zmacs command 3-79
- Kill Comment (c-m-;) Zmacs command 4-23
- Kill History 3-73
- kill history 3-15
- Killing text 4-60
- Killing, and Renaming Zmail Messages 6-81
- Killing a Lisp Comment in Zmacs 3-171
- Killing and Yanking 4-60
- Killing Text 3-72
- Killing Text 3-72
- :kill** method of **si:process** 8-93
- :kill** option for **zwei:open-editor-stream** 7-378
- :kill** option for **zwei:with-editor-stream** 7-378
- Kill Previous Address Zmail Command 6-45
- Kill Sentence 1-53, 3-28
- Kill Sexp 1-53, 3-28, 3-79
- Kill Sexp (c-m-k) Zmacs command 4-60
- Kill Sexp (c-m-RUBOUT) Zmacs command 4-60
- Kill Word 1-53, 3-28, 3-78
- [Kill] Zmail menu item 6-81
- Kinds of Characters 2-268
- Kinds of Characters in Old-Zetallsp RN-17
- Kinds of Functions 2-303
- Kinds of Functions 2-305
- Kinds of Variables 2-126
- fs: \*known-types\*** variable 5-149
- Init File Form: Fixing White Space for h-K
- Viewing the Yanking in the
- Saving, Expunging,
- Deleting Vs. Overview of Deleting Vs.
- h-RUBOUT Backward Backward
- Backward Backward
- Two Two
- Other
- fs:**
- L**
- SELECT
- Sys:
- Manipulating the **:label** init option for **tv:**
- tv:momentary-menu** Example 3: Centered Disk Disk
- SCL arrays and circular-structure **:label-size** method of **tv:** **:set-label** method of **tv:**
- Window Window Margins, Borders, and **flset,**
- L**
- L** 3-40
- l-ucode; logical directory 1-210, 5-217
- L2:Move to point mouse click 3-57
- L:Move point mouse click 3-57
- Label 0-45
- label-mixin** 7-172
- label-mixin** flavor 7-171
- Label and Use of General List Items 7-224
- label comments 1-209, 5-216
- label information 1-200, 1-213
- :label** init option for **tv:choose-variable-values** 7-263
- :label** init option for **tv:label-mixin** 7-172
- :label** init option for **tv:menu** 7-222, 7-297
- labelling restriction 2-641
- label-mixin** 7-172
- label-mixin** 7-172
- Labels 7-103, 7-168
- Labels 7-171
- Labels 7-168
- labels,** and **macrolet** Special Forms 2-142
- L**

- CLM:
  - SCL and **&rest** parameters for
- &allow-other-keys**
- &aux**
- &body**
- &environment**
- &eval**
- &key**
- &local**
- &optional**
- &quote**
- &rest**
- &special**
- &whole**
- Default forms of
  - &list-of**
  - defmacro**
- Examples of Simple Specifying a Keyword Parameter's Symbol in
- Specifying Aux-variables in
- Specifying Default Forms in Variables in
  - mailer:**
    - Constraint
    - SCL
    - New
  - Changes to the Lisp
    - Lisp
    - Playing
    - Maintaining
    - Configuring
  - Deleting the
    - Cancel
  - X- date directory
    - Call
    - Name
    - Calling the
  - Example of Calling the Query Replace
    - Repeat
    - List the
    - List the
- :label-size** method of **tv:label-mixin** 7-172
- labels** special form 2-144
- Lambda character 2-32
- Lambda functions 2-304
- lambda** list 2-323
- Lambda Macros 2-355
- Lambda symbol 2-151
- Lambda-binding 2-125, 2-331
- Lambda-binding Subprimitive 8-23
- Lambda-expression 2-151
- Lambda-expressions 2-638
- lambda-expressions 2-638
- Lambda-list 2-151, 2-304
- Lambda-list Keywords 2-309
- Lambda-list Keyword 2-310, 2-373
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-311, 2-374, RN-39
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-310, 2-373
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-309
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-309
- Lambda-list Keyword 2-310
- Lambda-list Keyword 2-311, 2-374, RN-39
- Lambda-list Keyword Changes RN-28
- lambda-list parameters 2-151
- lambda-macro** special form 2-355
- lambda** and lexical scoping RN-12
- Lambda expression as line item entry 7-308
- lambda** is Now a Special Form RN-41
- Lambda-list Keyword 2-310
- lambda-list keyword **&list-of** and lexical scoping RN-12
- lambda-list-keywords** symbol 2-151
- lambda-list-keywords** variable 2-309
- Lambda Lists 2-154
- Lambda Lists 2-156
- Lambda Lists 2-157
- Lambda Lists 2-155
- lambda lists 2-151
- lambda** special form 2-163, RN-41
- land** function 6-111
- language 7-175, 7-179, 7-188
- language-tools** package 2-633
- Language for Specifying Frame Constraints RN-57
- Language in Release 6.0 RN-9
- language package 2-615
- Large Deletions 3-43
- Large Pieces Example 7-344
- Large Programs 4-187
- Large Sites for Multiple Mail Servers 0-64
- last** function 2-48
- Last Character 3-76
- last command 3-42
- last expunged indicator 5-236
- Last Kbd Macro (c-X E) Zmacs command 4-64
- Last Kbd Macro (m-X) Zmacs command 3-203, 4-64
- Last Keyboard Macro 3-200
- Last Keyboard Macro 3-200
- Last Kill 3-104
- Last message property 1-57
- Last Minibuffer Command 3-51, 3-74
- last sixty commands 3-46
- last sixty keystrokes 3-46

- Disk latency 8-50
- Reducing disk latency 8-53
- Minimum disk latency for transfers 8-50
- :latest** symbol in **make-system :version** option 4-222
- mailer:**
  - launch** function 6-111
- Installing layered products 0-87
- :layout** Constraint Frame Specification 7-180
- Storage Layout Definitions 8-18
- Lbus resetting 1-201
- ldb** function 2-116
- Use of **ldb**, **ldb-test**, **logand**, and **bit-test** on Characters RN-21
- ldb-test** function 2-117
- Use of **ldb**, **ldb-test**, **logand**, and **bit-test** on Characters RN-21
- ldiff** function 2-54
- Packets with array leader 9-200
- :leader** global line attribute 7-313
- :leader-length** option for **make-array** 2-241
- :leader-list** option for **make-array** 2-241
- Array leaders 2-238, 2-241, 2-248
- Line Item Array Leaders 7-313
- time:** **leap-year-p** function 7-369
- Least bits 2-115
- Leave option to Tape when done dump parameter 0-6
- Entering and Leaving Zmacs 3-40
- Entering and Leaving FED 3-225
- Entering and Leaving Mail Mode in Zmail 6-42
- Overview of Leaving the Inspector 1-189, 4-295
- Leaving Zmacs 3-40
- Leaving Zmacs Via the System Menu 3-40
- Leaving Zmacs with c-Z 3-40
- Leaving Zmacs with the SELECT Key 3-40
- Left increment 7-335
- Left justify 5-46
- Left kern 3-222, 7-144, 7-146
- Left and Right Edges of the FED Character Box 3-237
- Left edge of menu 7-298
- :left** init option for **tv:menu** 7-297
- :left** init option for **tv:sheet** 7-163
- Left Kern** Font Attribute 3-222, 7-144
- :left-margin-size** method of **tv:sheet** 7-167
- Show Legal Notice Command 1-37
- length** function 2-46
- :length** message 5-113
- :length** FEP file property 5-227, 8-48
- :length-in-blocks** file property 5-117
- :length-in-bytes** file property 5-117
- Length of **:function** line item 7-308
- Length of **:symeval** line item 7-308
- Length tape spec parameter 0-26
- Len tape spec parameter 0-26
- Less Common FEP Commands 1-201
- lessp** function 2-99
- let\*** special form 2-129
- let-closed** special form 2-305, 2-335
- let-globally** special form 2-131
- let-if** special form 2-130, 8-23
- Let Binding 3-104
- Query Replace **letf\*** RN-37
- New Special Forms: **letf** and **letf\*** special form 2-130
- letf** and **letf\*** RN-37
- New Special Forms: **letf** special form 2-130
- let-globally-if** special form 2-131



- Message status
- Abort At Top
- Motion Along One Nesting
- Patch
- The Lisp Top
- How to Choose Process Priority
- Motion up and Down Nesting
- si:**
- Funargs and
- applyhook** and
- defmacro** and
- defmacro** lambda-list keyword **&list-of** and
- evalhook** and
- global:functional-alist** and
- lambda** and
- Macro-expander functions and
- macro** and
- New Special Forms for
- si:lexical-closure** and
- Special forms and
- sys:funcall-macro** and
- sys:invalid-form** and
- sys:invalid-function** and
- sys:invalid-lambda-list** and
- Miscellaneous
- let** special form 2-128, 2-142, 8-23
- letters 1-57
- Level 3-42
- Level 3-65
- level 4-250
- Level 1-151
- Levels 8-87
- Levels 3-66
- Lexical closures 2-137, 2-303, 2-305, 2-331
- Lexical scope 2-126
- Lexical Scoping 2-137, 2-142, 2-144
- lexical-closure** and lexical scoping RN-12
- Lexical Closure Allocation 2-139, 2-140, 2-141, 2-312, 2-313
- Lexical Environment Objects and Arguments 2-138
- Lexically scoped compiler 2-137
- Lexically scoped interpreter 2-137
- lexical scoping RN-11
- lexical scoping 2-138
- lexical scoping RN-12
- lexical scoping RN-11
- lexical scoping RN-12
- lexical scoping RN-12
- lexical scoping 2-138
- lexical scoping 2-138
- Lexical Scoping RN-11
- lexical scoping RN-12
- lexical scoping RN-11
- lexical scoping RN-12
- lexical scoping RN-12
- lexical scoping RN-12
- lexical scoping RN-12
- lexical scoping RN-12
- Lexical Scoping Changes RN-12
- Lexical Scoping in Release 6.0 RN-10
- lexpr-funcall** function 2-160
- lexpr-send** function 2-160, 2-430
- lexpr-continue-whopper** function 2-463
- Lexpr Maclisp type 2-305
- Lexprs 2-151, 2-159
- Lexprs 2-165
- lexpr-send-if-handles** function 2-431
- \*lexpr** special form 4-325
- LF character 2-32
- lgp:basic-lgp-stream** flavor 4-124
- lgp:basic-lgp-stream** 4-124
- lgp:basic-lgp-stream** 4-124
- LGP Output 4-124
- LGP to Screen Coordinates 4-121
- libraries 0-15
- :limit** Constraint Size Specification 7-188
- LINE 1-144
- Line 1-50, 3-26, 3-63, 3-81
- line 3-22
- line 7-114
- line 7-113
- Line 3-82
- Line 3-81
- Line 3-63, 3-81
- Line 1-50, 3-26, 3-63, 3-81
- line 3-259
- Line 1-50, 3-26, 3-63, 3-81
- line 7-114
- line 7-113
- Line 1-53, 3-28, 3-81
- Line 3-63
- Beginning of
- Breaking a
- Delete
- Delete to end of
- Deleting Backward on the
- Deleting the Current
- Down
- Down Real
- Draw a
- End of
- Erase
- Erase backward to start of
- Erase to end of
- Kill
- Motion by

Mouse Documentation Line 1-5, 3-57, 6-5, 6-15, 6-67, 6-75, 7-156, 7-207, 7-211, 7-259  
 Move cursor to beginning of line 3-56  
 Moving to a Specified Line 3-56  
 Starting a New Line 3-22  
 Status Line 1-5, 7-103, 7-311  
 Up Line 3-63, 3-81  
 Up Real Line 1-50, 3-26, 3-63, 3-81  
 Using the Terminal Program with Hosts Connected to the Serial Line 5-265  
 Zmacs Mode Line 3-19  
 Zmail: Click Middle on Summary Line 6-55  
 Zmail: Click Right on Summary Line 6-55  
 Zmail: Mouse Documentation Line 6-5  
 Zmail Mode Line 6-13  
 Zmail Second Mode Line 1-62  
 Line character 2-32  
 Line height 3-221, 7-108, 7-143, 7-162  
 Line items 7-305  
 Line region 4-297  
 Mode Line's *Buffer* 3-20  
 Mode Line's *Buffer-status* 3-21  
 Mode Line's *Major-mode* 3-20  
 Mode Line's *Minor-mode* 3-20  
 Mode Line's *Position-flag* 3-21  
 Mode Line's *Version* 3-21  
 Indent New Line (LINE) Zmacs command 4-26  
 Indent New Comment Line (m-LINE) Zmacs command 4-23  
 Down Comment Line (m-N) Zmacs command 4-23  
 Up Comment Line (m-P) Zmacs command 4-23  
 Indent New Line (LINE) Zmacs command 4-26  
 :line-in message 5-16, 5-24  
 :line-in operation 5-12  
 :line-out message 5-15  
 Line-truncating Windows 7-117  
 Linear Equations 2-258  
 linear equations 2-258  
 :leader global line attribute 7-313  
 :mouse-self global line attribute 7-311  
 :mouse global line attribute 7-311  
 Global line attributes 7-307  
 Init File Form: Setting Goal Column for Real Line Commands 1-168, 3-214  
 Exclamation point line continuation indicator 3-23, 3-54  
 Status line documentation 3-255  
 Moving Rest of Line Down in Zmacs 3-166  
 Mode Line Example 3-21  
 Fresh line format directive 5-34  
 Zmail Mode Line Information 1-61  
 :line-in method of **si:interactive-stream** 7-12  
 Centering the Current Line in Zmacs 3-164  
 Creating a New Indented Lisp Comment Line in Zmacs 3-172  
 Deleting Blank Line in Zmacs 3-167  
 Indenting Current Line in Zmacs 3-162  
 Indenting New Line in Zmacs 3-164  
 Inserting Blank Line in Zmacs 3-167  
 Mouse Documentation Line in Zmacs 3-57  
 Moving Down to Lisp Comment on Next Line in Zmacs 3-172  
 Moving up to Lisp Comment on Previous Line in Zmacs 3-172  
 Length of **:function** line item 7-308  
 Length of **:symeval** line item 7-308  
 Width of **:function** line item 7-308  
 Width of **:symeval** line item 7-308  
 Line Item Array Leaders 7-313  
 Line item entries 7-307, 7-308  
**:function** line item entry 7-308  
**:string** line item entry 7-308

- :symeval** line item entry 7-308
- :value** line item entry 7-308
- Compiled object code as line item entry 7-308
- Lambda expression as line item entry 7-308
- Named-lambda expression as line item entry 7-308
- Symbol line item entry 7-308
- :mouse** line item entry attribute 7-311
- :mouse-item** line item entry attribute 7-311
- Constructing Line Items 7-307
- Mouse sensitivity and line items 7-311
- [Append] Message Summary Line menu item 6-71
- [Filter] Message Summary Line menu item 6-79
- :line-out** method of **tv:stream-mixin** 7-112
- Lines 1-53, 3-28
- Deleting and Transposing Lines 3-81
- Exchange Lines 3-82
- Introduction to Deleting and Transposing Lines 3-81
- Merging lines 3-22
- Truncating lines 7-108, 7-117, 7-119
- Wraparound Lines 3-54
- Wrapping Lines 3-23
- List Matching Lines (m-X) Zmacs command 4-57
- Drawing Lines and Curves in FED 3-246
- Vertical spacing between lines in menu 7-222, 7-298
- Wraparound Lines in the Editor Window 3-54
- What the Lines Mean in the FED Character Box 3-237
- Transposing Lines of Text 3-82
- Drawing Lines on Windows 7-122
- Count Lines Page 3-48
- Count Lines Region 3-48
- tv:** **line-truncating-mixin** flavor 7-117
- New Line with This Indentation in Zmacs 3-166
- LINE Zmacs command 3-164
- Line Zmail Command 6-42
- Click Right on Summary [Draw Line] Font Editor menu item 3-246, 3-259
- Create Link (m-X) Zmacs command 3-135
- Create Link Command 1-19
- > link indicator in directory listings 5-236
- LMFS Links 5-210
- Creating Links to Files 3-135
- fs:** **link-target-not-found** flavor 2-549
- FSEdit [Link Transparencies] Command 5-235
- [Link Transparencies] File System Editor menu item 5-233
- FSEdit [Create Link] Command 5-234
- [Create Link] File System Editor menu item 5-233
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- Character Objects in Common Lisp RN-12
- Compiling and Evaluating Lisp 4-69
- Entering Lisp 3-40
- Introduction to Symbolics Common Lisp 2-631
- Lisp Facilities for Finding Out About Lisp 1-88
- New Feature in Release 6.0: Symbolics Common Lisp RN-45
- Setting the Syntax for Symbolics Common Lisp 3-140
- Symbolics Common Lisp 2-629
- Zmacs Commands for Finding Out About Lisp 1-86, 3-217
- Zmacs Commands for Interacting with Lisp 1-87, 3-218
- Lisp Errors 2-533
- Lisp macros 2-337
- Lisp Reader 1-227
- Indent For Lisp (TAB or c-m-TAB) Zmacs command 4-26
- lisp-reinitialize** function 1-151
- :lisp** canonical type 5-200
- Printed Representation of Common Lisp Character Objects 2-16
- Common Lisp Character Switchover in Release 6.0 RN-12
- Compiling Lisp Code 4-70

- Evaluating
  - Formatting
  - Init File Form: White Space in
  - Use #|...|# Instead of #|...|# to Comment Out
  - Commenting
  - Setting the
  - Indenting for
  - Killing a
  - Creating a New Indented
  - Moving Down to
  - Moving up to
  - Inserting and Removing
  - Common
- Namespace System
  - Tools for
  - SCL and Common
  - Deleting the Current
  - Deleting the List Containing the Current
  - Deleting the Previous
  - Description of Motion by
  - Motion by
  - Commands to Mark Regions by
  - Deleting and Transposing
  - Introduction to Deleting and Transposing
  - Transposing
  - Expanding
  - Parenthesizing
  - SCL and Symbolics Common
  - SCL and Common
  - Macros expanded to
  - Common
  - Adding patches to
  - Improvements to
  - Incompatible Changes to
  - New Features in
  - Changes to the
  - Lookup Commands Available At a
    - (fed)
    - (zmail)
- Communicating with the
  - Use of Symbolics
  - Standard
  - The
  - Chaosnet
  - Sending message to all
  - Namespace Attributes for a New
  - Init File Form: Electric Shift Lock in
  - Zmacs
  - Notation Conventions for
- Lisp Code 4-75
- Lisp Code 5-51
- Lisp Code 1-169, 3-215
- Lisp Code RN-79
- Lisp Code in Zmacs 3-171
- Lisp Comment Column in Zmacs 3-172
- Lisp Comment in Zmacs 3-171
- Lisp Comment in Zmacs 3-171
- Lisp Comment Line in Zmacs 3-172
- Lisp Comment on Next Line in Zmacs 3-172
- Lisp Comment on Previous Line in Zmacs 3-172
- Lisp Comments From Regions in Zmacs 3-173
- Lisp Compatibility Package 2-615
- Lisp Compiler Warnings 3-176
- lisp-crash-list** variable 1-181
- Lisp Data Types 9-29
- Lisp Debugging 1-189
- Lisp Differences 2-637
- Lisp environment features list 1-184
- Lisp Expression 3-79
- Lisp Expression 3-79
- Lisp Expression 3-79
- Lisp Expression 3-65, 3-79
- Lisp Expression 3-65
- Lisp Expressions 3-91
- Lisp Expressions 3-79
- Lisp Expressions 3-79
- Lisp Expressions 3-79
- Lisp Expressions in Zmacs 3-179
- Lisp Expressions in Zmacs 3-178
- Lisp Extensions 2-635
- Lisp Facilities for Finding Out About Lisp 1-88
- Lisp Files 2-635
- Lisp functions 2-355
- Lisp Functions Not Included RN-23
- Lisp image 0-46
- Lisp Input Editing 4-77
- Lisp in Release 6.0 RN-40
- Lisp in Release 6.0 RN-9
- Lisp in Release 6.0 RN-31
- Lisp Language in Release 6.0 RN-9
- Lisp language package 2-615
- Lisp Listener and in Zmacs 1-128
- Lisp Listener command 3-225
- Lisp Listener command 6-17
- Lisp Listener Commands for Converse 1-72, 6-103
- Lisp Listeners and **break** Loops Catch Trivial Errors in the Input Editor RN-66
- lispm-finger** Service 9-58
- lispm-name:** User Object Attribute 9-12
- Lisp Machine 1-9
- Lisp Machine Character Set 5-5
- Lisp Machine Characters in Source Code Where ASCII Characters Are Desired RN-20
- Lisp Machine File System 5-203
- Lisp Machine Fonts 1-75
- Lisp Machine Generic Network System 9-37
- Lisp Machine Implementation 9-134
- Lisp Machine Namespace Server Files 9-24
- Lisp Machines at site 1-72, 6-103, 9-135
- Lisp Host 0-79
- Lisp Mode 1-170, 3-214
- Lisp Mode 3-156
- Lisp Mode (m-X) Zmacs command 3-170, 4-12
- Lisp Objects 1-231
- LISP pathname type abbreviation 5-180

- Errors Involving
  - Errors inside
  - Debugging
  - Compiling
  - Editing
  - Evaluating
  - Evaluating and Compiling
  - Introduction to Editing
  - Overview of Evaluating and Compiling
  - Common
  - File Types of
- Binding Standard Variables for Writing
- Keeping Track of
  - The
  - si:**
  - si:**
- A Brief Introduction to the
- Poking Around in the
  - Save current
  - Variables for Examining the
  - :before-cold** initialization
  - :cold** initialization
  - :disable-services** initialization
  - :enable-services** initialization
  - :login** initialization
  - :logout** initialization
  - :once** initialization
  - :system** initialization
  - :warm** initialization
  - Backward
  - Backward up
  - BUG-LISPM mailing
  - Circular
  - Cons as property
  - Describe Attribute
  - Disembodied property
  - Display argument
  - Dotted
  - Down
  - Dumper Systems
  - FED Command
  - File attribute
  - Forward
  - Forward up
  - History
  - I/O buffer property
  - Initialization
  - Inserting elements into
  - Inspecting a
  - lambda**
  - Lisp environment features
  - Memory cell as property
  - Ordering
  - Parser for file attribute
  - Removing elements from
  - SCL and keywords in the **\*features\***
  - Select Candidate
  - Setting the Zmacs Font in the Attribute
  - Symbol associated with property
  - Systems
  - Transmit
  - Updating menu item
- Lisp Primitives for the Digital Audio Facilities 7-329
- Lisp Primitives for Wiring Memory 7-328
- Lisp Printed Representations 2-543
- Lisp printer 2-543
- Lisp Programs 4-79
- Lisp Programs in Zmacs 3-175
- Lisp Programs in Zmacs 3-169
- Lisp Programs in Zmacs 3-174
- Lisp Programs in Zmacs 3-174
- Lisp Programs in Zmacs 3-170
- Lisp Programs in Zmacs 3-174
- Lisp readtable 2-27
- Lisp Source and Compiled Code Files 4-318
- Lisp Style Command Loops 1-153
- Lisp Syntax 4-23
- Lisp Top Level 1-151
- lisp-top-level** function 1-151
- lisp-top-level1** function 1-151
- [Lisp Window] File System Maintenance menu
  - item 0-39
- Lisp World 1-151
- Lisp World 1-177
- Lisp world 0-46
- Lisp World 1-179
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- list 8-71
- List 3-65
- List 3-66
- list 2-524
- list 2-41
- list 2-67
- List 3-149
- list 2-67
- list 3-47, 3-48
- list 2-25, 2-41
- List 3-66
- List 0-20
- List 3-259
- list 2-579
- List 3-65
- List 3-66
- list 3-15
- list 7-132
- list 8-67
- list 2-150
- list 4-299
- list 2-323
- list 1-184
- list 2-67
- list 7-188
- list 5-109
- list 2-150
- list 2-644
- List 1-127, 1-131
- List 1-80
- list 2-67
- List 0-20, 0-21
- list 9-202
- list 7-235

- Variable argument number without consing
- Zmail Commands for Editing the Recipient
- list 8-23
- List 6-45
- List Buffers 3-118
- List elements 2-41
- list** function 2-48, 2-56, 7-313
- List Items 7-305
- List Iteration 2-193
- List Variables 3-210
- Kill Backward Up
- Reparse Attribute
- Update Attribute
- List (c-m-X) Zmacs command 3-79
- List (m-X) Zmacs command 3-137, 4-10
- List (m-X) Zmacs command 3-138, 4-10
- list\*** function 2-49, 2-56
- list\*-in-area** function 2-49
- :list-choices** option for **fquery** 7-56
- &list-of** RN-28
- &list-of** keyword for **defmacro** 2-373
- list-2d-array** function 2-260
- List all supported servers 9-216
- listarray** function 2-252, 4-35
- list-array-leader** function 2-253
- List as Init-plist Option 7-224
- List as menu item 7-208
- List as pattern in dummy description 7-188
- List Buffers Zmacs command 3-115
- List Callers (m-X) Zmacs command 1-177, 4-38, 4-44
- List Callers (m-X) Zmacs command 4-44
- List Changed Definitions (m-X) Zmacs command 4-56
- List Changed Definitions of Buffer (m-X) Zmacs command 3-183, 4-56
- List Combined Methods 2-471
- List Combined Methods (m-X) Zmacs command 4-142
- Zmacs Command:
- Deleting the
- The
- The Zmacs
- List Containing the Current Lisp Expression 3-79
- List contents of a directory 3-131
- List Data Type 2-5
- List Definition Commands 3-182
- List Definitions (m-X) Zmacs command 3-183
- Maximum number of
- chaos:**
- listen** function 9-136
- :listen** message 5-14, 5-251
- Listener and in Zmacs 1-128
- Listener command 3-225
- Listener command 6-17
- Listener Commands for Converse 1-72, 6-103
- Listeners and **break** Loops Catch Trivial Errors in the Input Editor RN-66
- Listening-state connection state 9-136
- Listening connection state 9-121
- :listen** method of **si:interactive-stream** 7-12
- :listen** method of **tv:stream-mixin** 7-135
- Listen packet 9-114
- Lister 0-34
- listf** function 5-123
- [List FEP FS Root] File System Maintenance menu item 0-39
- List Files 3-131
- List Files (m-X) Zmacs command 3-131
- List Fonts (m-X) Zmacs command 1-75, 1-174, 3-223, 3-271, 7-142
- List Fonts and Show Font Displays 3-263
- [List Fonts] Font Editor menu item 3-230, 3-260
- [List Fonts] Font Editor menu item 3-263
- List" Form of Item 7-210
- list functions and two-argument predicates 2-641
- list-functions-in-bucket** function 8-62
- math:
- tv:momentary-menu** Example 2: Item
- Multiple
- Zmacs Command:
- Deleting the
- The
- The Zmacs
- Maximum number of
- chaos:**
- Lookup Commands Available At a Lisp (fed) Lisp (zmail) Lisp Lisp Lisp
- Chaos:
- LSN
- Carry-tape
- Using the mouse with
- Mousing on the FED
- Using the mouse with The "General SCL sequence and meter:

- Property
  - Selecting, Example of
  - > link indicator in directory
  - How to Interpret Directory Specifying and Example of
  - :function**
  - :pre-process-function**
  - Applying functions to Constructing
  - tv:momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
  - Updating Property Virtual
  - Dynamic Item
  - Instantiable Dynamic Item Property
  - Zmacs Command:
    - Dynamic Item
    - tv:**
- defmacro** lambda-list keyword Property The Property
- Document Examiner
- Document Examiner
- Saving a
  - Basic
  - :system**
- Update Attribute
  - Argument
  - Arrays as
  - Arrays Overlaid with Association Attribute
  - Audio command
  - Building Audio Command CLM:
    - CLM: Sequences, Compact
    - Creating mailing
    - Depth of recursion of printing
  - listify** function 2-166
  - list-in-area** function 2-49, 2-56
  - list indicators 2-67
  - Listing Buffers 3-117
  - Listing, and Examining Zmacs Buffers 3-116
  - Listing Buffers 3-118
  - Listing Files in a Directory 3-131
  - Listing of tape contents 0-18
  - listings 5-236
  - Listings 5-236
  - Listing Tag Tables 3-106
  - Listing Variables by Matching a String 3-210
  - Listing Variables by Matching a String 3-211
  - Listing Zmacs Variables 3-210
  - Listing Zmail Buffers, Mail Files and Collections 6-77
  - list item keyword 7-313
  - list item keyword 7-313
  - List item plist 7-305, 7-313
  - list items 2-201
  - List Items 7-313
  - list items 7-315
  - list keywords 2-67
  - List Maintenance 7-315
  - List Matching Lines (m-X) Zmacs command 4-57
  - List Matching Symbols (m-X) Zmacs command 4-38
  - List Menus 7-203, 7-235
  - List Menus 7-236
  - List Messages 2-473
  - :list** method combination type 2-455
  - List Methods 2-471
  - List Methods (m-X) Zmacs command 4-142
  - List Mixins 7-235
  - list-mouse-buttons-mixin** flavor 4-129
  - &list-of** and lexical scoping RN-12
  - list of a symbol 2-3
  - List of a Symbol 2-564
  - List of bookmarks 1-129
  - List of Bookmarks 1-132
  - List of Choice Facilities 7-203
  - List of current candidates 1-127
  - List of Current Candidates 1-131
  - List of **defsystem** Transformations 4-209
  - &list-of** Lambda-list Keyword 2-310
  - List of Mail Files 6-78
  - List of Zmail commands 6-5
  - List Operations 2-46
  - List Option for **load-patches** 4-245
  - :list-or-nil** argument to **typep** 2-9
  - listp** function 2-7
  - List Query 3-141
  - :list** returned by **typep** 2-9
  - Lists 2-39, 2-41
  - Lists 4-43
  - lists 2-236
  - Lists 2-250
  - lists 2-59, 2-64, 2-67, 2-238
  - lists 3-137, 3-138
  - lists 7-321, 7-327
  - Lists 7-330
  - Lists 2-641
  - Lists 2-641
  - lists 2-56
  - lists 0-61
  - lists 2-16

- Examples of Simple Lambda Lists 2-154
- File Attribute Lists 4-10, 5-109
- Init File Form: Ordering Buffer Lists 1-168, 3-213
- Keywords in argument lists 2-189
- Looping Through Audio Command Lists 7-334
- Mailing lists 6-96
- Manipulating pathname property lists 5-165
- Parsing file attribute lists 5-109
- Printing lists 5-44
- Printing nested lists 2-17
- Property Lists 2-67
- Sorting lists 2-79
- Sorting Arrays and Lists 2-79
- Sorting compact lists 2-79
- Specifying a Keyword Parameter's Symbol in Lambda Lists 2-156
- Specifying Aux-variables in Lambda Lists 2-157
- Specifying Default Forms in Lambda Lists 2-155
- Storing functions on property lists 2-297
- System Initialization Lists 8-71
- User-created initialization lists 8-71
- Variables in lambda lists 2-151
- Warnings about file attribute lists 3-138
- Zmail bug lists 6-31
- Lists as Tables 2-59
- Lists as templates 2-345
- List Sequences (m-X) Zmail Command 6-77
- Lists in compiled code files 4-331, 5-241
- lists in files 4-10
- Lists on the control stack 8-26
- Lists on the Control Stack 8-26
- list storage area 8-107
- Lists to Zmail 6-31
- List Structure 2-54
- list structure 1-233
- List Structure 2-41
- List the last sixty commands 3-46
- List the last sixty keystrokes 3-46
- :list-tyl** method of **si:interactive-stream** 7-12
- List valid init-options for flavor 5-104
- list values 2-67
- List Variables (m-X) Zmacs command 3-210
- LMFS 1-208, 5-200, 5-215, 6-94, 6-95
- LMFS 0-35, 5-213, 5-219
- LMFS 5-203
- LMFS 1-209, 5-216
- LMFS 1-229
- LMFS 0-15
- LMFS Backup 5-212
- LMFS Concepts 5-203
- LMFS Links 5-210
- lmfs** package 2-615
- LMFS Pathnames 5-174
- LMFS Properties 5-204
- Lmfs.file file 0-35, 5-213
- lmfs:find-backup-copies** function 0-12
- lmfs:rename-local-file-tool** function 5-176
- LMFS Deletion, Expunging, and Versions 5-209
- LMFS File Partitions RN-80
- LMFS files 5-176
- LMFS File Space 1-212, 5-219
- LMFS Multiple Partitions 0-35, 5-213
- LMFS Partition 1-212
- LMFS Uses the FEP File System 1-209, 5-216
- Load** Commands 1-26
- load** function 4-73, 5-108
- :load-bfd** Transformation of **defsystem** 4-210
- Attribute
- Consing Property
- Adding Bug
- Alteration of
- Backquote constructing
- Manipulating
- Property
- Adding a Partition to
- Introduction to
- Local
- Questions About the FEP and
- Snapshot files on a local
- Warning Against Deleting
- Renaming
- Adding a Spare World Load as
- Adding a
- How



- :noselective** Option for
- :nowarn** Option for
- :selective** Option for
- :silent** Option for
- :system List** Option for
- :verbose** Option for
  
- :selective** Option for
  - What is a World
  
- Adding a Spare World
  - compiler:**
  - World
  - dis:**
  - Carry-tape
  - Distribution
  
- Using a Spare World
  - World
  
- Compiling and
  - World
  
- System-name** Option for
  - fs:**
  
- Concepts: Saving New Versions of World
  - Dumping World
  - Microcode
  - Saving New Versions of World
  - World
  - Installing world
  
- FSEdit
  - dbg:**
  
- load-byte** function 2-117
- Load-like transformations 4-214
- load-patches** 4-245
- load-patches** 0-46, 4-246
- load-patches** 0-46, 4-245, 4-246, RN-53
- load-patches** 0-46, 4-246
- load-patches** 4-245
- load-patches** 0-46, 4-245, 4-246
- load-patches** function 4-245
- load-patches** Has Changed RN-53
- Load? 1-228
- load-and-save-patches** function 0-46, 4-246
- loadarrays** MacLisp function 2-262
- Load as LMFS File Space 1-212, 5-219
- load-compiler-warnings** function 4-321
- Load Compiler Warnings (m-X) Zmacs
  - command 4-79, 4-321
- load disk-saves 0-48, 1-182
- load-distribution-tape** function 0-87
- [Loaded] Universe Creation Display menu item 6-64
- Loader 0-15, 0-25
- Loader 0-32
- Loader 0-17
- Load Fep file command 1-201
- LOAD FEP file type 5-228, 8-49
- Load File (m-X) Zmacs command 4-73
- Load File Command 1-26
- LOAD file type (FEP) 1-209, 5-215
- Load for Paging 1-212, 5-219
- loading 1-201
- Loading Files 5-108
- Loading patches 4-231, 4-244
- Loading a Dialnet Registry 9-83
- Loading a File 4-73
- Loading a File in Dired 3-148
- Loading and booting a new release 0-87
- Loading documentation index files 1-121
- Loading sources from a distribution tape 0-87
- Loading System Definitions That Use Logical
  - Pathnames 4-217
- Loading System Definitions That Use Physical
  - Pathnames 4-219
- Loading text files 5-109
- Loading the System Definition 4-217
- Load Microcode command 1-201
- load-patches** 4-245
- Load Patches Command 1-26
- load-pathname-defaults** variable 5-149
- :load-p** option for **zwei:open-editor-stream** 7-378
- :load-p** option for **zwei:with-editor-stream** 7-378
- Load Private Document 1-136
- Loads 0-45
- Loads 0-20
- Loads 1-208, 5-215
- Loads 0-45
- Loads 1-209, 5-215
- loads from other sites 0-87
- Load Sync-program command 1-201
- Load System command 1-27, 4-217
- Load World command 1-201
- [Load] Command 5-236
- [Load] File System Editor menu item 5-233
- loc** function 4-267
- LOCAL 1-144
- Local LMFS 1-209, 5-216
- :local** medium 9-44

- Local networks 9-211
- Local variables 2-126, 2-331, 8-23
- local-declarations** variable 2-316
- local-declare** special form 2-126, 2-315
- net:** **\*local-host\*** variable 9-29
- local-namespace:** Site Object Attribute 9-19
- neti:** **\*local-networks\*** variable 9-211
- net:** **\*local-site\*** variable 9-29
- Binding local and special variables 2-126
- Creating More Room on the Local Disk 0-43, 5-239
- Manipulating the local file system 0-39
- local-interned-symbols loop** iteration path 2-225
- Locality of Reference 8-121
- &local** Lambda-list Keyword 2-310
- :local-lisp-machines** 9-21
- Snapshot files on a local LMFS 0-15
- zwei:** **\*local-mail-header-force\*** variable 6-89
- zwei:** **\*local-mail-include-subject\*** variable 6-89
- sys:** **local-network-error** flavor 2-554
- Local Network Problems 2-554
- :local** step type 9-44
- [Local] Mail menu item 6-27
- Locate functions 2-147
- locate-in-closure** function 2-335
- locate-in-instance** function 2-440
- Overview of Locating and Replacing Strings Automatically 3-102
- Locating and Replacing Strings Automatically in Zmacs 3-102
- Locating generalized variables 2-147
- Introduction to Locating Source Code in Zmacs 3-180
- Locating Source Code to Edit in Zmacs 3-180
- Location Errors 2-534
- location-boundp** function 2-85
- location-contents** RN-36
- location-contents** function 2-84
- location-makunbound** function 2-84
- location:** Host Object Attribute 9-9
- :location** function spec type 2-297
- Physical location of host 9-9
- Saving and Moving to Locations in Registers 3-89
- The Locative pointer 2-147
- Returning a Locative Data Type 2-5
- locativep** function 2-9
- locative pointer 8-22
- :locative** returned by **typep** 2-9
- Locatives 2-67, 2-83
- Cdr-coding and Locatives 2-83
- Cells and Locatives 2-83
- Functions That Operate on Locatives 2-84
- lof** macro 2-148
- loci** macro 2-83
- Lock queue 8-84
- Locked windows 7-82
- Adding new symbols to locked packages 2-626
- External-only Packages and Locking 2-626
- Basic Locking Subprimitive 8-17
- Init File Form: Electric Shift Lock in Lisp Mode 1-170, 3-214
- Electric Shift Lock Mode (m-X) Zmacs command 4-12
- :lock-reason** option for **tape:make-stream** 5-269
- FEP File Locks 8-83
- Locks 5-228, 8-48
- Log files 9-24
- log** function 2-106
- logand** function 2-113
- Use of **ldb**, **ldb-test**, **logand**, and **bit-test** on Characters RN-21
- Logarithm of nonpositive number error 2-534

- Natural logarithms 2-106
- %logdpb** function 2-118
- Namespace Database
  - Log Files 9-26
  - Logging in 1-1, 1-155
  - Logging Out 1-3
  - Error logging code 2-494
  - Logging in Without Processing Your Init File 1-164
- Cold boot after logging out 1-3
- Logical hosts 5-188, RN-71
- Logical Pathnames 5-186
- Logical **and** function 2-178
- logical directory 1-210, 5-217
- Logical end of data 9-118
- logical host 4-217, 5-197
- logical host 5-186
- Logical Hosts Across Physical Hosts 5-196, RN-72
- logical hosts to physical hosts 5-186
- logical operation 2-114
- Logical Operations on Numbers 2-113
- Logical **or** function 2-179
- logical-pathname** 5-199
- logical pathname 5-199
- logical-pathname** method of **fs:** 5-199
- What is a Logical Pathname? 1-228
- logical pathnames 5-186
- logical pathnames 5-188, RN-71
- Logical Pathnames 4-217
- logical pathnames for **nil** 5-186
- logical pathnames for quoting 5-186
- logical pathname to physical pathname 5-186, 5-199
- Logical Pathname Translation 5-188, 5-189, RN-71
- logical pathname translation 5-196
- logical pathname translation rules 5-192
- Logical Pathname Translations RN-71
- Logical Pathname Wildcard Syntax 5-188, RN-71
- :login** 9-21
- Login 9-65
- Login Command 1-28
- Login errors 2-547
- login** function 1-156, 8-71
- Login Problems 2-547
- login** Service 9-58
- login-forms** special form 1-157, 1-158, 1-162, 1-163
- login-history** variable 0-48
- login-name:** User Object Attribute 9-12
- fs:** **login-problems** flavor 2-547
- fs:** **login-required** flavor 2-548
- Login and Logout* Commands 1-28
- Login Capability 9-67, RN-75
- Login Facilities 9-69
- :login** initialization list 8-71
- :login** option for **add-initialization** 8-67
- Login QFILE Command 9-184
- login-to-sys-host** function 0-83
- login with machine in use 9-70
- logior** function 2-113
- %logldb** function 2-117
- lognot** function 2-114
- Logout Command 1-29
- logout** function 1-157, 8-71
- logout-list** variable 1-157
- Logout* Commands 1-28
- :logout** initialization list 8-71
- :logout** option for **add-initialization** 8-67
- [Logout] Save-Exit menu item 6-17
- logxor** function 2-113

- :long** day-of-the-week-representation 7-370
- Long Documentation 3-47
- cl:** **long-float** format 2-23
- Fill Long Comment (m-X) Zmacs command 4-23
- Long Documentation (m-sh-D) Zmacs command 4-39, 4-42
- Request for N longs failed. 1-44, 1-199
- Look-ahead 7-12, 7-135
- Looking up Documentation 1-120
- File Lookup 2-548
- SCL case checking in package-name Documentation lookup 2-640
- Lookup Commands 1-122
- Lookup Commands Available At a Lisp Listener and in Zmacs 1-128
- Lookup Commands Available in an Editor 1-128
- Lookup Commands Available in the Document Examiner 1-127
- Lookup Commands Available in the Document Examiner, Editor, and Command Processor 1-122
- Lookup Commands Available in the Document Examiner and Editor 1-123
- File lookup errors 2-548
- SCL and file lookup errors 2-645
- Interfacing to the Service Break Lookup Mechanism 9-208
- CLM: the Top-level Break loop 1-151
- Data Types Recognized by **loop** 2-642
- Enter a breakpoint **loop** 2-219
- Introduction to **loop** 1-180
- Read-eval-print **loop** 2-205
- Top-level **loop** 1-151, 1-155
- loop** 1-151
- Loop epilogue 2-205, 2-212
- loop** iteration 2-221
- loop** macro 2-205
- Loop prologue 2-205, 2-212
- loop** Synonyms 2-218
- Loop termination 2-212, 2-214
- loop-finish** macro 2-215
- si:** **loop-tassoc** function 2-228
- si:** **loop-tequal** function 2-228
- si:** **loop-tmember** function 2-228
- Loop Back bit 9-131
- Expressions in **loop** constructs 2-206
- fixnum** **loop** data-type keyword 2-219
- flonum** **loop** data-type keyword 2-219
- integer** **loop** data-type keyword 2-219
- notype** **loop** data-type keyword 2-219
- number** **loop** data-type keyword 2-219
- Loop exit code 2-205, 2-212
- How to Use the **loop** Indentor 3-163
- New **loop** Indentor RN-47
- The **loop** Indentor 3-162
- Loop Indentor Example 1 3-163
- Loop Indentor Example 2 3-163
- Looping Through Audio Command Lists 7-334
- Loop initialization code 2-205, 2-212
- Loop Input Editor Example 5-56, 7-24
- Loop Iteration 2-75
- Loop Iteration 2-79
- loop** iteration Macro 2-205
- loop** iteration Over Hash Tables or Heaps 2-224
- loop** iteration path 2-225
- loop** iteration path 2-225, 2-257
- loop** iteration path 2-224
- loop** iteration path 2-224
- Command **array-element**
- Hash Tables and **array-elements**
- Heaps and **hash-elements**
- The **heap-elements**

<b>interned-symbols</b>	<b>loop</b>	iteration path	2-225
<b>local-interned-symbols</b>	<b>loop</b>	iteration path	2-225
<b>above</b>	<b>loop</b>	keyword	2-207, 2-225
<b>always</b>	<b>loop</b>	keyword	2-215
<b>and</b>	<b>loop</b>	keyword	2-207, 2-210, 2-216, 2-222
<b>append</b>	<b>loop</b>	keyword	2-212
<b>appending</b>	<b>loop</b>	keyword	2-212
<b>as</b>	<b>loop</b>	keyword	2-207
<b>being</b>	<b>loop</b>	keyword	2-207, 2-222
<b>below</b>	<b>loop</b>	keyword	2-207, 2-225
<b>by</b>	<b>loop</b>	keyword	2-207, 2-225
<b>collect</b>	<b>loop</b>	keyword	2-212
<b>collecting</b>	<b>loop</b>	keyword	2-212
<b>count</b>	<b>loop</b>	keyword	2-212
<b>counting</b>	<b>loop</b>	keyword	2-212
<b>do</b>	<b>loop</b>	keyword	2-212
<b>doing</b>	<b>loop</b>	keyword	2-212
<b>downfrom</b>	<b>loop</b>	keyword	2-207, 2-225
<b>downto</b>	<b>loop</b>	keyword	2-207, 2-225
<b>each</b>	<b>loop</b>	keyword	2-207, 2-222
<b>else</b>	<b>loop</b>	keyword	2-216
<b>finally</b>	<b>loop</b>	keyword	2-212
<b>first</b>	<b>loop</b>	keyword	2-207
<b>for</b>	<b>loop</b>	keyword	2-207
<b>from</b>	<b>loop</b>	keyword	2-207, 2-225
<b>her</b>	<b>loop</b>	keyword	2-222
<b>his</b>	<b>loop</b>	keyword	2-222
<b>if</b>	<b>loop</b>	keyword	2-216
<b>in</b>	<b>loop</b>	keyword	2-207, 2-222, 2-225
<b>index</b>	<b>loop</b>	keyword	2-222, 2-225
<b>initially</b>	<b>loop</b>	keyword	2-212
<b>into</b>	<b>loop</b>	keyword	2-212
<b>it</b>	<b>loop</b>	keyword	2-216
<b>its</b>	<b>loop</b>	keyword	2-207, 2-222
<b>maximize</b>	<b>loop</b>	keyword	2-212
<b>minimize</b>	<b>loop</b>	keyword	2-212
<b>named</b>	<b>loop</b>	keyword	2-218
<b>nconc</b>	<b>loop</b>	keyword	2-212
<b>nconcing</b>	<b>loop</b>	keyword	2-212
<b>never</b>	<b>loop</b>	keyword	2-215
<b>nodeclare</b>	<b>loop</b>	keyword	2-210
<b>of</b>	<b>loop</b>	keyword	2-222, 2-225
<b>on</b>	<b>loop</b>	keyword	2-207
<b>repeat</b>	<b>loop</b>	keyword	2-207
<b>return</b>	<b>loop</b>	keyword	2-216, 2-218
<b>sum</b>	<b>loop</b>	keyword	2-212
<b>summing</b>	<b>loop</b>	keyword	2-212
<b>the</b>	<b>loop</b>	keyword	2-207, 2-222
<b>their</b>	<b>loop</b>	keyword	2-222
<b>then</b>	<b>loop</b>	keyword	2-207
<b>thereis</b>	<b>loop</b>	keyword	2-215
<b>to</b>	<b>loop</b>	keyword	2-207, 2-225
<b>unless</b>	<b>loop</b>	keyword	2-216
<b>until</b>	<b>loop</b>	keyword	2-214
<b>upfrom</b>	<b>loop</b>	keyword	2-207
<b>using</b>	<b>loop</b>	keyword	2-222, 2-225
<b>when</b>	<b>loop</b>	keyword	2-216
<b>while</b>	<b>loop</b>	keyword	2-214
<b>with</b>	<b>loop</b>	keyword	2-210
<b>with-key</b>	<b>loop</b>	keyword	2-224
<b>SCL</b>	<b>loop</b>	macro	2-635
<b>TAB in</b>	<b>loop</b>	macro	3-162, RN-47
<b>indentation in</b>	<b>loop</b>	Macros	3-162
<b>sl:</b>	<b>loop-named-variable</b>	function	2-229
	<b>loop</b>	Now Supports Iteration Over Hash Tables or Heaps	RN-42

Bindings in loops 2-210, 2-220  
 Binding Standard Variables for Writing Lisp Style Command  
     Loops 1-153  
 Evaluation in loops 2-212  
 Standard Variable Bindings Now Guarantee Consistent Behavior in Break and Debugging  
     Loops RN-42  
 Lisp Listeners and **break**  
     **si:** Loops Catch Trivial Errors in the Input Editor RN-66  
           **loop-use-system-destructuring?** variable 2-221  
           LOS Lossage packet 9-117  
 Chaos:  
     LOS los-received-state connection state 9-136  
         Lossage packet 9-117  
         Lost records 0-37  
         Lost connection state 9-121  
         Lost Count bit 9-131  
         Low-level: Chaosnet Software Protocol 9-121  
     Set Lowercase (m-X) Zmacs command 3-142, 3-143, 4-10  
         Lowercase file attribute 3-142, 3-143, 5-109  
         Lowercase format directive 5-34  
         Lowercase in pathname components 5-145  
         **lower-case-p** function 2-270  
 Enclose character in lozenge 5-34  
     Lozenge format directive 5-34  
     **lsh** function 2-114  
     LSN Listen packet 9-114  
     Lsubs 2-151  
     c-X L Zmacs command 3-48  
     HELP L Zmacs command 1-51, 3-14, 3-46  
         L Zmail command 6-75

**M****M****M**

FUNCTION M 1-141  
 SELECT M 3-40  
     M (Kbd) Zmail Command 6-29  
 Meters (M) 1-187  
     [Find (M)] 1-124, 1-133  
     [Help (M)] 1-133  
     [Private (M)] 1-133  
     [Viewer (M)] 1-133  
     [Show (M)] Document Examiner menu item 1-127, 1-133  
     [Move (M)] Zmail command 6-77  
     [Mail (M)] Zmail Menu Item 6-27  
     [Filters (M)] Zmail Profile Mode command 6-73  
     [Universes (M)] Zmail Profile Mode command 6-73  
 Query Replace (m-%) Zmacs command 4-57  
     m-% Zmacs command 3-102  
     m-) Zmacs command 3-67  
     m- 1-85  
     m-. 2-471  
     (m-.) Zmacs command 4-40, 4-141, 4-142  
     m-. Command 3-181  
     m-; Zmacs command 3-171  
     m-< 1-134  
     m-< Debugger command 4-264, 4-271  
     m-< Zmacs command 1-50, 3-26, 3-70  
     m-= Zmacs command 3-48  
     m-> 1-134  
     m-> Debugger command 4-264, 4-271  
     m-> Zmacs command 1-50, 3-26, 3-70  
     m-@ Zmacs command 3-91  
     m-ABORT 1-139  
     m-A Zmacs command 1-50, 3-26  
     m-B Debugger command 4-80, 4-264, 4-271  
     m-BREAK Debugger command 2-532  
     m-B Zmacs command 1-50, 3-26, 3-61

	m-C Zmacs command 3-160
	m-D Zmacs command 1-53, 3-28, 3-78
Evaluate Minibuffer	(m-ESCAPE) Zmacs command 4-75
	m-ESCAPE Zmacs command 3-175
	m-E Zmacs command 3-62
	m-F Zmacs command 1-50, 3-26, 3-61
	m-H Zmacs command 3-92
	m-I Debugger command 4-264, 4-267, 4-271
	m-K Zmacs command 1-53, 3-28, 3-83
	m-L Debugger command 4-80, 4-264, 4-271
Indent New Comment Line	(m-LINE) Zmacs command 4-23
	m-LINE Zmacs command 3-172
	m-L Zmacs command 3-160
Down Comment Line	(m-N) Zmacs command 4-23
	m-N Debugger command 4-264, 4-271
	m-N Zmacs command 3-172
	m-O Zmacs command 3-166
Up Comment Line	(m-P) Zmacs command 4-23
	m-P Debugger command 4-264, 4-271
	m-P Zmacs command 3-172
FUNCTION	m-Q 1-108, 1-141, 3-268
	m-RUBOUT Zmacs command 1-53, 3-28, 3-78
	m-R Zmacs command 3-56
	m-SCROLL 1-134
SCROLL and	m-SCROLL Now Display Next Screen and Previous Screen RN-47
	m-SCROLL Zmacs command 1-50, 3-26, 3-56
	m-S Debugger command 4-264, 4-271
Push Pop Point Explicit	(m-SPACE) Zmacs command 4-59
	m-SUSPEND 1-146
Entering the Debugger with	m-SUSPEND 1-194, 4-256
	m-S Zmacs command 3-164
	m-T Zmacs command 3-78
	m-U Zmacs command 3-160
	m-V 1-134
	m-V Zmacs command 1-50, 3-26, 3-56
Save Region	(m-W) Zmacs command 4-60
	m-W Zmacs command 3-94
	m-X 1-49, 3-7
Init File Form: Edit Buffers on	m-X 1-169, 3-216
Abort Patch	(m-X) 3-191, 4-243
Add Patch	(m-X) 3-188, 4-240
Add Patch Changed Definitions	(m-X) 3-189, 4-241
Add Patch Changed Definitions of Buffer	(m-X) 3-188, 4-241
Arglist	(m-X) 3-48
Finish Patch	(m-X) 3-190, 4-242
Recompile Patch	(m-X) 3-192, 4-243, RN-49
Reload Patch	(m-X) 3-192, 4-244, RN-49
Resume Patch	(m-X) 3-191, 4-243
Select Patch	(m-X) 3-190, 4-242
Set Syntax	(m-X) 3-140
Setting the Zmacs Font with Set Fonts	(m-X) 1-80
Start Patch	(m-X) 3-187, 4-239
Start Private Patch	(m-X) 3-188, 4-240
View Patches	(m-X) 3-190, 4-242
Append Buffer	(m-X) Converse Command 1-71
Append Conversation	(m-X) Converse Command 1-72
Delete Conversation	(m-X) Converse Command 1-71
Regenerate Buffer	(m-X) Converse Command 1-72, 6-103
Write Buffer	(m-X) Converse Command 1-71
Write Conversation	(m-X) Converse Command 1-71
Append To File	(m-X) Zmacs command 3-124
Arglist	(m-X) Zmacs command 3-48
Atom Word Mode	(m-X) Zmacs command 4-12
Auto Fill Mode	(m-X) Zmacs command 4-12
Change File Properties	(m-X) Zmacs command 3-133

Clean Directory	(m-X) Zmacs command	3-136
Compile Buffer	(m-X) Zmacs command	4-70
Compile Changed Definitions	(m-X) Zmacs command	4-70
Compile File	(m-X) Zmacs command	4-73
Compile Region	(m-X) Zmacs command	3-94, 4-316
Compiler Warnings	(m-X) Zmacs command	4-79, 4-321
Copy File	(m-X) Zmacs command	3-134, 5-105, 5-153
Create Directory	(m-X) Zmacs command	3-131
Create Link	(m-X) Zmacs command	3-135
Deinstall Macro	(m-X) Zmacs command	3-204, 4-64
Delete File	(m-X) Zmacs command	3-135
Describe Flavor	(m-X) Zmacs command	4-141
Describe Variable	(m-X) Zmacs command	3-210
Dired	(m-X) Zmacs command	3-144, 4-45
Disassemble	(m-X) Zmacs command	4-104
Edit Buffers	(m-X) Zmacs command	3-118
Edit Callers	(m-X) Zmacs command	4-44
Edit Changed Definitions	(m-X) Zmacs command	4-56
Edit Changed Definitions Of Buffer	(m-X) Zmacs command	4-56
Edit Combined Methods	(m-X) Zmacs command	4-142
Edit Compiler Warnings	(m-X) Zmacs command	4-79, 4-321
Edit Directory	(m-X) Zmacs command	3-144
Edit File Warnings	(m-X) Zmacs command	4-321
Edit Methods	(m-X) Zmacs command	4-65, 4-142
Electric Shift Lock Mode	(m-X) Zmacs command	4-12
Evaluate and Replace Into Buffer	(m-X) Zmacs command	3-175, 4-75
Evaluate Buffer	(m-X) Zmacs command	3-175, 4-75
Evaluate Changed Definitions	(m-X) Zmacs command	3-175, 4-75
Evaluate Changed Definitions of Buffer	(m-X) Zmacs command	3-175
Evaluate Into Buffer	(m-X) Zmacs command	3-175, 4-75
Evaluate Region	(m-X) Zmacs command	3-175
Fill Long Comment	(m-X) Zmacs command	4-23
Find File In Fundamental Mode	(m-X) Zmacs command	3-122
Find Unbalanced Parentheses	(m-X) Zmacs command	3-48, 4-26
Format Buffer	(m-X) Zmacs command	3-33, 3-38, RN-49
Format File	(m-X) Zmacs command	3-33, 3-38, RN-49
Format Region	(m-X) Zmacs command	3-33, 3-38, RN-49
Function Apropos	(m-X) Zmacs command	4-41
Hardcopy Buffer	(m-X) Zmacs command	1-107, 3-119, 3-267
Insert Buffer	(m-X) Zmacs command	3-124, 4-63
Insert File	(m-X) Zmacs command	3-124, 4-63
Install Command	(m-X) Zmacs command	3-209
Install Macro	(m-X) Zmacs command	3-203, 4-64
Install Mouse Macro	(m-X) Zmacs command	4-64
Lisp Mode	(m-X) Zmacs command	3-170, 4-12
List Callers	(m-X) Zmacs command	1-177, 4-38, 4-44
List Changed Definitions	(m-X) Zmacs command	4-56
List Changed Definitions of Buffer	(m-X) Zmacs command	3-183, 4-56
List Combined Methods	(m-X) Zmacs command	4-142
List Definitions	(m-X) Zmacs command	3-183
List Files	(m-X) Zmacs command	3-131
List Fonts	(m-X) Zmacs command	1-75, 1-174, 3-223, 3-271, 7-142
List Matching Lines	(m-X) Zmacs command	4-57
List Matching Symbols	(m-X) Zmacs command	4-38
List Methods	(m-X) Zmacs command	4-142
List Variables	(m-X) Zmacs command	3-210
Load Compiler Warnings	(m-X) Zmacs command	4-79, 4-321
Load File	(m-X) Zmacs command	4-73
Macro Expand Expression All	(m-X) Zmacs command	4-100
Multiple Edit Callers	(m-X) Zmacs command	4-44
Multiple List Callers	(m-X) Zmacs command	4-44
Name Last Kbd Macro	(m-X) Zmacs command	3-203, 4-64
Prepend To File	(m-X) Zmacs command	3-124
Print Modifications	(m-X) Zmacs command	4-56
Query Replace	(m-X) Zmacs command	3-102



Reap File	(m-X) Zmacs command	3-136
Rename Buffer	(m-X) Zmacs command	3-119
Rename File	(m-X) Zmacs command	3-133, 5-153
Reparse Attribute List	(m-X) Zmacs command	3-137, 4-10
Replace String	(m-X) Zmacs command	3-102
Revert Buffer	(m-X) Zmacs command	3-121
Select All Buffers As Tag Table	(m-X) Zmacs command	4-57
Select System As Tag Table	(m-X) Zmacs command	4-57
Set Backspace	(m-X) Zmacs command	3-141, 3-143, 4-10
Set Base	(m-X) Zmacs command	3-141, 3-143, 4-10
Set Fonts	(m-X) Zmacs command	3-141, 3-143, 4-10
Set Key	(m-X) Zmacs command	4-64
Set Lowercase	(m-X) Zmacs command	3-142, 3-143, 4-10
Set Nofill	(m-X) Zmacs command	3-142, 3-143, 4-10
Set Package	(m-X) Zmacs command	3-138, 3-143, 4-10
Set Patch File	(m-X) Zmacs command	3-143, 4-10
Set Tab Width	(m-X) Zmacs command	3-143, 4-10
Set Variable	(m-X) Zmacs command	3-212
Set Visited File Name	(m-X) Zmacs command	3-122
Set Vsp	(m-X) Zmacs command	3-143, 4-10
Show Directory	(m-X) Zmacs command	3-132
Show File	(m-X) Zmacs command	3-132
Source Compare	(m-X) Zmacs command	3-125, 4-56
Source Compare Merge	(m-X) Zmacs command	3-125, 4-56
Split Screen	(m-X) Zmacs command	4-65
Tags Query Replace	(m-X) Zmacs command	4-57
Tags Search	(m-X) Zmacs command	4-57
Trace	(m-X) Zmacs command	3-48, 4-92, 4-94
Uncomment Region	(m-X) Zmacs command	3-173
Update Attribute List	(m-X) Zmacs command	3-138, 4-10
View Buffer	(m-X) Zmacs command	3-119
View Directory	(m-X) Zmacs command	3-132, 4-45
View File	(m-X) Zmacs command	3-132
View File Properties	(m-X) Zmacs command	3-133
View Kbd Macro	(m-X) Zmacs command	3-200
View Mail	(m-X) Zmacs Command	6-48
Where Is Symbol	(m-X) Zmacs command	2-571, 4-38
Apropos	(m-X) Zmail command	6-5, 6-15
Bug	(m-X) Zmail Command	6-29
Check for New Mail	(m-X) Zmail Command	6-48
Decrypt Msg	(m-X) Zmail command	1-67
Delete Duplicate Msgs	(m-X) Zmail command	6-68
Delete Referenced Msgs	(m-X) Zmail command	6-68
Find String	(m-X) Zmail command	6-49, 6-67
Forward	(m-X) Zmail Command	6-29
Insert File	(m-X) Zmail Command	6-45
List Sequences	(m-X) Zmail Command	6-77
Move to Default Previous Point	(m-X) Zmail command	6-50
Move to Previous Point	(m-X) Zmail command	6-50
Occur	(m-X) Zmail command	6-49
Redistribute Msg	(m-X) Zmail Command	6-29
Redo	(m-X) Zmail Command	6-25
Revoke Msg	(m-X) Zmail Command	6-25
Select Arbitrary Format Mail File	(m-X) Zmail command	6-95
Select Conversation	(m-X) Zmail command	6-69
Show Draft Disposition	(m-X) Zmail command	6-42
Start Background Save	(m-X) Zmail Command	6-81
Undigestify	(m-X) Zmail Command	6-48
Undo	(m-X) Zmail Command	6-25
Completion for Extended Commands	(m-X Commands)	1-84
Append Buffer	m-X Converse Command	6-103
Append Conversation	m-X Converse Command	6-103
Delete Conversation	m-X Converse Command	6-102
Write Buffer	m-X Converse Command	6-102
Write Conversation	m-X Converse Command	6-102
	m-X Debugger command	4-264, 4-271

- Delete Duplicate Messages
- Yank Pop
- Init File Form:
  - m-X Zmail Command 6-56
  - (m-Y) Zmacs command 4-60
  - m-Y input editor command 4-77
  - m-Y yank command 3-15, 3-51, 3-74
  - m-Z Zmacs command 3-176
  - m-[ Zmacs command 1-50, 3-26, 3-68
  - m-\ Zmacs command 1-53, 3-28
  - m-] Zmacs command 1-50, 3-26, 3-68
  - m-^ Zmacs command 1-53, 3-28, 3-166
  - m-. on m-(L) 1-169, 3-216
  - M2284 disk drive 1-214
  - M2351 disk drive 1-214
  - M2:Save/Kill/Yank mouse click 3-57
  - M:Mark thing mouse click 3-57
  - m-;) Zmacs command 4-23
  - Machine 1-9
  - machine 0-49
  - machine-model** function 1-224
  - machine-type:** Host Object Attribute 9-8
  - Machine Character Set 5-5
  - Machine command 1-201
  - Machine Command 1-23
  - Machine Crashed 1-214
  - Machine File System 5-203
  - Machine Fonts 1-75
  - Machine Generic Network System 9-37
  - Machine Implementation 9-134
  - Machine is Doing 1-177
  - Machine Namespace Server Files 9-24
  - machines 0-87
  - machines 0-87
  - machines 0-49
  - Machines and Printers? 1-229
  - Machines at site 1-72, 6-103, 9-135
  - Machine tape spec parameter 0-26
  - Maclisp 1-184, 2-205, 2-305
  - Maclisp 1-235
  - Maclisp compatibility 2-503
  - Maclisp Conversion 5-201
  - Maclisp **allfiles** function 5-201
  - Maclisp Array Compatibility 2-262
  - Maclisp Compatibility 2-36
  - Maclisp-compatible String-manipulation Functions 2-292
  - Maclisp **crunit** function 5-201
  - Maclisp **default** function 5-201
  - Maclisp **directory** function 5-201
  - Maclisp file manipulation 5-201
  - Maclisp function 2-262
  - Maclisp function 2-262
  - Maclisp function 2-262
  - Maclisp Lexprs 2-165
  - Maclisp **mergef** function 5-201
  - Maclisp Must Compile 4-329
  - Maclisp **namelist** function 5-201
  - Maclisp **namestring** function 5-201
  - Maclisp **open** function 5-91
  - Maclisp property names 2-564
  - Maclisp **status homedir** function 5-201
  - Maclisp **status udir** function 5-201
  - Maclisp system property names 2-564
  - Maclisp **truename** function 5-201
  - Maclisp type 2-305
  - Maclisp type 2-305
  - Maclisp type 2-305
  - Maclisp type 2-305
- Indent For Comment (c-; or Communicating with the Lisp Source)
  - si:
  - Lisp
  - Clear
  - Halt
  - Finding Out Why Your Lisp
  - Standard Lisp
  - The Lisp
  - Chaosnet Lisp
  - Checking on What the Lisp
  - Distributing a new world to other
  - Installing new
  - Target
  - Why Do You Name
  - Sending message to all Lisp
- Notation Conventions for
- Readtable Functions for
- dumparrays**
- loadarrays**
- \*rearray**
- Functions for Compatibility with
- Files That
- expr**
- fexpr**
- Lexpr
- macro**

	Maclisp <b>uread</b> function	5-201
	<b>macro</b>	4-310
	Macro	2-30
#♦	Reader	Macro 2-28
#'	Reader	Macro 2-29
#+	Reader	Macro 2-28
#,	Reader	Macro 2-30
#-	Reader	Macro 2-29
#.	Reader	Macro 2-30
#<	Reader	Macro 2-29
#b	Reader	Macro 2-29
#m	Reader	macro 4-329
#M	sharp-sign reader	Macro 2-29
	#n Reader	Macro 2-29
	#o Reader	Macro 2-643
	#P Reader	Macro 2-29
	#q Reader	macro 4-329
#Q	sharp-sign reader	Macro 2-29
	#r Reader	Macro 2-29
	#x Reader	Macro 2-27
#\	or #/ Reader	Macro 2-28
	#~ Reader	Macro 2-30
	#  Reader	macro 4-213
:skip	defsystem	macro 2-263
	array	macro 7-334
	audio:audio-loop	macro 7-333
audio:computing-immediate-audio-samples		macro 7-333
audio:push-immediate-audio-sample		macro 7-334
audio:set-audio-repeat-count		macro 7-330
audio:with-audio		Macro 3-200
Calling the Last Keyboard		macro 2-505
	check-arg	macro 2-506
	check-arg-type	macro 2-438, 2-485, 4-133
comple-flavor-methods		macro 2-494, 2-495
dbg:with-erring-frame		macro 2-149
	defc	macro 2-428, 4-113, 4-116
	defflavor	macro 2-308
	@define	macro 2-218
	define-loop-macro	macro 2-227
	define-loop-path	macro 2-225
	define-loop-sequence-path	Macro 3-202
Defining an Interactive Keyboard		Macro 3-199
Definition of a Zmacs Keyboard		macro 2-344
	defmacro	macro 2-372
	defmacro-displace	macro 2-429
	defmethod	macro 2-345, 2-383
	defstruct	macro 2-409
defstruct-define-type		macro 2-302, 2-305
	defunp	macro 2-464
	defwhopper-subst	macro 2-461
	defwrapper	Macro 3-204
Deinstalling a		Macro 3-200
Ending a Keyboard		Macro 3-200
Example of Calling the Last Keyboard		Macro 3-204
Example of Installing and Deinstalling a		macro 5-48
	format:breakline	macro 5-45
	format:outfmt	macro 5-45
	format:output	macro 5-47
	format:pad	macro 9-55
fs:define-file-protocol		macro 4-329
	if-for-lispm	macro 4-329
	if-for-maclisp	macro 4-329
if-for-maclisp-else-lispm		macro 4-329
	if-in-lispm	macro 4-329
	if-in-maclisp	macro 2-149
	incc	macro 4-323
inhibit-style-warnings		

- Installing a Mouse Macro 3-203
- locf** macro 2-148
- loci** macro 2-83
- loop** macro 2-205
- loop-finish** macro 2-215
- meter:with-monitoring** macro 8-63
- Naming a Keyboard Macro 3-203
- net:define-medium** macro 9-209
- net:invoke-multiple-services** macro 9-50
- neti:with-server-error-disposition** macro 9-54
- once-only** macro 2-365
- pkg-bind** macro 2-598
- pop** macro 2-150
- push** macro 2-150
- push-in-area** macro 2-150
- SCL and # + Reader Macro 2-644, 2-645
- SCL and #- Reader Macro 2-644, 2-645
- SCL and **defstruct** macro 2-642
- SCL and **prog1** macro 2-639
- SCL and **prog2** macro 2-639
- SCL and **progv** macro 2-639
- SCL and returned values from **cond** macro 2-639
- SCL **loop** macro 2-635
- self** macro 2-147, 7-308
- si:check-memory-scan** macro 8-111
- si:define-simple-method-combination** macro 2-459
- si:encapsulate** macro 2-326
- si:inhibit-gc-flips** macro 8-125
- si:scanning-through-memory** macro 8-111
- stack-let** macro 8-27
- stack-let\*** macro 8-28
- standard-value-let** macro 1-153
- standard-value-let\*** macro 1-153
- standard-value-progv** macro 1-154
- Starting a Keyboard Macro 3-200
- Start Kbd Macro 3-199
- swapf** macro 2-149
- sys:defsubst-with-parent** macro 2-319
- sys:printing-random-object** macro 2-18
- sys:with-indentation** macro 5-49
- sys:with-open-file-search** macro 5-97
- TAB in **loop** macro 3-162, RN-47
- The **loop** iteration Macro 2-205
- undefmethod** macro 2-437, 2-468
- unless** macro 2-179
- unwind-protect-case** macro 2-199
- Viewing a Keyboard Macro 3-200
- when** macro 2-179
- with-open-file-case** macro 5-96
- with-open-stream-case** macro 5-97
- zwei:with-editor-stream** macro 7-377
- Macro character 2-26, 2-32
- Macro characters 1-233
- Call Last Kbd Macro (c-X E) Zmacs command 4-64
- Deinstall Macro (m-X) Zmacs command 3-204, 4-64
- Install Macro (m-X) Zmacs command 3-203, 4-64
- Install Mouse Macro (m-X) Zmacs command 4-64
- Name Last Kbd Macro (m-X) Zmacs command 3-203, 4-64
- View Kbd Macro (m-X) Zmacs command 3-200
- Macro-defining macros 2-343, 2-345
- Macro-expander functions 2-368
- macro-expander functions 2-138
- Macro-expander functions and lexical scoping 2-138
- New Macro: **defwhopper-subst** RN-32
- New Macro: **unwind-protect-case** RN-37
- macro** and lexical scoping 2-138

- Backquote macro character 2-26
- Comma macro character 2-26
- Quote macro character 2-26
- Semicolon (;) macro character 2-26
- Sharp-sign macro character 2-26
- SCL and *non-terminating* macro character attribute 2-643
- CLM: Macro Characters 2-643
- Functions That Change Characters Into Macro Characters 2-35
- How the Reader Recognizes Macro Characters 2-26
- Notation Conventions for Macro Characters 1-233
- CLM: Standard Dispatching Macro Character Syntax 2-644
- CLM: Macro Definition 2-639
- Selective evaluation in macro definitions 2-345
- SCL and equivalent macro definitions for special forms 2-638
- macroexpand** RN-11
- macroexpand** function 2-375
- macroexpand-1** RN-11
- macroexpand-1** function 2-375
- si:** **\*macroexpand-hook\*** RN-11
- si:** **\*macroexpand-hook\*** variable 2-375
- Macro Expand Expression (c-sh-M) Zmacs command 4-100
- Macro Expand Expression All (m-X) Zmacs command 4-100
- Macro Expand Expression All Now Bound to m-sh-M RN-47
- Macro Expansion RN-11
- macro expansions 2-371
- macro for infix expressions 2-30
- macro form 2-642
- macrolet** special form 2-144
- macrolet** Special Forms 2-142
- macro** Maclisp type 2-305
- Macro on a Key 3-203
- Macro PCs 1-216
- Macro Query 3-202
- Macros 2-144, 2-303, 2-305, 2-337
- macros 2-27
- Macros 2-369
- Macros 2-343
- Macros 2-397
- Macros 2-396
- macros 2-26
- macros 2-379, 2-395
- Macros 3-199
- Macros 2-371
- Macros 3-206
- Macros 3-201
- Macros 3-206
- Macros 3-202
- Macros 4-100
- Macros 2-375
- Macros 3-162
- Macros 2-339
- Macros 2-379
- Macros 4-64
- Macros 2-355
- macros 2-337
- macros 2-343, 2-345
- Macros 3-205
- Macros 2-366
- Procedure for Creating Zmacs Commands with Keyboard Macros 3-199
- Sharp-sign introducing reader macros 1-233
- Sharp-sign Reader Macros 2-27



- Initialize
  - Show Mail Command 1-24
  - Zmail Mail Command 1-38
- Files and Directories Used by the
  - Installing and Configuring the Overview of the Symbolics Store-and-Forward Mail Command 6-27
- Mailer
  - 6-113
  - 0-61
  - 6-109
  - 6-107
  - Functions 6-111
  - installation 0-61
  - options 6-113
  - program 6-11
  - mailer:disable** function 6-111
  - mailer:enable** function 6-112
  - mailer:hardcopy-all-mail** function 6-112
  - mailer:hardcopy-all-mail-for-user** function 6-112
  - mailer:hardcopy-last-mail** function 6-112
  - mailer:hardcopy-last-mail-for-user** function 6-112
  - mailer:hardcopy-new-mail** function 6-112
  - mailer:hardcopy-new-mail-for-user** function 6-112
  - mailer:land** function 6-111
  - mailer:launch** function 6-111
  - mailer:relaunch** function 6-111
  - mailer:start** function 6-111
  - mailer:stop** function 6-111
  - mailer:update-options** function 6-112
  - mailer:update-forwarding-tables** function 6-112
  - mailer:update-mailbox-tables** function 6-112
- Mailer Crashes 6-117
- Mailer forwarding files 6-113
- Mailer options 0-61
- mail file 1-57
- mail file 6-11, 6-12
- mail file 1-64, 6-46
- Mail File 1-67
- Mail File (m-X) Zmail command 6-95
- \*mail-file-for-drafts\*** variable 6-91
- mail file format 6-95
- mail file format 6-95, 6-96
- mail file format 6-95, 6-96
- mail file format 6-95, 6-96
- mail file format 6-95
- mail file formats 6-95
- Mail File Formats for Zmail 6-95
- mail file names 6-94
- mail file names 6-94
- Mail Files 6-81
- Mail Files 6-78
- mail files 6-77
- Mail Files and Collections 6-77
- [Mail files] Profile Mode menu item 6-77, 6-78
- Mailing lists 6-96
- mailing list 2-524
- mailing lists 0-61
- Mail menu item 6-70
- Mail menu item 6-27
- Mail menu item 6-70
- \*mail-middle-mode\*** variable 6-87
- Mail Mode 6-46
- Mail Mode in Zmail 6-37
- Mail Mode in Zmail 6-42
- mail mode recursively 6-45
- MAIL pathname type abbreviation 5-180
- Mail Protocol 9-125
- MAIL protocol reply 9-125
- mail recipients 6-31
- mail sequence commands 6-71
- What to Do When the
  - Setting up
    - Current
    - Default
    - Primary
  - Saving the
    - Select Arbitrary Format
  - zwei:**
    - BABYL
    - RMAIL
    - TENEX
    - UNIX
    - VAX/VMS
    - Standard
  - Default
  - Other
- Hints for Using Keywords, Mail Collections, and Saving a List of
  - Selecting
  - Listing Zmail Buffers,
- BUG-LISPM
  - Creating
  - [Forward]
  - [Local]
  - [Redistribute]
  - zwei:**
  - Recursive
  - Leaving
    - Enter
  - Chaosnet
  - Bug
  - Rearranging

- Configuring Large Sites for Multiple
  - Network System Virtual List File System
    - [Complete Dump] File System
    - [Flush Free Buffer] File System
    - [Free Records] File System
    - [HELP] File System
    - [Incremental Dump] File System
    - [Lisp Window] File System
    - [List FEP FS Root] File System
    - [Maintenance] File System
    - [Print Herald] File System
    - [QUIT] File System
    - [Reload/Retrieve] File System
    - [Salvage] File System
    - [Server Errors] File System
    - [Server Shutdown] File System
    - [Tree edit any] File System
    - [Tree edit Homedir] File System
    - [Tree edit root] File System
    - [Active Structure Edit]
    - [Check Records]
    - [Close All Files]
    - [Expunge All FS]
    - [Initialize]
    - MNT File System
    - Free Records: File System
- Mail Servers 0-64
- mail-to-user** Service 9-59
- [Mail] Zmail menu item 1-62, 6-27
- :maintaining-sites** Option for **defsystem** 4-196
- Maintaining Large Programs 4-187
- maintenance 9-124
- maintenance 4-231
- Maintenance 7-315
- Maintenance Commands 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-10, 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39
- Maintenance menu item 0-39, 5-231
- Maintenance menu item 0-39, 5-231
- Maintenance menu item 0-39, 5-231
- Maintenance Operations menu item 0-39
- Maintenance Operations menu item 0-39
- Maintenance Operations menu item 0-39
- Maintenance Operations menu item 0-39
- Maintenance Operations menu item 0-39
- Maintenance packet 9-121
- Maintenance Program 0-37
- Maintenance Program 0-37
- [Maintenance] File System Maintenance menu item 0-39
- Main Zmail window 6-11, 6-13
- Major modes 5-153
- Major version 4-236
- Major-mode** 3-20
- Major and Minor Modes 4-12
- Major Editing Modes 3-156
- major mode 3-198
- Major Mode 1-168, 3-213
- Major Mode 3-155
- major mode for file 5-109
- major modes 5-153
- Major Modes 3-198
- Major Modes 3-198
- Major Modes 3-198
- \*major-mode-translations\*** variable 3-198
- major release 0-87
- major release on a newly acquired machine 0-87
- Major version number 4-231
- Make region 3-57
- make-area** 8-104
- make-area** 8-104, 8-107
- make-area** 8-104
- make-area** 8-104
- make-area** 8-104
- make-area** 8-104
- make-area** 8-104
- make-area** command 8-107
- make-area** function 8-104
- make-array** 2-241, 8-31
- make-array** 2-241, 8-31

- Upgrading an existing system to a new
  - Bringing up a new
    - :capacity** option for
    - :gc** option for
    - :name** option for
    - :representation** option for
    - :room** option for
    - :size** option for
  - :area** option for
  - :type** option for



- make-array** function 2-235, 2-241, 8-31
  - make-array** No Longer Accepts Obsolete Form RN-28
  - :make-array** option for **defstruct** 2-385, 2-389, 2-395
  - tv:**
    - make-blinker** function 4-133, 7-147
    - make-char** function 2-270
    - :make-complete** option for **fquery** 7-56
    - make-condition** function 2-505
    - make-heap** function 2-77
    - make-instance** function 2-430
    - make-list** 2-49
    - make-list** function 2-49, 2-56
    - make-obsolete** special form 4-323
    - make-package** 2-573
    - make-package** 2-599, 2-602
    - make-package** 2-573
    - make-package** 2-599, 2-602
    - make-package** 2-601
    - make-package** 2-599, 2-601
    - make-package** 2-574
    - make-package** 2-599, 2-602
    - make-package** 2-571, 2-602
    - make-package** function 2-601
    - make-pathname** function 5-145, 5-162
    - make-plane** 2-261
    - make-plane** 2-261
    - make-plane** function 2-261
    - %make-pointer** function 8-16
    - make-process** 8-85
    - make-process** 8-85
    - make-process** 8-85
    - make-process** function 8-85
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** 5-269
    - make-stream** function 9-137
    - make-stream** function 5-269
    - make-stream** Function 5-269
    - make-symbol** function 2-566, 2-573
    - make-system** 4-79, 4-222
    - make-system** 4-222
    - make-system** 4-222
    - make-system** 4-223
    - make-system** 4-222
    - make-system** 4-223
    - make-system** 4-222
    - make-system** 4-223
    - make-system** 4-222
    - make-system** 4-222
    - make-system** 4-222
    - make-system** 4-222
    - make-system** 4-227
    - make-system** 4-202
    - make-system** function 4-79, 4-217, 4-221, 4-307
    - make-system** Keywords 4-222
    - make-system :version** option 4-222
    - make-system :version** option 4-222
    - make-system :version** option 4-222
    - make-window** function 4-112, 4-121, 4-126, 4-129, 7-107, 7-305
    - make-area** 8-104
    - make-area** 8-104
    - make-area** 8-104
  - :area** keyword for
    - compiler:**
      - :export** option for
    - :export** Option for **defpackage** and
    - :import** option for
    - :import** Option for **defpackage** and
    - :invisible** Option for
    - :nicknames** Option for **defpackage** and
    - :shadow** option for
    - :shadow** Option for **defpackage** and
    - :use** option for
  - fs:**
    - :extension** option for
    - :type** option for
  - :flavor** option for
  - :priority** option for
  - :quantum** option for
  - :density** option for **tape:**
  - :direction** option for **tape:**
  - :host** option for **tape:**
  - :norewind** option for **tape:**
  - :prompt** option for **tape:**
  - :reel** option for **tape:**
  - :unit** option for **tape:**
  - chaos:**
  - tape:**
  - The **tape:**
    - :batch** option for
    - :compile** Option for
    - :noconfirm** Option for
    - :noload** Option for
    - :nowarn** Option for
    - :recompile** Option for
    - :reload** Option for
    - :selective** Option for
    - :silent** Option for
    - :version** Option for
- Adding New Keywords to Interaction Between **defsystem** Transformations and
- :latest** symbol in
  - :newest** symbol in
  - :released** symbol in
  - tv:**
    - :capacity-ratio** option for
    - :n-levels** option for
    - :read-only** option for

- :region-size** option for
- :swap-recommendations** option for
- sys:%region-scavenge-enable** option for
- sys:%region-space-type** option for
- :displaced-conformally** option for
- :displaced-index-offset** option for
- :displaced-to** option for
- :fill-pointer** option for
- :initial-value** option for
- :leader-length** option for
- :leader-list** option for
- :named-structure-symbol** option for
- make-area** 8-104
- make-area** 8-104
- make-area** 8-104
- make-area** 8-104
- make-array** 2-241
- make-array** 2-240, 2-241
- make-array** 2-239, 2-241
- make-array** 2-241
- make-array** 2-241, 8-31
- make-array** 2-241
- make-array** 2-241
- make-array** 2-241
- make-array-into-named-structure** function 2-405
- make-broadcast-stream** function 5-23
- make-concatenated-stream** function 2-643
- make-coroutine-bidirectional-stream** function 5-27
- make-coroutine-input-stream** function 5-27
- make-coroutine-output-stream** function 5-27
- make-echo-stream** function 2-643
- make-equal-hash-table** function 2-72
- make-hardcopy-stream** 3-275
- make-hardcopy-stream** 3-274
- make-hardcopy-stream** 3-274
- make-hardcopy-stream** 3-274
- make-hardcopy-stream** 3-275
- make-hardcopy-stream** 3-274
- make-hardcopy-stream** 3-275
- make-hardcopy-stream** 3-275
- make-hardcopy-stream** function 3-274, 4-126
- make-hash-table** function 2-72
- make-hash-table** function 2-641
- make-hash-table** function 2-641
- make-hash-table** function 2-641
- make-list** 2-49
- make-logical-pathname-host** 4-217
- make-logical-pathname-host** function 5-197
- make-macro-command** 3-201
- make-message-obsolete** special form 4-324
- make-mouse-char** function 2-274
- make-package** 2-585
- make-package** 2-601, 2-603
- make-package** 2-600, 2-603
- hash-inherited-symbols** Option for **defpackage** and **make-package** 2-600, 2-603
- make-package** 2-573
- make-package** 2-600, 2-602
- make-package** 2-600, 2-603
- make-package** 2-601, 2-603
- make-package** 2-601, 2-603
- make-package** 2-599, 2-601
- make-package** 2-582
- make-package** 2-600, 2-602
- make-package** 2-582
- make-package** 2-600, 2-602
- make-package** 2-573, 2-574
- make-package** 2-600, 2-602
- make-package** 2-600, 2-602
- make-system** 4-223
- make-pathname-defaults** 5-131, 5-133
- make-pathname-defaults** function 5-162
- make-pc-array** function 8-61
- make-plane** 2-261
- make-plane** 2-261
- make-plane** 2-261
- %make-pointer-offset** function 8-16
- make-process** 8-85
- make-process** 8-85
- :convert-to-device-units** method of **si:**
- :eject-page** method of **si:**
- :set-cursorpos** method of **si:**
- :set-font** method of **si:**
- :show-line** method of **si:**
- :show-rectangle** method of **si:**
- :un-relative-coordinates** method of **si:**
- si:**
- SCL and :rehash-size** keyword to
- SCL and :rehash-threshold** keyword to
- SCL and :test** keyword to
- :initial-value** keyword for
- fs:**
- fs:**
- zwei:**
- compiler:**
- :colon-mode** option for
- :colon-mode** Option for **defpackage** and
- :external-only** Option for **defpackage** and
- :import-from** option for
- :import-from** Option for **defpackage** and
- :include** Option for **defpackage** and
- :new-symbol-function** Option for **defpackage** and
- :prefix-intern-function** Option for **defpackage** and
- :prefix-name** Option for **defpackage** and
- :relative-names-for-me** option for
- :relative-names-for-me** Option for **defpackage** and
- :relative-names** option for
- :relative-names** Option for **defpackage** and
- :shadowing-import** option for
- :shadowing-import** Option for **defpackage** and
- :size** Option for **defpackage** and
- :noop** Option for
- fs:**
- fs:**
- meter:**
- :default-value** option for
- :initial-dimensions** option for
- :initial-origins** option for
- :arrest-reasons** option for
- :regular-pdl-area** option for



- Memory
- Screen
- The Screen
- Screen
- Instructions for
- How Programs
- Retrieving the Black Plane While
- Commands for
- Creating and
- Bit
- Debugger Commands for Stack
- Maclisp file
- Pointer
- Overview of Zmacs File
- Zmacs File
- Byte
- Invoking Restart Handlers
- Macros Expanding Into
- Color
- Dump
- FEP file data
- Font
- Free record
- Release 5.0 to Release 6.0 Documentation
- management of storage areas 8-103
- manager 7-76
- Manager 7-86
- Manager Background Process 7-86
- Managing Disk Space on the 3640 0-55
- Managing the Namespace Database 9-24
- Managing Your Mail 6-75
- Manipulate Definitions 2-316
- Manipulating defaults 5-156
- Manipulating messages 6-67
- Manipulating Buffers and Files in Zmacs 3-113
- Manipulating column geometry 7-215
- Manipulating FED Registers 3-241
- manipulating files 3-131
- Manipulating Files 1-47
- Manipulating List Structure 2-41
- Manipulating pathname property lists 5-165
- Manipulating the control stack 4-264, 4-271
- Manipulating the Label 0-45
- Manipulating the local file system 0-39
- Manipulating the readtable 2-33
- Manipulating Zmail Messages 6-67
- manipulation 2-114
- Manipulation 4-263
- manipulation 5-201
- Manipulation 8-15
- Manipulation Commands 3-131
- Manipulation Commands 3-131
- Manipulation Functions 2-115
- Manually 2-516
- Manual Storage Management 8-101
- Many Forms 2-360
- map 7-103
- map 0-6
- map 5-225, 8-46
- map 7-108, 7-140
- map 0-37
- Map RN-4
- map** function 2-202
- :map-hash** message 2-73
- map-resource** function 8-135
- mapatoms** function 2-608
- mapatoms-all** function 2-608, 2-625
- :map-block-no** message 5-225, 8-46
- mapc** function 2-202
- mapcan** function 2-203
- mapcar** function 2-202
- mapcon** function 2-203
- maphash** function 2-74
- maphash-equal** function 2-74
- maplist** function 2-202
- \*map-middle-mode\*** variable 6-87
- Map Names to Symbols 2-605
- map-over-areas** function 8-109
- map-over-functions-in-bucket** function 8-63
- Map over menu item 6-71, 6-80
- Map over menu item 6-80
- Map over menu item 6-67, 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80
- Map over menu item 6-80, 6-81
- zwel:**
- Functions That
- sl:**
- meter:**
- [Concatenate]
- [Delete]
- [Find String]
- [Forward]
- [Keywords]
- [Move]
- [Redistribute]
- [Reply]
- [Type]
- [Undelete]
- [Unkeywords]

- [By individual filters] Map over Move menu item 6-80
- [Find file] Map over Move menu item 6-81
- si: **map-over-objects** function 8-111
- si: **map-over-objects-in-area** function 8-111
- si: **map-over-objects-in-region** function 8-110
- si: **map-over-regions** function 8-110
- si: **map-over-regions-of-area** function 8-109
- [Map over] Zmail menu item 1-108, 3-268, 6-67, 6-69, 6-70, 6-71, 6-80, 6-81
- neti: **map-packet-buffers** function 9-202
- Mapper 0-15
- Mapper 0-18
- Distribution Mapping 2-201
- Wildcard Directory Mapping 5-155
- Wildcard Pathname Mapping 5-153
- Mapping Routines 8-109
- Mapping Between Names and Packages 2-607
- Mapping from names to symbols 2-559
- Mapping functions over areas 8-108
- Mapping functions over objects 8-108
- Mapping functions over regions 8-108
- Mapping names to objects 1-113, 9-5
- Mapping Names to Symbols 2-604
- Mapping Tools 8-108
- Memory si: **map-system-files** function 4-252
- New Function si: **map-system-files** Operates on a Declared System RN-53
- Choice boxes in bottom of Window margin 7-289
- margin 7-103, 7-162, 7-168
- Margin Choices 7-203
- Margin item 7-168
- Margin region 7-289
- Right margin character flag 7-108
- The Margin Choice Facility 7-289
- :margin-choices init option for tv: **margin-choice-mixin** 7-290
- :set-margin-choices method of tv: **margin-choice-mixin** 7-290
- tv: **margin-choice-mixin** Example 7-290
- tv: **margin-choice-mixin** flavor 7-289
- tv: **margin-choice-mixin** Messages 7-290
- tv: **margin-choice-mixin** Init-plist Option 7-290
- :margin-choices init option for tv: **choose-variable-values** 7-263
- :margin-choices init option for tv: **choose-variable-values-window** 7-275
- :margin-choices init option for tv: **margin-choice-mixin** 7-290
- Margin item flavors 7-168
- Margin item messages 7-168
- Margin Mode Variable 3-211
- Margins, Borders, and Labels 7-168
- Region Right Window tv: **margin-scroll-mixin** flavor 7-175
- tv: **margins** method of tv: **sheet** 7-167
- :set-space method of tv: **margin-space-mixin** 7-169
- :space init option for tv: **margin-space-mixin** 7-169
- :space method of tv: **margin-space-mixin** 7-169
- tv: **margin-space-mixin** flavor 7-169
- Border margin width 7-170
- QFILE mark 9-153
- Set Pop Mark 3-88
- Setting/Poppling the Mark 3-88
- Showing the Mark 3-88
- Single quotation mark 1-233
- Swap Point And Mark 3-88
- Mark Beginning 3-92
- Mark Definition 3-91
- Mark End 3-92

- Mark Page 3-92
- Mark Paragraph 3-92
- Mark region 3-57
- Mark Sexp 3-91
- Mark (c-SPACE) Zmacs command 4-59
- Mark (c-X c-X) Zmacs command 4-59
- Mark and the Region 3-86
- Mark Definition (c-m-H) Zmacs command 4-60
- marked frame message 2-523
- marker 5-12
- Marking messages 6-79
- Marking mode 1-57
- Marking text 3-91
- Marking a Region From Here to Beginning of Buffer 3-92
- Marking a Region From Here to End of Buffer 3-92
- Marking Files for Deletion in Dired 3-150
- Marking Files to Be Hardcopied in Dired 3-153
- Marking Mode Variable 3-211
- Mark Regions 3-91
- Mark Regions 3-91
- Mark Regions by Buffers 3-92
- Mark Regions by Lisp Expressions 3-91
- Mark Regions by Pages 3-92
- Mark Regions by Paragraphs 3-92
- Mark Regions by Paragraphs 3-92
- Mark Regions by Words 3-91
- Marks 9-192
- Marks 9-176
- Marks 9-191
- marks 9-176
- Marks and Asterisks 1-168, 3-215
- Marks and EOF Packets 9-162
- [Mark survey] Select menu item 6-79
- Mark thing mouse click 3-57
- Mark Whole (c-X H) Zmacs command 4-63
- mask 7-229
- mask-field** function 2-117
- :matcher** option for **defresource** 8-132
- Matching a String 3-211
- Matching a String 3-210
- Matching Lines (m-X) Zmacs command 4-57
- Matching parentheses 3-178
- Matching Symbols (m-X) Zmacs command 4-38
- math:decompose** function 2-259
- math:determinant** function 2-259
- math:fill-2d-array** function 2-260
- math:invert-matrix** function 2-259
- math:list-2d-array** function 2-260
- math:multiply-matrices** function 2-258
- math:singular-matrix** flavor 2-535
- math:solve** function 2-259
- math:transpose-matrix** function 2-259
- Matrices and Systems of Linear Equations 2-258
- Matrix operations 2-258
- matrix operation error 2-535
- max** function 2-100
- maximize loop** keyword 2-212
- Maximum height 7-213
- Maximum width 7-213
- Maximum number of list elements to be printed 2-18
- Maxtor XT-1140 disk drive 1-214
- chaos:**
- netl:**
- SELECT**
- may-transmit** function 9-139
- maybe-packet-buffer-panic** function 9-203
- M command 1-57, 6-17
- MDL programming environment 2-205
- Mouse buttons, bit
- Region
- Commands to
- Overview of Commands to
- Commands to
- Commands to
- Commands to
- Commands to
- Example of Commands to
- Commands to
- QFILE Asynchronous
- QFILE Close and Synchronous
- QFILE Errors and Asynchronous
- QFILE synchronous
- Init File Form: Balanced Quotation
- QFILE
- M:
- Example of Listing Variables by
- Listing Variables by
- List
- Insert
- List
- Singular

- Current
- Encapsulation
- Flavor Inheritance
- Interfacing to the Service Lookup
- Signalling
- fonts:**
- fonts:**
- Byte Stream
- Datagram
- Defined
- :byte-stream**
- :chaos**
- :datagram**
- :local**
- :pseudonet**
- dial Network
- Encapsulated
- Invoking
- :byte-stream**
- Available virtual
- Forwarding Words in
- Lisp Primitives for Wiring
- Physical
- Reporting the Use of
- Unwired
- Virtual
- Wired
- Special
- :activate-p** init option for **tv:**
- Adding an Item to the System
- Adding item to
- :borders** init option for **tv:**
- :bottom** init option for **tv:**
- :character-height** init option for **tv:**
- :character-width** init option for **tv:**
- Character Select
- Choice Boxes
- :choose** method of **tv:**
- :columns** init option for **tv:**
- Command
- Components of a
- :current-geometry** method of **tv:**
- :deactivate** method of **tv:**
- :deexpose** method of **tv:**
- :default-font** init option for **tv:**
- Dired
- Document Examiner command
- Drawing Pane
- Draw Mode
- Dumper Choose Variable Values
- meaning of mouse clicks 3-57
- mechanism 2-523
- mechanism 2-482
- Mechanism 9-208
- Mechanism 2-501, 2-509
- medfnb** font 7-140
- medfnt** font 7-140
- Media 9-38, 9-44
- Media 9-55
- Media 9-56
- Media 9-55
- medium 9-215
- medium 9-51
- medium 9-215
- medium 9-44
- medium 9-44
- Medium 9-87
- medium 9-44
- :medium** day-of-the-week-representation 7-370
- Medium Arguments: Starting Servers 9-215
- :medium** option for **net:define-server** 9-51
- Mediums 9-209
- :medium** step type 9-44
- medium type 9-51
- mem** function 2-60
- memass** function 2-65
- member** function 2-60
- memory 8-129
- Memory 8-14
- Memory 7-328
- memory 8-129
- Memory 8-129
- memory 7-327
- Memory 1-209, 5-216, 8-114
- memory 7-327
- Memory clearing 1-201
- Memory allocation of conses 2-56
- Memory cell as property list 2-67
- Memory management of storage areas 8-103
- Memory Mapping Tools 8-108
- Memory Referencing 8-20
- Memory word field variables 8-18
- memq** function 2-59
- Menu 7-207
- menu** 7-295
- Menu 7-238
- menu 7-235
- menu** 7-222, 7-295
- menu** 7-295
- menu** 7-295
- menu** 7-295
- menu** 7-295
- menu 3-229
- Menu 0-22
- menu** 7-223
- menu** 7-214, 7-296
- Menu 0-22
- Menu 7-208
- menu** 7-214
- menu** 7-223, 7-299
- menu** 7-299
- menu** 7-222, 7-296
- Menu 3-148, 3-149
- menu 1-133
- Menu 3-228
- Menu 3-228, 3-235, 3-262
- Menu 0-19

- Dumper Command Menu 0-22
- :edges-from** init option for **tv:** menu 7-296
- :edges** init option for **tv:** menu 7-296
- :execute** method of **tv:** menu 7-223
- :expose-p** init option for **tv:** menu 7-296
- :expose** method of **tv:** menu 7-299
  - Expunge/Save/Kill menu 6-46
  - FED Character Select Menu 3-229
  - FED Font Parameters Menu 3-229
- :fill-p** init option for **tv:** menu 7-214, 7-296
- :fill-p** method of **tv:** menu 7-214
  - [Filters] Profile Mode menu 6-75
- :font-map** init option for **tv:** menu 7-222, 7-296
  - Font Parameters menu 3-229
- Geometry Example 1: a Multicolumned Menu 7-215
- :geometry** init option for **tv:** menu 7-214, 7-296
- :geometry** method of **tv:** menu 7-214
  - Gray Plane Menu 3-228
- Hardcopying From the System Menu 1-107, 3-267
- :height** init option for **tv:** menu 7-296
  - Init-plist Options for **tv:** menu 7-295
- :inside-height** init option for **tv:** menu 7-296
- :inside-size** init option for **tv:** menu 7-296
- :inside-width** init option for **tv:** menu 7-297
  - [Inspect] in System menu 1-189, 4-295
- :item-llst** init option for **tv:** menu 7-222, 7-297
- :label** init option for **tv:** menu 7-222, 7-297
  - Left edge of menu 7-298
- :left** init option for **tv:** menu 7-297
  - Messages Accepted by **tv:** menu 7-299
- :minimum-height** init option for **tv:** menu 7-297
- :minimum-width** init option for **tv:** menu 7-297
  - Momentary menu 7-84, 7-203, 7-219, 7-223, 7-235, 7-242
- Mousing on the FED Draw Mode Menu 3-262
- Mousing on the FED Font Parameters Menu 3-263
  - Multicolumn menu 7-215
- :name** init option for **tv:** menu 7-297
- Outside FED Command Menu 3-229
- Overview of the Editor Menu 3-49
- :position** init option for **tv:** menu 7-297
  - Redraw menu 7-299
- :refresh** method of **tv:** menu 7-299
- :reverse-video-p** init option for **tv:** menu 7-297
- :right** init option for **tv:** menu 7-297
- :rows** init option for **tv:** menu 7-214, 7-297
  - Save-Exit menu 6-17
- :screen** init option for **tv:** menu 7-298
  - Selecting a FED Character From the Character Select Menu 3-233
- :set-edges** method of **tv:** menu 7-299
- :set-geometry** method of **tv:** menu 7-214
- :set-label** method of **tv:** menu 7-299
- :set-default-font** method of **tv:** menu 7-299
  - :set-fill-p** method of **tv:** menu 7-214
- :set-item-llst** method of **tv:** menu 7-299
  - The Editor Menu 3-49
- The Flavor Network of **tv:** menu 7-293
  - The Geometry of a Menu 7-213
  - Top edge of menu 7-298
- :top** init option for **tv:** menu 7-298
- tv:momentary-menu** Example 1: Simple Momentary Menu 7-223
  - Using the mouse in the draw mode menu 3-262
  - Using the mouse in the Font Parameters menu 3-263
  - Vertical spacing between lines in menu 7-222, 7-298
- :vsp** init option for **tv:** menu 7-222, 7-298
- :width** init option for **tv:** menu 7-298



- :x** init option for **tv**: **menu** 7-298
- :y** init option for **tv**: **menu** 7-298
- Zmail Command **Menu** 1-60
- tv**: **menu** flavor 7-213, 7-221, 7-293, 7-295, 7-299
- Menu formats 7-213
- Menu Items 7-208, 7-229, 7-311
- Menu Values 7-229
- tv**: **menu-choose** function 7-212, 7-219
- :menu-allset tv:choose-variable-values** variable type 7-259
- Menu and Keyboard Commands 3-259
- menu choose 7-247
- Menu Choose Facility 7-247
- Menu Choose Flavors 7-249
- Menu Choose Function 7-247
- Menu Choose Menus 7-203
- Menu Choose Mixin and Resource 7-248
- Menu Commands 3-49
- Menu Example 7-237
- Menu Example 7-219
- Menu Example 7-253
- Menu Facilities 7-207
- Menu Flavors 7-254
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-242
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** 7-243
- menu-highlighting-mixin** flavor 7-241
- menu** init-plist Options 7-222
- Menu Interface 7-219
- menu item 6-42
- menu item 6-60
- menu item 6-17
- menu item 0-39
- menu item 3-240, 3-260
- menu item 6-61
- menu item 6-71
- menu item 4-92
- menu item 6-17
- menu item 4-141
- menu item 6-81
- menu item 4-92
- menu item 4-92
- menu item 7-86
- menu item 6-80
- menu item 3-255, 3-259
- menu item 0-39
- menu item 0-22
- menu item 3-239, 3-260
- menu item 3-235
- menu item 4-298
- menu item 0-39
- menu item 5-233
- menu item 6-61
- menu item 0-39
- menu item 6-71, 6-80
- menu item 4-92
- menu item 4-92
- menu item 4-92, 4-98
- menu item 4-92, 4-98
- menu item 4-92
- FED**
- Multiple
- The Multiple
- Instantiable Multiple
- The Standard Multiple
- Multiple
- Multiple
- Editor
- Dynamic
- Standard Momentary
- tv:multiple-choose**
- Introduction to the
- Instantiable Multiple Choice
- :add-highlighted-item** method of **tv**:
- :add-highlighted-value** method of **tv**:
- :highlighted-items** init option for **tv**:
- :highlighted-items** method of **tv**:
- :highlighted-values** method of **tv**:
- :remove-highlighted-item** method of **tv**:
- :remove-highlighted-value** method of **tv**:
- :set-highlighted-items** method of **tv**:
- :set-highlighted-values** method of **tv**:
- tv**:
- Useful **tv**:
- The Standard Momentary
- [Abort Send] Editor
- [Abort] Filter Creation Display
- [Abort] Save-Exit
- [Active Structure Edit] Maintenance Operations
- [Add In Gray] Font Editor
- [And] Filter Creation Display
- [Append] Message Summary Line
- [ARGPDL] trace
- [Ask] Save-Exit
- [Attributes] System
- [Before] Filter Creation Display
- [Break after] trace
- [Break before] trace
- [Bury] Edit Screen
- [By individual filters] Map over Move
- [Center View] Font Editor
- [Check Records] Maintenance Operations
- [Clear all choices] Choice Boxes
- [Clear Gray] Font Editor
- [Clear Points] Font Editor draw mode
- [Clear] Inspector
- [Close All Files] Maintenance Operations
- [Close] File System Editor
- [Close] Filter Creation Display
- [Complete Dump] File System Maintenance
- [Concatenate] Map over
- [Cond after] trace
- [Cond before] trace
- [Cond break after] trace
- [Cond break before] trace
- [Conditional] trace

[Configure] Font Editor	menu item	3-227, 3-256, 3-259
Cons as	menu item	7-208
[Continue (R)] Draft File Zmail	Menu Item	6-39
[Continue (R)] Draft Message Zmail	Menu Item	6-41
Continue Zmail	Menu Item	6-39, 6-41
[Continue] Zmail	menu item	6-43
[Create Inferior Directory] File System Editor	menu item	5-233
[Create Link] File System Editor	menu item	5-233
[Create] System	menu item	7-75
[Current] Universe Creation Display	menu item	6-64
[Decache] File System Editor	menu item	5-233
[DeCache] Inspector	menu item	4-297, 4-298
[Default] Profile Mode	menu item	1-171, 6-57
[Delete (immediate)] File System Editor	menu item	5-233
[Delete] File System Editor	menu item	5-233
[Delete] Map over	menu item	6-80
[Delete] Zmail	menu item	1-66, 6-55, 6-68, 6-79
[Don't Save] Save-Exit	menu item	6-17
[Done] Filter Creation Display	menu item	6-60
[Draw Line] Font Editor	menu item	3-246, 3-259
[Draw Spline] Font Editor	menu item	3-246, 3-259
[Edit Font] Font Editor	menu item	3-230, 3-260
[Edit Properties] File System Editor	menu item	5-233
[Edit Screen] System	menu item	4-66, 4-129, 7-75, 7-76, 7-175
[Edit] Display Debugger	menu item	4-80
[Edit] File System Editor	menu item	5-233
[Edit] System	menu item	4-9
[Erase All] Font Editor	menu item	3-239, 3-243, 3-259
[Error] trace	menu item	4-92, 4-98
Executing a	menu item	7-212
[EXIT] Font Editor	menu item	3-260
[Exit] Inspector	menu item	4-104, 4-298
[Exit] Profile Mode	menu item	1-171, 6-57
[Expunge All FS] Maintenance Operations	menu item	0-39
[Expunge] File System Editor	menu item	5-233
[File options] Profile Mode	menu item	6-78
[Filters] Profile Mode	menu item	6-63, 6-77
[Filter] Message Summary Line	menu item	6-79
[Find (R)] Document Examiner	menu item	1-123
[Find file] Map over Move	menu item	6-81
[Find file] Zmail	menu item	6-77
[Find String] Map over	menu item	6-67, 6-80
[Find] Document Examiner	menu item	1-126
[Flip Points] Font Editor draw mode	menu item	3-235
[Flush Free Buffer] File System Maintenance	menu item	0-39
[Flush Typeout] File System Maintenance	menu item	0-39
[Forward] Mail	menu item	6-70
[Forward] Map over	menu item	6-80
[Free Records] File System Maintenance	menu item	0-39
[Get inbox] Zmail	menu item	6-12, 6-46
[Gray Char] Font Editor	menu item	3-239, 3-260
[Grid Size] Font Editor	menu item	3-256, 3-259
[Hardcopy] File System Editor	menu item	5-233
[Hardcopy] Zmail	menu item	1-108, 3-268, 6-70
[HELP] File System Maintenance	menu item	0-39
[HELP] Font Editor	menu item	3-260
[Incremental Dump] File System Maintenance	menu item	0-39
[Initialize] Maintenance Operations	menu item	0-39
[Inspect] System	menu item	4-104
[Jump] Zmail	menu item	6-49, 6-50, 6-58, 6-64, 6-67, 6-68
[Keywords] Map over	menu item	6-80
[Keywords] Profile Mode	menu item	6-75, 6-76, 6-77
[Keywords] Zmail	menu item	6-58, 6-75
[Kill] Zmail	menu item	6-81
[Link Transparencies] File System Editor	menu item	5-233
[Lisp Window] File System Maintenance	menu item	0-39

List as	menu item	7-208
[List FEP FS Root] File System Maintenance	menu item	0-39
[List Fonts] Font Editor	menu item	3-230, 3-260
[Loaded] Universe Creation Display	menu item	6-64
[Load] File System Editor	menu item	5-233
[Local] Mail	menu item	6-27
[Logout] Save-Exit	menu item	6-17
[Mail (M)] Zmail	Menu item	6-27
[Mail (R)] Zmail	Menu item	6-27
[Mail files] Profile Mode	menu item	6-77, 6-78
[Mail] Zmail	menu item	1-62, 6-27
[Maintenance] File System Maintenance	menu item	0-39
[Map over] Zmail	menu item	1-108, 3-268, 6-67, 6-69, 6-70, 6-71, 6-80, 6-81
[Mark survey] Select	menu item	6-79
[Modify] Inspector	menu item	4-104, 4-298
[Move (R)] Zmail	menu item	6-70
[Move Black] Font Editor	menu item	3-238, 3-259
[Move Gray] Font Editor	menu item	3-239, 3-260
[Move View] Font Editor	menu item	3-255, 3-259
[Move Window] Edit Screen	menu item	7-76
[Move] Map over	menu item	6-80
[Move] Zmail	menu item	1-108, 3-268, 6-58, 6-70, 6-77, 6-79, 6-81
[Namespace] System	Menu item	9-22
[New collection] Move	menu item	6-79
[New filter] Filter Selection Display	menu item	6-60
[New Properties] File System Editor	menu item	5-233
[New universe] Universe Selection Display	menu item	6-64
[New] Keywords	menu item	6-75
[Next] Zmail	menu item	1-66, 6-49, 6-67
Nil as a	menu item	7-208
[Not] Filter Creation Display	menu item	6-61
[Open] File System Editor	menu item	5-233
[Or] Filter Creation Display	menu item	6-61
[Per Process] <b>trace</b>	menu item	4-92
[Previous] Zmail	menu item	1-66, 6-49, 6-67
[Print after] <b>trace</b>	menu item	4-92
[Print before] <b>trace</b>	menu item	4-92
[Print Herald] File System Maintenance	menu item	0-39
[Print] <b>trace</b>	menu item	4-92
[Profile] Zmail	menu item	1-170, 6-57
[Prune systems] Choice Boxes	menu item	0-22
[QUIT] File System Maintenance	menu item	0-39
[Quit] Zmail	menu item	6-18
[Read/Create file] Zmail Select	menu item	6-77
[Read File] Font Editor	menu item	3-258, 3-260
[Recycled collection] Move	menu item	6-79
[Recycled temporary] Move	menu item	6-79
[Redistribute] Mail	menu item	6-70
[Redistribute] Map over	menu item	6-80
[Reflect] Font Editor	menu item	3-243, 3-259
[Reload/Retrieve] File System Maintenance	menu item	0-10, 0-39
[Remove] Zmail	menu item	6-79
[Rename Char] Font Editor	menu item	3-234, 3-260
[Rename] File System Editor	menu item	5-233
[Reply] Map over	menu item	6-80
[Reply] Zmail	menu item	1-67, 6-69
[Reset] Profile Mode	menu item	1-171, 6-57
Restore Draft File Zmail	Menu item	6-39
[Retry] Display Debugger	menu item	4-80
[Return] Inspector	menu item	4-104, 4-298
[Rotate] Font Editor	menu item	3-243, 3-259
[Salvage] File System Maintenance	menu item	0-39
[Sample] Filter Creation Display	menu item	6-60
[Save Char] Font Editor	menu item	3-234, 3-260
Save Draft as Msg Zmail	Menu item	6-41

Save Draft File Zmail	Menu Item	6-39
[Save] Zmail	menu item	1-67, 1-171, 6-17, 6-57, 6-81
[Search] Jump	menu item	6-67
[Selective Open] File System Editor	menu item	5-233
[Select] Document Examiner	menu item	1-127, 1-133
[Select] Zmail	menu item	6-58, 6-64, 6-78, 6-79
[Send Msg] Editor	menu item	6-42
[Server Errors] File System Maintenance	menu item	0-39
[Server Shutdown] File System Maintenance	menu item	0-39
[Set Points] Font Editor draw mode	menu item	3-235
[Set Sample] Font Editor	menu item	3-253, 3-260
[Set \] Inspector	menu item	4-298
[Show (M)] Document Examiner	menu item	1-127, 1-133
[Show (R)] Document Examiner	menu item	1-125, 1-133
[Show Font] Font Editor	menu item	3-227, 3-233, 3-234, 3-260
[Show] Document Examiner	menu item	1-122
[Sort] Zmail	menu item	6-71
[Split Screen] System	menu item	4-66, 4-129
[Step] <b>trace</b>	menu item	4-92, 4-94
[Stretch] Font Editor	menu item	3-259
String as	menu item	7-208
[Survey] Zmail	menu item	6-58, 6-64
[Swap Gray] Font Editor	menu item	3-239, 3-260
Symbol as	menu item	7-208
The Form of a	Menu Item	7-208
[Trace] System	menu item	4-92, 4-94
[Tree edit any] File System Maintenance	menu item	0-39, 5-231
[Tree edit Homedir] File System Maintenance	menu item	0-39, 5-231
[Tree edit root] File System Maintenance	menu item	0-39, 5-231
[Type] Map over	menu item	6-80
[Undelete] File System Editor	menu item	5-233
[Undelete] Map over	menu item	6-80
[Undelete] Zmail	menu item	1-66, 6-56, 6-68
[Universes] Profile Mode	menu item	6-64, 6-66
[Unkeywords] Map over	menu item	6-80, 6-81
[Unseen] Filter Selection Display	menu item	6-81
[Untrace] <b>trace</b>	menu item	4-92
Using the mouse with [List Fonts] Font Editor	menu item	3-263
Using the mouse with [Show Font] Font Editor	menu item	3-234, 3-263
[View Properties] File System Editor	menu item	5-233
[View] File System Editor	menu item	5-233
[Wherein] <b>trace</b>	menu item	4-92
[Wildcard Delete] File System Editor	menu item	5-233
Write Draft File Zmail	Menu Item	6-39
[Write File] Font Editor	menu item	3-258, 3-260
Updating	menu item list	7-235
<b>:documentation</b>	menu item option	7-211, 7-224
<b>:font</b>	menu item option	7-211, 7-224
FED Gray Plane	Menu Items	3-260
FED Outside World Interface	Menu Items	3-260
Selecting multiple	menu items	7-241
Types of	Menu Items	7-210
<b>:buttons</b>	Menu Items and Menu Values	7-229
<b>:documentation</b>	menu item type	7-210, 7-225, 7-311
<b>:eval</b>	menu item type	7-311
<b>:funcall</b>	menu item type	7-210, 7-311
<b>:funcall-with-self</b>	menu item type	7-210, 7-311
<b>:kbd</b>	menu item type	7-210
<b>:menu</b>	menu item type	7-210, 7-311
<b>:no-select</b>	menu item type	7-210, 7-311
<b>:value</b>	menu item type	7-210
<b>:window-op</b>	menu item type	7-210, 7-212
<b>tv:multiple-choice</b>	menu item type	7-210, 7-220
	<b>:menu</b> menu item type	7-210, 7-311
	Menu Messages	7-255

- Useful **tv:**
- Command
- Multiple
- R2:System
- R:
- The Inspector
- Basic and Mixin Pop-up and Momentary
- Command
- Dynamic Item List
- FED
- Filter
- Init-plist Option for Dynamic
- Instantiable Command
- Instantiable Dynamic Item List
- Instantiable Multiple
- Instantiable Pop-up and Momentary
- Messages to Dynamic
- Momentary and Pop-up
- Multiple
- Multiple Choice
- Multiple Menu Choose
- Pop-up
- Using the mouse with
- Using the mouse with Font Editor
- Using the mouse with momentary
- Using the mouse with multiple
- Menu Items and
- Deactivating
- Exposing
- Command
- Source Compare
- Source Compare
- fs:**
- fs:**
- Maclisp
- Source Compare
- Source Compare
- fs:**
- Source Compare
- Kill
- Pathname
- Tape Spec
- :accept**
- :add-network**
- :address-resolution-parameters**
- :advance-input-buffer**
- :advance-output-buffer**
- :alias-for-selected-windows**
- :allocate**
- :allocate-packet**
- :any-tyi**
- :beep**
- :bitbit**
- :block-in**
- :block-length**
- :block-out**
- :bug-report-description**
- :bug-report-recipient-system**
- :canonical-type**
- :change-properties**
- menu** Messages 7-223
- Menu Mixins 7-230
- Menu Mixins 7-241
- menu mouse click 3-57
- Menu mouse click 3-57
- Menu Pane 4-298
- Menus 7-220
- menus 3-228, 7-203, 7-229
- Menus 7-203, 7-235
- Menus 3-228
- menus 6-60
- Menus 7-237
- Menus 7-231
- Menus 7-236
- Menus 7-242
- Menus 7-221
- Menus 7-237
- Menus 7-219
- Menus 7-203, 7-241
- Menus 7-203, 7-251
- Menus 7-203
- menus 7-203, 7-219, 7-235
- menus 7-207
- menus 3-228
- menus 7-219
- menus 7-241
- Menu size parameter 7-213
- Menus with several columns 7-203, 7-247
- Menu Values 7-229
- menu window 7-223, 7-299
- menu window 7-223
- menu within window frame 7-231
- Merge 3-125
- Merge (m-X) Zmacs command 3-125, 4-56
- merge-pathnames** example 5-133, 5-134
- merge-pathnames** function 5-157
- :merged-help** option 5-61, 7-29
- mergef** function 5-201
- Merge Installed Definition 3-128
- Merge Newest Definition 3-127
- merge-pathnames-and-set-defaults** function 5-158
- Merge Saved Definition 3-127
- Merging 3-75
- merging 5-129, 5-147
- Merging lines 3-22
- Merging Characters with the FED Gray Plane 3-240
- Merging Examples 0-30
- Merging pathname components 5-147, 5-157
- message 9-212
- message 9-204
- message 9-213
- message 5-21
- message 5-21
- message 7-96
- message 5-225, 8-45
- message 9-206
- message 5-24
- message 5-19
- message 7-118
- message 5-226, 8-47
- message 5-226, 8-47
- message 5-227, 8-47
- message 2-525
- message 2-524
- message 5-151
- message 5-114

<b>:change-property</b>	message	5-227, 8-48
<b>:characters</b>	message	5-13, 5-114
<b>:choose</b>	message	7-212, 7-229
<b>:class</b>	message	9-32
<b>:clear-hash</b>	message	2-73
<b>:clear-input</b>	message	5-18, 5-251, 5-261
<b>:clear-output</b>	message	5-18
<b>:clear-window</b>	message	5-20
<b>:clear-rest-of-line</b>	message	5-15
<b>:close</b>	message	5-18
<b>:create-data-map</b>	message	5-225, 8-46
<b>:creation-date</b>	message	5-114
<b>:current-geometry</b>	message	7-216
<b>:default-services</b>	message	9-209
<b>:delete</b>	message	5-114
<b>:describe</b>	message	2-453
<b>:deselect</b>	message	7-99
<b>:desirability</b>	message	9-208
<b>:device</b>	message	5-145
<b>:direction</b>	message	5-13
<b>:directory</b>	message	5-145
<b>:directory-pathname</b>	message	2-549, RN-39
<b>:disable</b>	message	9-212
<b>:document-proceed-type</b>	message	2-517
<b>:document-special-command</b>	message	2-526
<b>:draw-rectangle</b>	message	7-118
<b>:enable</b>	message	9-212
<b>:eof</b>	message	5-18
<b>:eval-inside-yourself</b>	message	2-454
<b>:execute</b>	message	7-212, 7-311
<b>:fasd-form</b>	message	2-465, 4-331, 5-241
<b>:file-access-path</b>	message	5-225, 8-46
<b>:filled-elements</b>	message	2-73
<b>:finish</b>	message	5-18, 5-114
<b>:force-output</b>	message	5-18
<b>:force-redisplay</b>	message	7-377
<b>:force-kbd-input</b>	message	7-132
<b>:foreign-host</b>	message	9-212
<b>:fresh-line</b>	message	5-15
<b>:funcall-inside-yourself</b>	message	2-454
<b>:get</b>	message	2-473, 5-227, 8-48, 9-32
<b>:get-hash</b>	message	2-72
<b>:get-handler-for</b>	message	2-454
<b>:getl</b>	message	2-473
<b>:get-output-buffer</b>	message	5-21
<b>:grow</b>	message	5-224, 8-45
<b>:handle-condition</b>	message	2-511
<b>:handle-condition-p</b>	message	2-511
<b>:inferior-select</b>	message	7-97
<b>:info</b>	message	5-114
<b>:initialize-special-commands</b>	message	2-526
<b>:input-editor</b>	message	5-19, 5-54, 7-22, RN-56
<b>:input-wait</b>	message	5-13
<b>:interactive</b>	message	5-13, 7-3, RN-62
<b>:io-buffer</b>	message	7-132
<b>:length</b>	message	5-113
<b>:line-in</b>	message	5-16, 5-24
<b>:line-out</b>	message	5-15
<b>:listen</b>	message	5-14, 5-251
<b>:map-hash</b>	message	2-73
<b>:map-block-no</b>	message	5-225, 8-46
<b>:modify-hash</b>	message	2-73
<b>:mouse-select</b>	message	7-98
<b>:multiple-choose</b>	message	7-247
<b>:name</b>	message	5-145, 9-32
<b>:name-for-selection</b>	message	7-96

:names	message	9-32
:namespace	message	9-31
:new-pathname	message	5-140, 5-145
:new-default-pathname	message	5-140, 5-145
:new-raw-device	message	5-145
:new-raw-directory	message	5-145
:new-raw-name	message	5-145
:new-raw-type	message	5-145
:notice	message	7-82
:notification-cell	message	7-128
:notification-mode	message	7-130
:operation-handled-p	message	2-453, 5-13
:parse-address	message	9-207
:pathname	message	5-113
:peek	message	9-213
:peek-header	message	9-213
:possible-medium-for-protocol	message	9-209
:possibly-qualified-string	message	9-32
:primary-name	message	9-32
:print	message	5-73
:print-self	message	2-16, 2-453
:proceed	message	2-520
:proceed-types	message	2-519
:proceed-type-p	message	2-519
:properties	message	5-114
:property-list	message	2-474
:protocol-address	message	9-205
:protocol-supported	message	9-204
:push-property	message	2-473
:put-hash	message	2-72
:putprop	message	2-473
:qualified-string	message	9-31
:raw-device	message	5-145
:raw-directory	message	5-145
:raw-name	message	5-145
:raw-type	message	5-145
:read	message	5-73
:read-bytes	message	5-115
:read-cursorpos	message	5-19
:read-pointer	message	5-20
:read-input-buffer	message	5-20
:receive-notification	message	7-128
:receive-packet	message	9-210
:redisplay	message	7-305
:reject	message	9-212
:rem-hash	message	2-73
:remprop	message	2-473
:rename	message	5-114
:report	message	2-529
:reset	message	5-251, 9-212
:screen-manage-deexposed-gray-array	message	7-92
:select	message	7-98
:select-pane	message	7-97, 7-187
:select-relative	message	7-96
:selectable-windows	message	7-96
:selected-pane	message	7-98, 7-187
:send-if-handles	message	2-454, 5-13
:set-cursorpos	message	5-20
:set-pointer	message	5-20
:set-display-item	message	7-305
:set-io-buffer	message	7-132
:set-notification-mode	message	7-131
:set-property-list	message	2-474
:set-type-alist	message	7-311
:size	message	2-73
:special-command	message	2-525

<b>:string</b>	message	9-31
<b>:string-in</b>	message	5-15
<b>:string-out</b>	message	5-15
<b>:string-line-in</b>	message	5-17
<b>:supports-broadcast</b>	message	9-209
<b>:swap-hash</b>	message	2-73
<b>:transmit-packet</b>	message	9-205
<b>:truename</b>	message	5-113
<b>:tyi</b>	message	5-11, 7-176
<b>:tyi-no-hang</b>	message	5-19, 5-251
<b>:tyipeek</b>	message	5-15
<b>:tyo</b>	message	5-11, 7-111
<b>:type</b>	message	5-145, 9-207
<b>:unclaimed-message</b>	message	2-454
<b>:unparse-address</b>	message	9-208
<b>:untyi</b>	message	5-12
<b>:untyo</b>	message	5-19
<b>:untyo-mark</b>	message	5-19
<b>:user-get</b>	message	9-32
<b>:which-operations</b>	message	2-453, 5-13
<b>:write-data-map</b>	message	5-225, 8-46
Break on exit from marked frame	message	2-523
Create a new	message	6-27
Current	message	1-64, 6-11, 6-13
Move in Place of Referenced	Message	6-72
No method for	message	2-542
Operating on Zmail Messages Referred to by the Current	Message	6-71
Peek Help	Message	4-303
Redistribute the current	message	6-27
Scrolling a Zmail	Message	1-66
Sending a	message	2-421
Type Decoding	Message	7-270
What to Do After Reading a Zmail	Message	1-66
	Message date	1-57
	Message keywords	1-57
	Message names	2-423
	Message properties	1-57
	Message recipients	1-57, 1-62, 6-27, 6-37
	Message sender	1-57
	Message stack	6-49, 6-68
	Message window	1-57, 1-67, 6-38
	Message-copying commands	6-77
	Message-id: Field	6-37
	Message-receiving object	2-423
	Message Characteristics	6-58
Testing Zmail	message commands	6-71
Referenced	Message deletion commands	6-68
	Message Deletion Commands	6-55
Saving and Restoring Zmail	Message Drafts	6-39
Zmail Draft	Message Facility	6-41
Operating on a	Message in a Mail Collection	6-80
Copy	message into reply	6-69
Editing	message mode	1-57
Zmail	Message Movement and Deletion	6-49
Simple Zmail	Message Movement Commands	6-49
Zmail	Message Movement Commands	6-49
	Message Passing in the Flavor System	2-421, 2-423
Answered	message property	1-57
Badheader	message property	1-57, 6-35
Deleted	message property	1-57, 6-55
Filed	message property	1-57
Forwarded	message property	1-57
Last	message property	1-57
Recent	message property	1-57, 6-46
Redistributed	message property	1-57



- Unseen message property 1-57, 6-46
- :force-output** messages 5-113
- :hang-p** keyword for block disk stream messages 8-53
- :verify** option for window size and position messages 7-162
- Adding keywords to messages 6-75
- Appending messages 6-71
- Arpanet digest messages 6-48
- Blinker messages 7-148
- Block disk stream messages 5-226, 8-47
- Classifying Zmail Messages 6-75
- Concatenating messages 6-71, 6-80
- Continuing Completed or Aborted Zmail Messages 6-43
- Copying messages 6-77
- Cursor position messages 7-112, 7-114
- Deleting messages 6-80
- Deleting and Undeleting Zmail Messages 1-66
- Deletion messages 7-113
- Disk stream messages 5-224, 8-45
- Editing Zmail Messages 6-71
- Encrypting Zmail Messages 1-67
- Erase messages 7-113
- Expunging deleted messages 1-67
- Flavor system messages 2-453
- Fonts In Zmail Messages 1-69
- Forwarding messages 6-80
- Forwarding and Redistributing Zmail Messages 6-70
- Functions for Passing Messages 2-430
- Geometry Messages 7-214
- Graphics messages 7-118
- Hardcopying Zmail Messages 6-70
- Hash Table Messages 2-72
- Header fields in Zmail messages 6-11, 6-85
- Incoming messages 1-70, 6-101
- Insertion messages 7-112
- Mail collection messages 6-80
- Manipulating messages 6-67
- Manipulating Zmail Messages 6-67
- Margin item messages 7-168
- Marking messages 6-79
- Moving messages 6-80
- Moving Around Zmail Messages 1-66
- New messages 6-46
- nil** option for window size and position messages 7-162
- Notification messages 7-103
- Operating on a Group of Zmail Messages 6-80
- Overview of Window Flavors and Messages 7-103
- Printing messages 1-108, 3-268, 6-70
- Proceed Type Messages 2-519
- Process Messages 8-89
- Properties of messages 6-11, 6-13
- Property List Messages 2-473
- Prune headers of yanked messages 6-86
- Redistributing messages 6-80
- Referenced messages 6-64
- Relationship between methods and messages 2-421
- Reordering Zmail Messages 6-71
- Replying to and Remailing Zmail Messages 6-69
- Replying to Zmail Messages 6-69, 6-80
- Reprint messages 1-73, 1-182, 6-104
- Saving, Expunging, Killing, and Renaming Zmail Messages 6-81
- Selecting messages 1-66, 6-67
- Selecting Zmail Messages 6-67
- Selecting Zmail Messages Based on the Stack of Recently Seen Messages 6-68
- Sending messages 2-159
- Sending interactive messages 1-70, 6-101

- Sorting messages 6-71
- Stream Messages 5-115
- Stream input messages 7-103
- Text field in Zmail messages 6-11
- Transmitting Inter-user messages 9-125
- Transmitting interactive messages 9-126
- Turning off Converse messages 1-72, 6-103
- Turning on Converse messages 1-72, 6-103
- tv:choose-variable-values-window** Messages 7-275
- tv:command-menu** Messages 7-231
- tv:margin-choice-mixin** Messages 7-290
- tv:multiple-choice** Menu Messages 7-255
- tv:multiple-menu-mixin** Messages 7-243
- Typing messages 6-80
- Undeleting messages 6-80
- Useful **tv:menu** Messages 7-223
- Window Flavors and Messages 7-103
- Window position messages 7-162
- Window size messages 7-162
- Yanking messages 6-69
- Zmail Messages 6-11
- Zmail Included Messages: Field 6-35
- Pathname Messages: Naming of Files 5-165
- Messages About Character Width and Cursor Motion 7-114
- Messages About Window Selection 7-96
- Messages Accepted by **tv:menu** 7-299
- Messages and Functions 7-283
- Messages and Init Options 2-529
- Messages and Mail 1-57
- Messages Based on Characteristics 6-67
- messages based on filter 6-49
- Messages Based on Position 6-49, 6-67
- messages based on string 6-49
- Messages Based on the Stack of Recently Seen Messages 6-68
- Message Search Spaces 6-64
- Messages for Input From Interactive Streams 7-11
- Messages for Input From Windows 7-134
- Messages for Window Graying 7-92
- Messages for Window Size and Position 7-165
- messages from mail buffer 1-66, 6-55
- messages from the garbage collector 8-124
- Messages in a mail buffer 6-80
- Messages in a mail collection 6-80
- messages in disk files 6-39
- Messages in the Input Editor 5-66, 7-34
- Messages in Zmail 6-68
- Messages m-X Zmail Command 6-56
- Messages Obsolete RN-56
- Messages Referred to by the Current Message 6-71
- Message Stack 6-50
- Message stack commands 6-50, 6-68
- message status 1-57
- : message status 1-57
- A message status 1-57
- D message status 1-57, 6-55
- Message status letters 1-57
- Messages to Display Characters on Windows 7-111
- Messages to Dynamic Menus 7-237
- Messages to file streams 5-113
- Messages to Frames 7-187
- Messages to Heaps 2-78
- Messages to Interactive Streams 5-70, 7-38
- messages to mail buffer 1-66, 6-55, 6-68
- Messages to Namespace Names and Objects 9-31
- Input Editor
- Restoring
- tv:basic-mouse-sensitive-items**
- Sending and Receiving
- Selecting Zmail
- Selecting
- Selecting Zmail
- Selecting
- Selecting Zmail
- Defining Zmail
- Functions, Flavors, and
- Deleting
- Output
- Saving
- Displaying Help
- Deleting and Undeleting
- Delete Duplicate
- :mouse-or-kbd-tyl** and **:mouse-or-kbd-tyl-no-hang**
- Operating on Zmail
- Moving Among Zmail Messages Using the

- Font
- Error
- [Append]
- [Filter]
- Moving Among Zmail
- Interactive
- Reply with Draft
- Moving a Zmail
- Sending
- Copying a Zmail
- Sending
- New
- :translate-wild-pathname**
- :translate-wild-pathname-reversible**
- :translate-wild-pathname**
- New
- :clear-eof**
- :discard-current-record**
- :record-status**
- New Optional Argument to **:replace-input**
- New Type for **:start-typeout**
- New
- :input-editor**
- :add-network**
- :force-output**
- :write-eof**
- :write-error-status**
- :generic-pathname**
- :rename**
- Send
- :prompt-and-read**
- :rename**
- New
- :package**
- :string**
- :package**
- :symbol**
- :name**
- :relative-to**
- :await-rewind**
- :bot-p**
- :check-ready**
- :clear-error**
- :close**
- :host-name**
- :rewind**
- :set-offline**
- :skip-file**
- :deexpose**
- :expose**
- :screen-manage**
- :set-save-bits**
- :clear-eof**
- :item-list**
- Messages to **netl:name** 9-31
- Messages to **netl:object** 9-32
- Messages to Read or Set Cursor Position 7-113
- Messages to Remove Characters From Windows 7-113
- Messages to Tape Streams 5-273
- Messages to Windows 7-141
- message stream 5-22
- Message Summary Line menu item 6-71
- Message Summary Line menu item 6-79
- Messages Using the Message Stack 6-50
- message system (Converse) 6-3
- Messages Zmail Command 6-42
- Message to a File 6-70
- message to all Lisp Machines at site 1-72, 6-103, 9-135
- Message to an object of some flavor 2-461
- Message to Another Buffer 6-77
- message to another user 1-72, 1-160, 6-104
- Message to Error Flavor
- fs:directory-not-found** RN-39
- message to fs:pathname 5-192
- message to fs:pathname 5-192
- message to **fs:pathname** example 5-132
- Message to Input Streams: **:input-wait** RN-62
- message to input tape streams 5-273
- message to input tape streams 5-273
- message to input tape streams 5-273
- Message to Interactive Streams RN-67
- Message to Interactive Streams: **:clear-window** RN-67
- Message to Interactive Streams: **:noise-string-out** RN-63
- Message to Interactive Streams Replaces **:rubout-handler** RN-55
- message to interfaces 9-210
- message to output tape streams 5-273
- message to output tape streams 5-273
- message to output tape streams 5-273
- message to pathnames 5-149
- message to pathnames 5-103
- message to self 2-159
- message to streams 7-59
- message to streams 5-103
- Message to Streams: **:interactive** RN-62
- message to **sys:external-symbol-not-found** 2-619
- message to **sys:external-symbol-not-found** 2-619
- message to **sys:package-locked** 2-543, 2-619
- message to **sys:package-locked** 2-543, 2-619
- message to **sys:package-not-found** 2-542, 2-619
- message to **sys:package-not-found** 2-542, 2-619
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to tape streams 5-273
- message to windows 7-79
- message to windows 7-79
- message to windows 7-86
- message to windows 7-79
- Message to Windows is Obsolete RN-60
- Message to Windows is Obsolete RN-57

New  
     **:edit**  
     **:interval-string**  
     **:set-interval-string**  
         Converse Pop-up  
         Using the mouse to scroll the  
             Zmail  
             Zmail  
     c-X c-Y Yank Current  
         [Continue (R)] Draft  
         Using the  
**netl:\*actual-number-of-wired-packet-buffers\***  
**netl:\*number-of-unwired-packet-buffers\***

    PC  
     Disk Error  
     Peek utility for disk error

**:decode-variable-type**  
     **:proceed**  
     **:report**  
**:who-line-documentation-string**  
     Adding a Type Decoding  
     Inspecting a select

**:case**  
     **:daemon**  
         Simple  
     **:and**  
     **:append**  
     **:case**  
     **:daemon**  
     **:daemon-with-and**  
     **:daemon-with-or**  
**:daemon-with-override**  
     **:inverse-list**  
     **:list**  
     **:nconc**  
     **:or**  
     **:pass-on**  
     **:progn**  
     No

Message to Windows:  
     **:set-font-map-and-vsp** RN-64  
     message to **zwei:standalone-editor-frame** 7-381  
     message to **zwei:standalone-editor-frame** 7-381  
     message to **zwei:standalone-editor-frame** 7-381  
     Message Window 1-70, 6-101  
     message window 1-64  
     Message Window 1-60, 6-13  
     Message Window Configuration 1-60  
     Message window scrolling 6-13  
     Message Zmail Command 6-45  
     Message Zmail Menu Item 6-41  
     Meta bit 5-5  
     META key while drawing characters 3-235  
     meter 9-198  
     meter 9-198  
     **meter:expand-range** function 8-62  
     **meter:function-range** function 8-63  
     **meter:function-name-with-escapes** function 8-63  
     **meter:list-functions-in-bucket** function 8-62  
     **meter:make-pc-array** function 8-61  
     **meter:map-over-functions-in-bucket** function 8-63  
     **meter:monitor-all-functions** function 8-61  
     **meter:monitor-between-functions** function 8-62  
     **meter:print-functions-in-bucket** function 8-62  
     **meter:range-of-bucket** function 8-62  
     **meter:report** function 8-62  
     **meter:setup-monitor** function 8-62  
     **meter:start-monitor** function 8-62  
     **meter:stop-monitor** function 8-62  
     **meter:with-monitoring** macro 8-63  
     Metering on the 3600 Family 8-61  
     Meters 8-41  
     meters 8-41  
     Meters (M) 1-187  
     Method 2-421  
     method 7-269  
     method 2-517, 2-520, 4-133  
     method 2-485, 4-133  
     method 4-129  
     Method 7-269  
     method 4-299  
     Method Combination 2-455  
     **:method-combination** Option for **defflavor** 2-441,  
         2-449  
     **:method-order** Option for **defflavor** 2-441, 2-449  
     method combination 2-517, 4-133  
     method combination 4-113, 4-116, 4-121  
     method combination definition RN-32  
     method combination type 2-455  
     method combination type 2-455, 2-456  
     method combination type 2-455, 2-457  
     method combination type 2-455  
     method combination type 2-455, 2-456  
     method combination type 2-455, 2-456  
     method combination type 2-455, 2-457  
     method combination type 2-455, 2-456  
     method combination type 2-455  
     method combination type 2-455, 2-456  
     method combination type 2-455  
     method combination type 2-455  
     method combination type 2-455, 2-456  
     method combination type 2-455  
     method for message 2-542  
     Method for Searching for Appropriate Zmacs  
         Commands 3-45  
     **:method** function specs 2-316

	<b>:method</b>	function spec type	2-297
<b>:document-proceed-type</b>	method of	<b>condition</b>	2-529
<b>:proceed-types</b>	method of	<b>condition</b>	2-530
<b>:proceed-type-p</b>	method of	<b>condition</b>	2-530
<b>:report</b>	method of	<b>condition</b>	2-530
<b>:report-string</b>	method of	<b>condition</b>	2-531
<b>:set-proceed-types</b>	method of	<b>condition</b>	2-530
<b>:special-commands</b>	method of	<b>condition</b>	2-530
<b>:special-command-p</b>	method of	<b>condition</b>	2-530
<b>:fn1</b>	method of	<b>fs:its-pathname</b>	5-186
<b>:fn2</b>	method of	<b>fs:its-pathname</b>	5-186
<b>:back-translated-pathname</b>	method of	<b>fs:logical-pathname</b>	5-199
<b>:translated-pathname</b>	method of	<b>fs:logical-pathname</b>	5-199
<b>:canonical-type</b>	method of	<b>fs:pathname</b>	5-166
<b>:device</b>	method of	<b>fs:pathname</b>	5-166
<b>:device-wild-p</b>	method of	<b>fs:pathname</b>	5-173
<b>:directory</b>	method of	<b>fs:pathname</b>	5-166
<b>:directory-pathname-as-file</b>	method of	<b>fs:pathname</b>	5-144
<b>:directory-wild-p</b>	method of	<b>fs:pathname</b>	5-173
<b>:generic-pathname</b>	method of	<b>fs:pathname</b>	5-171
<b>:get</b>	method of	<b>fs:pathname</b>	5-171
<b>:getl</b>	method of	<b>fs:pathname</b>	5-172
<b>:host</b>	method of	<b>fs:pathname</b>	5-165
<b>:name</b>	method of	<b>fs:pathname</b>	5-166
<b>:name-wild-p</b>	method of	<b>fs:pathname</b>	5-173
<b>:new-device</b>	method of	<b>fs:pathname</b>	5-167
<b>:new-directory</b>	method of	<b>fs:pathname</b>	5-167
<b>:new-name</b>	method of	<b>fs:pathname</b>	5-167
<b>:new-pathname</b>	method of	<b>fs:pathname</b>	5-170
<b>:new-type</b>	method of	<b>fs:pathname</b>	5-168
<b>:new-version</b>	method of	<b>fs:pathname</b>	5-168
<b>:new-canonical-type</b>	method of	<b>fs:pathname</b>	5-169
<b>:new-default-pathname</b>	method of	<b>fs:pathname</b>	5-170
<b>:new-raw-device</b>	method of	<b>fs:pathname</b>	5-168
<b>:new-raw-directory</b>	method of	<b>fs:pathname</b>	5-168
<b>:new-raw-name</b>	method of	<b>fs:pathname</b>	5-168
<b>:new-raw-type</b>	method of	<b>fs:pathname</b>	5-169
<b>:parse-truename</b>	method of	<b>fs:pathname</b>	5-171
<b>:pathname-match</b>	method of	<b>fs:pathname</b>	5-172
<b>:pathname-as-directory</b>	method of	<b>fs:pathname</b>	5-144
<b>:plist</b>	method of	<b>fs:pathname</b>	5-172
<b>:putprop</b>	method of	<b>fs:pathname</b>	5-172
<b>:raw-device</b>	method of	<b>fs:pathname</b>	5-166
<b>:raw-directory</b>	method of	<b>fs:pathname</b>	5-166
<b>:raw-name</b>	method of	<b>fs:pathname</b>	5-166
<b>:raw-type</b>	method of	<b>fs:pathname</b>	5-166
<b>:remprop</b>	method of	<b>fs:pathname</b>	5-172
<b>:string-for-directory</b>	method of	<b>fs:pathname</b>	5-171
<b>:string-for-dired</b>	method of	<b>fs:pathname</b>	5-171
<b>:string-for-editor</b>	method of	<b>fs:pathname</b>	5-171
<b>:string-for-host</b>	method of	<b>fs:pathname</b>	5-171
<b>:string-for-printing</b>	method of	<b>fs:pathname</b>	5-171
<b>:string-for-wholine</b>	method of	<b>fs:pathname</b>	5-171
<b>:system-type</b>	method of	<b>fs:pathname</b>	5-168
<b>:translate-wild-pathname</b>	method of	<b>fs:pathname</b>	5-173
<b>:type</b>	method of	<b>fs:pathname</b>	5-166
<b>:types-for-canonical-type</b>	method of	<b>fs:pathname</b>	5-169
<b>:type-wild-p</b>	method of	<b>fs:pathname</b>	5-173
<b>:version</b>	method of	<b>fs:pathname</b>	5-166
<b>:version-wild-p</b>	method of	<b>fs:pathname</b>	5-173
<b>:wild-p</b>	method of	<b>fs:pathname</b>	5-172
<b>:send-command</b>	method of	<b>lgp:basic-lgp-stream</b>	4-124
<b>:send-coordinates</b>	method of	<b>lgp:basic-lgp-stream</b>	4-124
<b>:disk-event</b>	method of	<b>si:disk-error-event</b>	8-38
<b>:error-type</b>	method of	<b>si:disk-error-event</b>	8-39
<b>:flushed-transfer-count</b>	method of	<b>si:disk-error-event</b>	8-39

:clear	method of	si:heap	2-78
:delete-by-item	method of	si:heap	2-78
:delete-by-key	method of	si:heap	2-78
:describe	method of	si:heap	2-78
:empty-p	method of	si:heap	2-78
:find-by-item	method of	si:heap	2-78
:find-by-key	method of	si:heap	2-78
:insert	method of	si:heap	2-79
:remove	method of	si:heap	2-79
:top	method of	si:heap	2-79
:add-asynchronous-character	method of	si:interactive-stream	7-17
:any-tyl	method of	si:interactive-stream	7-11
:any-tyl-no-hang	method of	si:interactive-stream	7-11
:asynchronous-character-p	method of	si:interactive-stream	7-17
:clear-input	method of	si:interactive-stream	7-12
:finish-typeout	method of	si:interactive-stream	5-71, 7-39
:force-rescan	method of	si:interactive-stream	5-71, 7-39
:handle-asynchronous-character	method of	si:interactive-stream	7-17
:input-editor	method of	si:interactive-stream	5-70, 7-38
:item	method of	si:interactive-stream	7-19, RN-57
:line-in	method of	si:interactive-stream	7-12
:listen	method of	si:interactive-stream	7-12
:list-tyl	method of	si:interactive-stream	7-12
:noise-string-out	method of	si:interactive-stream	5-72, 7-40
:read-bp	method of	si:interactive-stream	5-72, 7-40
:remove-asynchronous-character	method of	si:interactive-stream	7-18
:replace-input	method of	si:interactive-stream	5-71, 7-39
:rescanning-p	method of	si:interactive-stream	5-71, 7-39
:start-typeout	method of	si:interactive-stream	5-70, 7-38
:string-in	method of	si:interactive-stream	7-13
:string-line-in	method of	si:interactive-stream	7-14
:tyl	method of	si:interactive-stream	7-11
:tyl-no-hang	method of	si:interactive-stream	7-12
:untyl	method of	si:interactive-stream	7-12
:convert-to-device-units	method of	si:make-hardcopy-stream	3-275
:eject-page	method of	si:make-hardcopy-stream	3-274
:set-cursorpos	method of	si:make-hardcopy-stream	3-274
:set-font	method of	si:make-hardcopy-stream	3-274
:show-line	method of	si:make-hardcopy-stream	3-275
:show-rectangle	method of	si:make-hardcopy-stream	3-274
:un-relative-coordinates	method of	si:make-hardcopy-stream	3-275
:active-p	method of	si:process	8-92
:arrest-reason	method of	si:process	8-91
:arrest-reasons	method of	si:process	8-91
:flush	method of	si:process	8-93
:initial-form	method of	si:process	8-89
:initial-stack-group	method of	si:process	8-89
:interrupt	method of	si:process	8-93
:kill	method of	si:process	8-93
:name	method of	si:process	8-89
:preset	method of	si:process	8-92
:priority	method of	si:process	8-90
:quantum	method of	si:process	8-90
:quantum-remaining	method of	si:process	8-90
:reset	method of	si:process	8-92
:revoke-arrest-reason	method of	si:process	8-92
:revoke-run-reason	method of	si:process	8-91
:run-reason	method of	si:process	8-91
:run-reasons	method of	si:process	8-91
:runnable-p	method of	si:process	8-92
:set-priority	method of	si:process	8-90
:set-quantum	method of	si:process	8-90
:set-warm-boot-action	method of	si:process	8-91
:simple-p	method of	si:process	8-91
:stack-group	method of	si:process	8-89
:wait-function	method of	si:process	8-89

<b>:wait-argument-list</b>	method of <b>sl:process</b>	8-90
<b>:warm-boot-action</b>	method of <b>sl:process</b>	8-91
<b>:whostate</b>	method of <b>sl:process</b>	8-90
<b>:get</b>	method of <b>sl:serial-stream</b>	5-252
<b>:put</b>	method of <b>sl:serial-stream</b>	5-252
<b>:read-frame</b>	method of <b>sl:serial-hdlc-mixin</b>	5-263
<b>:write-frame</b>	method of <b>sl:serial-hdlc-mixin</b>	5-263
<b>:operation-handled-p</b>	method of <b>sl:vanilla-flavor</b>	4-142
<b>:which-operations</b>	method of <b>sl:vanilla-flavor</b>	4-142
<b>:any-tyi</b>	method of <b>tv:any-tyi-mixin</b>	4-129
<b>:decode-variable-type</b>	method of <b>tv:basic-choose-variable-values</b>	7-270
<b>:configuration</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:get-pane</b>	method of <b>tv:basic-constraint-frame</b>	7-187
<b>:pane-name</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:send-all-exposed-panes</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:send-all-panes</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:send-pane</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:set-configuration</b>	method of <b>tv:basic-constraint-frame</b>	7-188
<b>:item</b>	method of <b>tv:basic-mouse-sensitive-items</b>	7-283
<b>:item-list</b>	method of <b>tv:basic-mouse-sensitive-items</b>	RN-57
<b>:primitive-item</b>	method of <b>tv:basic-mouse-sensitive-items</b>	7-283
<b>:redisplay</b>	method of <b>tv:basic-scroll-window</b>	7-305
<b>:set-display-item</b>	method of <b>tv:basic-scroll-window</b>	7-305
<b>:deselected-visibility</b>	method of <b>tv:blinker</b>	7-149
<b>:half-period</b>	method of <b>tv:blinker</b>	7-149
<b>:read-cursorpos</b>	method of <b>tv:blinker</b>	7-148
<b>:set-cursorpos</b>	method of <b>tv:blinker</b>	7-148
<b>:set-sheet</b>	method of <b>tv:blinker</b>	7-149
<b>:set-visibility</b>	method of <b>tv:blinker</b>	7-148
<b>:set-deselected-visibility</b>	method of <b>tv:blinker</b>	7-149
<b>:set-follow-p</b>	method of <b>tv:blinker</b>	7-148
<b>:set-half-period</b>	method of <b>tv:blinker</b>	7-149
<b>:border-margin-width</b>	method of <b>tv:borders-mixin</b>	7-171
<b>:set-border-margin-width</b>	method of <b>tv:borders-mixin</b>	7-171
<b>:set-borders</b>	method of <b>tv:borders-mixin</b>	7-171
<b>:set-name</b>	method of <b>tv:changeable-name-mixin</b>	7-173
<b>:set-character</b>	method of <b>tv:character-blinker</b>	7-150
<b>:adjust-geometry-for-new-variables</b>	method of <b>tv:choose-variable-values-window</b>	7-276
<b>:appropriate-width</b>	method of <b>tv:choose-variable-values-window</b>	7-276
<b>:redisplay-variable</b>	method of <b>tv:choose-variable-values-window</b>	7-276
<b>:setup</b>	method of <b>tv:choose-variable-values-window</b>	7-275
<b>:set-variables</b>	method of <b>tv:choose-variable-values-window</b>	7-276
<b>:io-buffer</b>	method of <b>tv:command-menu</b>	7-231
<b>:set-io-buffer</b>	method of <b>tv:command-menu</b>	7-231
<b>:delayed-set-label</b>	method of <b>tv:delayed-redisplay-label-mixin</b>	7-173
<b>:update-label</b>	method of <b>tv:delayed-redisplay-label-mixin</b>	7-173
<b>:update-item-list</b>	method of <b>tv:dynamic-...-menu</b>	7-237
<b>:handle-mouse</b>	method of <b>tv:essential-mouse</b>	7-152
<b>:mouse-click</b>	method of <b>tv:essential-mouse</b>	7-153
<b>:mouse-moves</b>	method of <b>tv:essential-mouse</b>	7-152
<b>:center-around</b>	method of <b>tv:essential-set-edges</b>	7-167
<b>:expose-near</b>	method of <b>tv:essential-set-edges</b>	7-167
<b>:set-edges</b>	method of <b>tv:essential-set-edges</b>	7-167
<b>:set-inside-size</b>	method of <b>tv:essential-set-edges</b>	7-166
<b>:set-position</b>	method of <b>tv:essential-set-edges</b>	7-167
<b>:set-size</b>	method of <b>tv:essential-set-edges</b>	7-166
<b>:draw-circle</b>	method of <b>tv:graphics-mixin</b>	7-124
<b>:draw-circular-arc</b>	method of <b>tv:graphics-mixin</b>	7-124
<b>:draw-closed-curve</b>	method of <b>tv:graphics-mixin</b>	7-124
<b>:draw-cubic-spline</b>	method of <b>tv:graphics-mixin</b>	7-125
<b>:draw-curve</b>	method of <b>tv:graphics-mixin</b>	7-123
<b>:draw-dashed-line</b>	method of <b>tv:graphics-mixin</b>	7-122
<b>:draw-filled-in-circle</b>	method of <b>tv:graphics-mixin</b>	7-125
<b>:draw-filled-in-sector</b>	method of <b>tv:graphics-mixin</b>	7-125
<b>:draw-line</b>	method of <b>tv:graphics-mixin</b>	4-14, 4-116, 7-122
<b>:draw-lines</b>	method of <b>tv:graphics-mixin</b>	7-122

:draw-point	method of tv:graphics-mixin	7-120
:draw-regular-polygon	method of tv:graphics-mixin	7-125
:draw-string	method of tv:graphics-mixin	7-121
:draw-triangle	method of tv:graphics-mixin	7-124
:draw-wide-curve	method of tv:graphics-mixin	7-124
:point	method of tv:graphics-mixin	7-120
:gray-array-for-inferiors	method of tv:gray-deexposed-inferiors-mixin	7-93
:set-gray-array-for-inferiors	method of tv:gray-deexposed-inferiors-mixin	7-93
:gray-array-for-unused-areas	method of tv:gray-unused-areas-mixin	7-93
:set-gray-array-for-unused-areas	method of tv:gray-unused-areas-mixin	7-93
:hysteresis	method of tv:hysteretic-window-mixin	7-158
:set-hysteresis	method of tv:hysteretic-window-mixin	7-158
:label-size	method of tv:label-mixin	7-172
:set-label	method of tv:label-mixin	7-172
:set-margin-choices	method of tv:margin-choice-mixin	7-290
:set-space	method of tv:margin-space-mixin	7-169
:space	method of tv:margin-space-mixin	7-169
:choose	method of tv:menu	7-223
:current-geometry	method of tv:menu	7-214
:deactivate	method of tv:menu	7-223, 7-299
:deexpose	method of tv:menu	7-299
:execute	method of tv:menu	7-223
:expose	method of tv:menu	7-299
:fill-p	method of tv:menu	7-214
:geometry	method of tv:menu	7-214
:refresh	method of tv:menu	7-299
:set-edges	method of tv:menu	7-299
:set-geometry	method of tv:menu	7-214
:set-label	method of tv:menu	7-299
:set-default-font	method of tv:menu	7-299
:set-fill-p	method of tv:menu	7-214
:set-item-list	method of tv:menu	7-299
:add-highlighted-item	method of tv:menu-highlighting-mixin	7-243
:add-highlighted-value	method of tv:menu-highlighting-mixin	7-243
:highlighted-items	method of tv:menu-highlighting-mixin	7-243
:highlighted-values	method of tv:menu-highlighting-mixin	7-243
:remove-highlighted-item	method of tv:menu-highlighting-mixin	7-243
:remove-highlighted-value	method of tv:menu-highlighting-mixin	7-243
:set-highlighted-items	method of tv:menu-highlighting-mixin	7-243
:set-highlighted-values	method of tv:menu-highlighting-mixin	7-243
:choose	method of tv:multiple-choice	7-255
:setup	method of tv:multiple-choice	7-255
:set-size	method of tv:rectangular-blinker	7-150
:baseline	method of tv:sheet	7-142
:bitbit	method of tv:sheet	7-120
:bitbit-from-sheet	method of tv:sheet	7-120
:bitbit-within-sheet	method of tv:sheet	7-121
:bottom-margin-size	method of tv:sheet	7-167
:change-of-size-or-margins	method of tv:sheet	4-116, 7-166
:character-width	method of tv:sheet	7-114
:clear-char	method of tv:sheet	7-113
:clear-window	method of tv:sheet	7-114
:clear-rest-of-line	method of tv:sheet	7-113
:clear-rest-of-window	method of tv:sheet	7-113
:compute-motion	method of tv:sheet	7-114
:current-font	method of tv:sheet	7-142
:deexposed-typein-action	method of tv:sheet	7-116
:deexposed-typeout-action	method of tv:sheet	7-116
:delete-char	method of tv:sheet	7-114
:delete-line	method of tv:sheet	7-114
:delete-string	method of tv:sheet	7-114
:draw-char	method of tv:sheet	7-121
:draw-rectangle	method of tv:sheet	7-124
:edges	method of tv:sheet	7-167
:font-map	method of tv:sheet	7-141
:home-cursor	method of tv:sheet	7-113



- :home-down** method of **tv:sheet** 7-113
- :init** method of **tv:sheet** 4-116, 7-107
- :insert-char** method of **tv:sheet** 7-112
- :insert-line** method of **tv:sheet** 7-112
- :insert-string** method of **tv:sheet** 7-112
- :inside-edges** method of **tv:sheet** 7-167
- :inside-size** method of **tv:sheet** 4-116, 7-166
- :left-margin-size** method of **tv:sheet** 7-167
- :margins** method of **tv:sheet** 7-167
- :more-p** method of **tv:sheet** 7-115
- :name** method of **tv:sheet** 7-172
- :position** method of **tv:sheet** 7-166
- :read-cursorpos** method of **tv:sheet** 7-113
- :refresh** method of **tv:sheet** 4-116, 4-129, 7-113
- :reverse-video-p** method of **tv:sheet** 7-116
- :right-margin-size** method of **tv:sheet** 7-167
- :set-cursorpos** method of **tv:sheet** 7-113
- :set-vsp** method of **tv:sheet** 7-116
- :set-current-font** method of **tv:sheet** 7-142
- :set-deexposed-typein-action** method of **tv:sheet** 7-116
- :set-deexposed-typeout-action** method of **tv:sheet** 7-116
- :set-font-map** method of **tv:sheet** 7-141
- :set-font-map-and-vsp** method of **tv:sheet** 7-142, RN-64
- :set-more-p** method of **tv:sheet** 7-116
- :set-reverse-video-p** method of **tv:sheet** 7-116
- :set-size-in-characters** method of **tv:sheet** 7-166
- :set-truncate-line-out** method of **tv:sheet** 7-118
- :size** method of **tv:sheet** 7-166
- :size-in-characters** method of **tv:sheet** 7-166
- :string-length** method of **tv:sheet** 7-115
- :string-out** method of **tv:sheet** 7-111
- :top-margin-size** method of **tv:sheet** 7-167
- :truncate-line-out** method of **tv:sheet** 7-118
- :tyo** method of **tv:sheet** 7-111
- :vsp** method of **tv:sheet** 7-116
- :who-line-documentation-string** method of **tv:sheet** 7-152
- :any-tyi** method of **tv:stream-mixin** 7-134
- :any-tyi-no-hang** method of **tv:stream-mixin** 7-135
- :clear-input** method of **tv:stream-mixin** 7-135
- :fresh-line** method of **tv:stream-mixin** 7-112
- :line-out** method of **tv:stream-mixin** 7-112
- :listen** method of **tv:stream-mixin** 7-135
- :until** method of **tv:stream-mixin** 7-135
- Methods 4-142
- methods 2-438
- After-daemon methods 2-431
- Before-daemon methods 2-431
- Combined methods 2-431, 2-438
- Combining methods 2-461
- Creating methods 2-429
- Daemon methods 2-431, 4-116
- Defining methods 2-429
- Modifying methods 2-468
- Primary methods 2-431, 4-113, 4-116, 4-121
- Removing methods 2-437
- Zmacs Command: Edit Methods 2-471
- Zmacs Command: Edit Combined Methods 2-472
- Zmacs Command: List Methods 2-471
- Zmacs Command: List Combined Methods 2-471
- Edit Methods (m-X) Zmacs command 4-65, 4-142
- Edit Combined Methods (m-X) Zmacs command 4-142
- List Methods (m-X) Zmacs command 4-142
- List Combined Methods (m-X) Zmacs command 4-142
- Ordering Flavors, Methods, and Wrappers 2-467
- Relationship between methods and messages 2-421
- Notation Conventions for Methods and Variables 1-233

- Deriving Methods for Tools and Techniques 4-3
- :after** method type 2-455, 2-457
- :and** method type 2-455, 2-458
- :before** method type 2-455, 2-457
- :combined** method type 2-455, 2-458
- :default** method type 2-455, 2-457
- :or** method type 2-455, 2-458
- :override** method type 2-455, 2-457
- :whopper** method type 2-455, 2-458
- :wrapper** method type 2-455, 2-458
- Combination Method Types 2-459
- mexp** function 2-369, 4-100
- M Font Editor command 3-260
- Mica 9-16, 9-18
- MIC file type (FEP) 1-208, 5-215, 5-228, 8-49
- microcode 0-49, 0-54, 0-87, 1-210, 5-217
- microcode 0-87
- Microcode Loads 1-208, 5-215
- Microcode Command 1-18
- Microcode command 1-201
- Microcode in Release 6.0: 319. RN-7
- Microcode-name-and-version command 1-201
- Microcode Support for the Digital Audio Facilities 7-321
- Micro PCs 1-215
- microsecond-time** function 7-357
- Microseconds 7-357
- Microtask 7-335
- Microtask 7-321
- Midas Mode 3-157
- MIDAS pathname type abbreviation 5-180
- Middle on Summary Line 6-55
- \*middle-reply-mode\*** variable 6-90
- \*middle-reply-window-mode\*** variable 6-90
- min** function 2-100
- Minibuffer 3-19, 4-8
- Minibuffer 3-19
- Minibuffer 3-175
- Minibuffer 3-51
- minibuffer 3-51
- Minibuffer 3-51
- Minibuffer 1-60
- Minibuffer Prompts 3-42
- Minibuffer (m-ESCAPE) Zmacs command 4-75
- minibuffer command 4-8
- minibuffer command 4-8
- minibuffer command 4-8
- minibuffer command 4-8
- Minibuffer Command 3-51, 3-74
- minibuffer command 4-8
- minibuffer command 4-8
- Minibuffer Prompts 3-42
- Minibuffer Response Format 3-51
- Minibuffer Response Help 3-51
- Minibuffer Responses 3-51
- minimize loop** keyword 2-212
- :minimum-height** init option for **tv:menu** 7-297
- Minimum-length tape spec parameter 0-26
- Minimum-record tape spec parameter 0-26
- :minimum-width** init option for **tv:menu** 7-297
- minimum-window** flavor 7-105
- Minimum disk latency for transfers 8-50
- :minimum-height** init option for **tv:essential-window** 4-116, 7-164
- :minimum-record-length-granularity** option for **tape:make-stream**
- Installing
- Restoring
- Copy
- Load
- New
- Set
- Decoding
- time:**
- Elapsed Time in
- Starting and Stopping the Audio
- The Audio
- Zmacs
- Zmail: Click
- zwei:**
- zwei:**
- Echo Area's
- Evaluate
- More on the
- RETURN key in the
- Yanking in the
- Zmail
- Evaluate
- c-? Zmacs
- COMPLETE Zmacs
- END Zmacs
- HELP Zmacs
- Repeat Last
- RETURN Zmacs
- SPACE Zmacs
- Getting Out of
- More Ways to Enter
- tv:**

- Mode Line's
- Example of Filling Text with Auto Fill
- Built-in Customization Using Zmacs
- Definition of Zmacs
- Major and
- Summary of Zmacs
- How Zmacs
- 269
- Printed Representation of
- SCL and
- Multiple Menu Choose
- Instantiable, Basic, and
- Basic and
- Command Menu
- Dynamic Item List
- Multiple Menu
- A
- :command-only** command processor
- :command-preferred** command processor
- :external** colon
- :form-only** command processor
- :form-preferred** command processor
- :internal** colon
- :mouse** window-positioning
- :point** window-positioning
- :rectangle** window-positioning
- :window** window-positioning
- All reply
- Auto Fill
- Binary
- Character
- Default major
- Editing message
- Example of Filling Text with Auto Fill Minor
- Init File Form: Auto Fill in Text
- Init File Form: Electric Shift Lock in Lisp
- :minimum-record-length** option for
- tape:make-stream** 5-269
- Minimum-record-length tape spec parameter 0-26
- Minimum tape spec parameter 0-26
- :minimum-width** init option for
- tv:essential-window** 4-116, 7-164
- Minor version 4-236
- Minor-mode** 3-20
- Minor Mode 3-195
- Minor Modes 3-195
- Minor Modes 3-195
- Minor Modes 4-12
- Minor Modes 3-196
- Minor Modes Work 3-195
- Minor version number 3-186, 4-231, 4-238
- :minpad** option for formatting functions 5-44
- Minreclen tape spec parameter 0-26
- Minrec tape spec parameter 0-26
- minus** function 2-101
- minusp** function 2-97
- Minute 7-353
- Mirror imaging characters 3-243
- Miscellaneous Conventions 1-227
- Miscellaneous: Interfaces 9-206
- Miscellaneous: Packets 9-202
- Miscellaneous Data Types 2-18
- Miscellaneous file operations failures 2-552
- Miscellaneous Lexical Scoping Changes RN-12
- Miscellaneous Operations Failures 2-552
- Miscellaneous Other Clauses 2-218
- Miscellaneous System Errors Not Categorized by
- Base Flavor 2-536
- mismatch** function 2-641
- Mixin flavor 2-451
- Mixin flavors 7-205
- Mixin and Resource 7-248
- Mixin Flavors 7-205
- Mixing Flavors 2-431
- Mixin Pop-up and Momentary Menus 7-220
- Mixins 7-230
- Mixins 7-235
- Mixins 7-241
- Mixin to Position the Figure 4-113
- :mixture** Option for **defflavor** 2-441, 2-445
- :mmdf** example 9-44
- MNT Maintenance packet 9-121
- mod** function 2-104
- mode 1-165
- mode 1-165
- mode 2-601, 2-603
- mode 1-165
- mode 1-165
- mode 2-601, 2-603
- mode 7-167
- mode 7-167
- mode 7-167
- mode 7-167
- mode 1-67
- Mode 3-142, 3-143, 3-196
- mode 5-91
- mode 5-91
- mode 3-198
- mode 1-57
- Mode 3-195
- Mode 1-170, 3-214
- Mode 1-170, 3-214

Init File Form: Setting Default Major	Mode	1-168, 3-213
Interaction with Peek Network	Mode	9-213
Mail	mode	1-57, 6-39, 6-43
Marking	mode	1-57
Overview of Setting the Major	Mode	3-156
Profile	mode	1-57, 1-170, 1-171
QFILE NORMAL character set translation	mode	9-156
QFILE RAW character set translation	mode	9-156
QFILE SUPER-IMAGE character set translation	mode	9-156
Recursive Mail	Mode	6-46
Reply	mode	1-67
Sender reply	mode	1-67
Setting the Command Processor	Mode	1-165
Setting the Zmacs Major	Mode	3-155
System	mode	8-29
Two window	mode	3-129
User	mode	8-29
Using Zmail Profile	Mode	1-171, 6-58
Zero window	mode	6-38
Zmacs Bollo	Mode	3-157
Zmacs Electric P11	Mode	3-157
Zmacs Fortran	Mode	3-156
Zmacs Fundamental	Mode	3-156
Zmacs Lisp	Mode	3-156
Zmacs Macsyma	Mode	3-157
Zmacs Midas	Mode	3-157
Zmacs P11	Mode	3-157
Zmacs Teco	Mode	3-157
Zmacs Text	Mode	3-156
Atom Word	Mode (m-X)	Zmacs command 4-12
Auto Fill	Mode (m-X)	Zmacs command 4-12
Electric Shift Lock	Mode (m-X)	Zmacs command 4-12
Find File In Fundamental	Mode (m-X)	Zmacs command 3-122
Lisp	Mode (m-X)	Zmacs command 3-170, 4-12
Creating a Fundamental	Mode Buffer	3-122
[Filters (M)] Zmail Profile	Mode command	6-73
[Universes (M)] Zmail Profile	Mode command	6-73
32-bit	mode data	8-29
36-bit	mode data	8-29
Block	mode disk streams	5-221, 8-42
	Mode file attribute	5-109
Editor major	mode for file	5-109
Setting	Mode Hooks in Init Files	1-170, 3-214
Dired	Mode in Zmacs	3-144
Leaving Mail	Mode in Zmail	6-42
Mail	Mode in Zmail	6-37
Zmacs	Mode Line	3-19
Zmail	Mode Line	6-13
Zmail Second	Mode Line	1-62
	Mode Line's <i>Buffer</i>	3-20
	Mode Line's <i>Buffer-status</i>	3-21
	Mode Line's <i>Major-mode</i>	3-20
	Mode Line's <i>Minor-mode</i>	3-20
	Mode Line's <i>Position-flag</i>	3-21
	Mode Line's <i>Version</i>	3-21
	Mode Line Example	3-21
Zmail	Mode Line Information	1-61
	Modem	5-247
Null	modem	5-247
	Modem control parameters	5-253
Draw	Mode Menu	3-228, 3-235, 3-262
[Filters] Profile	Mode menu	6-75
Mousing on the FED Draw	Mode Menu	3-262
Using the mouse in the draw	mode menu	3-262
[Clear Points] Font Editor draw	mode menu item	3-235
[Default] Profile	Mode menu item	1-171, 6-57

- [Exit] Profile Mode menu item 1-171, 6-57
- [File options] Profile Mode menu item 6-78
- [Filters] Profile Mode menu item 6-63, 6-77
- [Flip Points] Font Editor draw mode menu item 3-235
- [Keywords] Profile Mode menu item 6-75, 6-76, 6-77
- [Mail files] Profile Mode menu item 6-77, 6-78
- [Reset] Profile Mode menu item 1-171, 6-57
- [Set Points] Font Editor draw mode menu item 3-235
- [Universes] Profile Mode menu item 6-64, 6-66
- Assignment of RS-232 Signals to Pins in Asynchronous Null Modems 5-247
- Ztop Mode No Longer Supported RN-47
- Profile mode options 1-170, 6-57
- Enter mail mode recursively 6-45
- Built-in Customization Using Zmacs Minor Modes 3-195
- Correspondence of Canonical Types and Editor Modes 5-153
- Definition of Zmacs Minor Modes 3-195
- Editor major modes 5-153
- File Types and Zmacs Major Modes 3-198
- Major modes 5-153
- Major and Minor Modes 4-12
- Peek Modes 1-186
- Reply modes 6-31
- Summary of Zmacs Minor Modes 3-196
- User-defined Zmacs Major Modes 3-198
- Zmacs Major Modes 3-198
- Zmacs Major Editing Modes 3-156
- How Zmacs Minor Modes Work 3-195
- Region Marking Mode Variable 3-211
- Region Right Margin Mode Variable 3-211
- Modification flag 3-114
- Print Modifications (m-X) Zmacs command 4-56
- Show System Modifications Command 1-39
- Modified Two Windows 3-129
- Modified Two Windows (c-X 4) Zmacs command 4-65
- Modifier bits 5-5
- Modifier Key Conventions 1-235
- :**modify-hash** message 2-73
- audio:** **modify-audio-command-arg** function 7-332
- Modifying flavors 2-438, 2-468
- Modifying methods 2-468
- Modifying wrappers 2-468
- CLM: Modifying Sequences 2-640
- Program Development: Modifying the Choice Facilities 7-206
- Modifying the Output Module 4-112
- Modifying values of variables 7-257
- [Modify] Inspector menu item 4-104, 4-298
- Modularity 4-112
- Modularity 2-509
- Modularity 2-510
- Modularity and Object-oriented Programming 2-418
- Module 4-191
- module 4-199
- Module 4-112
- Module specification 4-199
- Module for the Sample Program 4-147
- Module for the Sample Program 4-165
- :**module** option 4-199
- :**module** Option for **defsystem** 4-199
- CLM: Modules 2-640
- defsystem** Modules 4-198
- Interface between two modules 2-569
- Momentary menu 7-84, 7-203, 7-219, 7-223, 7-235, 7-242

- tv:** **momentary-menu** flavor 7-221, 7-293
- tv:** **momentary-menu** resource 7-221
- tv:** **momentary-menu** Example 1: Simple Momentary Menu 7-223
- tv:** **momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
- tv:** **momentary-menu** Example 4: Using the Mouse Buttons 7-225
- tv:momentary-menu** Example 1: Simple Standard
  - The Standard
  - Basic and Mixin Pop-up and Instantiable Pop-up and Using the mouse with
    - tv:** **momentary-multiple-menu** Example 7-243
    - tv:** **momentary-multiple-menu** flavor 7-242
    - Simple
    - tv:** **momentary-window-hacking-menu** flavor 7-221
    - Set
    - meter:** **monitor-all-functions** function 8-61
    - meter:** **monitor-between-functions** function 8-62
    - Month 7-353
    - time:** **month-length** function 7-369
    - time:** **month-string** function 7-370
    - More flag 7-108
    - More processing 7-103, 7-108, 7-115
    - :more-exception** 7-108, 7-116
    - :more-p** init option for **tv:sheet** 7-115
    - :more-p** method of **tv:sheet** 7-115
- netl:** **most-desirable-service-access-path** function 9-42
- Motion 3-57
- Motion 7-114
- Motion 7-159
- Motion Commands 3-60
- Motion Along One Nesting Level 3-65
- Motion Among Top-level Expressions 3-66
- Motion by Character 3-60
- Motion by Line 3-63
- Motion by Lisp Expression 3-65, 3-79
- Motion by Page 3-69
- Motion by Paragraph 3-68
- Motion by Sentence 3-62
- Motion by Word 3-61
- Motion Commands 3-60
- Motion Commands 3-60
- Motion Commands 3-63
- Motion Commands 1-51, 3-60
- Motion Commands 3-60
- Motion Commands 3-60
- Motion up and Down Nesting Levels 3-66
- Motion with Respect to the Whole Buffer 3-70
- Disk
  - mount 1-201, 1-213
  - Mount command 1-201
  - tape:** **mount-error** flavor 2-556, 5-277
  - si:** **mount-disk-unit** function 8-58
  - Mounting a Disk Unit 8-58
  - Mouse 1-48, 3-12, 3-57, 3-118, 3-125
  - Mouse 3-87
  - Mouse 3-235
  - mouse 3-235
  - Mouse 1-48, 3-12
  - mouse 7-151, 7-154
  - Mouse 7-151
- Creating a Region with the
- Drawing Characters in FED with the
- Drawing characters with the
- Entering Zmacs with the
- Grabbing the
- Handling the

- Introduction to Using the Mouse 3-57
- Moving the Cursor with the Mouse 3-57
- Owning of a window by the mouse 7-151
- Scrolling with the Mouse 1-149
- The Arrow Window: Interaction, Processes, and the Mouse 1-7
- Tracking the Mouse 4-129
- Using Zmail with a Broken mouse 7-151, 7-157
- Usurping the Mouse 6-24
- Mouse Behavior 7-281
- Mouse blinker 7-146
- Mouse buttons 1-7
- Mouse Characters 2-273
- Mouse clicks 1-7, 4-129, 7-151, 7-152
- Mouse documentation 7-152
- Mouse Input 7-151
- Mouse position 7-155
- Mouse process 7-151
- Mouse Sensitivity 7-311
- Mouse signals 5-5
- tv:** **mouse-buttons** function 7-158
- tv:** **mouse-input** function 7-157
- :mouse-item** line item entry attribute 7-311
- :mouse-select** message 7-98
- :mouse-self** global line attribute 7-311
- Mouse-sensitive Areas 7-203
- Mouse-sensitive entries 7-308
- Mouse-sensitive Items 7-203
- Mouse-sensitive Areas Example 7-286
- Mouse-sensitive Item 7-280
- Mouse-sensitive Items 7-280
- Mouse-sensitive Items 7-19
- mouse-sensitive items 7-281
- Mouse-sensitive Items Facility 7-279
- Mouse-sensitive Zmacs commands 3-57
- tv:** **mouse-sheet** variable 7-152
- tv:** **mouse-wait** function 7-155
- tv:** **mouse-wakeup** function 7-152
- tv:** **mouse-x** variable 7-155
- tv:** **mouse-y** variable 7-155
- Mouse-1-1 2-32
- Mouse-1-2 2-32
- Mouse-2-1 2-32
- Mouse-2-2 2-32
- Mouse-3-1 2-32
- Mouse-3-2 2-32
- Mouse as a graphic input device 3-227
- Mouse as an input device 7-103, 7-151
- tv:** **mouse-button-encode** function 7-156
- Mouse button encoding 7-311
- mouse buttons 7-151, 7-156, 7-157
- Mouse Buttons 7-225
- Mouse buttons, bit mask 7-229
- Mouse (C-(m)) RN-48
- Mouse Characters RN-22
- mouse-char-p** function 2-273
- mouse click 3-57
- mouse click 3-57
- mouse click 3-57
- mouse click 3-57
- mouse click 3-57
- mouse click 3-57
- :mouse-click** method of **tv:essential-mouse** 7-153
- mouse clicks 3-57
- mouse clicks 7-151
- mouse clicks 7-311
- Attributes of a mouse-sensitive item 7-280
- Associating Actions with Interactive Streams and Using the mouse with The mouse 7-280
- tv:** **mouse-wait** function 7-155
- tv:** **mouse-wakeup** function 7-152
- tv:** **mouse-x** variable 7-155
- tv:** **mouse-y** variable 7-155
- Identifying **tv:momentary-menu** Example 4: Using the mouse 7-225
- New Zwei Command: Copy Use of the mouse 7-225
- L2:Move to point
- L:Move point
- M2:Save/Kill/Yank
- M:Mark thing
- R2:System menu
- R:Menu
- Current meaning of Encoded Reading 7-151

- Initialize Mouse Command 1-24
- Mouse Command Conventions 1-236
- Substitutes for mouse commands 6-23
- Mouse cursor as an arrow 4-297
- Mouse Cursor Shape 1-149
- Mouse Documentation Line 1-5, 3-57, 6-5, 6-15, 6-67, 6-75, 7-156, 7-207, 7-211, 7-259
- Zmail: Mouse Documentation Line 6-5
- Mouse Documentation Line in Zmacs 3-57
- Mouse documentation string 4-129
- Mouse documentation window 7-311
- tv:** **mouse-double-click-time** variable 7-161
- Quick Summary of Mouse Functions 1-149
- :mouse** global line attribute 7-311
- \*mouse-incrementing-keystates\*** variable 7-161
- Using the mouse in the character select pane 3-263
- Using the mouse in the drawing pane 3-262
- Using the mouse in the draw mode menu 3-262
- Using the mouse in the Font Parameters menu 3-263
- Using the mouse in the Inspector 4-297, 4-298
- Using the mouse in the register pane 3-263
- Using the mouse in the sample pane 3-262
- Mouse-L-1 2-32
- Mouse-L-2 2-32
- tv:** **mouse-last-buttons** variable 7-155
- :mouse** line item entry attribute 7-311
- Mouse-M-1 2-32
- Mouse-M-2 2-32
- Installing a Mouse Macro 3-203
- Install Mouse Macro (m-X) Zmacs command 4-64
- tv:** **\*mouse-modifying-keystates\*** variable 7-161
- Scaling Mouse Motion 7-159
- :mouse-moves** method of
- tv:essential-mouse** 7-152
- Using the Mouse on History Elements 3-74
- Using the mouse on the character box 3-238
- :mouse** option for **si:sb-on** 8-80
- :mouse-or-kbd-tyi** and **:mouse-or-kbd-tyi-no-hang**
- Messages Obsolete RN-56
- :mouse-or-kbd-tyi-no-hang** Messages
- Obsolete RN-56
- Controlling the Mouse Outside a Window 7-158
- The User's Process and the Mouse Process 7-206
- Mouse-R-1 2-32
- Mouse-R-2 2-32
- Mouse Scaling Now Works on 3600-family Computers RN-68
- Creating mouse-sensitive-area of screen 7-283
- tv:** **mouse-sensitive-text-scroll-window** flavor 7-174
- Mouse Sensitivities in FED 3-262
- Mouse sensitivity and line items 7-311
- Mouse sequence break 8-80
- tv:** **mouse-set-blinker-cursorpos** function 7-152
- Using the mouse to enter Zmacs 1-48, 3-12
- Using the mouse to scroll the message window 1-64
- Relationship of mouse to windows 7-151
- :mouse** window-positioning mode 7-167
- Using the mouse with Font Editor menus 3-228
- Using the mouse with List Files 3-131
- Using the mouse with menus 7-207
- Using the mouse with momentary menus 7-219
- Using the mouse with mouse-sensitive items 7-281
- Using the mouse with multiple choice window 7-251
- Using the mouse with multiple menus 7-241
- Using the mouse with [List Fonts] Font Editor menu item 3-263
- Using the mouse with [Show Font] Font Editor menu



- item 3-234, 3-263
- tv: **mouse-x-scale-array** variable 7-159
- tv: **mouse-y-or-n-p** function 7-220
- tv: **mouse-y-scale-array** variable 7-160
- Mousing on the FED Character Select Pane 3-263
- Mousing on the FED Drawing Pane 3-262
- Mousing on the FED Draw Mode Menu 3-262
- Mousing on the FED Font Parameters Menu 3-263
- Mousing on the FED List Fonts and Show Font Displays 3-263
- Mousing on the FED Register Pane 3-263
- Mousing on the FED Sample Pane 3-262
- [Move (M)] Zmail command 6-77
- [Move (R)] Zmail menu item 6-70
- Default
  - move-destination file 6-70
  - [Move Black] Font Editor menu item 3-238, 3-259
  - Move cursor to beginning of line 3-56
  - Move drawing in the gray plane 3-239, 3-260
- h-F
  - Move Forward Over Address Zmail Command 6-45
  - [Move Gray] Font Editor menu item 3-239, 3-260
  - Move In Place of Referenced Message 6-72
- Summary of Cursor
  - Movement 3-54
  - Movement and Deletion 6-49
  - movement commands 1-50, 1-51, 3-26, 3-60
- Zmail Message
  - Cursor
    - Movement Commands 6-49
    - Movement Commands 6-49
- Simple Zmail Message
  - Zmail Message
    - [By individual filters] Map over
      - [Find file] Map over
        - [New collection]
          - [Recycled collection]
            - [Recycled temporary]
              - Dired
                - L:
                  - move point 3-149
                  - Move point mouse click 3-57
                  - Move to Default Previous Point 3-88
                  - Move to Default Previous Point (m-X) Zmail command 6-50
                - L2:
                  - Move to point mouse click 3-57
                  - Move to Previous Point 3-88
                  - Move To Previous Point (c-m-SPACE) Zmacs command 4-59
                  - Move to Previous Point (m-X) Zmail command 6-50
                  - [Move View] Font Editor menu item 3-255, 3-259
                  - [Move Window] Edit Screen menu item 7-76
                  - [Move] Map over menu item 6-80
                  - [Move] Zmail menu item 1-108, 3-268, 6-58, 6-70, 6-77, 6-79, 6-81
              - Moving messages 6-80
              - Moving Text 4-59
              - Moving Among Zmail Messages Using the Message Stack 6-50
              - Moving Around in Dired 3-149
              - Moving Around Zmail Messages 1-66
              - Moving a Zmail Message to a File 6-70
              - Moving Down to Lisp Comment on Next Line in Zmacs 3-172
              - Moving Rest of Line Down in Zmacs 3-166
            - Moving the cursor 3-57
            - Moving the Cursor 1-50, 3-26
            - Moving the Cursor 1-50, 3-26
            - Moving the Cursor 3-54
            - Moving the Cursor 1-50, 3-26
            - Moving the Cursor in Zmacs 3-53
            - Moving the Cursor with the Mouse 3-57
            - Moving the drawing 3-246, 3-259
            - Moving the Drawing Horizontally and/or Vertically in FED 3-255
    - Description of
      - Introduction to
        - Overview of
          - Summary of

- Moving the Drawing in FED 3-246
  - Moving Through Text 4-59
  - Moving to a Specified Line 3-56
  - Moving to end of buffer 3-70
  - Moving to Locations in Registers 3-89
  - Moving to Previous Points 3-88
  - Moving up to Lisp Comment on Previous Line in Zmacs 3-172
  - MS-DOS Pathnames 5-186
  - Msg 6-72
  - Msg 6-71
  - Msg (m-X) Zmail command 1-67
  - Msg (m-X) Zmail Command 6-29
  - Msg (m-X) Zmail Command 6-25
  - Msgs 6-71
  - Msgs (m-X) Zmail command 6-68
  - Msgs (m-X) Zmail command 6-68
  - Msg Zmail Menu Item 6-41
  - Msg] Editor menu item 6-42
  - m-sh-A input editor command 1-122
  - (m-sh-C) Zmacs command 4-70
  - m-sh-D command 2-302
  - (m-sh-D) Zmacs command 4-39, 4-42
  - m-sh-D editor command 1-122
  - m-sh-D Zmacs command 3-47
  - (m-sh-E) Zmacs command 4-75
  - m-sh-E Zmacs command 3-175
  - m-sh-F input editor command 1-122
  - m-sh-M RN-47
  - m-sh-V input editor command 1-122
  - Multibyte words 9-198
  - Multicolumn menu 7-215
  - Multicolumned Menu 7-215
  - Multics Pathnames 5-184
  - Multics external arrays 2-262
  - Multidimensional Arrays 2-237
  - multidimensional arrays 2-641
  - Multidimensional Arrays as One-dimensional 2-245
  - Multidimensional array subscripts 2-245
  - Multilevel Qualified Package Names 2-586
  - Multipackage Programs 2-621
  - Multiple buffers 3-114, 4-65
  - Multiple Menus 7-203, 7-241
  - Multiple Values 2-167
  - Multiple windows 3-114, 4-65
  - multiple-choice** 7-255
  - multiple-choice** 7-255
  - tv:** **multiple-choice** Example 7-255
  - tv:** **multiple-choice** flavor 7-254
  - tv:** **multiple-choice** Menu Messages 7-255
  - tv:** **multiple-choose** function 7-252
  - :multiple-choose** message 7-247
  - tv:** **multiple-choose** Menu Example 7-253
  - Multiple-line objects 7-305
  - tv:** **multiple-menu** flavor 7-242
  - multiple-value** special form 2-168, 4-116
  - Multiple and Out-of-order Evaluation 2-363
  - Multiple Choice Facility 7-251
  - Multiple Choice Flavor 7-254
  - Multiple Choice Function 7-252
  - Multiple Choice Menu Flavors 7-254
  - Multiple Choice Menus 7-203, 7-251
  - multiple choice window 7-251
  - Multiple choice window parameters 7-251, 7-255
  - Multiple disk drives 1-213
  - Multiple Disk Units 1-213
- Saving and
    - Append to Referenced
    - Select Referenced
    - Decrypt
    - Redistribute
    - Revoke
    - Delete Referenced
    - Delete Duplicate
    - Delete Referenced
    - Save Draft as
    - [Send]
  - Compile Changed Definitions Of Buffer
  - Long Documentation
  - Evaluate Changed Definitions Of Buffer
  - Macro Expand Expression All Now Bound to
  - Geometry Example 1: a
    - SCL and Accessing
  - :choose** method of **tv:**
  - :setup** method of **tv:**
  - tv:**
  - tv:**
  - tv:**
  - tv:**
  - tv:**
  - The
  - The Basic
  - The Standard
  - Instantiable
  - Using the mouse with

- Multiple Document Examiner viewers 1-129
- Multiple dynamic columns 7-236
- Multiple Edit Callers (m-X) Zmacs command 4-44
- fs:** **multiple-file-not-found** flavor 2-548
- fs:** **multiple-file-plists** function 5-119
- Deleting Multiple File Versions in Dired 3-151
- Hardcopy files with multiple fonts 3-273
- Querying While Making Multiple Global Replacements in Zmacs 3-103
- Configuring Large Sites for Multiple List Callers (m-X) Zmacs command 4-44
- Multiple Mail Servers 0-64
- Multiple menu choose 7-247
- tv:** **multiple-menu-choose** Example 7-248
- tv:** **multiple-menu-choose** function 7-247
- The Multiple Menu Choose Facility 7-247
- Instantiable Multiple Menu Choose Flavors 7-249
- The Standard Multiple Menu Choose Function 7-247
- tv:** **multiple-menu-choose-menu** Example 7-249
- tv:** **multiple-menu-choose-menu** flavor 7-249
- tv:** **multiple-menu-choose-menu-mixin** flavor 7-248
- Multiple Menu Choose Menus 7-203
- Multiple Menu Choose Mixin and Resource 7-248
- Selecting multiple menu items 7-241
- :special-choices** init option for **tv:** **multiple-menu-mixin** 7-242
- tv:** **multiple-menu-mixin** flavor 7-241
- tv:** **multiple-menu-mixin** Messages 7-243
- tv:** **multiple-menu-mixin** Init-plist Options 7-242
- Multiple Menu Mixins 7-241
- Instantiable Multiple Menus 7-242
- Using the mouse with multiple menus 7-241
- LMFS Multiple Partitions 0-35, 5-213
- Multiple paths to a service 9-43
- Multiple physical hosts 5-196, RN-72
- Multiple reel tape files 1-201
- multiple-value-bind** special form 2-168
- multiple-value-call** special form 2-168
- multiple-value-list** special form 2-168
- multiple-value-prog1** special form 2-169
- CLM: Rules Governing the Passing of Multiple Values 2-639
- Functions that return multiple values 2-167
- Interaction of Some Common Special Forms with Multiple Values 2-169
- Passing-back of Multiple Values 2-169
- Primitive for Producing Multiple Values 2-167
- Special Forms for Receiving Multiple Values 2-167
- Displaying multiple values of a function 7-308
- Deleting Multiple Versions 3-135
- Using Multiple Windows 4-65
- Multiplication 2-102
- math:** **multiply-matrices** function 2-258
- Multiprocessing 8-75
- Hash table considerations while using multiprocessing 2-69
- Music systems 7-324
- Save All Files (m-X) Renamed to Save File Buffers (m-X) RN-47
- chaos:** **my-address** variable 0-83
- My Address register 9-131
- c-X M Zmail Command 6-46
- Cannot [Select M] Zmail 6-24

## N

SELECT N 3-40  
 Network (N) 1-188  
   N-buffers tape spec parameter 0-26  
   N-buffs tape spec parameter 0-26  
   N-bufs tape spec parameter 0-26  
   Name 1-112, 9-4, 9-29  
   name 8-103  
   name 7-179  
   name 1-119, 1-120  
   name 5-222, 8-43  
   name 5-151  
   **name** 9-31  
   name 1-136  
   name 1-113, 9-5  
   name 2-645  
   Name 5-122, 5-160  
   Name 1-11  
   name 7-297  
   Name Conflicts 2-357, 2-613  
   **:name** message 5-145, 9-32  
   NAME protocol 9-126  
   Name (m-X) Zmacs command 3-122  
   **name-char** function 2-273  
   **name-conflict** flavor 2-619  
   Name-conflict Errors 2-593  
   Name-conflict Errors 2-595  
   Name/Finger protocol 9-126  
   **name:** Host Object Attribute 9-7  
   **name:** Network Object Attribute 9-14  
   **name:** Printer Object Attribute 9-16  
   **name:** User Object Attribute 9-12  
   name conflicts 2-581  
   name conflicts 2-574  
   name conventions 5-127  
   Named Structures 2-403  
   Named Structures 2-403  
   Named-lambda expression as line item entry 7-308  
   Named Constant 2-135  
   **named loop** keyword 2-218  
   named objects 1-113, 9-5  
   **:named** option for **defstruct** 2-385, 2-389  
   **:named** option for **defstruct** 2-642  
   **:named** option for **defstruct-define-type** 2-410,  
     2-411  
   named structure 4-299  
   Named structure array 2-238, 2-241  
   **named-structure-invoke** 2-403, 2-404  
   **named-structure-invoke** 2-403, 2-404  
   **named-structure-invoke** 2-403, 2-404  
   **named-structure-invoke** function 2-405  
   **named-structure-p** function 2-405  
   Named Structures 2-405  
   Named Structures 2-403  
   Named Structures 2-16  
   Named Structures 2-17  
   Named structure symbol 2-403  
   **named-structure-symbol** function 2-405  
   **:named-structure-symbol** option for  
     **make-array** 2-241  
   **:name-font** init option for  
     **tv:basic-choose-variable-values** 7-274  
   **:name-for-selection** message 7-96

## N

## N

Area  
 Constraint frame configuration  
 Documentation topic  
   FEP directory  
 Host-independent file  
 Messages to **netl:**  
   Private document  
   Qualified  
 SCL and **ieee-floating-point** feature  
   Special Defaulting of the  
   Supplying a Command  
   Window  
  
 Set Visited File  
  
   **sys:**  
   Package  
 Resolving Package  
   Arpanet  
  
   Package  
   Symbol  
   File  
  
 Special Form for Declaring a  
   Globally  
   SCL and  
  
   Inspecting a  
   **:describe** keyword for  
   **:print-self** keyword for  
   **:which-operations** keyword for  
  
   Functions That Operate on  
   Handler Functions for  
   Printed Representation of Arrays That Are  
   Printed Representation of Arrays That Are Not

- Maclisp
- Why Do You
  - Print
  - The Print
  - True
  - Primary
- Chaosnet
- Character
- Command
- Compiled file
- Data type
- Default mail file
- Font
- Format of patch file
- Forms of qualified
- Inbox file
- Introduction to Package
- Introduction to Qualified Package
- Maclisp property
- Maclisp system property
- Message
- Multilevel Qualified Package
- Notation Conventions for Packages and Keyword
- Other mail file
- Package
- Proceed Type
- Qualified
- Qualified Package
- Relative Package
- Renamed inbox file
- SCL and printed character
- Shadowing package
- Source file
- Special Character
- Structure
- Symbolic host
- Zmacs Buffer and File
- Contact
- Messages to Namespace
- Mapping Between
- Qualified Package
- Disk File
- Symbolic
- :name** init option for **tv:menu** 7-297
- :name** init option for **tv:sheet** 7-171
- name** keyword for **terminal-f-argument** attribute 9-7
- Name Last Kbd Macro (m-X) Zmacs command 3-203, 4-64
- namelist** function 5-201
- Name Machines and Printers? 1-229
- :name** message to **sys:package-not-found** 2-542, 2-619
- :name** method of **fs:pathname** 5-166
- :name** method of **sl:process** 8-89
- :name** method of **tv:sheet** 7-172
- name of a symbol 2-3
- Name of a Symbol 2-565
- name of file 5-107
- name of object 9-32
- :name** Option for **defsystem** 4-194
- :name** option for **make-area** 8-104
- :name** option for **process-run-function** 8-86
- :name** option for **process-run-restartable-function** 8-87
- Name Protocol 9-126
- Names 2-559, 4-41
- Names 2-273
- Names 1-49, 3-6
- names 6-94
- names 2-576
- names 6-94
- names 7-140, 7-145
- names 4-236
- names 2-585
- names 6-94
- Names 2-581
- Names 2-584
- names 2-564
- names 2-564
- names 2-423
- Names 2-586
- Names 1-234
- names 6-94
- Names 2-581
- Names 2-520
- names 2-589
- Names 2-584
- Names 2-582, 2-610
- names 6-94
- names 2-644
- names 2-582
- names 6-94
- Names 2-32
- names 2-383
- names 9-104
- Names 3-114
- :names** message 9-32
- Names: Chaosnet Software Protocol 9-103
- Names and Namespaces 1-113, 9-5
- Names and Objects 9-31
- Names and Packages 2-607
- Names as Interfaces 2-585
- Names for Zmail 6-94
- Names of commands 3-7, 3-45
- Names of functions 2-297
- Names of Patch Files 4-236
- Names of processes 8-87
- names of shift keys 7-160

- Qualified Changes to Registering a Tape Drive in the Registering Users and Hardware in the Site's
  - Names of Symbols 2-585
  - namespace 9-26
  - Namespace 0-72
  - Namespace 0-71
  - Namespace attributes 9-21
  - Namespace classes 0-87
  - Namespace database 0-87
  - Namespace editor 9-22
  - :namespace** message 9-31
  - Namespace object 0-87, 1-112
  - Namespace Objects 9-4, 9-21
  - Namespace server 0-87
  - namespace** Service 9-59
  - Namespace System 9-3
  - net:**
    - \*namespace\*** variable 9-29
    - namespace-timestamp** Service 9-60
    - Namespace Attributes for a New Lispm Host 0-79
    - Namespace Attributes for a New UNIX Host 0-80
    - Namespace Attributes for a New VMS Host 0-80
    - Namespace Attributes for New Hosts 0-79
    - Namespace Classes 9-35
    - namespace database 9-22
    - Namespace Database 9-79
    - namespace database 9-22
    - Namespace Database 9-24
    - namespace database 9-206
    - namespace database 9-28
    - Namespace Database 1-116
    - Namespace Database Changes Files 9-26
    - Namespace database descriptor files 9-24
    - Namespace Database Log Files 9-26
    - Namespace Database Object Files 9-25
    - Namespace descriptor file 0-87
    - Namespace Names and Objects 9-31
    - Namespace Object 1-117
    - Namespace Object 1-117
    - Namespace Object Attribute 9-22
    - Namespace Object Attribute 9-22
    - Namespace Object Attribute 9-22
    - Namespace Object Attribute 9-21
    - Namespace Object Attribute 9-22
    - Namespace Object Command 0-73, 1-21, 9-22
    - Namespace Protocol 9-33
    - Namespaces 1-113, 9-5
    - \*namespace-search-list\*** variable 9-29
    - namespace server 9-24
    - Namespace Server Files 9-24
    - Namespace System 9-33
    - Namespace System 1-111, 9-3
    - Namespace System 9-29
    - Namespace System 1-111
    - Namespace System 9-22
    - Namespace System Administrative Functions 9-28
    - Namespace System Attributes 1-112, 9-4
    - Namespace System Attributes 1-112, 9-4
    - Namespace System Classes 1-112, 9-4
    - Namespace System Functions 9-29
    - Namespace System Host Objects 9-7
    - Namespace System Lisp Data Types 9-29
    - Namespace System Network Objects 9-14
    - Namespace System Object Definitions 9-7
    - Namespace System Printer Objects 9-16
    - Namespace System Site Objects 9-18
    - Namespace System User Objects 9-11
    - Namespace System Variables 9-29
    - Namespace Timestamp Protocol 9-35
- Defining Adding new objects to the Dialnet Representation in the Editing objects in the Managing the Network not in Update the Updating the
  - Messages to Creating a New Editing a
    - descriptor-file:**
    - internet-domain-name:**
    - primary-name-server:**
    - search-rules:**
    - secondary-name-server:**
    - Edit
    - Network
    - Names and
      - net:**
        - Primary
        - Lisp Machine
        - Implementation of the
        - Introduction to the
        - Software Interface to the
        - Understanding Networks and the
        - User Interface to the
    - Data Types of

- Symbol print
- Mapping
- Functions That Map
- Mapping
- Mapping from
- Maclisp
- Init File
- Pathname Messages:
- si:
- sys:
- Testing for
- Square root of a
- Example of
- Printing
- Motion Along One
- Motion up and Down
- [Namespace] System Menu Item 9-22
- names storage area 8-107
- names to objects 1-113, 9-5
- Names to Symbols 2-605
- Names to Symbols 2-604
- names to symbols 2-559
- namestring** function 5-201
- :name-wild-p** method of **fs:pathname** 5-173
- Naming convention 2-7
- Naming a File 3-121
- Naming a Keyboard Macro 3-203
- Naming Conventions 5-200
- Naming mail collections 6-79
- Naming of FEP Files 5-222, 8-43
- Naming of Files 5-127
- Naming of Files 5-165
- Native case representation 5-145
- Native pathname component case 5-145
- Natural logarithms 2-106
- NBS encryption 1-67
- nbutlast** function 2-53, 2-252
- nc-N* Zmail command 6-67
- nc-P* Zmail command 6-67
- nconc** function 2-52, 2-56
- nconcing loop** keyword 2-212
- nconc loop** keyword 2-212
- :nconc** method combination type 2-455, 2-456
- ncons** function 2-45, 2-56
- ncons-in-area** function 2-45
- \*n-disk-retries\*** variable 8-36, 8-38
- :near-mode** init option for
- tv:choose-variable-values** 7-263
- negative-sqrt** flavor 2-536
- negative number 2-97
- negative number error 2-536
- Negative Numeric Arguments and Motion
- Commands 3-60
- Negative Numeric Arguments with Motion
- Commands 3-60
- neq** function 2-10
- nested lists 2-17
- Nesting Macros 2-366
- Nesting Level 3-65
- Nesting Levels 3-66
- net** package 2-615
- net:abort-service-access-path-future** function 9-43
- net:after-network-initialization-list** variable 9-211
- net:continue-service-access-path-future** function 9-42
- net:define-medium** macro 9-209
- net:define-medium** special form 9-45
- net:define-protocol** special form 9-50, 9-209
- net:define-server** special form 9-51
- net:find-object-from-property-list** function 9-30
- net:find-object-named** function 9-29
- net:find-objects-from-property-list** function 9-30
- net:find-paths-to-protocol-on-host** function 9-41
- net:find-paths-to-service** function 9-41
- net:find-paths-to-service-on-host** function 9-41
- net:find-path-to-protocol-on-host** function 9-41
- net:find-path-to-service-on-host** function 9-41
- net:finger-location** variable 9-135
- net:finger-all-lispms** function 9-135
- net:finger-local-lispms** function 9-135
- net:get-connection-for-service** function 9-51
- net:invoke-multiple-services** macro 9-50







- Local
- Remote
- sys:**
  - :network** option for **net:define-server** 9-51
  - Network Problems 2-554
  - Network Problems 2-554
  - network-resources-exhausted** flavor 2-554
  - Networks 1-113, 9-5, 9-206, RN-1
  - networks 9-37
  - Networks 9-1
  - networks 9-211
  - Networks 9-93
  - Networks 9-91
  - Networks and Addresses 9-37
  - Networks and the Namespace System 1-111
  - Networks in Release 6.0 RN-75
  - Networks in Release 6.0 RN-75
  - Networks in Release 6.0 RN-75
  - :network** step type 9-44
- New Stream Handling Error Flavors: **sys:stream-closed** and **sys:network-stream-closed** RN-38
  - network-stream-closed** flavor 2-556
  - Network System 9-195
  - Network System 9-37
  - network type 9-44
  - network type 9-15
  - network type 9-15
  - network type 9-15
  - network type 9-15
  - network type 9-15
  - network-type-flavor** property 9-206
  - NETWORK X command 1-115
  - never loop** keyword 2-215
  - New mail 6-11, 6-12, 6-46
  - New messages 6-46
  - New space 8-117
  - New &-Keywords for **defmacro** RN-39
  - :new-device** method of **fs:pathname** 5-167
  - :new-directory** method of **fs:pathname** 5-167
  - :new-name** method of **fs:pathname** 5-167
  - :new-name** proceed type 2-542, 2-619
  - :new-pathname** message 5-140, 5-145
  - :new-pathname** method of **fs:pathname** 5-170
  - :new-pathname** Translation Rule 5-192
  - :new-type** method of **fs:pathname** 5-168
  - :new-version** method of **fs:pathname** 5-168
  - New Array Error Flavor:
    - sys:array-wrong-number-of-subscripts** RN-38
- Reading a File Into a
- Selecting a FED Character by Creating a
  - Creating
  - Indent
  - Creating
- Source Compare
- Source Compare Merge
- >
  - :newest** pathname component 5-140, 5-170
  - :newest** symbol in **make-system :version** option 4-222
  - :newest** version specifier 5-186
  - New Facility: Heaps RN-36
  - New Feature: Window Graying RN-61

- New Feature in Release 6.0: Symbolics Common Lisp RN-45
- New Feature in Release 6.0: the Command Processor RN-61
- New Feature in Release 6.0: the Document Examiner RN-52
- New Features in Lisp in Release 6.0 RN-31
- New Features in Networks in Release 6.0 RN-75
- New Features in the User Interface in Release 6.0 RN-61
- New Features in Utilities in Release 6.0 RN-51
- New Features in Zmacs in Release 6.0 RN-48
- New Files 3-115
- New Files 1-168, 3-214
- [New filter] Filter Selection Display menu item 6-60
- New Flavor:
  - sys:float-invalid-compare-operation** RN-38
- Creating a
  - New Font in FED 3-230
  - New Function: **array-column-major-index** RN-37
  - New Function: **array-push-portion-extend** RN-37
  - New Function: **change-instance-flavor** RN-31
  - New Function: **conjugate** RN-35
  - New Function: **copytree-share** RN-37
  - New Function: **location-contents** RN-36
  - New Function: **string-nconc-portion** RN-38
  - New Function: **tand** RN-33
  - New Function **note-private-patch** Adds Private Patch to Your World RN-53
  - New Functions: **%32-bit-plus** and **%32-bit-difference** RN-33
  - New Functions for Converting Non-integral Numbers to Integers RN-36
  - New Functions for Converting Numbers to Floating-point Numbers RN-36
  - New Function **si:map-system-files** Operates on a Declared System RN-53
  - New Function **si:set-system-file-properties** Operates on a Declared System RN-53
- Namespace Attributes for
  - Creating a
    - New Hosts 0-79
    - New Indented Lisp Comment Line in Zmacs 3-172
    - New Input Editor Commands: PAGE, COMPLETE, c-? RN-61
    - New Input Editor Help Options RN-63
    - New Input Editor Options RN-63
    - new keywords to initialization functions 8-67
    - New Keywords to **make-system** 4-227
    - New Keywords to **typep** RN-33
    - New Language for Specifying Frame Constraints RN-57
  - Starting a
    - New Line 3-22
    - Newline characters 3-22
    - New Line (LINE) Zmacs command 4-26
    - New Line in Zmacs 3-164
    - New Line with This Indentation in Zmacs 3-166
  - Indenting
    - New Lisp Host 0-79
    - new logical host 5-197
    - New Logical Pathname Translations RN-71
  - Installing
    - New **loop** Indentor RN-47
    - new machines 0-87
    - New Macro: **defwhopper-subst** RN-32
    - New Macro: **unwind-protect-case** RN-37
    - New Macro:
      - si:define-simple-method-combination** RN-32
  - Getting
    - new mail 1-64
  - Check for
    - New Mail (m-X) Zmail Command 6-48
    - \*new-mail-file-append-p\*** variable 6-92
- Init File Form: Setting Find File Not to Create
- Buffer Flags for
- zwei:

- Upgrading an existing system to a new major release 0-87
- Bringing up a new major release on a newly acquired machine 0-87
- Create a new message 6-27
- New Message to Error Flavor
  - fs:directory-not-found** RN-39
- New Message to Input Streams: **:input-wait** RN-62
- New Message to Interactive Streams:
  - :noise-string-out** RN-63
- New Message to Streams: **:interactive** RN-62
- New Message to Windows:
  - :set-font-map-and-vsp** RN-64
- Adding new methods 2-438
- Installing New Microcode 0-54
- New Microcode in Release 6.0: 319. RN-7
- Creating a New Namespace Object 1-117
- Adding new networks 9-37
- New Notification System RN-64
- Adding new objects to the namespace database 9-22
- :new-ok** option for **fs:complete-pathname** 5-120, 5-158
- New Optional Arguments to **:initial-input** Input Editor Option RN-67
- New Optional Argument to **:replace-input** Message to Interactive Streams RN-67
- New Option for **defwindow-resource**:
  - :superior** RN-68
- Adding New Options to **defsystem** 4-214
- New Option to **defflavor**:
  - :export-instance-variables** RN-31
- New Option to **defstruct**: **:export** RN-32
- [New Properties] File System Editor menu item 5-233
- FSEdit [New Property] Command 5-234
- :new-raw-device** message 5-145
- :new-raw-device** method of **fs:pathname** 5-168
- :new-raw-directory** message 5-145
- :new-raw-directory** method of **fs:pathname** 5-168
- :new-raw-name** message 5-145
- :new-raw-name** method of **fs:pathname** 5-168
- :new-raw-type** message 5-145
- :new-raw-type** method of **fs:pathname** 5-169
- New Reading Functions RN-61
- New Readtables 2-33
- Functions That Create new release 0-87
- Loading and booting a new releases distributed in patch tape format 0-87
- Installing new site 0-87
- Defining a New Software 0-49
- Installing New Special Form:
  - without-floating-underflow-traps** RN-32
- New Special Forms: **left** and **left\*** RN-37
- New Special Forms for Destructuring RN-40
- New Special Forms for Lexical Scoping RN-11
- New Special Forms: tv:with-mouse-and-buttons-grabbed,
  - tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
- New Stream Handling Error Flavors: sys:stream-closed and
  - sys:network-stream-closed** RN-38
- CLM: Creating New Streams 2-643
- :new-symbol-function** Option for **defpackage** and **make-package** 2-601, 2-603
- Adding new symbols to locked packages 2-626
- New Time Functions RN-65
- New Transcendental Functions RN-35
- New Type for **:start-typeout** Message to Interactive

- Streams: **:clear-window** RN-67
- [New universe] Universe Selection Display menu item 6-64
- New UNIX Host 0-80
- New Versions of World Loads 0-45
- New Versions of World Loads 0-45
- :new-version** symbol in **:if-exists** option for **open** 5-222, 8-43
- New VMS Host 0-80
- new world to other machines 0-87
- New-Zetalisp String and Character Compatibility RN-18
- New Zmacs Commands with Keyboard Macros 3-199
- New Zwei Command: Copy Mouse (C-(m)) RN-48
- [New] Keywords menu item 6-75
- Next frame 2-494
- Next Page 1-50, 3-26, 3-69
- Next Possibility 3-110
- Next Screen 1-50, 3-26
- \*next-after-delete\*** variable 6-86
- Next Kill 3-75
- Next Line in Zmacs 3-172
- \*next-middle-mode\*** variable 6-87
- Next Possibility 3-110
- Next Possibility 3-110
- Next Screen 3-55
- Next Screen and Previous Screen RN-47
- Next Undumped 3-153
- [Next] Zmail menu item 1-66, 6-49, 6-67
- nickname**: Host Object Attribute 9-7
- nickname**: Network Object Attribute 9-14
- nickname**: User Object Attribute 9-13
- Nicknames 1-113, 9-5
- :nicknames** Option for **defpackage** and **make-package** 2-599, 2-601
- NIL 2-205, 2-220
- nil** 2-519
- nil** 5-186
- nil** symbol 2-561
- nil** argument to **setsyntax** 2-36
- Nil as a menu item 7-208
- nil** blinker visibility 7-146
- :nil** option for **trace** 4-92
- nil** option for window size and position messages 7-162
- nil** pathname component 5-140
- nil** symbol in **:if-exists** option for **open** 5-222, 8-43
- nil** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- nintersection** function 2-62
- nJ** Zmail command 6-67
- nleft** function 2-53
- :n-levels** option for **make-area** 8-104
- nlistp** function 2-7
- N** longs failed. 1-44, 1-199
- nN** Zmail command 6-67
- :no-action** proceed type 2-523, 2-542, 2-543, 2-619
- :no-eof** property 9-215
- :no-select** menu item type 7-210
- No-unwind options for **:reset** 8-92
- sys**: **no-action-mixin** flavor 2-532
- :no-bot-prompt** option for **tape:make-stream** 5-269
- :no-close** stream option for **net:define-server** 9-51
- :noconfirm** Option for **make-system** 4-222
- Bridge node 9-96
- Network node 9-96
- Namespace Attributes for a Concepts: Saving Saving
- Namespace Attributes for a Distributing a Old-Zetalisp and Creating
- zwel**: Append
- Moving Down to Lisp Comment on **zwel**: Displaying the Example of Displaying the SCROLL and m-SCROLL Now Display Dired
- :proceed** Can Return Double-arrow character in logical pathnames for
- Request for

- nodeclare loop** keyword 2-210
- :no-eof** stream option for **net:define-server** 9-51
- condition-call** and **:no-error** 2-493
- :noerror** option for **fs:directory-list** 5-117
- :noerror** option for **with-open-file** 5-91
- :no-extra-info** option for **fs:directory-list** 5-117
- NO-EXTRA-INFO** QFILE DIRECTORY option 9-188
- fs:** **no-file-system** flavor 2-546
- Set** **nofill** (m-X) Zmacs command 3-142, 3-143, 4-10
- nofill** file attribute 3-142, 3-143
- :no-increment-patch** Option for **make-system** 4-223
- :no-input-save** option 5-63, 7-31
- :no-input-save** option for **fquery** 7-56
- :noise-string-out** RN-63
- :noise-string-out** method of **si:interactive-stream** 5-72, 7-40
- :noload** Option for **make-system** 4-223
- New Message to Interactive Streams:** **No Longer Work for Special Forms** RN-27
- apply** and **funcall** **No method for message** 2-542
- fs:** **no-more-room** flavor 2-552
- New Functions for Converting SCL and SCL and** **Non-integral Numbers to Integers** RN-36
- non-null hosts** 2-644
- non-terminating macro** character attribute 2-643
- :non-complex-number** argument to **typep** 2-9
- Nongeneric protocols** 9-44
- Nonincremental garbage collection** 8-113
- Nonlocal Exits** 2-197
- Nonlocal exit control structures** 2-175
- Nonmouse cursor** 3-235, 3-236, 3-261
- Nonmouse Cursor** 3-236
- The FED** **non-positive-log** flavor 2-534
- sys:** **nonpositive number error** 2-534
- Logarithm of Character code for** **nonprinting characters** 2-27
- Support for** **Non-real-time synthesis** 7-343, 7-344
- Non-real-time Synthesis Example** 7-343
- Nonstandard Character Sets** 2-275
- \*noop** Option for **make-system** 4-223
- \*nopoint** variable 2-14, 7-257
- Dired Complement** **No Reap Flag** 3-152
- No Response After Zmail Error** 6-24
- :norewind** option for **tape:make-stream** 5-269
- QFILE** **NORMAL** character set translation mode 9-156
- :normal** deexposed timeout action 7-82
- :normal** option for **add-initialization** 8-67
- tv:** **no-screen-managing-mixin** flavor 7-87
- :noselective** Option for **load-patches** 4-245
- not** function 2-12
- fs:** **not-available** flavor 2-553
- Exponential Documentation** **notation** 2-14
- Example 1 of Zmacs** **Notation Conventions** 1-231
- Example 2 of Zmacs** **Notation Conventions** 3-9
- Example 3 of Zmacs** **Notation Conventions** 3-9
- Understanding Zmacs Manual** **Notation Conventions** 3-9
- Notation Conventions** 1-231
- Notation Conventions** 3-9
- Notation Conventions for Character Case** 1-234
- Notation Conventions for Functions** 1-231
- Notation Conventions for Lisp Objects** 1-231
- Notation Conventions for Maclisp** 1-235
- Notation Conventions for Macro Characters** 1-233
- Notation Conventions for Macros and Special Forms** 1-232
- Notation Conventions for Methods and Variables** 1-233
- Notation Conventions for Packages and Keyword**

- Names 1-234
- Notation Conventions for Quoting Characters 1-233
- Notation Conventions for the Character Set 1-235
- Notation Conventions Quick Reference 1-235
- :not-backed-up** file property 5-117
- fs:** **not-enough-resources** flavor 2-547
- New Function **note-private-patch** function 3-192, 4-244
- note-private-patch** Adds Private Patch to Your World RN-53
- Notes and Clarifications for Release 6.0 RN-79
- net:** **note-server-closed** function 9-217
- net:** **note-server-established** function 9-214, 9-217
- Notes on Serial I/O 5-261
- Notes on Wired Structures 7-327
- @note text formatting command 3-37
- Disk block not found 8-40
- Show Legal **:notice** message 7-82
- Notice Command 1-37
- Notification messages 7-103
- :notification-cell** message 7-128
- :notification-handler** option 5-64, 7-32
- :notification-mode** message 7-130
- Notification Commands 1-142
- FUNCTION Key: Selection and **\*notification-deliver-timeout\*** variable 7-130
- tv:** **\*notification-pop-down-delay\*** variable 7-132
- Notifications 7-126
- Entering Notifications 3-40
- Overview of Notifications 7-126
- Pop-up Notifications 7-131
- Receiving and Displaying Notifications 7-127
- Show Notifications Command 1-38
- New Notification System RN-64
- chaos:** **notify** function 9-135
- tv:** **notify** function 7-127
- notify** Service 9-60
- :notify** deexposed timeout action 7-82
- Notifying the User 7-127
- chaos:** **notify-local-lispms** function 1-72, 6-103, 9-135
- :not-in-disk-label** Option for **defsystem** 4-196
- SCL and **nonline** declaration 2-640
- fs:** **not-logged-in** flavor 2-548
- \$** character do not reap file flag 5-236
- notype loop** data-type keyword 2-219
- [Not] Filter Creation Display menu item 6-61
- :no-vanilla-flavor** Option for **defflavor** 2-441, 2-445
- :nowarn** Option for **load-patches** 0-46, 4-246
- :nowarn** Option for **make-system** 4-222
- Now a Special Form RN-41
- :now** option for **add-initialization** 8-67
- Now Specified Dynamically RN-55
- nP** Zmail command 6-67
- nreconc** function 2-53
- nreverse** function 2-51, 2-56
- NRZI technique 9-98
- nsublis** function 2-56
- nsubst** function 2-55
- nsubstring** function 2-240, 2-278
- nsymbolp** function 2-7
- nth** function 2-47
- nthcdr** function 2-48
- null** function 2-12
- Null modem 5-247
- si:** **null-stream** function 5-25
- :null** argument to **typep** 2-9
- Nullifying prefixes 3-42
- Assignment of RS-232 Signals to Pins in Asynchronous

- Null Modems 5-247
- Area number 8-103
- Channel number 9-142
- File block number 5-221, 5-226, 8-42, 8-47
- File system version number 9-26
- Font number 5-5
- Major version number 4-231
- Minor version number 3-186, 4-231, 4-238
- Testing for even number 2-97
- Testing for negative number 2-97
- Testing for odd number 2-97
- Testing for positive number 2-97
- Testing for sign of a number 2-97
- Unit number 8-29
- Disk page number (DPN) 8-29
- sys:**
  - :number** argument to **typep** 2-9
  - number-array-not-allowed** flavor 2-541
  - :number** command processor argument type 7-48
  - number error 2-534
  - number error 2-536
  - number field RN-16
  - number field in disk address 8-29
  - number field in disk address 8-29
  - number generator 2-118
  - number in binary 2-29
  - number in floating point 5-46
  - numbering convention 9-107
  - number-into-array** function 2-281
  - number into disk address 5-225, 8-46
  - number loop** data-type keyword 2-219
  - Number of bits per byte 5-91
  - Number-of-buffers tape spec parameter 0-26
  - number of columns 7-214, 7-296
  - :number-of-data-bits** serial I/O parameter 5-253
  - Number of disk blocks disk array can contain 8-31
  - :number-of-disk-blocks** option for **open** 5-222, 5-226, 8-43, 8-46
  - Number of input packets available 9-144
  - number of list elements to be printed 2-18
  - Number of packet slots available in transmit window 9-144
  - audio:** **\*number-of-polyphonic-voices\*** variable 7-330
  - :number-of-stop-bits** serial I/O parameter 5-253
  - netl:** **\*number-of-unwired-packet-buffers\*** meter 9-198
  - :number** option for **prompt-and-read** 7-59, RN-58
  - :number-or-nil** option for **prompt-and-read** 7-59, RN-58
  - :number-or-nil tv:choose-variable-values** variable type 7-259, RN-59
  - numberp** function 2-7
- Packet Number packet header field 9-106
- Numbers 2-87
- Numbers 2-119
- numbers 2-119, RN-33
- Numbers 2-90
- numbers 2-89, 2-95, RN-34
- numbers 2-90
- Double-precision floating-point numbers 2-89
- Fixed-point numbers 2-7
- Floating-point numbers 2-4, 2-7, 2-94
- How the Reader Recognizes Complex Numbers 2-24
- How the Reader Recognizes Floating-point Numbers 2-22
- Introduction to Numbers 2-89
- Logical Operations on Numbers 2-113
- New Functions for Converting Numbers to Floating-point Numbers RN-36



- Packet Numbers 9-105
- Printed Representation of Numbers 2-90
- Printed Representation of Complex Numbers 2-15
- Printed Representation of Floating-point Numbers 2-14
- Random Numbers 2-118
- Rational Numbers 2-93, RN-34
- Rational and Complex Numbers RN-33
- SCL and potential numbers 2-644
- Single-precision floating-point numbers 2-89
- Subtraction of 32-bit numbers 2-119, RN-33
- Types of Numbers 2-4, 2-93
- Window into the set of packet numbers 9-111
  - Font numbers and character objects 2-267, RN-15
  - CLM: Parsing of Numbers and Symbols 2-643
  - Numbers in compiled code files 4-331, 5-241
  - Numbers in the Compiler 2-90
  - Numbers to Floating-point Numbers RN-36
  - Numbers to Integers RN-36
  - :number tv:choose-variable-values** variable type 7-259, RN-59
- New Functions for Converting
- New Functions for Converting Non-integral
- Symbolics-Lisp
- Variable argument
  - Roman
  - Integer
- Use of
- Quadruple
- %arg-desc-interpreted**
- %%arg-desc-interpreted**
- %%arg-desc-max-args**
- %%arg-desc-min-args**
- %%arg-desc-quoted**
- %%arg-desc-rest-arg**
- Defaults to
- Example of
- Overview of
- Negative
- Example of
- Example of Negative
- Numeric arrays 2-5
- Numeric Comparisons 2-98
- Numeric Functions 2-97
- Numeric Predicates 2-97
- Numerical Comparisons on Characters RN-20
- Numeric Arg 3-24
- Numeric argument descriptor 2-324
- numeric argument descriptor field 2-324
- numeric argument descriptor field 2-324
- numeric argument descriptor field 2-324
- numeric argument descriptor field 2-324
- numeric argument descriptor field 2-324
- numeric argument descriptor field 2-324
- Numeric Arguments 3-24
- Numeric Arguments 3-24
- Numeric Arguments 3-24
- Numeric Arguments and Motion Commands 3-60
- Numeric Arguments and the Motion Commands 3-60
- Numeric Arguments with Motion Commands 3-60
- Numeric Arguments with Motion Commands 3-60
- Numeric Data Types 2-4
- Numeric host addresses 9-104
- Numeric Type Conversions 2-107
- nunion** function 2-62
- N Zmail command 6-49, 6-67
- FUNCTION 0 1-141
- Other Window (c-X) 0) Zmacs command 4-65
- Obarrays 2-262
- Object 9-29
- object 5-84
- object 4-309
- Object 2-19
- Object 1-117
- Object 1-117
- Object 0-73
- object 2-529
- Character
- Compiled function
- Controlling the Printed Representation of an
- Creating a New Namespace
- Editing a Namespace
- Edit Namespace
- Error

|                                                    |                             |             |
|----------------------------------------------------|-----------------------------|-------------|
| Host                                               | object                      | 1-112, 9-4  |
| Inspecting a compiled code                         | object                      | 4-299       |
| Interactive handler                                | object                      | 2-511       |
| Message-receiving                                  | object                      | 2-423       |
| Messages to <b>netl</b> :                          | <b>object</b>               | 9-32        |
| Namespace                                          | object                      | 0-87, 1-112 |
| Network                                            | object                      | 1-112, 9-4  |
| Primary name of                                    | object                      | 9-32        |
| Printer                                            | object                      | 1-112, 9-4  |
| Site                                               | object                      | 1-112, 9-4  |
| User                                               | object                      | 1-112, 9-4  |
|                                                    | Object comparisons          | 2-10        |
|                                                    | Object files                | 9-24        |
|                                                    | Object-oriented programming | 2-417       |
|                                                    | Object-oriented Programming | 2-418       |
| Modularity and                                     | Object Attribute            | 9-8         |
| <b>address</b> : Host                              | Object Attribute            | 9-14        |
| <b>affiliation</b> : User                          | Object Attribute            | 9-14        |
| <b>birthday</b> : User                             | Object Attribute            | 9-9         |
| <b>bitmap-printer</b> : Host                       | Object Attribute            | 9-18        |
| <b>character-size</b> : Printer                    | Object Attribute            | 9-17        |
| <b>default-font</b> : Printer                      | Object Attribute            | 9-19        |
| <b>default-printer</b> : Site                      | Object Attribute            | 9-19        |
| <b>default-bitmap-printer</b> : Site               | Object Attribute            | 9-22        |
| <b>descriptor-file</b> : Namespace                 | Object Attribute            | 9-20        |
| <b>dont-reply-to-mailing-lists</b> : Site          | Object Attribute            | 9-18        |
| <b>dplt-logo</b> : Printer                         | Object Attribute            | 9-11        |
| <b>filo-control-lifetime</b> : Host                | Object Attribute            | 9-9         |
| <b>finger-location</b> : Host                      | Object Attribute            | 9-18        |
| <b>font-widths-file</b> : Printer                  | Object Attribute            | 9-17        |
| <b>format</b> : Printer                            | Object Attribute            | 9-17        |
| <b>header-font</b> : Printer                       | Object Attribute            | 9-13        |
| <b>home-address</b> : User                         | Object Attribute            | 9-13        |
| <b>home-host</b> : User                            | Object Attribute            | 9-13        |
| <b>home-phone</b> : User                           | Object Attribute            | 9-17        |
| <b>host</b> : Printer                              | Object Attribute            | 9-19        |
| <b>host-for-bug-reports</b> : Site                 | Object Attribute            | 9-19        |
| <b>host-protocol-desirability</b> : Site           | Object Attribute            | 9-17        |
| <b>interface-options</b> : Printer                 | Object Attribute            | 9-17        |
| <b>interface</b> : Printer                         | Object Attribute            | 9-22        |
| <b>internet-domain-name</b> : Namespace            | Object Attribute            | 9-12        |
| <b>llspm-name</b> : User                           | Object Attribute            | 9-19        |
| <b>local-namespace</b> : Site                      | Object Attribute            | 9-9         |
| <b>location</b> : Host                             | Object Attribute            | 9-12        |
| <b>login-name</b> : User                           | Object Attribute            | 9-8         |
| <b>machine-type</b> : Host                         | Object Attribute            | 9-13        |
| <b>mail-address</b> : User                         | Object Attribute            | 9-7         |
| <b>name</b> : Host                                 | Object Attribute            | 9-14        |
| <b>name</b> : Network                              | Object Attribute            | 9-16        |
| <b>name</b> : Printer                              | Object Attribute            | 9-12        |
| <b>name</b> : User                                 | Object Attribute            | 9-7         |
| <b>nickname</b> : Host                             | Object Attribute            | 9-14        |
| <b>nickname</b> : Network                          | Object Attribute            | 9-13        |
| <b>nickname</b> : User                             | Object Attribute            | 9-20        |
| <b>other-sites-ignored-in-zmail-summary</b> : Site | Object Attribute            | 9-18        |
| <b>page-size</b> : Printer                         | Object Attribute            | 9-11        |
| <b>peripheral</b> : Host                           | Object Attribute            | 9-12        |
| <b>personal-name</b> : User                        | Object Attribute            | 9-9         |
| <b>pretty-name</b> : Host                          | Object Attribute            | 9-16        |
| <b>pretty-name</b> : Printer                       | Object Attribute            | 9-18        |
| <b>pretty-name</b> : Site                          | Object Attribute            | 9-22        |
| <b>primary-name-server</b> : Namespace             | Object Attribute            | 9-9         |
| <b>printer</b> : Host                              | Object Attribute            | 9-10        |
| <b>print-spooler-options</b> : Host                | Object Attribute            | 9-14        |
| <b>project</b> : User                              | Object Attribute            | 9-17        |
| <b>protocol</b> : Printer                          | Object Attribute            | 9-14        |
| <b>remarks</b> : User                              | Object Attribute            | 9-14        |

- search-rules:** Namespace Object Attribute 9-21
- secondary-name-server:** Namespace Object Attribute 9-22
- secure-subnets:** Site Object Attribute 9-20
- server-machine:** Host Object Attribute 9-11
- service:** Host Object Attribute 9-10
- short-name:** Host Object Attribute 9-7
- site-directory:** Site Object Attribute 9-19
- site-system:** Site Object Attribute 9-19
- site:** Host Object Attribute 9-7
- site:** Network Object Attribute 9-14
- site:** Printer Object Attribute 9-16
- spooled-printer:** Host Object Attribute 9-10
- standalone:** Site Object Attribute 9-20
- subnet:** Network Object Attribute 9-15
- supervisor:** User Object Attribute 9-14
- system-type:** Host Object Attribute 9-8
- terminal-f-argument:** Site Object Attribute 9-21
- timezone:** Site Object Attribute 9-20
- type:** Network Object Attribute 9-15
- type:** Printer Object Attribute 9-16
- user-property:** Object Attribute 9-8, 9-13, 9-15, 9-16, 9-18, 9-22
- validate-lmfs-dump-tapes:** Site Object Attribute 9-21
- work-address:** User Object Attribute 9-13
- work-phone:** User Object Attribute 9-13
- Storing database object attributes 9-25
- Compiled object code as line item entry 7-308
- Edit Namespace Object Command 1-21
- Edit Namespace Object command 9-22
- Show Object Command 1-38
- Namespace System Object Definitions 9-7
- Character Object Details 2-265
- Additional Character Object Enhancements RN-15
- Namespace Database Object Files 9-25
- :object-list** option for **prompt-and-read** 7-59, RN-58
- object of some flavor 2-461
- :object** option for **prompt-and-read** 7-59, RN-58
- object record 1-119
- Objects 0-20, 4-35
- Objects 2-1
- Objects 2-265
- objects 2-479, 2-481, 2-519, 2-529
- objects 2-505
- objects 0-87
- Objects RN-14
- objects 2-267, RN-15
- objects 2-423
- Objects 2-421
- objects 1-113, 9-5
- objects 4-298
- objects 8-108
- objects 1-113, 9-5
- Objects 9-31
- objects 7-305
- Objects 9-4, 9-21
- Objects 9-7
- Objects 9-14
- Objects 9-16
- Objects 9-18
- Objects 9-11
- Objects 1-231
- Objects 2-16
- objects 6-11
- Objects and Arguments 2-138
- objects and text intermingled 7-279
- Objects and the Flavor System 2-417
- Objects as hash table keys 2-69

- Character objects code field 2-265, RN-14
- Character objects device-font number field RN-16
- Character objects font field 2-265, RN-14
- Character Objects in Common Lisp RN-12
- Compiled code objects in compiled code files 4-331, 5-241
- Editing objects in the namespace database 9-22
- Deallocating allocated objects of a resource 8-135
- Forgetting objects remembered by a resource 8-135
- Character objects style field 2-265, RN-14
- Character objects subindex field RN-16
- Adding new objects to the namespace database 9-22
- :clear-eof** Message to Windows is Obsolete RN-60
- :fixnum-array** Option for **defstruct** is Obsolete RN-28
- :flonum-array** Option for **defstruct** is Obsolete RN-28
- :item-list** Message to Windows is Obsolete RN-57
- alphabetic-case-affects-string-comparison** is Now Obsolete RN-31
- compiler:make-obsolete** Now Makes a Flavor or Structure Obsolete RN-52
- :mouse-or-kbd-tyi** and **:mouse-or-kbd-tyi-no-hang** Messages Obsolete RN-56
- Replacing **io-buffer-output-function** and Binding **tv:kbd-tyi-hook** Are Obsolete RN-56
- zwei:chaos-direct-send-it** is Now Obsolete RN-69
- make-array** No Longer Accepts Obsolete Terms 1-227
- Obsolete Form RN-28
- Obsolete Programming Practices Using Characters and Strings RN-19
- :obsolete** system status 4-251
- Occur (m-X) Zmail command 6-49
- format:** **ochar** function 5-46
- c-X 0 command 1-62
- Reading octal character codes 2-25
- Octal format directive 5-31
- Octal representation of characters 5-5
- Testing for odd number 2-97
- Turning the Command Processor on and **oddp** function 2-97
- Off 1-15
- Off-negative implication 7-251
- Off-positive implication 7-251
- :off** blinker visibility 7-146
- Turning off Converse messages 1-72, 6-103
- Offline option to Tape when done dump parameter 0-6
- Byte offset 9-198
- Index offset 2-240, 2-241
- format:** **ofloat** function 5-46
- of loop** keyword 2-222, 2-225
- Old space 8-117
- Old-Zetalisp RN-17
- Two Kinds of Characters in **:oldest** pathname component 5-140
- < **:oldest** version specifier 5-186
- Character and String Functions for **:old** option for **fs:complete-pathname** 5-120, 5-158
- Old-Zetalisp/New-Zetalisp Compatibility RN-24
- Old-Zetalisp and New-Zetalisp String and Character Compatibility RN-18
- On-negative implication 7-251
- On-positive implication 7-251
- :on** blinker visibility 7-146
- once-only** macro 2-365
- :once** initialization list 8-71
- :once** option for **add-initialization** 8-67
- One Window 3-130
- Accessing Multidimensional Arrays as One-dimensional 2-245
- Advising One Function Within Another 4-285
- Motion Along One Nesting Level 3-65
- Returning to One Window 3-130

- zwei:**
  - One Window (c-X 1) Zmacs command 4-65
  - \*one-window-after-yank\*** variable 6-86
  - One Window Default Variable 3-211
  - Online documentation 6-5
  - Online documentation for commands 3-45
  - Online Documentation for Dired 3-148
  - Online documentation for prefixes 3-45
  - Online Documentation System 1-119
  - Online Help for Zmail 6-5
  - on loop** keyword 2-207
  - Only on 3600-family Machines RN-7
  - onum** 5-45
  - onum** 5-45
  - onum** function 5-45
  - opcode 9-106
  - Opcode pkt header field 9-138
  - Opcodes 7-323
  - Opcodes 9-114
  - Opcodes 7-326
  - Opcodes 9-159
  - open** 5-97
  - open** 5-222, 5-228, 8-43, 8-48
  - open** 5-93, 5-99
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 5-228, 8-43, 8-48
  - open** 5-222, 8-43
  - open** 5-222, 5-226, 8-43, 8-46
  - open** 5-97
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - open** 5-222, 8-43
  - Open frame 2-494
  - open** function 5-97, 5-222, 8-43
  - Open subroutine 2-351
  - Open-coding 2-418
- Chaos:
  - open-state connection state 9-136
  - Open a stream connection 9-134
  - Open coded functions 2-351
  - Open connection packet 9-114
  - Open connection state 9-121
- OPN
  - :buffer-name** option for **zwei:**
  - :create-p** option for **zwei:**
  - :default** option for **zwei:**
  - :end** option for **zwei:**
  - :hack-fonts** option for **zwei:**
  - :interval** option for **zwei:**
  - :kill** option for **zwei:**
  - :load-p** option for **zwei:**
  - :ordered-p** option for **zwei:**
  - :pathname** option for **zwei:**
  - :start** option for **zwei:**
  - :window** option for **zwei:**
  - zwei:**
  - chaos:**
  - Maclisp
- Release 6.0 Is Supported
- :commas** option for **format:**
- :signed** option for **format:**
- format:**
- Packet
  - Audio Command
  - Packet
  - Polyphony Command
  - QFILE Packet
  - :deleted** option for
  - :direction** option for
  - :error** option for
  - :estimated-length** option for
  - :if-exists** option for
  - :if-locked** option for
  - :if-does-not-exist** option for
  - :number-of-disk-blocks** option for
  - :submit** option for
  - :create** symbol in **:if-does-not-exist** option for
  - :error** symbol in **:if-exists** option for
  - :error** symbol in **:if-locked** option for
  - :error** symbol in **:if-does-not-exist** option for
  - :new-version** symbol in **:if-exists** option for
  - nil** symbol in **:if-exists** option for
  - nil** symbol in **:if-does-not-exist** option for
  - :overwrite** symbol in **:if-exists** option for
  - :share** symbol in **:if-locked** option for
  - :supersede** symbol in **:if-exists** option for
- One Window (c-X 1) Zmacs command 4-65
- \*one-window-after-yank\*** variable 6-86
- One Window Default Variable 3-211
- Online documentation 6-5
- Online documentation for commands 3-45
- Online Documentation for Dired 3-148
- Online documentation for prefixes 3-45
- Online Documentation System 1-119
- Online Help for Zmail 6-5
- on loop** keyword 2-207
- Only on 3600-family Machines RN-7
- onum** 5-45
- onum** 5-45
- onum** function 5-45
- opcode 9-106
- Opcode pkt header field 9-138
- Opcodes 7-323
- Opcodes 9-114
- Opcodes 7-326
- Opcodes 9-159
- open** 5-97
- open** 5-222, 5-228, 8-43, 8-48
- open** 5-93, 5-99
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 5-228, 8-43, 8-48
- open** 5-222, 8-43
- open** 5-222, 5-226, 8-43, 8-46
- open** 5-97
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- open** 5-222, 8-43
- Open frame 2-494
- open** function 5-97, 5-222, 8-43
- Open subroutine 2-351
- Open-coding 2-418
- open-state connection state 9-136
- Open a stream connection 9-134
- Open coded functions 2-351
- Open connection packet 9-114
- Open connection state 9-121
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** 7-378
- open-editor-stream** function 7-377
- open-foreign-connection** function 9-134
- open** function 5-91
- Open Get Register (c-X G) Zmacs command 4-63
- Opening blinkers 7-146
- Opening a bidirectional stream 7-377

- Opening a File with QFILE 9-155
- Opening and Closing a Directory 5-232
- Opening and Closing Connections 9-134, 9-143
- Opening and Closing Connections 9-136
- Opening and Closing Connections 9-134
- Server-side:
- User-side:
- BINARY QFILE OPEN option 9-166
- BYTE-SIZE QFILE OPEN option 9-166
- CHARACTER QFILE OPEN option 9-166
- DEFAULT QFILE OPEN option 9-166
- DELETED QFILE OPEN option 9-166
- ESTIMATED-LENGTH QFILE OPEN option 9-166
- IF-EXISTS QFILE OPEN option 9-166
- IF-DOES-NOT-EXIST QFILE OPEN option 9-166
- INHIBIT-LINKS QFILE OPEN option 9-166
- PRESERVE-DATES QFILE OPEN option 9-166
- PROBE-DIRECTORY QFILE OPEN option 9-166
- PROBE QFILE OPEN option 9-166
- RAW QFILE OPEN option 9-166
- READ QFILE OPEN option 9-166
- SUBMIT QFILE OPEN option 9-166
- SUPER QFILE OPEN option 9-166
- TEMPORARY QFILE OPEN option 9-166
- WRITE QFILE OPEN option 9-166
- QFILE OPEN options 9-166
- QFILE unbinding QFILE close-abort QFILE OPEN options 9-155
- IF-EXISTS QFILE OPEN option values 9-166
- QFILE OPEN QFILE command 9-155, 9-164
- QFILE OPEN Response Result Values 9-172
- QFILE open stream 9-154
- FSEdit [Open] Command 5-234
- FSEdit [Open] Command 5-235
- FSEdit [Selective] [Open] File System Editor menu item 5-233
- [Selective] [Open] File System Editor menu item 5-233
- Functions That Operate on a System 4-251
- Functions That Operate on Locatives 2-84
- Functions That Operate on Named Structures 2-405
- New Function **si:map-system-files** Operates on a Declared System RN-53
- New Function **si:set-system-file-properties** Operates on a Declared System RN-53
- Person operating dump parameter 0-6
- Operating on a Group of Zmail Messages 6-80
- Operating on a Mail Collection 6-79
- Operating on a Message in a Mail Collection 6-80
- Operating on Disk Streams 5-224, 8-45
- Operating on Zmail Messages Referred to by the Current Message 6-71
- :clear-eof** operation 9-137
- :close** operation 5-97, 9-137
- :eof** operation 9-137
- :finish** operation 9-137
- :force-output** operation 9-137
- :read** operation 5-73
- :tyl** stream operation 5-91
- Complement logical operation 2-114
- Example of a Tag Tables Replacement Operation 3-106
- Shadowing-import operation 2-573
- Testing **:line-in** operation 5-12
- Testing **:string-in** operation 5-12
- Testing **:string-line-in** operation 5-12
- Singular matrix operation error 2-535
- Invalid file operation errors 2-550
- operation-handled-p** function 2-431
- :operation-handled-p** message 2-453, 5-13
- operation-handled-p** method of **si:vanilla-flavor** 4-142
- Operation of Polyphony 7-325
- Operation of the Garbage Collector 8-117

- Advanced General-purpose Stream Operations 5-13
- Basic General-purpose Stream Operations 5-11
  - Basic List Operations 2-46
- Basic Special-purpose Stream Operations 5-19
  - Basic String Operations 2-278
  - Boolean operations 2-113
  - File Stream Operations 5-113
- General-purpose Stream Operations 5-11
  - General Blinker Operations 7-147
  - Generic operations 4-112
  - Generic pathname operations 9-55
- Introduction to Site Operations 0-3
  - Matrix operations 2-258
  - Site Operations 0-1
- Special-purpose Stream Operations 5-19
- The `:read` and `:print` Stream Operations 5-73
- Truth table for the Boolean operations 2-114
  - SCL I/O operations and streams 2-634
  - Miscellaneous Operations Failures 2-552
  - Miscellaneous file operations failures 2-552
  - Interactive-stream Operations for Asynchronous Characters 7-17
  - Special-purpose Stream Operations for Buffered Input Streams 5-20
  - Special-purpose Stream Operations for Buffered Output Streams 5-21
  - Special-purpose Stream Operations for Files 5-20
- Other Types of Replacement Operations in Zmacs 3-104
- [Active Structure Edit] Maintenance Operations menu item 0-39
- [Check Records] Maintenance Operations menu item 0-39
- [Close All Files] Maintenance Operations menu item 0-39
- [Expunge All FS] Maintenance Operations menu item 0-39
- [Initialize] Maintenance Operations menu item 0-39
- Use of Arithmetic Operations on Characters RN-21
- Performing arithmetic operations on characters in SCL 2-265, RN-12
  - Logical Operations on Numbers 2-113
  - Generic Operations on Objects 2-421
  - Input operations on serial streams 5-251
  - Output operations on serial streams 5-251
  - Input operations on windows 7-75
  - Output operations on windows 7-75
- Operations the User Can Perform on Functions 2-302
- Performing Operations with Tag Tables 3-107
- Strategy for Unattended Operation with the Garbage Collector 8-128
- format:** OPN Open connection packet 9-114
- SCL and **oprint** function 5-46
- SCL and Optimization 2-635
- Compiler Source-level **optimize** declaration 2-640
- :activation** Optimizers 4-327
- :blip-handler** option 5-63, 7-31
- :brief-help** option 5-62, 7-30
- :byte-size** file-opening option 5-61, 7-29
- :character** file-opening option 5-91
- :command** option 5-91
- :complete-help** option 5-64, 7-32
- :direction** file-opening option 5-60, 7-28
- :documentation** menu item option 5-91
- :do-not-echo** option 7-211, 7-224
- :editor-command** option 5-63, 7-31
- :error** file-opening option 5-64, 7-32
- :font** menu item option 5-91
- :full-rubout** option 7-211, 7-224
- :function** init-plist option 5-59, 7-27
- :initial-input** option 7-262
- :input-wait** option 5-61, 7-29
- option 5-64, 7-32

- :input-history-default** option 5-62, 7-30
- :input-wait-handler** option 5-64, 7-32
- :io-buffer** init option 7-132
- :item-type-alist** init-plist option 7-280
- :merged-help** option 5-61, 7-29
- :no-input-save** option 5-63, 7-31
- :notification-handler** option 5-64, 7-32
- :partial-help** option 5-60, 7-28
- :pass-through** option 5-59, 7-27
- :preemptable** option 5-63, 7-31
- :preserve-dates** file-opening option 5-91
- :proceed-types** init option 2-519
- :prompt** option 5-60, 7-28
- :reprompt** option 5-60, 7-28
- :stack-group** init option 7-274
- :suppress-notifications** option 5-64, 7-32
- BINARY QFILE OPEN option 9-166
- BYTE-SIZE QFILE OPEN option 9-166
- CHARACTER QFILE OPEN option 9-166
- DEFAULT QFILE OPEN option 9-166
- DELETED QFILE DIRECTORY option 9-188
- DELETED QFILE OPEN option 9-166
- DIRECTORIES-ONLY QFILE DIRECTORY option 9-188
- ESTIMATED-LENGTH QFILE OPEN option 9-166
- FAST QFILE DIRECTORY option 9-188
- IF-EXISTS QFILE OPEN option 9-166
- IF-DOES-NOT-EXIST QFILE OPEN option 9-166
- INHIBIT-LINKS QFILE OPEN option 9-166
- :latest** symbol in **make-system :version** option 4-222
- :newest** symbol in **make-system :version** option 4-222
- New Optional Arguments to **:initial-input** Input Editor
  - Option RN-67
  - NO-EXTRA-INFO QFILE DIRECTORY option 9-188
  - :package** option for the **:module** option 4-199
  - PRESERVE-DATES QFILE OPEN option 9-166
  - PROBE-DIRECTORY QFILE OPEN option 9-166
  - PROBE QFILE OPEN option 9-166
  - RAW QFILE OPEN option 9-166
  - READ QFILE OPEN option 9-166
  - :released** symbol in **make-system :version** option 4-222
  - SUBMIT QFILE OPEN option 9-166
  - SUPER QFILE OPEN option 9-166
  - TEMPORARY QFILE OPEN option 9-166
  - tv:margin-choice-mixin** Init-plist Option 7-290
  - tv:momentary-menu** Example 2: Item List as Init-plist
    - Option 7-224
    - WRITE QFILE OPEN option 9-166
- defflavor** Now Accepts the
  - Option **:required-init-keywords** RN-40
  - &optional 1-231
  - &optional** keyword 2-151
  - :optional** keyword 2-161
  - Optional parameters 2-154
  - Optional Argument RN-41
  - Optional Argument **:ask** Added to **zwei:save-all-files** RN-68
- si:install-microcode** Takes a Second
  - New Optional Arguments to **:initial-input** Input Editor Option RN-67
  - New Optional Argument to **:replace-input** Message to Interactive Streams RN-67
  - Change in Optional Argument to **read-or-end** RN-57
  - The Optional Constraint Function 7-262
  - set-syntax-macro-char** Takes an Optional Fourth Argument RN-40
  - &optional** keyword for **defmacro** 2-373
  - &optional** Lambda-list Keyword 2-309
  - Optional Second Argument RN-42
  - Option Facility 7-266
- array-pop** Takes an
  - The User Option Facility 7-266



|                                               |                                                                   |
|-----------------------------------------------|-------------------------------------------------------------------|
| User                                          | option facility 7-203                                             |
| <b>always</b>                                 | option for <b>reset</b> 8-92                                      |
| <b>:before-cold</b>                           | option for <b>add-initialization</b> 8-67                         |
| <b>:cold</b>                                  | option for <b>add-initialization</b> 8-67                         |
| <b>:disable-services</b>                      | option for <b>add-initialization</b> 8-67                         |
| <b>:enable-services</b>                       | option for <b>add-initialization</b> 8-67                         |
| <b>:first</b>                                 | option for <b>add-initialization</b> 8-67                         |
| <b>:full-gc</b>                               | option for <b>add-initialization</b> 8-116                        |
| <b>:login</b>                                 | option for <b>add-initialization</b> 8-67                         |
| <b>:logout</b>                                | option for <b>add-initialization</b> 8-67                         |
| <b>:normal</b>                                | option for <b>add-initialization</b> 8-67                         |
| <b>:now</b>                                   | option for <b>add-initialization</b> 8-67                         |
| <b>:once</b>                                  | option for <b>add-initialization</b> 8-67                         |
| <b>:redo</b>                                  | option for <b>add-initialization</b> 8-67                         |
| <b>:site</b>                                  | option for <b>add-initialization</b> 8-67                         |
| <b>:system</b>                                | option for <b>add-initialization</b> 8-67                         |
| <b>:warm</b>                                  | option for <b>add-initialization</b> 8-67                         |
| <b>:proceed-types</b>                         | option for <b>condition</b> 2-530                                 |
| <b>:byte-size</b>                             | option for <b>copyf</b> 5-105                                     |
| <b>:characters</b>                            | option for <b>copyf</b> 5-105                                     |
| <b>:create-directories</b>                    | option for <b>copyf</b> 5-105                                     |
| <b>:report-stream</b>                         | option for <b>copyf</b> 5-105                                     |
| <b>:abstract-flavor</b>                       | Option for <b>defflavor</b> 2-441, 2-450                          |
| <b>:accessor-prefix</b>                       | Option for <b>defflavor</b> 2-441, 2-448                          |
| <b>:default-handler</b>                       | Option for <b>defflavor</b> 2-441, 2-447                          |
| <b>:default-init-plist</b>                    | Option for <b>defflavor</b> 2-441, 2-442, 4-116                   |
| <b>:documentation</b>                         | Option for <b>defflavor</b> 2-441, 2-449, 4-141                   |
| <b>:export-instance-variables</b>             | Option for <b>defflavor</b> 2-441, 2-448                          |
| <b>:gettable-instance-variables</b>           | Option for <b>defflavor</b> 2-441, 2-485, 4-113                   |
| <b>:included-flavors</b>                      | Option for <b>defflavor</b> 2-441, 2-444                          |
| <b>:init-keywords</b>                         | Option for <b>defflavor</b> 2-441, 2-442                          |
| <b>:initable-instance-variables</b>           | Option for <b>defflavor</b> 2-441, 2-485, 4-124, 4-126            |
| <b>:method-combination</b>                    | Option for <b>defflavor</b> 2-441, 2-449                          |
| <b>:method-order</b>                          | Option for <b>defflavor</b> 2-441, 2-449                          |
| <b>:mixture</b>                               | Option for <b>defflavor</b> 2-441, 2-445                          |
| <b>:no-vanilla-flavor</b>                     | Option for <b>defflavor</b> 2-441, 2-445                          |
| <b>:ordered-instance-variables</b>            | Option for <b>defflavor</b> 2-441, 2-447                          |
| <b>:outside-accessible-instance-variables</b> | Option for <b>defflavor</b> 2-441, 2-447                          |
| <b>:required-flavors</b>                      | Option for <b>defflavor</b> 2-441, 2-443, 4-116                   |
| <b>:required-methods</b>                      | Option for <b>defflavor</b> 2-441, 2-442, 4-113                   |
| <b>:required-init-keywords</b>                | Option for <b>defflavor</b> 2-441, 2-442, RN-40                   |
| <b>:required-instance-variables</b>           | Option for <b>defflavor</b> 2-441, 2-442                          |
| <b>:settable-instance-variables</b>           | Option for <b>defflavor</b> 2-441                                 |
| <b>:special-instance-variables</b>            | Option for <b>defflavor</b> 2-441, 2-448                          |
| <b>:colon-mode</b>                            | option for <b>defpackage</b> 2-585                                |
| <b>:export</b>                                | option for <b>defpackage</b> 2-573                                |
| <b>:import</b>                                | option for <b>defpackage</b> 2-573                                |
| <b>:import-from</b>                           | option for <b>defpackage</b> 2-573                                |
| <b>:relative-names</b>                        | option for <b>defpackage</b> 2-582                                |
| <b>:relative-names-for-me</b>                 | option for <b>defpackage</b> 2-582                                |
| <b>:shadow</b>                                | option for <b>defpackage</b> 2-574                                |
| <b>:shadowing-import</b>                      | option for <b>defpackage</b> 2-573, 2-574                         |
| <b>:use</b>                                   | option for <b>defpackage</b> 2-571, 2-599                         |
| <b>:colon-mode</b>                            | Option for <b>defpackage</b> and <b>make-package</b> 2-601, 2-603 |
| <b>:export</b>                                | Option for <b>defpackage</b> and <b>make-package</b> 2-599, 2-602 |
| <b>:external-only</b>                         | Option for <b>defpackage</b> and <b>make-package</b> 2-600, 2-603 |
| <b>:hash-inherited-symbols</b>                | Option for <b>defpackage</b> and <b>make-package</b> 2-600, 2-603 |
| <b>:import</b>                                | Option for <b>defpackage</b> and <b>make-package</b> 2-599, 2-602 |
| <b>:import-from</b>                           | Option for <b>defpackage</b> and <b>make-package</b> 2-600, 2-602 |
| <b>:include</b>                               | Option for <b>defpackage</b> and <b>make-package</b> 2-600,       |

|                                |                                                      |                     |
|--------------------------------|------------------------------------------------------|---------------------|
|                                | 2-603                                                |                     |
| <b>:new-symbol-function</b>    | Option for <b>defpackage</b> and <b>make-package</b> | 2-601, 2-603        |
| <b>:nicknames</b>              | Option for <b>defpackage</b> and <b>make-package</b> | 2-599, 2-601        |
| <b>:prefix-intern-function</b> | Option for <b>defpackage</b> and <b>make-package</b> | 2-601, 2-603        |
| <b>:prefix-name</b>            | Option for <b>defpackage</b> and <b>make-package</b> | 2-599, 2-601        |
| <b>:relative-names</b>         | Option for <b>defpackage</b> and <b>make-package</b> | 2-600, 2-602        |
| <b>:relative-names-for-me</b>  | Option for <b>defpackage</b> and <b>make-package</b> | 2-600, 2-602        |
| <b>:shadow</b>                 | Option for <b>defpackage</b> and <b>make-package</b> | 2-599, 2-602        |
| <b>:shadowing-import</b>       | Option for <b>defpackage</b> and <b>make-package</b> | 2-600, 2-602        |
| <b>:size</b>                   | Option for <b>defpackage</b> and <b>make-package</b> | 2-600, 2-602        |
| <b>:checker</b>                | option for <b>defresource</b>                        | 8-132               |
| <b>:constructor</b>            | option for <b>defresource</b>                        | 8-132               |
| <b>:finder</b>                 | option for <b>defresource</b>                        | 8-132               |
| <b>:free-list-size</b>         | option for <b>defresource</b>                        | 8-132               |
| <b>:initial-copies</b>         | option for <b>defresource</b>                        | 8-132               |
| <b>:initializer</b>            | option for <b>defresource</b>                        | 8-132               |
| <b>:matcher</b>                | option for <b>defresource</b>                        | 8-132               |
| <b>:alterant</b>               | option for <b>defstruct</b>                          | 2-385, 2-386        |
| <b>:but-first</b>              | option for <b>defstruct</b>                          | 2-385, 2-390        |
| <b>:callable-accessors</b>     | option for <b>defstruct</b>                          | 2-385, 2-391        |
| <b>:conc-name</b>              | option for <b>defstruct</b>                          | 2-385, 2-387        |
| <b>:constructor</b>            | option for <b>defstruct</b>                          | 2-385, 2-386, 2-396 |
| <b>:copier</b>                 | option for <b>defstruct</b>                          | 2-385, 2-392        |
| <b>:default-pointer</b>        | option for <b>defstruct</b>                          | 2-385, 2-386        |
| <b>:eval-when</b>              | option for <b>defstruct</b>                          | 2-385, 2-391        |
| <b>:export</b>                 | option for <b>defstruct</b>                          | 2-385, 2-386, RN-32 |
| <b>:include</b>                | option for <b>defstruct</b>                          | 2-385, 2-387        |
| <b>:initial-offset</b>         | option for <b>defstruct</b>                          | 2-385, 2-390        |
| <b>:make-array</b>             | option for <b>defstruct</b>                          | 2-385, 2-389, 2-395 |
| <b>:named</b>                  | option for <b>defstruct</b>                          | 2-385, 2-389        |
| <b>:predicate</b>              | option for <b>defstruct</b>                          | 2-385, 2-392        |
| <b>:print</b>                  | option for <b>defstruct</b>                          | 2-385, 2-391        |
| <b>:property</b>               | option for <b>defstruct</b>                          | 2-385, 2-391        |
| <b>:size-macro</b>             | option for <b>defstruct</b>                          | 2-385, 2-390        |
| <b>:size-symbol</b>            | option for <b>defstruct</b>                          | 2-385, 2-390        |
| <b>:times</b>                  | option for <b>defstruct</b>                          | 2-385, 2-390, 2-395 |
| <b>:type</b>                   | option for <b>defstruct</b>                          | 2-385               |
| SCL and <b>:named</b>          | option for <b>defstruct</b>                          | 2-642               |
| SCL and <b>:type</b>           | option for <b>defstruct</b>                          | 2-642               |
| <b>:cons</b>                   | option for <b>defstruct-define-type</b>              | 2-410               |
| <b>:copier</b>                 | option for <b>defstruct-define-type</b>              | 2-410, 2-412        |
| <b>:defstruct</b>              | option for <b>defstruct-define-type</b>              | 2-410, 2-412        |
| <b>:keywords</b>               | option for <b>defstruct-define-type</b>              | 2-410, 2-412        |
| <b>:named</b>                  | option for <b>defstruct-define-type</b>              | 2-410, 2-411        |
| <b>:overhead</b>               | option for <b>defstruct-define-type</b>              | 2-410, 2-411        |
| <b>:predicate</b>              | option for <b>defstruct-define-type</b>              | 2-410, 2-412        |
| <b>:ref</b>                    | option for <b>defstruct-define-type</b>              | 2-410               |
| <b>:fixnum-array</b>           | Option for <b>defstruct</b> is Obsolete              | RN-28               |
| <b>:flonum-array</b>           | Option for <b>defstruct</b> is Obsolete              | RN-28               |
| <b>:array</b>                  | option for <b>defstruct :type</b>                    | 2-385               |
| <b>:array-leader</b>           | option for <b>defstruct :type</b>                    | 2-385               |
| <b>:fixnum</b>                 | option for <b>defstruct :type</b>                    | 2-385, 2-386        |
| <b>:grouped-array</b>          | option for <b>defstruct :type</b>                    | 2-385, 2-386        |
| <b>:list</b>                   | option for <b>defstruct :type</b>                    | 2-385               |
| <b>:named-array</b>            | option for <b>defstruct :type</b>                    | 2-385               |
| <b>:named-list</b>             | option for <b>defstruct :type</b>                    | 2-385               |
| <b>:named-array-leader</b>     | option for <b>defstruct :type</b>                    | 2-385               |

**:tree** option for **defstruct :type** 2-385, 2-386  
**:bug-reports** Option for **defsystem** 4-196, 6-31  
**:component-systems** Option for **defsystem** 4-197  
**:initial-status** Option for **defsystem** 4-196  
**:maintaining-sites** Option for **defsystem** 4-196  
**:module** Option for **defsystem** 4-199  
**:name** Option for **defsystem** 4-194  
**:not-in-disk-label** Option for **defsystem** 4-196  
**:package** Option for **defsystem** 4-194  
**:patchable** Option for **defsystem** 4-195, 4-231, 4-235  
**:pathname-default** Option for **defsystem** 4-195, 4-231, 4-235  
**:short-name** Option for **defsystem** 4-194  
*patch-atom* argument to **:patchable** option for **defsystem** 4-236  
**:constructor** option for **defwindow-resource** 7-107  
New Option for **defwindow-resource: :superior** RN-68  
**:initial-copies** option for **defwindow-resource** 7-107  
**:make-window** option for **defwindow-resource** 7-107  
**:reusable-when** option for **defwindow-resource** 7-107  
**:superior** option for **defwindow-resource** 7-107  
Init-plist Option for Dynamic Menus 7-237  
**:commas** option for **format:onum** 5-45  
**:signed** option for **format:onum** 5-45  
**:terpri** option for **format:tab** 5-47  
**:unit** option for **format:tab** 5-47  
269 **:minpad** option for formatting functions 5-44  
**:padchar** option for formatting functions 5-44  
**:tab-period** option for formatting functions 5-44  
**:beep** option for **fquery** 7-56  
**:choices** option for **fquery** 7-56  
**:clear-input** option for **fquery** 7-56  
**:fresh-line** option for **fquery** 7-56  
**:help-function** option for **fquery** 7-56  
**:list-choices** option for **fquery** 7-56  
**:make-complete** option for **fquery** 7-56  
**:no-input-save** option for **fquery** 7-56  
**:select** option for **fquery** 7-56  
**:signal-condition** option for **fquery** 7-56  
**:status** option for **fquery** 7-56  
**:stream** option for **fquery** 7-56  
**:type** option for **fquery** 7-56  
**:deleted** option for **fs:complete-pathname** 5-120, 5-158  
**:in** option for **fs:complete-pathname** 5-120, 5-158  
**:new-ok** option for **fs:complete-pathname** 5-120, 5-158  
**:old** option for **fs:complete-pathname** 5-120, 5-158  
**:out** option for **fs:complete-pathname** 5-120, 5-158  
**:print** option for **fs:complete-pathname** 5-120, 5-158  
**:read** option for **fs:complete-pathname** 5-120, 5-158  
**:write** option for **fs:complete-pathname** 5-120, 5-158  
**:deleted** option for **fs:directory-list** 5-117  
**:noerror** option for **fs:directory-list** 5-117  
**:no-extra-info** option for **fs:directory-list** 5-117  
**:sorted** option for **fs:directory-list** 5-117  
**:noselective** Option for **load-patches** 4-245  
**:nowarn** Option for **load-patches** 0-46, 4-246  
**:selective** Option for **load-patches** 0-46, 4-245, 4-246, RN-53  
**:silent** Option for **load-patches** 0-46, 4-246  
**:system List** Option for **load-patches** 4-245  
**:verbose** Option for **load-patches** 0-46, 4-245, 4-246  
**:selective** Option for **load-patches** Has Changed RN-53  
System-name Option for **load-patches** 4-245  
**:capacity** option for **make-area** 8-104  
**:gc** option for **make-area** 8-104, 8-107  
**:name** option for **make-area** 8-104  
**:representation** option for **make-area** 8-104  
**:room** option for **make-area** 8-104  
**:size** option for **make-area** 8-104

**:area** option for **make-array** 2-241, 8-31  
**:type** option for **make-array** 2-241, 8-31  
**:export** option for **make-package** 2-573  
**:import** option for **make-package** 2-573  
**:invisible** Option for **make-package** 2-601  
**:shadow** option for **make-package** 2-574  
**:use** option for **make-package** 2-571, 2-602  
**:extension** option for **make-plane** 2-261  
**:type** option for **make-plane** 2-261  
**:flavor** option for **make-process** 8-85  
**:priority** option for **make-process** 8-85  
**:quantum** option for **make-process** 8-85  
**:batch** option for **make-system** 4-79, 4-222  
**:compile** Option for **make-system** 4-222  
**:noconfirm** Option for **make-system** 4-222  
**:noload** Option for **make-system** 4-223  
**:noop** Option for **make-system** 4-223  
**:nowarn** Option for **make-system** 4-222  
**:recompile** Option for **make-system** 4-223  
**:reload** Option for **make-system** 4-223  
**:selective** Option for **make-system** 4-222  
**:silent** Option for **make-system** 4-222  
**:version** Option for **make-system** 4-223  
**:capacity-ratio** option for **make-area** 8-104  
**:n-levels** option for **make-area** 8-104  
**:read-only** option for **make-area** 8-104  
**:region-size** option for **make-area** 8-104  
**:swap-recommendations** option for **make-area** 8-104  
**sys:%%region-scavenge-enable** option for **make-area** 8-104  
**sys:%%region-space-type** option for **make-area** 8-104  
**:displaced-conformally** option for **make-array** 2-241  
**:displaced-index-offset** option for **make-array** 2-240, 2-241  
**:displaced-to** option for **make-array** 2-239, 2-241  
**:fill-pointer** option for **make-array** 2-241  
**:initial-value** option for **make-array** 2-241, 8-31  
**:leader-length** option for **make-array** 2-241  
**:leader-list** option for **make-array** 2-241  
**:named-structure-symbol** option for **make-array** 2-241  
**:colon-mode** option for **make-package** 2-585  
**:import-from** option for **make-package** 2-573  
**:relative-names** option for **make-package** 2-582  
**:relative-names-for-me** option for **make-package** 2-582  
**:shadowing-import** option for **make-package** 2-573, 2-574  
**:default-value** option for **make-plane** 2-261  
**:initial-dimensions** option for **make-plane** 2-261  
**:initial-origins** option for **make-plane** 2-261  
**:arrest-reasons** option for **make-process** 8-85  
**:regular-pdl-area** option for **make-process** 8-85  
**:regular-pdl-size** option for **make-process** 8-85  
**:run-reasons** option for **make-process** 8-85  
**:sg-area** option for **make-process** 8-85  
**:simple-p** option for **make-process** 8-85  
**:special-pdl-area** option for **make-process** 8-85  
**:special-pdl-size** option for **make-process** 8-85  
**:stack-group** option for **make-process** 8-85  
**:warm-boot-action** option for **make-process** 8-85  
**:allow-unknown-keywords** option for **make-stack-group** 8-5  
**:regular-pdl-area** option for **make-stack-group** 8-5  
**:regular-pdl-size** option for **make-stack-group** 8-5  
**:safe** option for **make-stack-group** 8-5  
**:sg-area** option for **make-stack-group** 8-5  
**:special-pdl-area** option for **make-stack-group** 8-5  
**:special-pdl-size** option for **make-stack-group** 8-5  
**:increment-patch** Option for **make-system** 4-223  
**:no-increment-patch** Option for **make-system** 4-223  
**:print-only** Option for **make-system** 4-223

- :update-directory** Option for **make-system** 4-226
- :desirability** option for **net:define-protocol** 9-50
- :invoke** option for **net:define-protocol** 9-50
- :conn** option for **net:define-server** 9-51
- :direction** stream option for **net:define-server** 9-51
- :medium** option for **net:define-server** 9-51
- :network** option for **net:define-server** 9-51
- :invoke-with-stream** option for **net:define-protocol** 9-50
- :invoke-with-stream-and-close** option for **net:define-protocol** 9-50
- :property** option for **net:define-protocol** 9-50
- :accept-p** stream option for **net:define-server** 9-51
- :address** option for **net:define-server** 9-51
- :ascii-translation** stream option for **net:define-server** 9-51
- :error-disposition** option for **net:define-server** 9-51
- :host** option for **net:define-server** 9-51
- :no-close** stream option for **net:define-server** 9-51
- :no-eof** stream option for **net:define-server** 9-51
- :process-name** option for **net:define-server** 9-51
- :reject-unless-trusted** option for **net:define-server** 9-51
- :request-array** option for **net:define-server** 9-51
- :response-array** option for **net:define-server** 9-51
- :stream** option for **net:define-server** 9-51
- :trusted-p** option for **net:define-server** 9-51
- :who-line** option for **net:define-server** 9-51
- :request-array** option for **neti:funcall-server-internal-function** 9-215
- :request-array-end** option for **neti:funcall-server-internal-function** 9-215
- :request-array-start** option for **neti:funcall-server-internal-function** 9-215
- :response-array** option for **neti:funcall-server-internal-function** 9-215
- :response-array-end** option for **neti:funcall-server-internal-function** 9-215
- :response-array-start** option for **neti:funcall-server-internal-function** 9-215
- :deleted** option for **open** 5-97
- :direction** option for **open** 5-222, 5-228, 8-43, 8-48
- :error** option for **open** 5-93, 5-99
- :estimated-length** option for **open** 5-222, 8-43
- :if-exists** option for **open** 5-222, 8-43
- :if-locked** option for **open** 5-222, 5-228, 8-43, 8-48
- :if-does-not-exist** option for **open** 5-222, 8-43
- :number-of-disk-blocks** option for **open** 5-222, 5-226, 8-43, 8-46
- :submit** option for **open** 5-97
- :create** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- :error** symbol in **:if-exists** option for **open** 5-222, 8-43
- :error** symbol in **:if-locked** option for **open** 5-222, 8-43
- :error** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- :new-version** symbol in **:if-exists** option for **open** 5-222, 8-43
- nil** symbol in **:if-exists** option for **open** 5-222, 8-43
- nil** symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
- :overwrite** symbol in **:if-exists** option for **open** 5-222, 8-43
- :share** symbol in **:if-locked** option for **open** 5-222, 8-43
- :supersede** symbol in **:if-exists** option for **open** 5-222, 8-43
- :name** option for **process-run-function** 8-86
- :priority** option for **process-run-function** 8-86
- :quantum** option for **process-run-function** 8-86
- :restart-after-boot** option for **process-run-function** 8-86
- :restart-after-reset** option for **process-run-function** 8-86
- :warm-boot-action** option for **process-run-function** 8-86
- :name** option for **process-run-restartable-function** 8-87
- :priority** option for **process-run-restartable-function** 8-87
- :quantum** option for **process-run-restartable-function** 8-87
- :restart-after-boot** option for **process-run-restartable-function** 8-87
- :restart-after-reset** option for **process-run-restartable-function** 8-87

|                                           |                                                    |             |
|-------------------------------------------|----------------------------------------------------|-------------|
| <b>:warm-boot-action</b>                  | option for <b>process-run-restartable-function</b> | 8-87        |
| <b>:character</b>                         | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:class</b>                             | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:complete-string</b>                   | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:date</b>                              | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:date-or-never</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:decimal-number</b>                    | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:decimal-number-or-nil</b>             | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:delimited-string</b>                  | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:delimited-string-or-nil</b>           | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:eval-form</b>                         | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:eval-form-or-end</b>                  | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:expression</b>                        | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:expression-or-end</b>                 | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:flavor-name</b>                       | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:font</b>                              | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:font-list</b>                         | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:function-spec</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:host</b>                              | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:host-list</b>                         | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:host-or-local</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:integer</b>                           | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:keyword</b>                           | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:keyword-list</b>                      | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:number</b>                            | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:number-or-nil</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:object</b>                            | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:object-list</b>                       | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:past-date</b>                         | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:past-date-or-never</b>                | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:pathname</b>                          | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:pathname-host</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:pathname-list</b>                     | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:pathname-or-nil</b>                   | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:string</b>                            | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:string-list</b>                       | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:string-or-nil</b>                     | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:string-trim</b>                       | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:symbol</b>                            | option for <b>prompt-and-read</b>                  | 7-59, RN-58 |
| <b>:time-interval-or-never</b>            | option for <b>prompt-and-read</b>                  | 7-59        |
| <b>:host</b>                              | option for server                                  | 9-214       |
| <b>:trusted-p</b>                         | option for server                                  | 9-214       |
| <b>:area</b> init                         | option for <b>si:eq-hash-table</b>                 | 2-71        |
| <b>:growth-factor</b> init                | option for <b>si:eq-hash-table</b>                 | 2-71        |
| <b>:rehash-before-cold</b> init           | option for <b>si:eq-hash-table</b>                 | 2-71        |
| <b>:size</b> init                         | option for <b>si:eq-hash-table</b>                 | 2-71        |
| <b>:rehash-threshold</b> init             | option for <b>si:equal-hash-table</b>              | 2-72        |
| <b>:asynchronous-characters</b> init      | option for <b>si:interactive-stream</b>            | 7-17        |
| <b>:property-list</b> init                | option for <b>si:property-list-mixin</b>           | 2-474       |
| <b>:clock</b>                             | option for <b>si:sb-on</b>                         | 8-80        |
| <b>:disk</b>                              | option for <b>si:sb-on</b>                         | 8-80        |
| <b>:mouse</b>                             | option for <b>si:sb-on</b>                         | 8-80        |
| <b>:density</b>                           | option for <b>tape:carry-dump</b>                  | 0-31        |
| <b>:file-or-files</b>                     | option for <b>tape:carry-dump</b>                  | 0-31        |
| <b>:reel</b>                              | option for <b>tape:carry-dump</b>                  | 0-31        |
| <b>report</b>                             | option for <b>tape:carry-dump</b>                  | 0-31        |
| <b>:tape-host</b>                         | option for <b>tape:carry-dump</b>                  | 0-31        |
| <b>:density</b>                           | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:direction</b>                         | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:host</b>                              | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:input-stream-mode</b>                 | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:lock-reason</b>                       | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:minimum-record-length</b>             | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:minimum-record-length-granularity</b> | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:no-bot-prompt</b>                     | option for <b>tape:make-stream</b>                 | 5-269       |
| <b>:norewind</b>                          | option for <b>tape:make-stream</b>                 | 5-269       |

|                                |                                                                  |                     |
|--------------------------------|------------------------------------------------------------------|---------------------|
| <b>:pad-char</b>               | option for <b>tape:make-stream</b>                               | 5-269               |
| <b>:prompt</b>                 | option for <b>tape:make-stream</b>                               | 5-269               |
| <b>:record-length</b>          | option for <b>tape:make-stream</b>                               | 5-269               |
| <b>:reel</b>                   | option for <b>tape:make-stream</b>                               | 5-269               |
| <b>:unit</b>                   | option for <b>tape:make-stream</b>                               | 5-269               |
| <b>:package</b>                | option for the <b>:module</b> option                             | 4-199               |
| <b>:arg</b>                    | option for <b>trace</b>                                          | 4-92, 4-278         |
| <b>:argpdl</b>                 | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:both</b>                   | option for <b>trace</b>                                          | 4-92, 4-278         |
| <b>:break</b>                  | option for <b>trace</b>                                          | 4-92, 4-98, 4-276   |
| <b>:cond</b>                   | option for <b>trace</b>                                          | 4-92, 4-276         |
| <b>:entry</b>                  | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:entrycond</b>              | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:entryprint</b>             | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:error</b>                  | option for <b>trace</b>                                          | 4-92, 4-98, 4-276   |
| <b>:exit</b>                   | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:exitbreak</b>              | option for <b>trace</b>                                          | 4-92, 4-98, 4-276   |
| <b>:exitcond</b>               | option for <b>trace</b>                                          | 4-92, 4-276         |
| <b>:exitprint</b>              | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:nil</b>                    | option for <b>trace</b>                                          | 4-92                |
| <b>:per-process</b>            | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:print</b>                  | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:step</b>                   | option for <b>trace</b>                                          | 4-92, 4-94, 4-276   |
| <b>:value</b>                  | option for <b>trace</b>                                          | 4-92, 4-278         |
| <b>:wherein</b>                | option for <b>trace</b>                                          | 4-92, 4-277         |
| <b>:keyboard-process</b>       | option for <b>tv:add-function-key</b>                            | 7-135               |
| <b>:process-name</b>           | option for <b>tv:add-function-key</b>                            | 7-135               |
| <b>:typeahead</b>              | option for <b>tv:add-function-key</b>                            | 7-135               |
| <b>:function</b>               | init option for <b>tv:basic-choose-variable-values</b>           | 7-274               |
| <b>:name-font</b>              | init option for <b>tv:basic-choose-variable-values</b>           | 7-274               |
| <b>:selected-choice-font</b>   | init option for <b>tv:basic-choose-variable-values</b>           | 7-275               |
| <b>:stack-group</b>            | init option for <b>tv:basic-choose-variable-values</b>           | 7-274               |
| <b>:string-font</b>            | init option for <b>tv:basic-choose-variable-values</b>           | 7-275               |
| <b>:unselected-choice-font</b> | init option for <b>tv:basic-choose-variable-values</b>           | 7-275               |
| <b>:value-font</b>             | init option for <b>tv:basic-choose-variable-values</b>           | 7-275               |
| <b>:variables</b>              | init option for <b>tv:basic-choose-variable-values</b>           | 7-274               |
| <b>:configuration</b>          | init option for <b>tv:basic-constraint-frame</b>                 | 7-188               |
| <b>:configurations</b>         | init option for <b>tv:basic-constraint-frame</b>                 | 7-179               |
| <b>:constraints</b>            | init option for <b>tv:basic-constraint-frame</b>                 | 7-189, 7-196        |
| <b>:panes</b>                  | init option for <b>tv:basic-constraint-frame</b>                 | 7-179, 7-189, 7-196 |
| <b>:selected-pane</b>          | init option for <b>tv:basic-constraint-frame</b>                 | 7-98, 7-187         |
| <b>:item-type-alist</b>        | init option for <b>tv:basic-mouse-sensitive-items</b>            | 7-283               |
| <b>:deselected-visibility</b>  | init option for <b>tv:blinker</b>                                | 7-148               |
| <b>:follow-p</b>               | init option for <b>tv:blinker</b>                                | 7-148               |
| <b>:half-period</b>            | init option for <b>tv:blinker</b>                                | 7-149               |
| <b>:visibility</b>             | init option for <b>tv:blinker</b>                                | 7-148               |
| <b>:x-pos</b>                  | init option for <b>tv:blinker</b>                                | 7-148               |
| <b>:y-pos</b>                  | init option for <b>tv:blinker</b>                                | 7-148               |
| <b>:border-margin-width</b>    | init option for <b>tv:borders-mixin</b>                          | 7-171               |
| <b>:borders</b>                | init option for <b>tv:borders-mixin</b>                          | 7-170               |
| <b>:char</b>                   | init option for <b>tv:character-blinker</b>                      | 7-150               |
| <b>:font</b>                   | init option for <b>tv:character-blinker</b>                      | 7-150               |
| <b>:extra-width</b>            | init option for <b>tv:choose-variable-values</b>                 | 7-263               |
| <b>:function</b>               | init option for <b>tv:choose-variable-values</b>                 | 4-133               |
| <b>:label</b>                  | init option for <b>tv:choose-variable-values</b>                 | 7-263               |
| <b>:margin-choices</b>         | init option for <b>tv:choose-variable-values</b>                 | 7-263               |
| <b>:near-mode</b>              | init option for <b>tv:choose-variable-values</b>                 | 7-263               |
| <b>:superior</b>               | init option for <b>tv:choose-variable-values</b>                 | 7-264               |
| <b>:width</b>                  | init option for <b>tv:choose-variable-values</b>                 | 7-263               |
| <b>:io-buffer</b>              | init option for <b>tv:choose-variable-values-window</b>          | 7-275               |
| <b>:margin-choices</b>         | init option for <b>tv:choose-variable-values-window</b>          | 7-275               |
| <b>:io-buffer</b>              | init option for <b>tv:command-menu</b>                           | 7-231               |
| <b>:io-buffer</b>              | init option for <b>tv:constraint-frame-with-shared-io-buffer</b> | 7-179               |

|                                         |      |                                                     |              |
|-----------------------------------------|------|-----------------------------------------------------|--------------|
| <b>:item-list-pointer</b>               | init | option for <b>tv:dynamic-...-menu</b>               | 7-237        |
| <b>:column-spec-list</b>                | init | option for <b>tv:dynamic-multicolumn-mixin</b>      | 7-237        |
| <b>:activate-p</b>                      | init | option for <b>tv:essential-window</b>               | 7-107        |
| <b>:edges-from</b>                      | init | option for <b>tv:essential-window</b>               | 4-116, 7-164 |
| <b>:expose-p</b>                        | init | option for <b>tv:essential-window</b>               | 4-116, 7-107 |
| <b>:minimum-height</b>                  | init | option for <b>tv:essential-window</b>               | 4-116, 7-164 |
| <b>:minimum-width</b>                   | init | option for <b>tv:essential-window</b>               | 4-116, 7-164 |
| <b>:timeout-window</b>                  | init | option for                                          |              |
|                                         |      | <b>tv:essential-window-with-timeout-mixin</b>       | 7-174        |
| <b>:gray-array-for-inferiors</b>        | init | option for <b>tv:gray-deexposed-inferiors-mixin</b> | 7-93         |
| <b>:gray-array-for-unused-areas</b>     | init | option for <b>tv:gray-unused-areas-mixin</b>        | 7-93         |
| <b>:hysteresis</b>                      | init | option for <b>tv:hysteretic-window-mixin</b>        | 7-158        |
| <b>:height</b>                          | init | option for <b>tv:ibeam-blinker</b>                  | 7-150        |
| <b>:label</b>                           | init | option for <b>tv:label-mixin</b>                    | 7-172        |
| <b>:margin-choices</b>                  | init | option for <b>tv:margin-choice-mixin</b>            | 7-290        |
| <b>:space</b>                           | init | option for <b>tv:margin-space-mixin</b>             | 7-169        |
| <b>:activate-p</b>                      | init | option for <b>tv:menu</b>                           | 7-295        |
| <b>:borders</b>                         | init | option for <b>tv:menu</b>                           | 7-222, 7-295 |
| <b>:bottom</b>                          | init | option for <b>tv:menu</b>                           | 7-295        |
| <b>:character-height</b>                | init | option for <b>tv:menu</b>                           | 7-295        |
| <b>:character-width</b>                 | init | option for <b>tv:menu</b>                           | 7-295        |
| <b>:columns</b>                         | init | option for <b>tv:menu</b>                           | 7-214, 7-296 |
| <b>:default-font</b>                    | init | option for <b>tv:menu</b>                           | 7-222, 7-296 |
| <b>:edges-from</b>                      | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:edges</b>                           | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:expose-p</b>                        | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:fill-p</b>                          | init | option for <b>tv:menu</b>                           | 7-214, 7-296 |
| <b>:font-map</b>                        | init | option for <b>tv:menu</b>                           | 7-222, 7-296 |
| <b>:geometry</b>                        | init | option for <b>tv:menu</b>                           | 7-214, 7-296 |
| <b>:height</b>                          | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:inside-height</b>                   | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:inside-size</b>                     | init | option for <b>tv:menu</b>                           | 7-296        |
| <b>:inside-width</b>                    | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:item-list</b>                       | init | option for <b>tv:menu</b>                           | 7-222, 7-297 |
| <b>:label</b>                           | init | option for <b>tv:menu</b>                           | 7-222, 7-297 |
| <b>:left</b>                            | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:minimum-height</b>                  | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:minimum-width</b>                   | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:name</b>                            | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:position</b>                        | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:reverse-video-p</b>                 | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:right</b>                           | init | option for <b>tv:menu</b>                           | 7-297        |
| <b>:rows</b>                            | init | option for <b>tv:menu</b>                           | 7-214, 7-297 |
| <b>:screen</b>                          | init | option for <b>tv:menu</b>                           | 7-298        |
| <b>:top</b>                             | init | option for <b>tv:menu</b>                           | 7-298        |
| <b>:vsp</b>                             | init | option for <b>tv:menu</b>                           | 7-222, 7-298 |
| <b>:width</b>                           | init | option for <b>tv:menu</b>                           | 7-298        |
| <b>:x</b>                               | init | option for <b>tv:menu</b>                           | 7-298        |
| <b>:y</b>                               | init | option for <b>tv:menu</b>                           | 7-298        |
| <b>:highlighted-items</b>               | init | option for <b>tv:menu-highlighting-mixin</b>        | 7-242        |
| <b>:special-choices</b>                 | init | option for <b>tv:multiple-menu-mixin</b>            | 7-242        |
| <b>:process</b>                         | init | option for <b>tv:process-mixin</b>                  | 4-129, 7-94  |
| <b>:height</b>                          | init | option for <b>tv:rectangular-blinker</b>            | 7-149        |
| <b>:width</b>                           | init | option for <b>tv:rectangular-blinker</b>            | 7-149        |
| <b>:type-alist</b>                      | init | option for <b>tv:scroll-mouse-mixin</b>             | 7-311        |
| <b>:backspace-not-overprinting-flag</b> | init | option for <b>tv:sheet</b>                          | 7-108, 7-117 |
| <b>:blinker-p</b>                       | init | option for <b>tv:sheet</b>                          | 4-116        |
| <b>:bottom</b>                          | init | option for <b>tv:sheet</b>                          | 7-163        |
| <b>:character-height</b>                | init | option for <b>tv:sheet</b>                          | 7-164        |
| <b>:character-width</b>                 | init | option for <b>tv:sheet</b>                          | 7-164        |
| <b>:cr-not-newline-flag</b>             | init | option for <b>tv:sheet</b>                          | 7-108, 7-117 |
| <b>:deexposed-typein-action</b>         | init | option for <b>tv:sheet</b>                          | 7-116        |
| <b>:deexposed-typeout-action</b>        | init | option for <b>tv:sheet</b>                          | 7-116        |
| <b>:edges</b>                           | init | option for <b>tv:sheet</b>                          | 7-163        |
| <b>:font-map</b>                        | init | option for <b>tv:sheet</b>                          | 7-142        |
| <b>:height</b>                          | init | option for <b>tv:sheet</b>                          | 7-163        |



|                                     |      |                                              |              |
|-------------------------------------|------|----------------------------------------------|--------------|
| <b>:inside-height</b>               | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:inside-size</b>                 | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:inside-width</b>                | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:integral-p</b>                  | init | option for <b>tv:sheet</b>                   | 7-164        |
| <b>:left</b>                        | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:more-p</b>                      | init | option for <b>tv:sheet</b>                   | 7-115        |
| <b>:name</b>                        | init | option for <b>tv:sheet</b>                   | 7-171        |
| <b>:position</b>                    | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:right</b>                       | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:right-margin-character-flag</b> | init | option for <b>tv:sheet</b>                   | 7-117        |
| <b>:size</b>                        | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:superior</b>                    | init | option for <b>tv:sheet</b>                   | 7-107        |
| <b>:tab-nchars</b>                  | init | option for <b>tv:sheet</b>                   | 7-108, 7-117 |
| <b>:top</b>                         | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:vsp</b>                         | init | option for <b>tv:sheet</b>                   | 7-116        |
| <b>:width</b>                       | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:x</b>                           | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:y</b>                           | init | option for <b>tv:sheet</b>                   | 7-163        |
| <b>:verify</b>                      |      | option for window size and position messages | 7-162        |
| <b>nil</b>                          |      | option for window size and position messages | 7-162        |
| <b>:ascii</b>                       |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:block</b>                       |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:byte-size</b>                   |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:deleted</b>                     |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:direction</b>                   |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:fixnum</b>                      |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:in</b>                          |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:noerror</b>                     |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:out</b>                         |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:print</b>                       |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:probe</b>                       |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:raw</b>                         |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:read</b>                        |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:single</b>                      |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:super-image</b>                 |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:temporary</b>                   |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:write</b>                       |      | option for <b>with-open-file</b>             | 5-91         |
| <b>:buffer-name</b>                 |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:create-p</b>                    |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:default</b>                     |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:end</b>                         |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:hack-fonts</b>                  |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:interval</b>                    |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:kill</b>                        |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:load-p</b>                      |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:ordered-p</b>                   |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:pathname</b>                    |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:start</b>                       |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:window</b>                      |      | option for <b>zwei:open-editor-stream</b>    | 7-378        |
| <b>:buffer-name</b>                 |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:create-p</b>                    |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:defaults</b>                    |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:end</b>                         |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:hack-fonts</b>                  |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:interval</b>                    |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:kill</b>                        |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:load-p</b>                      |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:ordered-p</b>                   |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:pathname</b>                    |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:start</b>                       |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| <b>:window</b>                      |      | option for <b>zwei:with-editor-stream</b>    | 7-378        |
| Changes to <b>fquery</b>            |      | Options                                      | RN-57        |
| Changes to <b>prompt-and-read</b>   |      | Options                                      | RN-58        |
| CLM: <b>defstruct</b>               |      | Options                                      | 2-642        |
| Debugger Proceed and Restart        |      | Options                                      | 1-193, 4-256 |
| <b>deffavor</b>                     |      | Options                                      | 2-441        |

- defsystem** Options 4-194
  - File Options 6-93
  - Geometry Init-plist Options 7-213
  - Init options 2-425
  - Input Editor Options 5-59, 7-27
  - Keyword Options 7-378
  - Mailer options 6-113
  - Menu Item Options 7-211
  - Messages and Init Options 2-529
  - New Input Editor Options RN-63
  - New Input Editor Help Options RN-63
  - Profile mode options 1-170, 6-57
  - QFILE Directory Options 9-188
  - QFILE Open Options 9-166
  - QFILE unbinding QFILE close-abort QFILE OPEN options 9-155
  - Setting and Saving Zmail Options 1-171, 6-57
  - Setting up Mailer options 0-61
  - tv:basic-choose-variable-values** Init-plist Options 7-274
  - tv:basic-mouse-sensitive-items** Init-plist Options 7-283
  - tv:choose-variable-values** Options 7-263
  - tv:command-menu** Init-plist Options 7-231
  - tv:multiple-menu-mixin** Init-plist Options 7-242
  - Useful **tv:menu** Init-plist Options 7-222
  - Window position init options 7-162
  - Window size init options 7-162
  - Zmail Profile Options 6-85
  - User Options Example 7-268
  - No-unwind options for **:reset** 8-92
  - Init-plist Options for **tv:menu** 7-295
  - Input Editor Options Now Specified Dynamically RN-55
  - Options to **defstruct** 2-385
  - Options to **defstruct-define-type** 2-410
  - Options to **defsystem** 4-214
  - Options to programs 7-266
  - Options to **trace** 4-276
  - options window 1-171, 6-57, 6-71
  - options] Profile Mode menu item 6-78
  - Option to **defflavor**:
    - :export-instance-variables** RN-31
    - Option to **defstruct: :export** RN-32
    - option to Tape when done dump parameter 0-6
    - option to Tape when done dump parameter 0-6
    - option to Tape when done dump parameter 0-6
    - option to Tape when done dump parameter 0-6
    - option values 9-166
    - Option Variables 7-267
    - Option Variables 7-267
    - or** 2-179
    - order 2-235
    - :ordered-instance-variables** Option for **defflavor** 2-441, 2-447
    - :ordered-p** option for **zwei:open-editor-stream** 7-378
    - :ordered-p** option for **zwei:with-editor-stream** 7-378
    - order for arrays 2-641
    - ordering 2-248
    - Ordering list 7-188
    - Ordering Buffer Lists 1-168, 3-213
    - Ordering Flavors, Methods, and Wrappers 2-467
    - Order of Initializations 8-67
    - Ordinal format directive 5-36
    - or** function 2-179
    - Organization of Patch Files 4-235
    - Organization of the Screen 3-17
    - Organization of the Zmacs Manual 3-4
- Adding New
- Setting parameter
- User
- [File
- New
- New
- Leave
- Offline
- Query
- Rewind
- IF-EXISTS QFILE OPEN
- Functions for Altering User
- Functions for Defining User
- Inclusive
- Row-major
- SCL and column-major
- Column-major
- Init File Form:
- Logical

- Organization of Tools and Techniques 4-4
  - :or** method combination type 2-455
  - :or** method type 2-455, 2-458
  - Orphans 0-38
  - or** special form 2-179
  - [Or] Filter Creation Display menu item 6-61
  - ostring** function 5-46
  - Other Components 5-123, 5-161
  - Other Displays 4-68
  - Other Window 3-130
  - Other Clauses 2-218
  - Other Contents 3-129
  - Other Contexts 1-85
  - Other Environment Inquiries 2-645
  - Other Hardcopy Commands 3-269
  - Other Kinds of Functions 2-305
  - other machines 0-87
  - Other mail file names 6-94
  - Other Process Functions 8-97
  - Other Region-related Commands 3-95
  - Other Set Commands for File and Buffer Attributes 3-140
  - other sites 0-87
  - other-sites-ignored-in-zmail-summary**: Site Object Attribute 9-20
  - Other Systems 4-264
  - Other Types of Replacement Operations in Zmacs 3-104
  - Other Users 1-69
  - Other Window 3-130
  - Other Window 3-130
  - Other Window 3-130
  - Other Window (c-X 0) Zmacs command 4-65
  - Other Window (c-m-V) Zmacs command 4-65
  - Other Windows 4-66
  - otherwise** symbol 2-178
  - Other Zmail Commands 6-45
  - out 1-3
  - Out 1-3
  - Out Code 4-83
  - Outer Frames 4-266
  - Outer Frames 4-266
  - outfmt** macro 5-45
  - Outline 4-13
  - Outlining the Figure 4-16
  - Out Lisp Code RN-79
  - out-of-bounds 2-541
  - out-of-bounds 2-541
  - Out-of-bounds subscripts 2-541
  - Out of Dired 3-147
  - Out of Keystroke Prefixes 3-42
  - Out of Minibuffer Prompts 3-42
  - Out-of-order Evaluation 2-363
  - Out of Prefixes and Prompts 3-42
  - Out of the Debugger in Zmail 6-23
  - Out of Trouble 3-42
  - Out of Trouble 3-42
  - Out of Trouble in Zmail 6-23
  - :out** option for **fs:complete-pathname** 5-120, 5-158
  - :out** option for **with-open-file** 5-91
  - output 5-46
  - output 5-18
  - output 5-44
  - Output 4-279
  - Output 1-217
  - Output 4-124
- format:**
  - Miscellaneous
  - Creating Two Windows, Specifying Completion in CLM:
  - Distributing a new world to
  - Installing world loads from
  - Debugger Commands That Call
  - Talking to
  - Choosing the Scroll
  - Scrolling the Scroll
  - Zmacs and
  - Cold boot after logging
  - Logging
  - Commenting
  - Clearing the Trap-on-exit Flag for the Current and All
  - Setting the Trap-on-exit Flag for the Current and All
  - format:**
  - Program Development: Design and Figure
  - Use #|...|# Instead of #|...|# to Comment Elements
  - Instance variable
  - Getting
  - Getting
  - Getting
  - Multiple and
  - Getting
  - Getting
  - Getting
  - Overview of Getting
  - Getting
  - Character
  - Clear buffered
  - Concatenating constant and variable
  - Controlling the Format of **trace**
  - FEP Show Status Command
  - Flavors for Lgp

- Formatted Output 5-29
  - Gc-status Output 1-105, 8-124
  - How Windows Display Graphic Output 7-118
  - Simple Screen Output 4-14
  - trace** output 4-279
  - VAX/VMS character output 9-143
  - Window Attributes for Character Output 7-115
  - Window Exposure and Output 7-82
  - Output Functions 5-87
  - format:**
    - output** macro 5-45
    - Output padding 5-47
    - Output Base Command 1-33
    - output devices 2-268, RN-16
    - :output** disk stream 5-222, 8-43
    - Output Disk Streams 5-226, 8-46
    - Outputexample 3-34
    - Output File Pathname From an Input File 5-132
    - Output File Streams 5-116
    - output format style 5-46
    - output format style 5-46
    - output format style 5-46
    - output functions 5-89
    - Output hold flag 7-82, 7-108, 7-118
    - Output Hold Process State 6-23
    - Output Hold state 7-82
    - Output messages from the garbage collector 8-124
    - Output Module 4-112
    - Output Module for the Sample Program 4-165
    - Output of the Sample Program 4-185
    - Output operations on serial streams 5-251
    - Output operations on windows 7-75
    - OUTPUT pathname type abbreviation 5-180
    - output stream 5-21
    - Output Streams 5-21
    - output streams 7-103, 7-108
    - Output streams to buffered asynchronous devices 5-18, 5-114
    - Output Subsystem 5-44
    - output tape streams 5-273
    - output tape streams 5-273
    - output tape streams 5-273
    - Output to Character Streams 2-644
    - Output to Windows 7-108
    - Output to Windows 7-118
    - :output-xoff-character** serial I/O parameter 5-253
    - :output-xon-character** serial I/O parameter 5-253
    - :outside-accessible-instance-variables** Option for **defflavor** 2-441, 2-447
  - Outside a Window 7-158
  - Outside FED Command Menu 3-229
  - Outside World Interface Menu Items 3-260
  - overflow 2-94
  - overflow error 2-535
  - overflow error 2-537
  - :overhead** option for **defstruct-define-type** 2-410, 2-411
  - Overlaid with Lists 2-250
  - Overlapping windows 7-75
  - Overlapping disk transfers with computation 8-50
  - :override** method type 2-455, 2-457
  - Overriding Variable-defined-but-never-referenced Warnings 4-326
  - Overstrike character 2-32
  - Overstriking 7-108
  - Overview 9-102
  - overview 1-120, 1-127
- Input and
    - Defaulting an Direct Access
    - :editor**
    - :read**
    - :sail**
    - Slashification-related
    - Zmail in
  - Program Development: Modifying the
    - Graphic
    - Buffered
  - Special-purpose Stream Operations for Buffered Windows as
    - The
      - :force-output** message to
      - :write-eof** message to
      - :write-error-status** message to
      - CLM: Formatted
      - Character
      - Graphic
  - Controlling the Mouse
    - FED
    - Exponent
    - Exponent
    - Stack
    - Arrays
  - Chaosnet Software Protocol – Documentation

FEP File System Overview 1-208, 5-215  
 Show Overview 1-127  
 Show Documentation (an Overview) 1-122  
 Overview and Definitions of Signalling and Handling 2-479  
 Overview of Changing Case in Zmacs 3-160  
 Overview of Commands to Mark Regions 3-91  
 Overview of Commenting Lisp Code in Zmacs 3-171  
 Overview of Customizing the Zmacs Environment 3-194  
 Overview of Deleting Vs. Killing Text 3-72  
 Overview of Dired 3-144  
 Overview of Evaluating and Compiling Lisp Programs in Zmacs 3-174  
 Overview of Finding Out About Zmacs Commands 3-44  
 Overview of Garbage Collection 1-105, 8-114  
 Overview of Getting Out of Trouble 3-42  
 Overview of Indentation in Zmacs 3-162  
 Overview of Leaving Zmacs 3-40  
 Overview of Locating and Replacing Strings Automatically 3-102  
 Overview of Moving the Cursor 3-54  
 Overview of Notifications 7-126  
 Overview of Numeric Arguments 3-24  
 Overview of Peek 1-185, 4-303  
 Overview of Remote Login Capability 9-67, RN-75  
 Overview of Searching in Zmacs 3-98  
 Overview of Setting the Major Mode 3-156  
 Overview of Sorting in Zmacs 3-112  
 Overview of Storage Management 8-101  
 Overview of the Choice Facilities 7-203  
 Overview of the Command Processor 1-9  
 Overview of the Editor Menu 3-49  
 Overview of the Mailer 6-109  
 Overview of the Zmacs Manual 3-4  
 Overview of Window Flavors and Messages 7-103  
 Overview of Working with Buffers and Files in Zmacs 3-114  
 Overview of Zmacs 1-47, 3-6  
 Overview of Zmacs File Manipulation Commands 3-131  
 Overview of Zmail 6-3  
**:overwrite** symbol in **:if-exists** option for **open** 5-222, 8-43  
 [Map over] Zmail menu item 1-108, 3-268, 6-67, 6-69, 6-70, 6-71, 6-80, 6-81  
 Owning of a window by the mouse 7-151  
 c-X O Zmacs command 3-130  
 c-X O Zmail Command 6-38

**P**

SELECT  
 Processes  
 Disk  
 Change current  
**chaos**  
 CHAOS.B32 BLISS-32 subroutine  
**cl**  
**common-lisp**  
 Common Lisp Compatibility

**P**

P 3-40  
 (P) 1-186  
**%p-dpb** function 8-21  
**%p-ldb** function 8-21  
**%p-pointer** function 8-21  
 pack 8-29  
 package 2-597  
 package 2-615, 9-134  
 package 9-142  
 package 2-615, 2-633  
 package 2-633  
 Package 2-615

**P**

**common-lisp-global** package 2-615  
**common-lisp-system** package 2-633  
**common-lisp-user** package 2-633  
**compiler** package 2-615  
 Condition system package 2-615  
   Current package 2-597  
   **dbg** package 2-615  
   **debugger** package 2-615  
   Defining a Package 2-598  
   Editor package 2-615  
**file-system** package 2-615  
   **fonts** package 2-615, 7-140  
   **format** package 2-615  
   **fs** package 2-615  
   **global** package 2-615  
   Home package 2-606  
 Init File Form: Putting Buffers Into Current Package 1-168, 3-213  
   **keyword** package 2-615  
   Lisp language package 2-615  
   **lmfs** package 2-615  
   **net** package 2-615  
   **neti** package 2-615  
   **network** package 2-615  
**network-internals** package 2-615  
   Pathnames package 2-615  
   Remove package 2-603  
 Removing symbol from package 2-606  
   **scl** package 2-633  
   SCL **gprint** package 2-633  
   SCL **language-tools** package 2-633  
   SCL **zl** package 2-633  
   SCL **zl-user** package 2-633  
   Setting the Package 3-138  
   **sl** package 2-615  
**symbolics-common-lisp** package 2-633  
   **sys** package 2-615  
   **system** package 2-571, 2-615  
**system-internals** package 2-615  
   The Current Package 2-597  
   The **global** Package 2-571  
   **time** package 7-353  
   **tv** package 2-615  
   **user** package 1-234, 2-579, 2-615  
   Window system package 2-615  
   Zmail package 2-615  
   **zwei** package 2-615  
   Package attribute 2-579  
   Package commands 2-612  
   Package "Commands" 2-612  
   Package Inheritance 2-571, 2-599, 2-602  
   Package Iteration 2-608  
   Package Names 2-581  
   Package system 2-566  
   **package** variable 2-579, 2-597, 7-257  
   Package (m-X) Zmacs command 3-138, 3-143, 4-10  
   **package-declare** special form 2-625  
   **package-error** 2-542  
   **package-error** flavor 2-542, 2-619  
   **package-locked** 2-543, 2-619  
   **package-locked** 2-543, 2-619  
   **package-locked** flavor 2-543, 2-619  
   package-name lookup 2-640  
   Package-related Conditions 2-619  
   **package-cell-location** function 2-607  
   Package cell of a symbol 2-3, 2-566  
   Set Package Command 1-33  
   Set

Interning Errors Based on **sys:**  
   **sys:**  
   **package** message to **sys:**  
   **symbol** message to **sys:**  
   **sys:**  
   SCL case checking in

- :package** command processor argument type 7-48
- package-external-symbols** function 2-611
- Package file attribute 5-109
- Package Functions, Special Forms, and Variables 2-597
- :package** message to
  - sys:external-symbol-not-found** 2-619
- :package** message to **sys:package-locked** 2-543, 2-619
- Package Name-conflict Errors 2-593
- Package Name-conflict Errors 2-595
- Package name conflicts 2-581
- Package Names 2-581
- Package Names 2-584
- Package Names 2-586
- Package Names 2-584
- Package Names 2-582, 2-610
- package names 2-582
- Package Names as Interfaces 2-585
- package-not-found** 2-542, 2-619
- package-not-found** 2-542, 2-619
- package-not-found** flavor 2-542, 2-619
- Package of a Symbol 2-607
- Package of a Symbol 2-573
- :package** Option for **defsystem** 4-194
- :package** option for the **:module** option 4-199
- package qualifier 2-601, 2-603
- package qualifier 2-584
- package qualifier 2-585, 2-601, 2-603
- Packages 2-557, 3-138, 4-10, 4-16, 4-38, 4-44
- packages 2-626
- Packages 2-591
- Packages 2-560
- Packages 2-589
- packages 2-581, 2-582
- Packages 2-607
- Packages 2-633
- Packages 2-569
- Packages 2-585
- Packages 2-615
- Packages 2-559
- Packages and Keyword Names 1-234
- Packages and Locking 2-626
- package-shadowing-symbols** function 2-612
- Packages in Programs 2-579
- Packages storage area 8-107
- Package System 2-625
- Package System Allows Symbol Sharing 2-569
- package-used-by-list** function 2-610, 2-625
- package-use-list** function 2-610
- packet 9-114
- packet 9-119
- packet 9-198
- packet 9-114
- packet 9-118
- packet 9-118
- packet 9-118
- packet 9-129
- packet 9-114
- packet 9-117
- packet 9-114
- packet 9-121
- packet 9-114
- packet 9-153
- packet 9-114
- packet 9-108
- Resolving
  - Introduction to
  - Introduction to Qualified
  - Multilevel Qualified
  - Qualified
  - Relative
  - Shadowing
  - Qualified
- :name** message to **sys:**
- :relative-to** message to **sys:**
- sys:**
- Functions That Find the Home
  - Home
- ::
- #:
- :
- Adding new symbols to locked
- Consistency Rules for
- Example of the Need for
- Examples of Symbol Sharing Among
  - Invisible
  - Mapping Between Names and SCL
  - Sharing of Symbols Among
- Specifying Internal and External Symbols in System
  - The Need for
  - Notation Conventions for External-only
- Specifying
- Compatibility with the Pre-release 5.0
  - How the
- ANS Answer to a simple transaction
  - BRD Broadcast
  - Chaos
  - CLS Close connection
  - DAT 16-bit Data
  - DAT 8-bit Data
  - EOF End of File
  - Foreign
- FWD Forward a request for connection
  - LOS Lossage
  - LSN Listen
  - MNT Maintenance
  - OPN Open connection
  - QFILE
- RFC Request for connection
  - Routing

RUT  
 RUT Routing Information  
   Sending a CLS  
   SNS Sense status  
   STS Status  
 UNC Uncontrolled Data

packet 9-108  
 packet 9-121  
 packet 9-118  
 packet 9-117  
 packet 9-117  
 packet 9-118, 9-129  
 Packet Contents 9-106  
 Packet forwarding 9-108  
 Packet I/O 9-138, 9-144  
 Packet Numbers 9-105  
 Packet opcode 9-106  
 Packet Opcodes 9-114  
 Packet Reception 9-210  
 Packet Transmission 9-210  
 Packet types 9-114  
**packet-gateway** Service 9-60  
**packet-gateway:** Service 9-60  
 Packet-switching network 9-15  
**packet-being-transmitted** function 9-202  
 packet buffer 9-198  
 Packet buffer panic 9-202  
**packet-buffer-panic** function 9-203  
 Packet Data Contents 9-159  
 packet error information 9-117  
 packet header field 9-106, 9-111, 9-117  
 packet header field 9-106  
 packet header field 9-106  
 packet header field 9-106  
 packet header field 9-106  
 packet header field 9-106  
 packet header field 9-106  
 packet header field 9-106  
 Packet header fields 9-106, 9-114  
 Packet Number packet header field 9-106  
 packet numbers 9-111  
 Packet on Writing with QFILE 9-177  
 Packet Opcodes 9-159  
 Packet Pool 9-195  
 Packets 9-195  
 Packets 9-96  
 packets 9-134  
 packets 9-105, 9-111  
 packets 9-134  
 packets 9-205  
 packets 9-205  
 packets 9-202  
 Packets 9-202  
 Packets 9-162  
 Packets 9-197  
 packets 9-111  
 packets 9-111, 9-117  
 packets 9-111  
 Packets 9-198  
 packets 9-105, 9-111  
 packets 9-195  
 packets available 9-144  
 packet slots available in transmit window 9-144  
 Packets with array leader 9-200  
 Packet to an Interface 9-205  
 packet types 9-162  
**pad** macro 5-47  
**:padchar** option for formatting functions 5-44  
**:pad-char** option for **tape:make-stream** 5-269  
 padding 5-47  
 PAGE 1-144  
 Page 3-69

RUT  
 RUT Routing Information  
   Sending a CLS  
   SNS Sense status  
   STS Status  
 UNC Uncontrolled Data

**neti:**  
 Size in bytes of

**neti:**  
 QFILE  
 Passing  
 Acknowledgement  
   Count  
 Destination Address  
 Destination Index  
   Operation  
 Packet Number  
 Source Address  
   Source Index

Window into the set of  
 Waiting for Acknowledgement of the EOF  
 QFILE  
 The

Chaosnet  
 Control  
 Controlled  
   Data  
 Delivering  
   Freeing  
   Free pool of  
   Miscellaneous:  
 QFILE Marks and EOF  
   Reference Material:  
     SNS  
     Status  
     STS  
 Subpackets and Coercing  
   Uncontrolled  
   Wired  
 Number of input  
   Number of

Sending a  
 QFILE  
**format:**  
  
 Output  
 Backward



- Count Lines Page 3-48
- Forward Page 3-69
- Introduction to Motion by
  - Mark Page 3-92
  - Motion by Page 3-69
  - Next Page 1-50, 3-26, 3-69
  - Previous Page 1-50, 3-26, 3-69
- Page character 2-32, 5-5
- Page fault 8-77
- New Input Editor Commands:
  - PAGE, COMPLETE, c-? RN-61
  - page-size:** Printer Object Attribute 9-18
  - PAGE FEP file type 5-228, 8-49
  - sys:** **page-in-area** function 8-25
  - sys:** **page-in-array** function 8-25
  - sys:** **page-in-region** function 8-25
  - sys:** **page-in-structure** function 8-24
  - sys:** **page-in-words** function 8-25
  - Disk page number (DPN) 8-29
  - sys:** **page-out-area** function 8-26
  - sys:** **page-out-array** function 8-25
  - sys:** **page-out-region** function 8-26
  - sys:** **page-out-structure** function 8-25
  - sys:** **page-out-words** function 8-26
- Commands to Mark Regions by
  - Disk pages 8-29
  - Page separator character 5-5
  - Page separator format directive 5-34
  - Paging 8-121
- Using a Spare World Load for
  - Paging 1-212, 5-219
  - Paging file 1-201, 1-209, 5-216
  - Paging space 8-114
  - Add Paging-file command 1-201
  - Clear Paging-files command 1-201
  - Allocating Extra
    - Extra Paging Space 0-44, 5-240
    - Extra paging space 1-212, 5-219
    - The Paging System 8-24
  - Pair 1-112, 9-4, 9-29
  - Dotted pair 1-227
  - pairlis** function 2-66
  - Black pane 3-239
  - Constraint frame pane 7-179
  - Document Examiner Command
    - Pane 1-133
    - Drawing pane 3-227, 3-262
    - FED Drawing Pane 3-227
    - FED Prompt Pane 3-228
    - FED Register Pane 3-229, 3-241, 3-263
    - FED Sample Pane 3-227
    - FED Status Pane 3-229
  - Height and width of the drawing pane 3-256
  - Mousing on the FED Character Select Pane 3-263
  - Mousing on the FED Drawing Pane 3-262
  - Mousing on the FED Register Pane 3-263
  - Mousing on the FED Sample Pane 3-262
  - Prompt pane 3-228
  - Sample pane 3-227, 3-235, 3-253, 3-262
  - Setting the Box Size in the FED Drawing Pane 3-256
  - Setting the Height and Width of the FED Drawing Pane 3-256
  - Size of boxes in the drawing pane 3-256, 3-259
  - Status pane 3-229
  - The Inspector History Pane 4-297
  - The Inspector Inspection Pane 4-298
  - The Inspector Interaction Pane 4-297
  - The Inspector Menu Pane 4-298
  - Using the mouse in the character select pane 3-263
  - Using the mouse in the drawing pane 3-262
  - Using the mouse in the register pane 3-263

- Using the mouse in the sample pane 3-262
- Document Examiner **tv:**
  - Command Inspection Drawing **pane border** 7-176
  - pane-mixin** flavor 7-100, 7-176
  - Pane Actions 1-133
  - Pane Display 4-299
  - Pane Menu 3-228
  - :pane-name** method of **tv:basic-constraint-frame** 7-188
  - tv:** **pane-no-mouse-select-mixin** flavor 7-100, 7-177
  - Creating Frames and Size of Window panes 7-103, 7-175
  - Examples of Specifications of Specifying panes 7-176
  - Examples of Specifications of Specifying panes 7-95
  - Flavors for panes 7-188
  - panes 7-76
  - Panes and Constraints 7-185
  - Panes and Constraints 7-179
  - Panes and Constraints Before Release 6.0 7-196
  - Panes and Constraints Before Release 6.0 7-188
  - Panes and Frames 7-176
  - :panes** init option for **tv:basic-constraint-frame** 7-179, 7-189, 7-196
- Packet buffer panic 9-202
  - Backward Paragraph 1-50, 3-26, 3-68
  - Fill Paragraph 3-95
  - Forward Paragraph 1-50, 3-26, 3-68
- Introduction to Motion by Paragraph 3-68
  - Mark Paragraph 3-92
  - Motion by Paragraph 3-68
- Commands to Mark Regions by Paragraphs 3-92
- Example of Commands to Mark Regions by Paragraphs 3-92
  - :ascii-characters** serial I/O parameter 5-253
  - :baud** serial I/O parameter 5-253
  - :carrier-detect** serial I/O parameter 5-253
  - :check-framing-errors** serial I/O parameter 5-253
  - :check-over-run-errors** serial I/O parameter 5-253
  - :check-parity-errors** serial I/O parameter 5-253
  - :clear-to-send** serial I/O parameter 5-253
  - :data-terminal-ready** serial I/O parameter 5-253
  - :flavor** serial I/O parameter 5-253
  - :force-output** serial I/O parameter 5-251, 5-253
  - :generate-xon-xoff** serial I/O parameter 5-253
  - :input-error-character** serial I/O parameter 5-253
  - :input-xoff-character** serial I/O parameter 5-253
  - :input-xon-character** serial I/O parameter 5-253
  - :mode** serial I/O parameter 5-253
  - :number-of-data-bits** serial I/O parameter 5-253
  - :number-of-stop-bits** serial I/O parameter 5-253
  - :output-xoff-character** serial I/O parameter 5-253
  - :output-xon-character** serial I/O parameter 5-253
  - :parity** serial I/O parameter 5-253
  - :request-to-send** serial I/O parameter 5-253
  - :unit** serial I/O parameter 5-253
  - :xon-xoff-protocol** serial I/O parameter 5-253
- Append to tape dump parameter 0-6
  - Buffers tape spec parameter 0-26
  - Bufs tape spec parameter 0-26
  - Comment dump parameter 0-6
  - Consolidate from dump parameter 0-6
  - Density tape spec parameter 0-26
  - Dens tape spec parameter 0-26
  - Den tape spec parameter 0-26
  - Device tape spec parameter 0-26
  - Dev tape spec parameter 0-26
  - Dump deleted files dump parameter 0-6
  - Dump Type dump parameter 0-6
  - Granularity tape spec parameter 0-26

|                                       |                                    |              |
|---------------------------------------|------------------------------------|--------------|
| Host tape spec                        | parameter                          | 0-26         |
| Leave option to Tape when done dump   | parameter                          | 0-6          |
| Length tape spec                      | parameter                          | 0-26         |
| Len tape spec                         | parameter                          | 0-26         |
| Machine tape spec                     | parameter                          | 0-26         |
| Menu size                             | parameter                          | 7-213        |
| Minimum-length tape spec              | parameter                          | 0-26         |
| Minimum-record tape spec              | parameter                          | 0-26         |
| Minimum-record-length tape spec       | parameter                          | 0-26         |
| Minimum tape spec                     | parameter                          | 0-26         |
| Minreclen tape spec                   | parameter                          | 0-26         |
| Minrec tape spec                      | parameter                          | 0-26         |
| N-buffers tape spec                   | parameter                          | 0-26         |
| N-buffs tape spec                     | parameter                          | 0-26         |
| N-bufs tape spec                      | parameter                          | 0-26         |
| Number-of-buffers tape spec           | parameter                          | 0-26         |
| Offline option to Tape when done dump | parameter                          | 0-6          |
| Pathnames dump                        | parameter                          | 0-6          |
| Person operating dump                 | parameter                          | 0-6          |
| Query option to Tape when done dump   | parameter                          | 0-6          |
| Reclen tape spec                      | parameter                          | 0-26         |
| Record-length tape spec               | parameter                          | 0-26         |
| Recline tape spec                     | parameter                          | 0-26         |
| Reel tape spec                        | parameter                          | 0-26         |
| Restart pathname dump                 | parameter                          | 0-6          |
| Rewind option to Tape when done dump  | parameter                          | 0-6          |
| Set date dumped dump                  | parameter                          | 0-6          |
| Tape Host dump                        | parameter                          | 0-6          |
| Tape Reel ID dump                     | parameter                          | 0-6          |
| Tape when done dump                   | parameter                          | 0-6          |
| Unit tape spec                        | parameter                          | 0-26         |
| Vol tape spec                         | parameter                          | 0-26         |
| Volume tape spec                      | parameter                          | 0-26         |
| Specifying a Keyword                  | Parameter's Symbol in Lambda Lists | 2-156        |
| Setting                               | parameter options to programs      | 7-266        |
| Actual                                | parameters                         | 2-151        |
| Default forms of lambda-list          | parameters                         | 2-151        |
| Digital Audio                         | Parameters                         | 7-329        |
| Formal                                | parameters                         | 2-151        |
| Initialize border                     | parameters                         | 7-222, 7-295 |
| Keyword                               | parameters                         | 2-151        |
| Modem control                         | parameters                         | 5-253        |
| Multiple choice window                | parameters                         | 7-251, 7-255 |
| Optional                              | parameters                         | 2-154        |
| Positional                            | parameters                         | 2-154        |
| Reading serial I/O                    | parameters                         | 5-251        |
| Required                              | parameters                         | 2-154        |
| Rest                                  | parameters                         | 2-154        |
| Set edge                              | parameters                         | 7-296        |
| Setting serial I/O                    | parameters                         | 5-251        |
| Tape Spec                             | Parameters                         | 0-26         |
| XON/XOFF protocol                     | parameters                         | 5-253        |
| SCL and <b>&amp;rest</b>              | parameters for lambda-expressions  | 2-638        |
|                                       | Parameters for Serial I/O          | 5-253        |
| FED Font                              | Parameters Menu                    | 3-229        |
| Font                                  | Parameters menu                    | 3-229        |
| Mousing on the FED Font               | Parameters Menu                    | 3-263        |
| Using the mouse in the Font           | Parameters menu                    | 3-263        |
| Tape spec                             | parameter specification            | 0-28         |
| Binding                               | Parameters to Arguments            | 2-153        |
| QFILE                                 | parcel                             | 9-153        |
|                                       | Parentheses                        | 1-232        |
| Balancing                             | Parentheses                        | 4-26         |
| Insert Matching                       | parentheses                        | 3-178        |
| Find Unbalanced                       | Parentheses (m-X) Zmacs command    | 3-48, 4-26   |

- Check Unbalanced
  - Parenttheses When Saving Variable 3-211
  - Parenthesizing Lisp Expressions in Zmacs 3-178
  - :parity** serial I/O parameter 5-253
  - time:** **parse** function 7-361
  - sys:** **:parse-address** message 9-207
  - parse-error** flavor 2-543
  - parse-ferror** flavor 2-543
  - parse-ferror** function 2-504
  - si:** **parse-host** function 9-31
  - SCL and **parse-namestring** function 2-644
  - fs:** **parse-number** function 2-281
  - SCL and **parse-pathname** function 5-156
  - parse-pathname** function 2-644
  - :parse-truename** method of **fs:pathname** 5-171
  - time:** **parse-interval-or-never** function 7-365
  - SCL and **:junk-allowed** keyword for **parse-namestring** 2-644
  - fs:** **parse-pathname-error** flavor 2-553
  - time:** **parse-present-based-universal-time** function 7-362, RN-65
  - time:** Parser for file attribute list 5-109
  - time:** **parse-universal-time** function 7-362
  - time:** **parse-universal-time-relative** function 7-362, RN-65
  - parse\_host** function 9-142
  - Parsing pathnames 5-156
  - Parsing file attribute lists 5-109
  - CLM: Parsing of Numbers and Symbols 2-643
  - :partial-help** option 5-60, 7-28
  - Partially visible windows 7-75, 7-86
  - Adding a LMFS
    - Partition 1-212
    - Partitions 0-16
    - LMFS Multiple Partitions 0-35, 5-213
    - Warning Against Deleting LMFS File Partitions RN-80
    - File system partition table 0-35, 5-213
    - Adding a Partition to LMFS 0-35, 5-213, 5-219
    - Zmail Window Partly Covered 6-24
    - Dummy parts 7-188
  - Parts of a Command 1-9
  - :pass-on** method combination type 2-455, 2-456
  - :pass-through** option 5-59, 7-27
  - Passing-back of Multiple Values 2-169
  - Passing in the Flavor System 2-421, 2-423
  - Passing Messages 2-430
  - CLM: Rules Governing the Passing of Multiple Values 2-639
  - Passing packet error information 9-117
  - Suppress prompting for passwords 5-107
  - :past-date** option for **prompt-and-read** 7-59, RN-58
  - :past-date-or-never** option for **prompt-and-read** 7-59, RN-58
  - :past-date-or-never tv:choose-variable-values** variable type 7-259, RN-59
  - :past-date tv:choose-variable-values** variable type 7-259
  - Drawing past edge of screen error 2-537
  - Read past the end-of-file error 2-536
  - Patch 4-231
    - Current patch 3-190, 4-242
    - In-progress patch 4-242
    - Send mail about patch 3-190, 4-242
    - Patch Facility 4-231
    - Patch file 4-231
    - Patch level 4-250
    - Abort Patch (m-X) 3-191, 4-243
    - Add Patch (m-X) 3-188, 4-240
    - Finish Patch (m-X) 3-190, 4-242
    - Recompile Patch (m-X) 3-192, 4-243, RN-49
    - Reload Patch (m-X) 3-192, 4-244, RN-49

- Resume Patch (m-X) 3-191, 4-243
- Select Patch (m-X) 3-190, 4-242
- Start Patch (m-X) 3-187, 4-239
- Start Private Patch (m-X) 3-188, 4-240
- patch-atom* argument to **:patchable** option for **defsystem** 4-236
- PATCH-DIRECTORY pathname type abbreviation 5-180
- Patch-File file attribute 3-143, 5-109
- fs:** **patch-file** Translation Rule 5-196
- :patchable** Option for **defsystem** 4-195, 4-231, 4-235
- patch-atom* argument to **:patchable** option for **defsystem** 4-236
- Changing the Status of a Patchable System 4-251
  - Add Patch Changed Definitions (m-X) 3-189, 4-241
  - Add Patch Changed Definitions of Buffer (m-X) 3-188, 4-241
- File types of the Patch Directory File 4-234
  - Active patches 3-186, 3-190, 4-238, 4-242
  - Inactive patches 3-190, 4-242
  - Loading patches 4-231, 4-244
  - Making Patches 3-186, 4-238
  - Two New Zmacs Commands for Recompiling and Reloading Patches RN-49
  - View Patches (m-X) 3-190, 4-242
  - Load Patches Command 1-26
  - Adding patches to Lisp image 0-46
  - Add region to patch file 3-186, 4-238
    - Install patch file 3-190, 4-242
    - Set Patch File (m-X) Zmacs command 3-143, 4-10
  - Format of patch file logical pathname translation 5-196
  - Changes to patch file names 4-236
    - Individual Patch Files RN-52
    - Names of Patch Files 4-236
    - Organization of Patch Files 4-235
    - Types of Patch Files 4-233
  - si:** Patching Programs in Zmacs 3-186
  - In-progress **patch-loaded-p** function 4-250
  - Initial patch state 3-190, 4-242
  - si:** patch state 3-190, 4-242
  - Installing new releases distributed in **patch-system-pathname** function 4-237, RN-52
  - New Function **note-private-patch** Adds Private patch tape format 0-87
  - array-element loop** iteration Patch to Your World RN-53
  - array-elements loop** iteration path 2-225
  - hash-elements loop** iteration path 2-225, 2-257
  - heap-elements loop** iteration path 2-224
  - interned-symbols loop** iteration path 2-224
  - local-interned-symbols loop** iteration path 2-225
  - Service access path 2-225
  - The **interned-symbols** path 9-41
  - An Example Path 2-225
  - :canonical-type** method of **fs:** Path Definition 2-229
  - Converting logical pathname to physical **pathname** 5-166
  - Converting physical pathname to logical **pathname** 5-186, 5-199
  - :device** method of **fs:** **pathname** 5-199
  - :device-wild-p** method of **fs:** **pathname** 5-166
  - :directory** method of **fs:** **pathname** 5-173
  - :directory-pathname-as-file** method of **fs:** **pathname** 5-166
  - :directory-wild-p** method of **fs:** **pathname** 5-144
  - :generic-pathname** method of **fs:** **pathname** 5-173
  - :getl** method of **fs:** **pathname** 5-171
  - :get** method of **fs:** **pathname** 5-172
  - pathname** 5-171

**:host** method of **fs:pathname** 5-165  
**:name** method of **fs:pathname** 5-166  
**:name-wild-p** method of **fs:pathname** 5-173  
**:new-device** method of **fs:pathname** 5-167  
**:new-directory** method of **fs:pathname** 5-167  
**:new-name** method of **fs:pathname** 5-167  
**:new-pathname** method of **fs:pathname** 5-170  
**:new-type** method of **fs:pathname** 5-168  
**:new-version** method of **fs:pathname** 5-168  
**:new-canonical-type** method of **fs:pathname** 5-169  
**:new-default-pathname** method of **fs:pathname** 5-170  
**:new-raw-device** method of **fs:pathname** 5-168  
**:new-raw-directory** method of **fs:pathname** 5-168  
**:new-raw-name** method of **fs:pathname** 5-168  
**:new-raw-type** method of **fs:pathname** 5-169  
**:parse-truename** method of **fs:pathname** 5-171  
**:pathname-match** method of **fs:pathname** 5-172  
**:pathname-as-directory** method of **fs:pathname** 5-144  
**:plist** method of **fs:pathname** 5-172  
**:putprop** method of **fs:pathname** 5-172  
**:raw-device** method of **fs:pathname** 5-166  
**:raw-directory** method of **fs:pathname** 5-166  
**:raw-name** method of **fs:pathname** 5-166  
**:raw-type** method of **fs:pathname** 5-166  
**:remprop** method of **fs:pathname** 5-172  
**:string-for-directory** method of **fs:pathname** 5-171  
**:string-for-dired** method of **fs:pathname** 5-171  
**:string-for-editor** method of **fs:pathname** 5-171  
**:string-for-host** method of **fs:pathname** 5-171  
**:string-for-printing** method of **fs:pathname** 5-171  
**:string-for-wholine** method of **fs:pathname** 5-171  
**:system-type** method of **fs:pathname** 5-168  
**:translate-wild-pathname** message to **fs:pathname** 5-192  
**:translate-wild-pathname** method of **fs:pathname** 5-173  
**:translate-wild-pathname-reversible** message to **fs:pathname** 5-192  
**:type** method of **fs:pathname** 5-166  
**:types-for-canonical-type** method of **fs:pathname** 5-169  
**:type-wild-p** method of **fs:pathname** 5-173  
**:version** method of **fs:pathname** 5-166  
**:version-wild-p** method of **fs:pathname** 5-173  
**:wild-p** method of **fs:pathname** 5-172  
Pathname defaults 5-147, 5-158  
Pathname Errors 2-553  
Pathname examples 5-129  
**fs:pathname** flavor 5-153  
Pathname Functions 5-156  
Pathname merging 5-129, 5-147  
**:pathname** message 5-113  
Pathname system 9-55  
**:pathname-default** Option for **defsystem** 4-195, 4-231, 4-235  
**fs:pathname-error** flavor 2-553  
**:pathname-match** method of **fs:pathname** 5-172  
**:pathname-plist** function 5-165  
Pathname? 1-228  
pathname abbreviations 5-180  
pathname abbreviations 5-180  
**:pathname-as-directory** method of **fs:pathname** 5-144  
**fs:pathname-attribute-list** function 5-111  
**:pathname** command processor argument type 7-48  
Pathname completion with **prompt-and-read** 7-59  
pathname component 5-140, 5-170  
pathname component 5-140  
pathname component 5-140  
pathname component 5-140, 5-170  
**:newest**  
**:oldest**  
**:relative**  
**:unspecific**

- :up pathname component 5-140
- :wild pathname component 5-140
- :wild-inferiors pathname component 5-140
- Device generic pathname component 5-149
- Directory generic pathname component 5-149
- Directory TOPS-20 pathname component 5-183
- Host generic pathname component 5-149
- nil pathname component 5-140
- Type generic pathname component 5-149
- Type ITS pathname component 5-185
- Version generic pathname component 5-149
- Version ITS pathname component 5-185
- Version TENEX pathname component 5-183
- Version TOPS-20 pathname component 5-183
- Native pathname component case 5-145
- Raw pathname component case 5-145
- Lowercase in pathname components 5-145
- Merging pathname components 5-147, 5-157
- SCL and pathname components 2-644
- Uppercase in pathname components 5-145
- Values of Pathname Components 5-140
- \* :wild pathname component specifier 5-186
- Sticky Pathname Defaulting From the Current Context 5-134
- Tailoring pathname defaults 5-131, 5-133
- Using pathname defaults 5-130
- Sticky pathname defaults 5-129
- Center-dot character in TOPS-20 pathname defaults example 5-133
- Restart pathname display 5-183
- :translate-wild-pathname message to fs: pathname dump parameter 0-6
- Defaulting an Output File pathname example 5-132
- CLM: pathname From an Input File 5-132
- pathname Functions 2-644
- :pathname-host option for prompt-and-read 7-59, RN-58
- :pathname-host tv:choose-variable-values variable type 7-259
- :pathname-list option for prompt-and-read 7-59, RN-58
- :pathname-list tv:choose-variable-values variable type 7-259
- Wildcard Pathname Mapping 5-153
- Generic Pathname Messages: Naming of Files 5-165
- pathname operations 9-55
- :pathname option for prompt-and-read 7-59, RN-58
- :pathname option for
- zwei:open-editor-stream 7-378
- :pathname option for
- zwei:with-editor-stream 7-378
- :pathname-or-nil option for prompt-and-read 7-59, RN-58
- :pathname-or-nil tv:choose-variable-values variable type 7-259
- File attributes as pathname properties 5-138
- Manipulating pathname property lists 5-165
- :generic-pathname message to Pathnames 2-222, 4-45, 5-91, 5-127
- :relative relative directory specifier syntax in logical pathnames 5-149
- :rename message to pathnames 5-186
- :wild-inferiors in logical pathnames 5-103
- Canonical Types in pathnames 5-188, RN-71
- Canonical types in UNIX Pathnames 5-151
- Canonical types in UNIX 4.2 Pathnames 5-176
- Canonical types in VMS Pathnames 5-178
- Case in Pathnames 5-180
- Circle-X character in TOPS-20 Pathnames 5-145
- CLM: pathnames 5-183
- Pathnames 2-644

- Equivalence sign character in ITS pathnames 5-185
- FEP File System Pathnames 5-176
- Generic Pathnames 5-149
- Host Determination in Pathnames 5-136
- Interchange case in pathnames 5-145
- Interning of Pathnames 5-138
- ITS Pathnames 5-185
- LMFS Pathnames 5-174
- Loading System Definitions That Use Logical Pathnames 4-217
- Loading System Definitions That Use Physical Pathnames 4-219
  - Logical Pathnames 5-186
  - MS-DOS Pathnames 5-186
  - Multics Pathnames 5-184
  - Parsing pathnames 5-156
  - Printing pathnames 2-643, 5-139
  - Raw case in pathnames 5-145
  - Relative pathnames 5-140
- Right horseshoe character in ITS pathnames 5-185
- Surface type in pathnames 5-151
- TOPS-20 and TENEX Pathnames 5-183
- UNIX Pathnames 5-176
- UNIX 4.2 Pathnames 5-178
- Using pathnames 5-129
- Using **prompt-and-read** with pathnames 5-129
  - VAX/VMS Pathnames 5-180
  - Wildcard pathnames 5-153
- Pathnames package 2-615
- Relative Pathnames: Files 5-149
- SCL pathnames and **:unspecific** 2-644
- Directory Pathnames and Directory Pathnames as Files 5-142
- Directory Pathnames as Files 5-142
- Pathnames dump parameter 0-6
- Double-arrow character in logical pathnames for **nil** 5-186
- Equivalence sign character in logical pathnames for quoting 5-186
- Default Pathnames in Dired 3-147
- Pathnames on Supported Host File Systems 5-174
- Pathname special variables 5-147
- Invalid pathname syntax errors 2-550
- Simple Usage of the Pathname System 5-129
  - Converting physical pathname to logical pathname 5-199
  - Converting logical pathname to physical pathname 5-186, 5-199
  - Logical Pathname Translation 5-188, 5-189, RN-71
  - Patch file logical pathname translation 5-196
  - Reversible wild pathname translation 5-189
  - Reversible Wildcard Pathname Translation 5-191
  - Wild pathname translation 5-189
  - VMS logical pathname translation rules 5-192
  - New Logical Pathname Translations RN-71
- :pathname tv:choose-variable-values** variable type 7-259
- BABYL pathname type abbreviation 5-180
- CWARNS pathname type abbreviation 5-180
- INIT pathname type abbreviation 5-180
- LISP pathname type abbreviation 5-180
- MAIL pathname type abbreviation 5-180
- MIDAS pathname type abbreviation 5-180
- OUTPUT pathname type abbreviation 5-180
- PATCH-DIRECTORY pathname type abbreviation 5-180
- (PDIR) pathname type abbreviation 5-180
- PRESS pathname type abbreviation 5-180
- QFASL pathname type abbreviation 5-180
- QWABL pathname type abbreviation 5-180
- TEXT pathname type abbreviation 5-180
- ULOAD pathname type abbreviation 5-180
- UNFASL pathname type abbreviation 5-180
- XMAIL pathname type abbreviation 5-180



- Translating
  - Standard
  - Simple
- prompt-and-read (**
  - Logical
  - Defining Iteration
  - File access
  - Iteration
  - Predefined Iteration
  - Selecting
  - Multiple
  - Finding
  - :black**
  - :white**
  - Array as
  - List as
  - Symbol as
  - defmacro**
- pathname type field 5-151
- pathname types 5-180
- pathname usage 5-129
- :pathname :visible-default** example 5-130, 5-132, 5-133, 5-134
- Pathname wildcard example 5-132
- Pathname Wildcard Syntax 5-188, RN-71
- Paths 2-227
- paths 9-55
- Paths 2-222
- Paths 2-225
- paths 9-38
- paths to a service 9-43
- Paths to Hosts 9-44
- pattern in dummy description 7-188
- pattern in dummy description 7-188
- pattern in dummy description 7-188
- pattern in dummy description 7-188
- pattern in dummy description 7-188
- Patterns Are Now Made Consistent RN-30
- Pauses 7-108
- %p-cdr-code** function 8-22
- PC Metering on the 3600 Family 8-61
- %p-contents-as-locative** function 8-20
- %p-contents-as-locative-offset** function 8-20
- %p-contents-offset** function 8-20
- PCs 1-216
- PCs 1-215
- %p-data-type** function 8-22
- (PDIR) pathname type abbreviation 5-180
- P Dired command 1-108, 3-153, 3-268
- pdl-overflow** flavor 2-537
- PDP-10 file server 5-91
- %p-dpb-offset** function 8-21
- Peek 3-40
- Peek 1-185, 4-303
- Peek 1-185
- peek** function 4-304
- :peek** message 9-213
- Peek Modes 1-186
- Peek subsystem 7-303
- :peek-header** message 9-213
- Peek command 1-185, 4-303
- Peek Help Message 4-303
- Peek Network Mode 9-213
- Peek Program 4-301
- Peek utility for disk error meters 8-41
- :per-process** option for **trace** 4-92, 4-277
- Performance 2-255
- Performance 8-50
- Performance 8-52
- Performing Dumps 0-6
- Performing arithmetic operations on characters in SCL 2-265, RN-12
- Performing Operations with Tag Tables 3-107
- Perform on Functions 2-302
- peripheral**: Host Object Attribute 9-11
- Permanent process 8-85
- permanent-storage-area** variable 8-107
- Permanent translation rules 5-189
- :permit** deexposed timeout action 7-82, 7-86
- [Per Process] **trace** menu item 4-92
- personal-name**: User Object Attribute 9-12
- Personal default fonts 1-174, 3-271
- Person operating dump parameter 0-6
- phase** function 2-107, RN-35

- QFILE File Transfer
  - Philosophy 9-154
  - Physical memory 8-129
  - Physical Connection to the Dial Network 9-77
  - physical hosts 5-196, RN-72
  - Physical Hosts 5-196, RN-72
  - physical hosts 5-186
  - Physical location of host 9-9
  - physical pathname 5-186, 5-199
  - Physical Pathnames 4-219
  - physical pathname to logical pathname 5-199
  - pictures onto arrays 7-118
  - Pieces Example 7-344
  - Pieces of Characters in FED Registers 3-241
  - Pins 5-247
  - Pins in Asynchronous Null Modems 5-247
  - Pixel 3-196, 3-227
  - Pixels 7-78
  - Pixels and Bit-save Arrays 7-78
- si:
  - pkg-area** variable 8-107
  - pkg-bind** macro 2-598
  - pkg-goto** function 2-597, 4-16
  - pkg-kill** function 2-603
  - pkg-load** function 2-625
  - pkg-name** function 2-607
  - pkg-add-relative-name** function 2-582, 2-610
  - pkg-contained-in** function 2-625
  - pkg-create-package** function 2-626
  - pkg-debug-copy** function 2-625
  - pkg-delete-relative-name** function 2-582, 2-610
  - pkg-find-package** function 2-607
  - pkg-global-package** variable 2-617
  - pkg-keyword-package** variable 2-617
  - pkg-refname-alist** function 2-625
  - pkg-super-package** function 2-625
  - pkg-system-package** variable 2-617
  - Pkt 9-134, 9-138
  - pkt-link** function 9-141
  - pkt-nbytes** function 9-138
  - pkt-opcode** function 9-138
  - pkt-string** function 9-139
  - pkt header field 9-138
  - Pl1 Mode 3-157
  - Pl1 Mode 3-157
  - Place of Referenced Message 6-72
  - plane 3-239, 3-260
  - Plane 3-239
  - plane 3-228, 3-239
  - Plane 3-240
  - plane 3-239, 3-260
  - Plane 3-239
  - plane-aref** function 2-261
  - plane-aset** function 2-262
  - plane-default** function 2-261
  - plane-extension** function 2-261
  - plane-origin** function 2-261
  - plane-ref** function 2-261
  - plane-store** function 2-262
  - Plane Menu 3-228
  - Plane Menu Items 3-260
  - Planes 2-260
  - Plane While Manipulating FED Registers 3-241
  - Playing Large Pieces Example 7-344
  - %p-ldb-offset** function 8-21
  - Plist 2-67
  - plist 7-305, 7-313
  - plist** function 2-565, 4-38
- chaos:
  - chaos:
    - chaos:
      - chaos:
        - Opcode
        - Zmacs
        - Zmacs Electric
          - Move in
          - Clear gray
      - Getting Things Into the FED Gray
        - Gray
      - Merging Characters with the FED Gray
        - Move drawing in the gray
        - The FED Gray
    - Gray
    - FED Gray
  - Retrieving the Black
    - Gray
    - FED Gray
- List item

- format:**
  - :plist** method of **fs:pathname** 5-172
  - plural** function 5-47
  - Plural format directive 5-35
  - Pluralize 5-47
  - Pluralizing words 2-280
  - plus** function 2-100
  - Plus-Minus character 2-32
  - plusp** function 2-97
  - pname-area** variable 8-107
  - Point 3-47
  - Point 3-48
  - point 3-149
  - Point 3-17
  - Point 3-88
  - Point 3-88
  - point 5-46
  - point 2-14
  - point (!) line continuation indicator 3-23, 3-54
  - Point (c-m-SPACE) Zmacs command 4-59
  - Point (c-sh-V) Zmacs command 4-39
  - Point (m-X) Zmail command 6-50
  - Point (m-X) Zmail command 6-50
  - Point-pdl 3-87
  - Point And Mark 3-88
  - Point And Mark (c-X c-X) Zmacs command 4-59
  - Point and the Region 3-86
  - Pointer 2-83
  - pointer 2-238, 2-247, 7-330
  - pointer 8-20
  - pointer 2-494
  - pointer 2-56
  - pointer 2-147
  - pointer 8-22
  - %pointer** function 8-16
  - Pointer Manipulation 8-15
  - %pointer-difference** function 8-16
  - %pointer-lessp** function 8-16
  - pointer field 8-22
  - pointer field 8-21
  - %pointerp** function 8-15
  - Pointers 8-20
  - pointers 3-86
  - pointers 2-56
  - pointers 8-12, 8-14
  - %pointer-type-p** function 8-15
  - Point Explicit (m-SPACE) Zmacs command 4-59
  - :point** method of **tv:graphics-mixin** 7-120
  - point mouse click 3-57
  - point mouse click 3-57
  - points 3-259
  - Points 3-88
  - points 2-479
  - Points on Windows 7-120
  - Points] Font Editor draw mode menu item 3-235
  - Points] Font Editor draw mode menu item 3-235
  - Points] Font Editor draw mode menu item 3-235
  - :point** window-positioning mode 7-167
  - Poking Around in the Lisp World 1-177
  - Policy 0-17
  - Polygons and Circles on Windows 7-124
  - Polyphonic increments 7-337
  - Polyphonic Increments 7-337
  - polyphonic-wave-table-entry-channels** function 7-337
  - Polyphonic wavetable increments 7-337
  - Polyphony 7-325
- Describe Variable At
  - Dired move
- Editor Window's Cursor and
  - Move to Default Previous
  - Move to Previous
- Print number in floating
  - Trailing decimal
- Exclamation
  - Move To Previous
- Describe Variable At
  - Move to Default Previous
  - Move to Previous
- The
  - Swap
  - Swap
- Fill
  - Forwarding
  - Frame
  - Invisible
  - Locative
- Returning a locative
  - sys:**
    - Destroying
    - Extracting
  - sys:**
    - Buffer
  - Conses represented as
    - Invisible
  - sys:**
    - Push Pop
  - L2:Move to
    - L:Move
    - Clear all
  - Moving to Previous
    - Restart
  - Drawing
    - [Clear
    - [Flip
    - [Set
- System Source
  - Drawing
- Computing
  - audio:**

- Operation of
  - Polyphony 7-325
  - Polyphony Example 7-347
  - Polyphony feature 7-319
  - Polyphony Command Opcodes 7-326
  - Polyphony Feature 7-337
- Conversions for the
  - The Packet
    - Free
    - Yank
- The Packet
  - Pool 9-195
  - pool of packets 9-202
  - Pop 3-51, 3-74
  - %pop** function 8-24
  - pop** macro 2-150
  - Yank
    - Pop (m-Y) Zmacs command 4-60
    - Pop-up menus 7-203, 7-219, 7-235
    - Pop-up Notifications 7-131
    - Pop-up and Momentary Menu 7-220
    - Pop-up and Momentary Menu 7-221
    - Pop-up Menu 7-219
    - Pop-up Message Window 1-70, 6-101
    - Pop Mark 3-88
    - Pop Mark (c-SPACE) Zmacs command 4-59
    - Pop Point Explicit (m-SPACE) Zmacs command 4-59
    - tv:** **pop-up-menu** Example 7-226
    - tv:** **pop-up-menu** flavor 7-221
    - tv:** **pop-up-multiple-menu-choose-menu** flavor 7-249
    - tv:** **pop-up-multiple-menu-choose-resource** resource 7-248
- Basic and Mixin
  - Instantiable
  - Momentary and
    - Converse
      - Set
      - Set
    - Push
      - tv:** **pop-up-menu** Example 7-226
      - tv:** **pop-up-multiple-menu-choose-menu** flavor 7-249
      - tv:** **pop-up-multiple-menu-choose-resource** resource 7-248
- Ports 9-129
  - position 7-103, 7-108, 7-113, 7-146
  - position 3-63
  - Position 7-163
  - Position 7-165
  - Position 7-113
  - position 7-155
  - Position 6-49, 6-67
  - Position (c-X J) Zmacs command 4-59
  - Position (c-X S) Zmacs command 4-59
  - Position-flag** 3-21
  - Positional parameters 2-154
  - Positional Arguments to a Command 1-11
  - position field of a byte specifier 2-116
  - Positioning the Drawing in FED 3-255
  - Positioning the Window Around a Definition 3-56
  - :position** init option for **tv:menu** 7-297
  - :position** init option for **tv:sheet** 7-163
  - position init options 7-162
  - position messages 7-162
  - position messages 7-112, 7-114
  - position messages 7-162
  - position messages 7-162
  - :position** method of **tv:sheet** 7-166
  - Position of blinkers 7-146
  - Position of window 7-103
  - Positions 7-162
  - Position the Figure 4-113
  - positive number 2-97
  - Possibility 3-110
  - Possibility 3-110
  - Possibility 3-110
  - Possibility Buffers 3-110
  - :possible-medium-for-protocol** message 9-20<sup>9</sup>
  - :possibly-qualified-string** message 9-32
  - Post-step-enttest 2-221
  - potential numbers 2-644
  - Powering down 1-201
  - Powering up 1-1
  - powering up 1-1
- Cold boot after
  - Cursor
    - Default column
    - Initializing Window Size and Messages for Window Size and Messages to Read or Set Cursor
    - Mouse
  - Selecting Zmail Messages Based on
    - Jump To Saved
    - Save
  - Mode Line's
  - Supplying
    - Extract
  - Window
    - :verify** option for window size and Cursor
    - nil** option for window size and Window
- Window Sizes and
  - A Mixin to
    - Testing for
      - Displaying the Next
      - Example of Displaying the Next
      - Next
- SCL and

- Compatibility with the
  - Ppss 2-115
  - Pre-release 5.0 Package System 2-625
  - Predefined filters 6-59
  - Predefined universes 6-64
  - Predefined Iteration Paths 2-225
  - Predefined **tv:choose-variable-values** Variable Types 7-259
  - :predicate** option for **defstruct** 2-385, 2-392
  - :predicate** option for **defstruct-define-type** 2-410, 2-412
  - Predicates 2-7
  - Predicates 8-108
  - Predicates 2-270
  - Predicates 2-638
  - Predicates 2-97
  - predicates 2-641
  - Predicates on Characters 2-640
  - :preemptable** option 5-63, 7-31
  - Preferred surface type 5-151
- Area and Region
  - Predicates 2-270
- Character
  - Predicates 2-638
- CLM: Specific Data Type
  - Predicates 2-97
- Numeric
  - predicates 2-641
- SCL sequence and list functions and two-argument
  - CLM:
    - Predicates on Characters 2-640
    - :preemptable** option 5-63, 7-31
    - Preferred surface type 5-151
- Set Fill
  - Prefix 3-95
- si:
  - prefix 1-234
  - Prefix Commands 3-45
  - Prefix character commands 1-49, 3-6
  - Prefix Command Does 3-45
- Finding Out What a
  - Prefixes 3-42
  - Prefixes 3-42
  - prefixes 3-42
  - prefixes 3-45
  - Prefixes and Prompts 3-42
  - :prefix-intern-function** Option for **defpackage** and **make-package** 2-601, 2-603
  - :prefix-name** Option for **defpackage** and **make-package** 2-599, 2-601
  - prepare-sheet** special form 7-84
- Getting Out of Keystroke
  - Prepending, and Inserting Text in Zmacs 3-124
  - Prepending a Region to a File 3-124
  - Prepend To File (m-X) Zmacs command 3-124
  - :pre-process-function** list item keyword 7-313
  - PRESERVE-DATES QFILE OPEN option 9-166
  - :preserve-dates** file-opening option 5-91
- Nullifying
  - prefixes 3-45
- Online documentation for
  - Prefixes and Prompts 3-42
  - :prefix-intern-function** Option for **defpackage** and **make-package** 2-601, 2-603
  - :prefix-name** Option for **defpackage** and **make-package** 2-599, 2-601
  - prepare-sheet** special form 7-84
- Getting Out of
  - Prepending, and Inserting Text in Zmacs 3-124
  - Prepending a Region to a File 3-124
  - Prepend To File (m-X) Zmacs command 3-124
  - :pre-process-function** list item keyword 7-313
  - PRESERVE-DATES QFILE OPEN option 9-166
  - :preserve-dates** file-opening option 5-91
- tv:
  - prepare-sheet** special form 7-84
- Appending,
  - Prepending, and Inserting Text in Zmacs 3-124
  - Prepending a Region to a File 3-124
  - Prepend To File (m-X) Zmacs command 3-124
  - :pre-process-function** list item keyword 7-313
  - PRESERVE-DATES QFILE OPEN option 9-166
  - :preserve-dates** file-opening option 5-91
- zwei:
  - \*preserve-msg-references-across-expunge\*** variable 6-85
  - :preset** method of **si:process** 8-92
  - Presetting a function 8-75
  - Presetting the stack group 8-3
  - :press-fonts** 3-274
- Sending
  - press files to Dover printer 9-128
  - PRESS pathname type abbreviation 5-180
  - Pre-step-endtest 2-221
  - pretty-name**: Host Object Attribute 9-9
  - pretty-name**: Printer Object Attribute 9-16
  - pretty-name**: Site Object Attribute 9-18
  - Pretty-printing 1-180, 5-51
  - Previous frame 2-494
  - Previous Page 1-50, 3-26, 3-69
  - Previous Screen 1-50, 3-26
  - Previous Address Zmail Command 6-45
  - Previous Buffer 3-117
  - Previous Buffer 3-117
  - Previous Buffer (c-m-L) Zmacs command 4-59
  - previous keystrokes 3-46
  - Previous Line in Zmacs 3-172
  - Previous Lisp Expression 3-79
  - Previously Undocumented Feature: Array Registers RN-37
- h-RUBOUT Kill
  - Previous Buffer 3-117
- Select
  - Previous Buffer (c-m-L) Zmacs command 4-59
  - previous keystrokes 3-46
- Select Default
  - Previous Line in Zmacs 3-172
- Select
  - Previous Lisp Expression 3-79
- Displaying
  - Previously Undocumented Feature: Array Registers RN-37
- Moving up to Lisp Comment on
  - Previously Undocumented Feature: Array Registers RN-37
- Deleting the
  - \*previous-middle-mode\*** variable 6-87
- zwei:
  - \*previous-middle-mode\*** variable 6-87

- Move to Previous Point 3-88
- Move to Default Previous Point 3-88
- Move To Previous Point (c-m-SPACE) Zmacs command 4-59
- Move to Previous Point (m-X) Zmail command 6-50
- Move to Default Previous Point (m-X) Zmail command 6-50
- Moving to Previous Points 3-88
- Displaying the Previous Screen 3-56
- SCROLL and m-SCROLL Now Display Next Screen and Previous Screen RN-47
- Deleting the Previous Sentence 3-83
- Deleting the Previous Word 3-78
- [Previous] Zmail menu item 1-66, 6-49, 6-67
- Primary methods 2-431, 4-113, 4-116, 4-121
- :primary-name message 9-32
- Primary mail file 1-64, 6-46
- Primary name of object 9-32
- primary-name-server**: Namespace Object Attribute 9-22
- primary-name-server** keyword for terminal-f-argument attribute 9-22
- Primary namespace server 9-24
- Hash Primitive 2-75
- Primitive for Producing Multiple Values 2-167
- :primitive-item method of
- tv:basic-mouse-sensitive-items** 7-283
- Primitives for Drawing Onto Arrays 7-126
- Lisp Primitives for the Digital Audio Facilities 7-329
- Lisp Primitives for Wiring Memory 7-328
- prin1** function 5-87
- prin1** variable 1-155
- prin1-then-space** function 5-87
- princ** function 2-585, 5-87
- :princ tv:choose-variable-values** variable type 7-259
- prinlength** variable 2-18
- prinlevel** variable 2-17, 7-257
- Print file 5-105
- Print formats 9-17
- print** function 5-87
- :print message 5-73
- chaos: **print-conn** function 9-141
- time: **print-date** function 7-359
- print-herald** function 0-85
- format: **print-list** function 5-44
- si: **print-list** function 5-73
- print-notifications** function 1-182
- si: **print-object** function 5-73
- chaos: **print-pkt** function 9-141
- Print-Print consistency 2-591
- Print-Read consistency 2-591
- si: **print-readably** variable 2-18
- :print-self** message 2-16, 2-453
- print-sends** function 1-73, 1-182, 6-104
- time: **print-time** function 7-359
- [Print after] **trace** menu item 4-92
- chaos: **print-all-pkts** function 9-141
- [Print before] **trace** menu item 4-92
- time: **print-brief-universal-time** function 7-359
- print-compiler-warnings** function 4-321
- Print compiler warnings database 4-321
- time: **print-current-date** function 7-359
- time: **print-current-time** function 7-359
- print-disk-label** function 0-45, 1-209, 5-216
- print-disk-label** Service 9-60
- Maximum number of list elements to be printed 2-18
- Printed representation 2-3, 2-13, 2-559, 2-585

- SCL and Clarification of **gc-on** Controlling the
    - printed character names 2-644
    - Printed Documentation RN-80
    - Printed Representation of an Object 2-19
    - Printed Representation of Arrays That Are Named Structures 2-16
    - Printed Representation of Arrays That Are Not Named Structures 2-17
    - Printed Representation of Common Lisp Character Objects 2-16
    - Printed Representation of Complex Numbers 2-15
    - Printed Representation of Conses 2-17
    - Printed Representation of Floating-point Numbers 2-14
    - Printed representation of functions 2-297
    - Printed Representation of Instances 2-16
    - Printed Representation of Integers 2-14
    - Printed Representation of Miscellaneous Data Types 2-18
    - Printed Representation of Numbers 2-90
    - Printed Representation of Ratios 2-14
    - Printed Representation of Strings 2-16
    - Printed Representation of Symbols 2-15
    - Printed Representations 2-543
  - Errors Involving Lisp
    - Printer 2-13, 2-585
  - Changing the Default
    - Default printer 1-174, 3-271
    - Errors inside Lisp printer 2-543
    - Registering a Printer 0-73
    - Sending press files to Dover printer 9-128
  - Printer attributes 9-16
  - Printer object 1-112, 9-4
  - printer**: Host Object Attribute 9-9
  - :printer** command processor argument type 7-48
  - printer for screen copies 1-174, 3-271
  - Printer Object Attribute 9-18
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-18
  - Printer Object Attribute 9-18
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-16
  - Printer Object Attribute 9-18
  - Printer Object Attribute 9-16
  - Printer Object Attribute 9-17
  - Printer Object Attribute 9-16
  - Printer Object Attribute 9-16
  - Printer Object Attribute 9-16
  - Printer Objects 9-16
  - Printer Produces 2-14
  - Printer Protocol 9-128
  - Printers 1-113, 9-5
  - Printers 0-67
  - Printers? 1-229
  - Printer Works 2-13
  - print-fep-filesystem** function 8-59
  - print-frame-locals** function 2-499
  - print-function-and-args** function 2-499
  - Print Function Produces 2-644
  - print-functions-in-bucket** function 8-62
  - [Print Herald] File System Maintenance menu item 0-39
  - Printing 2-13
  - Printing lists 5-44
  - Printing messages 1-108, 3-268, 6-70
- Default
    - character-size**: Printer Object Attribute 9-18
    - default-font**: Printer Object Attribute 9-17
    - dplt-logo**: Printer Object Attribute 9-18
    - font-widths-file**: Printer Object Attribute 9-18
    - format**: Printer Object Attribute 9-17
    - header-font**: Printer Object Attribute 9-17
    - host**: Printer Object Attribute 9-17
    - interface-options**: Printer Object Attribute 9-17
    - interface**: Printer Object Attribute 9-17
    - name**: Printer Object Attribute 9-16
    - page-size**: Printer Object Attribute 9-18
    - pretty-name**: Printer Object Attribute 9-16
    - protocol**: Printer Object Attribute 9-17
    - site**: Printer Object Attribute 9-16
    - type**: Printer Object Attribute 9-16
  - Namespace System
    - What the Printer Protocol 9-128
    - Chaosnet Dover Printers 1-113, 9-5
  - Installing Printers 0-67
  - Why Do You Name Machines and Printers? 1-229
  - How the Printer Works 2-13
  - si**: **print-fep-filesystem** function 8-59
  - dbg**: **print-frame-locals** function 2-499
  - dbg**: **print-function-and-args** function 2-499
  - CLM: What the Print Function Produces 2-644
  - meter**: **print-functions-in-bucket** function 8-62
  - [Print Herald] File System Maintenance menu item 0-39
- Effects of Slashification on
    - Printing 2-13
    - Printing lists 5-44
    - Printing messages 1-108, 3-268, 6-70

- Printing pathnames 2-643, 5-139
  - Printing and Hardcopy Commands 3-267
  - Printing Dates and Times 7-359
  - Printing garbage collector statistics 8-124
  - printing lists 2-16
  - printing nested lists 2-17
  - printing of structures 2-642
  - printing-random-object** macro 2-18
  - Printing Time Intervals 7-365
  - print-interval-or-never** function 7-365
  - print-login-history** function 0-48, 1-182
  - Print Modifications (m-X) Zmacs command 4-56
  - Print name of a symbol 2-3
  - Print Name of a Symbol 2-565
  - print names storage area 8-107
  - print-not-readable** flavor 2-543
  - Print number in floating point 5-46
  - \*print-object-error-message\*** variable 2-543
  - print of function definitions 1-180, 5-51
  - :print-only** Option for **make-system** 4-223
  - :print** option for **defstruct** 2-385, 2-391
  - :print** option for **fs:complete-pathname** 5-120, 5-158
  - :print** option for **trace** 4-92, 4-277
  - :print** option for **with-open-file** 5-91
  - :print-self** keyword for **named-structure-invoke** 2-403, 2-404
  - print server 0-67
  - Print Server on UNIX 0-67
  - Print Server on VMS 0-68
  - Print Server on VMS 0-76
  - print-spooler-options**: Host Object Attribute 9-10
  - :print** Stream Operations 5-73
  - print-system-modifications** function 4-250
  - print-system-status-warning** function 0-85
  - print-universal-date** function 7-359
  - print-universal-time** function 7-359
  - [Print] **trace** menu item 4-92
  - Priority Levels 8-87
  - :priority** method of **si:process** 8-90
  - :priority** option for **make-process** 8-85
  - :priority** option for **process-run-function** 8-86
  - :priority** option for **process-run-restartable-function** 8-87
  - [Private (M)] 1-133
  - [Private (R)] 1-133
  - Private symbol 2-571
  - Private Document 1-136
  - Private Document 1-136
  - Private Document 1-136
  - Private Document 1-136
  - Private document name 1-136
  - Private Documents 1-136
  - Private Patch (m-X) 3-188, 4-240
  - Private Patch to Your World RN-53
  - [Private] 1-133
  - PROBE-DIRECTORY QFILE OPEN option 9-166
  - :probe** disk stream 5-222, 8-43
  - probed** function 5-107
  - :probe** option for **with-open-file** 5-91
  - PROBE QFILE OPEN option 9-166
  - Probing 9-111, 9-117
  - problem 8-7
  - Problem 9-179
  - Problems 2-555
  - Problems 2-554
- Depth of recursion of
    - SCL and **sys:**
    - Reading and **time:**
    - si:**
    - The Symbol **sys:**
    - si:**
    - Formatted
  - UNIX ASCII
    - Installing an ASCII
    - Installing an ASCII
    - Registering an ASCII
  - The **:read** and
    - si:**
    - time:**
    - time:**
  - How to Choose Process
  - Hardcopy
    - Load
    - Read
    - Save
  - Document Examiner
    - Start
  - New Function **note-private-patch** Adds
  - Samefringe
  - The Filepos QFILE Command Byte Size
    - Connection
    - Local Network



- Login Problems 2-547
  - Network connection problems 2-555
  - Remote Network Problems 2-554
  - Zmail problems 6-23
  - Problems During Dumping 0-23
  - Procedure for Creating Zmacs Commands with Keyboard Macros 3-199
- Recovery Procedures 1-43
  - :proceed** message 2-520
  - :proceed** method 2-517, 2-520, 4-133
  - Proceed type 2-517
  - Proceed types 4-80, 4-133
  - :proceed-types** message 2-519
  - :proceed-types** init option 2-519
  - :proceed-types** init option for **condition** 2-530
  - :proceed-types** method of **condition** 2-530
  - Proceedable conditions 2-517
  - proceedable-ferror** flavor 2-532
  - Proceedable condition functions 2-521
  - proceedable conditions 2-521
  - Proceed and Restart Options 1-193, 4-256
  - :proceed** Can Return nil 2-519
  - Proceeding 2-517, 4-133
  - Proceeding 2-517
  - Proceeding 2-521
  - Proceeding From the Error in the Debugger: Resume 4-261
  - Proceeding with **condition-bind** Handlers 2-520
  - proceed type 2-619
  - proceed type 2-542, 2-619
  - proceed type 2-619
  - proceed type 2-542, 2-619
  - proceed type 2-523, 2-542, 2-543, 2-619
  - proceed type 2-619
  - proceed type 2-619
  - proceed type 2-619
  - proceed type 2-619
  - proceed type 2-619
  - proceed type 2-619
  - Proceed Type Messages 2-519
  - Proceed Type Names 2-520
  - :proceed-type-p** message 2-519
  - :proceed-type-p** method of **condition** 2-530
  - \*proceed-type-special-keys\*** variable 2-528
- dbg:**
  - Signalling
  - Debugger
- Protocol for
- Reference Material:
- :choose**
  - :create-package**
  - :export**
  - :new-name**
  - :no-action**
  - :shadow**
  - :shadowing-import**
  - :share**
  - :skip**
  - :unintern**
- dbg:**
  - :active-p** method of **si:**
  - :arrest-reason** method of **si:**
  - :arrest-reasons** method of **si:**
    - Bashing the Process 8-92
    - Creating a Process 8-85
    - Current process 8-77
  - :flush** method of **si:**
  - :initial-form** method of **si:**
  - :initial-stack-group** method of **si:**
  - :interrupt** method of **si:**
    - Keyboard process 7-132
  - :kill** method of **si:**
    - Mouse process 7-151
  - :name** method of **si:**
    - Permanent process 8-85
  - :preset** method of **si:**
  - :priority** method of **si:**
  - :quantum-remaining** method of **si:**
  - :quantum** method of **si:**
    - Receiver process 9-134
  - :reset** method of **si:**
    - Resetting a process 8-75

- :revoke-arrest-reason** method of **si:** **process** 8-92
- :revoke-run-reason** method of **si:** **process** 8-91
- :run-reason** method of **si:** **process** 8-91
- :run-reasons** method of **si:** **process** 8-91
- :runnable-p** method of **si:** **process** 8-92
- Screen Manager Background **Process** 7-86
- Sending command to user **process** 7-229
- Server **process** 9-103
- :set-priority** method of **si:** **process** 8-90
- :set-quantum** method of **si:** **process** 8-90
- :set-warm-boot-action** method of **si:** **process** 8-91
- Simple **process** 8-95
- :simple-p** method of **si:** **process** 8-91
- :stack-group** method of **si:** **process** 8-89
- The User's Process and the Mouse **Process** 7-206
- User **process** 9-103
- :wait-function:** method of **si:** **process** 8-89
- :wait-argument-list** method of **si:** **process** 8-90
- :warm-boot-action** method of **si:** **process** 8-91
- :whostate** method of **si:** **process** 8-90
- Process Attributes 8-89
- si:** **process** flavor 8-95
- Process Flavors 8-95
- Process Messages 8-89
- Process State 1-6
- si:** **process-dequeue** function 8-84
- process-disable** function 8-97
- process-enable** function 8-97
- si:** **process-enqueue** function 8-84
- process-lock** function 8-83
- process-mixin** 4-129, 7-94
- tv:** **process-mixin** flavor 4-129, 7-94
- process-name** function 8-97
- process-preset** function 8-97
- process-reset** function 8-97
- process-sleep** function 8-79
- process-unlock** function 8-83
- process-wait** function 8-77, 8-79
- process-whostate** function 8-98
- process-allow-schedule** function 8-77, 8-79
- The User's **Process and the Mouse Process** 7-206
- Processes 4-129, 8-73
- Active **processes** 8-75, 8-77
- Background **processes** 6-11, 6-12, 9-134
- Channels attached to user **processes** 9-104
- Display status of active **processes** 1-185, 4-303
- Foreground **processes** 6-11
- Introduction: **Processes** 8-75
- Names of **processes** 8-87
- Restarting **processes** 8-92
- Stopped **processes** 8-75
- Stopping **processes** 8-92
- Windows and **Processes** 7-94
- Processes (P)** 1-186
- The Arrow Window: Interaction, **Processes, and the Mouse** 4-129
- Processes and SCL** 2-635
- Other **Process Functions** 8-97
- More **processing** 7-103, 7-108, 7-115
- Text **processing** 2-277
- Logging in Without **Processing Your Init File** 1-164
- process-initial-form** function 8-97
- process-initial-stack-group** function 8-97
- :process** init option for **tv:process-mixin** 4-129, 7-94
- :process-name** option for **net:define-server** 9-51
- :process-name** option for

- Completion in the Command Processor 1-14
- Customizing the Command Processor 1-164
- Error Handling in the Command Processor 1-15
- Front-end Processor 1-197, 5-221, 8-42
- Help in the Command Processor 1-14
- Lookup Commands Available in the Document Examiner, Editor, and Command Processor 1-122
- New Feature in Release 6.0: the Command Processor RN-61
- Overview of the Command Processor 1-9
- :activity** command processor argument type 7-48
- :boolean** command processor argument type 7-48
- :date** command processor argument type 7-48
- :documentation-topic** command processor argument type 7-48
- :enumeration** command processor argument type 7-48
- :font** command processor argument type 7-48
- :host** command processor argument type 7-48
- :integer** command processor argument type 7-48
- :make-system-version** command processor argument type 7-48
- :number** command processor argument type 7-48
- :package** command processor argument type 7-48
- :pathname** command processor argument type 7-48
- :printer** command processor argument type 7-48
- :string** command processor argument type 7-48
- :system** command processor argument type 7-48
- Command Processor Argument Types 7-48
- Defining a Command Processor Command 7-44
- Set Command Processor Command 1-32
- Command processor command table 7-53
- Creating a command processor command table 7-53
- Deleting a command processor command table 7-53
- Finding a command processor command table 7-53
- Command Processor Command Tables 7-52
- Customizing Command Processor Display 1-166
- :command-only** command processor mode 1-165
- :command-preferred** command processor mode 1-165
- :form-only** command processor mode 1-165
- :form-preferred** command processor mode 1-165
- Setting the Command Processor Mode 1-165
- Turning the Command Processor on and Off 1-15
- The Command Processor Program Interface 7-41
- Setting the Command Processor Prompt 1-165
- The Command Processor Reader 7-41
- Setting Command Processor Special Characters 1-166
- Show Command Processor Status Command 1-35
- How to Choose Process Priority Levels 8-87
- si:** **process-queue-locker** function 8-84
- process-reset-and-enable** function 8-97
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** 8-86
- process-run-function** function 8-86
- process-run-restartable-function** 8-87
- process-run-restartable-function** 8-87
- process-run-restartable-function** 8-87
- process-run-restartable-function** 8-87
- process-run-restartable-function** 8-87
- process-run-restartable-function** 8-87
- process-run-restartable-function** function 8-87
- process-run-temporary-function** function 8-87
- process-stack-group** function 8-97
- Garbage collector process state 8-124
- Zmail in Arrest Process State 6-23

- Zmail in Output Hold
- Zmail in Wait Forever
- [Per SCL and CLM: What the Print Function What the Printer
- Commands for Primitive for Installing layered Zmail
- Using Zmail
  - [Filters (M)] Zmail
  - [Universes (M)] Zmail
  - [Filters]
  - [Default]
  - [Exit]
  - [File options]
  - [Filters]
  - [Keywords]
  - [Mail files]
  - [Reset]
  - [Universes]
- Zmail
- SCL and
- SCL and
- Forms in a Top-level
- Calculation Module for the Sample
  - Chaosnet Network Control
  - File System Maintenance
- Free Records: File System Maintenance
  - Graphic Output of the Sample
  - Mailer
  - Network Control
- Output Module for the Sample
  - Reloader
- Responsibilities of Your
  - Supdup
  - Telnet
  - The Peek
- Write a breakpoint into a
  - Process State 6-23
  - Process State 6-23
  - process-wait-argument-list** function 8-97
  - process-wait-forever** function 8-79
  - process-wait-function** function 8-75, 8-97
  - process-wait-with-timeout** function 8-79
  - Process] **trace** menu item 4-92
  - proclaim** function 2-640
  - Produces 2-644
  - Produces 2-14
  - Producing Formatted Text 3-33
  - Producing Hardcopy 1-107, 3-267
  - Producing Multiple Values 2-167
  - products 0-87
  - Profile 1-171, 6-58
  - Profile mode 1-57, 1-170, 1-171
  - Profile Mode 1-171, 6-58
  - Profile Mode command 6-73
  - Profile Mode command 6-73
  - Profile Mode menu 6-75
  - Profile Mode menu item 1-171, 6-57
  - Profile Mode menu item 1-171, 6-57
  - Profile Mode menu item 6-78
  - Profile Mode menu item 6-63, 6-77
  - Profile Mode menu item 6-75, 6-76, 6-77
  - Profile Mode menu item 6-77, 6-78
  - Profile Mode menu item 1-171, 6-57
  - Profile Mode menu item 6-64, 6-66
  - Profile mode options 1-170, 6-57
  - Profile Options 6-85
  - [Profile] Zmail command 1-170, 6-57
  - [Profile] Zmail menu item 1-170, 6-57
  - prog** tags 2-189
  - prog\*** special form 2-196
  - prog-Context** Conflicts 2-359
  - prog1** macro 2-639
  - prog1** special form 2-165
  - prog2** macro 2-639
  - prog2** special form 2-165
  - progn** 4-310
  - progn** Are Top-level to the Compiler RN-28
  - :progn** method combination type 2-455
  - progn** special form 2-164
  - Program 4-147
  - Program 9-102
  - Program 0-37
  - Program 0-37
  - Program 4-185
  - program 6-11
  - Program 9-96
  - Program 4-165
  - program 0-10
  - Program 7-230
  - program 1-115
  - program 1-115
  - Program 4-301
  - program 1-180
  - Program control 2-175
  - Program Strategy 4-13
  - Program Development: Design and Figure Outline 4-13
  - Program Development: Drawing Stripes 4-27
  - Program Development: Modifying the Output Module 4-112
  - Program Development: Refining Stripe Density and Spacing 4-45





- :creation-date** file property 5-117
- :directory** FEP file property 5-227, 8-48
- :dont-delete** FEP file property 5-227, 8-48
- :length** FEP file property 5-227, 8-48
- :length-in-blocks** file property 5-117
- :length-in-bytes** file property 5-117
- :no-eof** property 9-215
- :not-backed-up** file property 5-117
- :raw** I/O buffer property 7-132
- :reference-date** file property 5-117
- :reject-unless-trusted** property 9-214
- :stream-options** property 9-215
- :truename** FEP file property 5-227, 8-48
- :who-line** property 9-214
- Adding a Type Keyword Property 7-269
- Answered message property 1-57
- Badheader message property 1-57, 6-35
- compiler:top-level-form** property 4-315
- Deleted property 6-68
- Deleted message property 1-57, 6-55
- Elements of the **tv:choose-variable-values-keyword** Property 7-270
- Filed message property 1-57
- Forwarded message property 1-57
- FREE-SPACE-DESCRIPTION file system property 9-186
- Last message property 1-57
- net:network-type-flavor** property 9-206
- Recent message property 1-57, 6-46
- Redistributed message property 1-57
- SETTABLE-PROPERTIES file system property 9-186
- si:defstruct-description** property 2-407
- tv:choose-variable-values-keyword** property 7-269
- Unseen message property 1-57, 6-46
- Property Lists 2-67
- :property-list** message 2-474
- :property-cell-location** function 2-565
- property errors 2-551
- :property** function spec type 2-297
- property list 2-67
- property list 2-67
- property list 7-132
- property list 2-67
- property list 2-67
- :property-list-area** variable 8-107
- Property list indicators 2-67
- :property-list** init option for
- si:property-list-mixin** 2-474
- Property list keywords 2-67
- Property List Messages 2-473
- :property-list-mixin** 2-474
- :property-list-mixin** flavor 2-473
- Property list of a symbol 2-3
- Property List of a Symbol 2-564
- property lists 5-165
- property lists 2-297
- Property list storage area 8-107
- Property list values 2-67
- property names 2-564
- property names 2-564
- :property** option for **defstruct** 2-385, 2-391
- :property** option for **net:define-protocol** 9-50
- Property] Command 5-234
- Protecting Files From Being Deleted in Dired 3-152
- Protecting Files From Being Reaped in Dired 3-152
- protection 2-197
- Protection-violation errors 2-549
- Protocol 9-38
- File
- Cons as
- Disembodied
- I/O buffer
- Memory cell as
- Symbol associated with
- :property-list** init option for **si:**
- si:**
- The
- Manipulating pathname
- Storing functions on
- Maclisp
- Maclisp system
- FSEdit [New
- Unwind

|                                             |                                           |              |
|---------------------------------------------|-------------------------------------------|--------------|
| Arpanet Name/Finger                         | protocol                                  | 9-126        |
| Arpanet Time                                | protocol                                  | 9-127        |
| Broadcast: Chaosnet Software                | Protocol                                  | 9-119        |
| Chaosnet Arpanet Gateway                    | Protocol                                  | 9-127        |
| Chaosnet Dover Printer                      | Protocol                                  | 9-128        |
| Chaosnet File                               | Protocol                                  | 9-153        |
| Chaosnet File Access                        | Protocol                                  | 9-125        |
| Chaosnet File Transfer                      | Protocol                                  | 9-153        |
| Chaosnet Hardware                           | Protocol                                  | 9-95         |
| Chaosnet Host Table                         | Protocol                                  | 9-127        |
| Chaosnet Mail                               | Protocol                                  | 9-125        |
| Chaosnet Name                               | Protocol                                  | 9-126        |
| Chaosnet Pulsar                             | Protocol                                  | 9-124        |
| Chaosnet RFC/ANS time                       | protocol                                  | 9-50         |
| Chaosnet Send                               | Protocol                                  | 9-126        |
| Chaosnet Time                               | Protocol                                  | 9-127        |
| Connection Establishment: Chaosnet Software | Protocol                                  | 9-114        |
| Connections: Chaosnet Software              | Protocol                                  | 9-102        |
| Contact Names: Chaosnet Software            | Protocol                                  | 9-103        |
| Data: Chaosnet Software                     | Protocol                                  | 9-118        |
| Data Formats: Chaosnet Software             | Protocol                                  | 9-107        |
| EFTP                                        | protocol                                  | 9-128        |
| EIA RS-232                                  | protocol                                  | 5-243        |
| End-of-data: Chaosnet Software              | Protocol                                  | 9-118        |
| Error-correcting                            | protocol                                  | 9-44         |
| FILE                                        | protocol                                  | 9-125        |
| FINGER                                      | protocol                                  | 9-126        |
| Flow and Error Control: Chaosnet Software   | Protocol                                  | 9-111        |
| Internet                                    | protocol                                  | 9-129        |
| Low-level: Chaosnet Software                | Protocol                                  | 9-121        |
| MAIL                                        | protocol                                  | 9-125        |
| NAME                                        | protocol                                  | 9-126        |
| Namespace Timestamp                         | Protocol                                  | 9-35         |
| Network Namespace                           | Protocol                                  | 9-33         |
| PULSAR                                      | protocol                                  | 9-124        |
| Selecting                                   | protocol                                  | 9-38         |
| SEND                                        | protocol                                  | 9-126        |
| STATUS                                      | protocol                                  | 9-119, 9-123 |
| Supdup                                      | protocol                                  | 9-125        |
| Telnet                                      | protocol                                  | 9-125        |
| TIME                                        | protocol                                  | 9-119, 9-127 |
| Transmission Control                        | Protocol                                  | 9-44, 9-129  |
| User Datagram                               | Protocol                                  | 9-129        |
| Chaosnet File                               | Protocol (QFILE)                          | 9-153        |
| Introduction: Chaosnet File                 | Protocol (QFILE)                          | 9-153        |
|                                             | <b>:protocol-address</b> message          | 9-205        |
|                                             | <b>:protocol-supported</b> message        | 9-204        |
|                                             | Protocol-translating gateway              | 9-129        |
|                                             | <b>protocol:</b> Printer Object Attribute | 9-17         |
| Chaosnet Software                           | Protocol -- Details                       | 9-114        |
|                                             | Protocol for Proceeding                   | 2-517        |
| Chaosnet Software                           | Protocol -- Overview                      | 9-102        |
| XON/XOFF                                    | protocol parameters                       | 5-253        |
| MAIL                                        | protocol reply                            | 9-125        |
| Arpanet Telnet and Supdup                   | protocols                                 | 9-125        |
| Chaosnet Status                             | Protocols                                 | 9-123        |
| Chaosnet Telnet and Supdup                  | Protocols                                 | 9-125        |
| Connection-initiation                       | protocols                                 | 9-114        |
| Defined Services and                        | Protocols                                 | 9-56         |
| Defining                                    | Protocols                                 | 9-49         |
| Details of Chaosnet Hardware                | Protocols                                 | 9-98         |
| File Users: Defining                        | Protocols                                 | 9-55         |
| Generic                                     | protocols                                 | 9-44         |
| Higher-level Chaosnet                       | Protocols                                 | 9-123        |
| Implementing                                | protocols                                 | 9-51         |
| Nongeneric                                  | protocols                                 | 9-44         |



- Server functions for datagram protocols 9-215
- Servers: Defining Protocols 9-51
- Users: Defining Protocols 9-50
- Using Foreign Protocols and Services 9-38
- Topics Protocols in Chaosnet 9-129
- Displaying Protocols supported by host 9-10
- zwei:** Pruned From the Documentation Database 1-121
- neti:** pruned topics 1-121
- c-X Y** **\*prune-headers-after-yanking\*** variable 6-86
- Prune headers of yanked messages 6-86
- neti:** **prune-namespace-changes-file** function 9-28
- [Prune systems] Choice Boxes menu item 0-22
- c-X Y** Prune Yanked Headers Zmail Command 6-45
- Pruning header fields 6-69
- Pruning the documentation database 1-121
- psetq** special form 2-128
- Pseudo-steps 2-221
- :pseudonet** medium 9-44
- pseudonet-gateway** Service 9-61
- Defining a Pseudosystem 0-25
- Pseudosystems 0-16
- sys:** **%p-store-cdr-and-contents** function 8-21
- sys:** **%p-store-cdr-code** function 8-22
- %p-store-cdr-type-and-pointer** function 8-21
- %p-store-contents** function 8-20
- %p-store-contents-offset** function 8-20
- %p-store-data-type** function 8-22
- %p-store-pointer** function 8-22
- %p-store-tag-and-pointer** function 8-20
- sys:** **%p-structure-offset** function 8-20
- Reducing Call Cost with Public Carrier Networks 9-91
- Chaosnet PULSAR protocol 9-124
- Pulsar Protocol 9-124
- %push** function 8-24
- push** macro 2-150
- :push-property** message 2-473
- audio:** **push-array-of-audio-samples** function 7-333
- audio:** **push-audio-jump** function 7-331
- audio:** **push-audio-load-voice** function 7-331
- audio:** **push-audio-polyphony** function 7-332
- audio:** **push-audio-zero-flag** function 7-331
- SCL and **push** function 2-641
- audio:** **push-immediate-audio-sample** macro 7-333
- push-in-area** macro 2-150
- SCL and **pushnew** function 2-641
- Push Pop Point Explicit (m-SPACE) Zmacs command 4-59
- :put-hash** message 2-72
- puthash** function 2-74
- puthash-equal** function 2-74
- :put** method of **si:serial-stream** 5-252
- putprop** function 2-68
- :putprop** message 2-473
- :putprop** method of **fs:pathname** 5-172
- Put Register (c-X X) Zmacs command 4-63
- Putting Buffers Into Current Package 1-168, 3-213
- Putting Data in Compiled Code Files 4-331, 5-241
- P Zmail command 6-49, 6-67
- Init File Form:

Q

Q

Q

|                                                               |                                                |
|---------------------------------------------------------------|------------------------------------------------|
| FUNCTION                                                      | Q 1-108, 1-141, 1-174, 3-268, 3-271            |
|                                                               | %%q-pointer variable 8-19                      |
|                                                               | %%q-all-but-cdr-code variable 8-19             |
|                                                               | %%q-all-but-pointer variable 8-19              |
|                                                               | %%q-all-but-typed-pointer variable 8-19        |
|                                                               | :qbin canonical type 5-200                     |
|                                                               | %%q-cdr-code variable 8-19                     |
|                                                               | %%q-data-type variable 8-19                    |
|                                                               | Q Dired command 3-148                          |
|                                                               | QFASL pathname type abbreviation 5-180         |
|                                                               | QFILE 9-153                                    |
| Opening a File with                                           | QFILE 9-155                                    |
| QFILE EOF Ending the Transfer with                            | QFILE 9-155                                    |
| Transferring Data with                                        | QFILE 9-155                                    |
| Waiting for Acknowledgement of the EOF Packet on Writing with | QFILE 9-177                                    |
|                                                               | QFILE binding 9-155                            |
|                                                               | QFILE command 9-153                            |
|                                                               | QFILE connection 9-153                         |
|                                                               | QFILE mark 9-153                               |
|                                                               | QFILE packet 9-153                             |
|                                                               | QFILE parcel 9-153                             |
|                                                               | QFILE response 9-153                           |
|                                                               | QFILE Syntax 9-160                             |
|                                                               | QFILE TID 9-153                                |
|                                                               | QFILE Tokens 9-160                             |
| Chaosnet File Protocol                                        | (QFILE) 9-153                                  |
| Introduction: Chaosnet File Protocol                          | (QFILE) 9-153                                  |
|                                                               | QFILE active channel 9-153                     |
|                                                               | QFILE Asynchronous Marks 9-192                 |
|                                                               | QFILE Character Set Translation 9-156          |
|                                                               | QFILE close-abort QFILE OPEN options 9-155     |
|                                                               | QFILE Close and Synchronous Marks 9-176        |
| QFILE unbinding                                               | QFILE Command 9-190                            |
| Change-properties                                             | QFILE command 9-155, 9-175, 9-176              |
| CLOSE                                                         | QFILE Command 9-191                            |
| Complete                                                      | QFILE Command 9-182                            |
| Continue                                                      | QFILE Command 9-182                            |
| Create-directory                                              | QFILE Command 9-182                            |
| Create-link                                                   | QFILE Command 9-163                            |
| Data-connection                                               | QFILE Command 9-180                            |
| Delete                                                        | QFILE Command 9-185                            |
| Directory                                                     | QFILE Command 9-183                            |
| Expunge                                                       | QFILE Command 9-179                            |
| Filepos                                                       | QFILE Command 9-178                            |
| Finish                                                        | QFILE Command 9-184                            |
| Login                                                         | QFILE command 9-155, 9-164                     |
| OPEN                                                          | QFILE Command 9-189                            |
| Properties                                                    | QFILE Command 9-180                            |
| Rename                                                        | QFILE Command 9-184                            |
| Set-file-system                                               | QFILE Command 9-164                            |
| Undata-connection                                             | QFILE Command and Response Format 9-158        |
| The Filepos                                                   | QFILE Command Byte Size Problem 9-179          |
|                                                               | QFILE Command Descriptions 9-163               |
|                                                               | QFILE control connection 9-153                 |
|                                                               | QFILE data channel 9-153                       |
|                                                               | QFILE data connection 9-153                    |
|                                                               | QFILE Directory Data Format 9-186              |
|                                                               | QFILE DIRECTORY option 9-188                   |
|                                                               | QFILE DIRECTORY option 9-188                   |
|                                                               | QFILE DIRECTORY option 9-188                   |
|                                                               | QFILE DIRECTORY option 9-188                   |
| DELETED                                                       | QFILE Directory Options 9-188                  |
| DIRECTORIES-ONLY                                              | QFILE EOF Ending the Transfer with QFILE 9-155 |
| FAST                                                          |                                                |
| NO-EXTRA-INFO                                                 |                                                |

- QFILE Error Codes 9-193
- QFILE Error Responses 9-192
- QFILE Errors and Asynchronous Marks 9-191
- QFILE file handle 9-155
- QFILE File Transfer Philosophy 9-154
- QFILE free channel 9-153
- QFILE Marks and EOF Packets 9-162
- QFILE NORMAL character set translation mode 9-156
- QFILE OPEN option 9-166
- BINARY QFILE OPEN option 9-166
- BYTE-SIZE QFILE OPEN option 9-166
- CHARACTER QFILE OPEN option 9-166
- DEFAULT QFILE OPEN option 9-166
- DELETED QFILE OPEN option 9-166
- ESTIMATED-LENGTH QFILE OPEN option 9-166
- IF-EXISTS QFILE OPEN option 9-166
- IF-DOES-NOT-EXIST QFILE OPEN option 9-166
- INHIBIT-LINKS QFILE OPEN option 9-166
- PRESERVE-DATES QFILE OPEN option 9-166
- PROBE QFILE OPEN option 9-166
- PROBE-DIRECTORY QFILE OPEN option 9-166
- RAW QFILE OPEN option 9-166
- READ QFILE OPEN option 9-166
- SUBMIT QFILE OPEN option 9-166
- SUPER QFILE OPEN option 9-166
- TEMPORARY QFILE OPEN option 9-166
- WRITE QFILE OPEN option 9-166
- QFILE Open Options 9-166
- QFILE OPEN options 9-155
- QFILE OPEN option values 9-166
- QFILE Open Response Result Values 9-172
- QFILE open stream 9-154
- QFILE Packet Data Contents 9-159
- QFILE Packet Opcodes 9-159
- QFILE packet types 9-162
- QFILE RAW character set translation mode 9-156
- QFILE return value 9-153
- QFILE String Values 9-160
- QFILE SUPER-IMAGE character set translation mode 9-156
- QFILE synchronization check 9-166
- QFILE synchronous marks 9-176
- CMD QFILE token 9-160
- FH QFILE token 9-160
- TID QFILE token 9-160
- QFILE transaction identifier 9-153
- QFILE Transfer 9-155
- QFILE unbinding QFILE close-abort QFILE OPEN options 9-155
- QFILE user-server dialogue 9-153
- Q Font Editor command 3-260
- %%q-pointer-within-page** variable 8-19
- qreply** function 1-73, 6-104
- qsend** function 1-72, 1-160, 6-104
- qsends-off** function 1-72, 6-103
- qsends-on** function 1-72, 6-103
- %%q-typed-pointer** variable 8-19
- Quadruple Numeric Arg 3-24
- Qualified names 1-113, 2-589, 9-5
- :qualified-string** message 9-31
- Forms of qualified names 2-585
- Qualified Names of Symbols 2-585
- Qualified Package Names 2-584
- Multilevel Qualified Package Names 2-586
- Qualified Package Names as Interfaces 2-585
- #: package qualifier 2-584

- : package      qualifier 2-585, 2-601, 2-603
- :: package     qualifier 2-601, 2-603
- :quantum-remaining** method of **si:process** 8-90
- :quantum** method of **si:process** 8-90
- :quantum** option for **make-process** 8-85
- :quantum** option for **process-run-function** 8-86
- :quantum** option for
- process-run-restartable-function** 8-87
- Queries to network database 9-33
- Query 3-202
- Query 3-141
- Query Replace 3-102
- query-io** variable 4-133, 5-22
- \*query-type\*** variable 4-229
- \*query-before-expunge\*** variable 6-85
- \*query-before-selecting-empty-sequence\***
- variable 6-93
- Querying the User 7-55
- Querying While Making Global Replacements in
- Zmacs 3-102
- Querying While Making Multiple Global Replacements
- in Zmacs 3-103
- Query option to Tape when done dump
- parameter 0-6
- Atom      Query Replace 3-104
- Query Replace (m-%) Zmacs command 4-57
- Query Replace (m-X) Zmacs command 3-102
- Tags      Query Replace (m-X) Zmacs command 4-57
- Query Replace Last Kill 3-104
- Query Replace Let Binding 3-104
- Yes-or-no      question 7-55
- Questions About the FEP and LMFS 1-229
- Answering      Questions the System Asks 1-227
- Questions Users Commonly Ask 1-228
- Lock      queue 8-84
- Unlock     queue 8-84
- Quick Arglist (c-sh-A) Zmacs command 3-47, 4-43
- Notation Conventions      Quick Reference 1-235
- Quick Summary of Mouse Functions 1-149
- Help and      Quit 1-188
- Quit (c-Z) Zmacs command 4-80
- Quitting Hostat 1-183, 9-141
- [QUIT] File System Maintenance menu item 0-39
- [Quit] Zmail menu item 6-18
- Single      quotation mark 1-233
- Init File Form: Balanced      Quotation Marks and Asterisks 1-168, 3-215
- &quote** RN-28
- Single      quote 2-161
- Quote character 2-32
- &quote** Lambda-list Keyword 2-310
- Quote macro character 2-26
- Double      quotes 9-24
- quote** special form 2-161
- quotient** function 2-102
- Quoting 9-24
- quoting 5-186
- quoting 2-643
- Quoting Characters 1-233
- QWABL pathname type abbreviation 5-180
- c-X      Q Zmacs command 3-202
- Q Zmail command 6-17

## R

## R

## R

- [Find (R)] 1-133
- [Private (R)] 1-133
- [Viewer (R)] 1-133
- [Find (R)] Document Examiner menu item 1-123
- [Continue (R)] Draft File Zmail Menu Item 6-39
- [Continue (R)] Draft Message Zmail Menu Item 6-41
- [Mail (R)] Zmail command 6-70
- [Select (R)] Zmail command 6-77
- [Mail (R)] Zmail Menu Item 6-27
- [Move (R)] Zmail menu item 6-70
- R2:System menu mouse click 3-57
- R:Menu mouse click 3-57
- Radians in trigonometric functions 2-106
- radix 2-14, 2-20
- radix 5-45
- Radix directive 5-36
- random** function 2-118
- Random Numbers 2-118
- Random-array 2-118
- random-initialize** function 2-119
- random access device 7-160
- random-create-array** function 2-119
- random number generator 2-118
- :random** returned by **typep** 2-9
- range-of-bucket** function 8-62
- rass** function 2-66
- rassoc** function 2-66
- rassq** function 2-65
- Raster height 7-146
- Raster width 7-146
- rate 7-146
- rate 7-329
- rational** function 2-108, RN-34
- Rational Numbers 2-93, RN-34
- Rational and Complex Numbers RN-33
- rational number in binary 2-29
- rationalp** function 2-8, RN-34
- :rational** returned by **typep** 2-9
- Ratios 2-89, 2-93, RN-34
- Ratios 2-22
- Ratios 2-14
- :raw-device** message 5-145
- :raw-device** method of **fs:pathname** 5-166
- :raw-directory** message 5-145
- :raw-directory** method of **fs:pathname** 5-166
- :raw-name** message 5-145
- :raw-name** method of **fs:pathname** 5-166
- :raw-type** message 5-145
- :raw-type** method of **fs:pathname** 5-166
- Raw case in pathnames 5-145
- Raw case representation 5-145
- QFILE RAW character set translation mode 9-156
- :raw** I/O buffer property 7-132
- :raw** option for **with-open-file** 5-91
- netl:** **raw-packet-buffer-size** variable 9-198
- Raw pathname component case 5-145
- RAW QFILE OPEN option 9-166
- R Dired command 3-150
- Re-reading a File Into the Buffer 3-121
- read 8-35
- read** function 2-13, 2-56, 5-73, 5-76, RN-55
- :read** message 5-73
- :read** operation 5-73
- \*read-base\*** variable 2-643
- SCL and

- sys:** **read-bytes** message 5-115
- sys:** **read-character** function 5-76, 7-5
- SCL and **read-char** function 2-643
- read-command** function 7-42
- read-cursorpos** message 5-19
- read-cursorpos** method of **tv:blinker** 7-148
- read-cursorpos** method of **tv:sheet** 7-113
- sys:** **read-error** flavor 2-544
- read-expression** function 5-78, 7-6
- read-form** function 5-78, 7-7
- Read-locked 5-228, 8-48
- Read-only error 2-537
- chaos:** **read-pkts** function 9-140
- read-pointer** message 5-20
- Read-Read consistency 2-591
- si:** **read-recursive** function 2-27
- SCL and **\*read-suppress\*** variable 2-643
- Read-time conditionalization facility 2-29
- [Read/Create file] Zmail Select menu item 6-77
- read-and-eval** function 5-81, 7-9
- The **read** and **:print** Stream Operations 5-73
- fs:** **read-attribute-list** function 5-109, 5-111
- read-bp** method of **si:interactive-stream** 5-72, 7-40
- Read Buffer register 9-131
- time:** **read-calendar-clock** function 7-355
- readch** function 5-84
- read-command-or-form** function 7-41
- cl:** **\*read-default-float-format\*** variable 2-23
- SCL and **read-delimited-list** function 2-644
- read-delimited-string** function 5-83
- sys:** **read-end-of-file** flavor 2-544
- Reader 2-13
- Lisp Reader 1-227
- The Command Processor Reader 7-41
- #♦** Reader Macro 2-30
- #'** Reader Macro 2-28
- # +** Reader Macro 2-29
- #,** Reader Macro 2-28
- #-** Reader Macro 2-30
- #.** Reader Macro 2-29
- #:** Reader Macro 2-29
- #<** Reader Macro 2-30
- #b** Reader Macro 2-29
- #m** Reader Macro 2-29
- #M** sharp-sign reader macro 4-329
- #n** Reader Macro 2-29
- #o** Reader Macro 2-29
- #P** Reader Macro 2-643
- #q** Reader Macro 2-29
- #Q** sharp-sign reader macro 4-329
- #r** Reader Macro 2-29
- #x** Reader Macro 2-29
- #\** or **#!/** Reader Macro 2-27
- #^** Reader Macro 2-28
- #|** Reader Macro 2-30
- SCL and **# +** Reader Macro 2-644, 2-645
- SCL and **#-** Reader Macro 2-644, 2-645
- Reader macro for infix expressions 2-30
- #** reader macros 2-27
- Sharp-sign Reader Macros 2-27
- Sharp-sign introducing reader macros 1-233
- The Reader Now Accepts Floating-point Infinity RN-41
- What the Reader Recognizes 2-20
- How the Reader Works 2-19
- Read-eval-print loop 1-151, 1-155
- si:** **\*read-extended-lbase-signed-number\***

- variable 2-21
- SCL and **\*read-extended-ibase-signed-numbers\*** variable 2-643
- si: **\*read-extended-ibase-unsigned-number\*** variable 2-21
- SCL and **\*read-extended-ibase-unsigned-numbers\*** variable 2-643
- si: **read-fep-label** function 8-58
- readfile** function 5-109
- :readfile** Transformation of **defsystem** 4-209
- [Read File] Font Editor menu item 3-258, 3-260
- \*read-form-completion-alist\*** variable 5-80, 7-8
- \*read-form-completion-delimiters\*** variable 5-80, 7-9
- \*read-form-edit-trivial-errors-p\*** variable 5-79, 7-8
- read-for-top-level** function 5-77, RN-55
- :read-frame** method of **si:serial-hdlc-mixin** 5-263
- read-from-string** function 5-84
- read-from-string** function 2-643
- SCL and CLM: What the Syntax errors in Read Function Accepts 2-643
- read functions 2-543
- Reading a File Into a New Buffer 3-120
- Reading a File Into an Existing Buffer 3-120
- Reading and Printing Time Intervals 7-365
- Reading and Writing FED Files 3-257
- What to Do After Reading a Zmail Message 1-66
- Reading characters from an input stream 5-15
- Reading characters from the keyboard 7-103
- Reading Dates and Times 7-361
- Reading FED Files 3-257
- Reading file attributes 5-111
- Reading font files 3-258
- New Reading Functions RN-61
- Reading function to use input editor 5-57, 7-25
- Reading Integers in Bases Greater Than 10 2-21
- Commands for Sending and Reading Mail 6-46
- Reading Mail 6-27
- Reading mouse clicks 7-311
- Reading octal character codes 2-25
- Reading serial I/O parameters 5-251
- Reading Your Mail 1-64
- :read-input-buffer** message 5-20
- time: **read-interval-or-never** function 7-365
- readline** function 5-81, RN-55
- readline-trim** function 5-81, RN-55
- readline-no-echo** function 5-82, 7-9
- readline-or-nil** function 5-82, RN-55
- Clarification of What **readline** Returns RN-79
- readlist** function 5-85
- sys: **read-list-end-of-file** flavor 2-544
- si: **\*read-multi-dot-tokens-as-symbols\*** variable 2-26
- neti: **read-object-file-and-update** function 9-28
- :read-only** option for **make-area** 8-104
- :read** option for **fs:complete-pathname** 5-120, 5-158
- :read** option for **with-open-file** 5-91
- read-or-character** function 5-80, 7-9
- read-or-end** RN-57
- read-or-end** function 5-80, 7-9, RN-55
- Change in Optional Argument to Read or Set Cursor Position 7-113
- Messages to Streams that read or write magnetic tape 5-269
- :read** output format style 5-46
- Read past the end-of-file error 2-536
- New Error Flavor: sys: **read-premature-end-of-symbol** RN-38
- sys: **read-premature-end-of-symbol** flavor 2-544, RN-38
- read-preserve-delimiters** variable 5-76
- Read Private Document 1-136





- Two New Zmacs Commands for
  - Documentation
  - Documentation concept
  - Documentation object
- Free
- Eliminate
- Lost
- Structured
  - Free
- Note on
  - [Free
  - [Check
- The Debugger:
  - FUNCTION Key:
- Automatic error
  - Error
- Copying Bit
- :height** init option for **tv:**
- :width** init option for **tv:**
- tv:**
- :set-size** method of **tv:**
- Condition Bind
  - Depth of
  - Enter mail mode
- sys:**
  - Illegal
- Zmail
- Zmail
- Zmail
- Forwarding and
  - sl:**
- :recompile** Option for **make-system** 4-223
- Recompile Patch (m-X) 3-192, 4-243, RN-49
- Recompiling and Reloading Patches RN-49
- Recompiling Source Files is Recommended RN-9
- record 1-119
- record 1-119
- record 1-119
- Record Format 9-24
- Record-length tape spec parameter 0-26
- Record-mode Connections 9-148
- :record-status** message to input tape streams 5-273
- :record-length** option for **tape:make-stream** 5-269
- record map 0-37
- record of changes 9-28
- records 0-37
- records 2-59
- Records: File System Maintenance Program 0-37
- Records in use 0-37
- record-source-file-name** 2-318
- record-source-file-name** function 2-317, 2-319
- Records] File System Maintenance menu item 0-39
- Records] Maintenance Operations menu item 0-39
- Recovering From a Stuck Document Examiner 1-121
- Recovering From Errors and Stuck States 1-43
- Recovering From Errors and Stuck States 1-44
- Recovering From Stuck States 1-143
- Recovering From Stuck States in Zmail 6-23
- recovery 8-34
- recovery 3-42
- Recovery Procedures 1-43
- Recsize tape spec parameter 0-26
- Rectangles to and From Windows 7-120
- :rectangle** window-positioning mode 7-167
- rectangular-blinker** 7-149
- rectangular-blinker** 7-149
- rectangular-blinker** flavor 7-149
- rectangular-blinker** 7-150
- Recursion 2-175
- Recursion 2-502
- recursion of printing lists 2-16
- recursively 6-45
- Recursive Mail Mode 6-46
- [Recycled collection] Move menu item 6-79
- [Recycled temporary] Move menu item 6-79
- Redefining functions 2-318
- redefinition** flavor 2-538
- redefinition error 2-538
- Redisplay 7-303
- :redisplay** message 7-305
- Redisplaying the Window 3-55
- :redisplay** method of **tv:basic-scroll-window** 7-305
- :redisplay-variable** method of **tv:choose-variable-values-window** 7-276
- Redistributed-by: Field 6-36
- Redistributed-date: Field 6-36
- Redistributed-to: Field 6-36
- Redistributed message property 1-57
- Redistribute Msg (m-X) Zmail Command 6-29
- Redistribute the current message 6-27
- [Redistribute] Mail menu item 6-70
- [Redistribute] Map over menu item 6-80
- Redistributing messages 6-80
- Redistributing Zmail Messages 6-70
- Redo (m-X) Zmail Command 6-25
- \*redo-all\*** variable 4-229
- :redo** option for **add-initialization** 8-67

- Redraw menu 7-299
  - Reducing Call Cost with Public Carrier Networks 9-91
  - Reducing disk latency 8-53
  - Reel ID dump parameter 0-6
  - :reel** option for **tape:carry-dump** 0-31
  - :reel** option for **tape:make-stream** 5-269
  - reel tape files 1-201
  - Reel tape spec parameter 0-26
  - reference 2-126
  - Reference 2-638
  - Reference 2-529
  - reference 2-126
  - Reference 8-121
  - Reference 1-235
  - :reference-date** file property 5-117
  - Referenced messages 6-64
  - Reference Description of Help Functions 1-88
  - Referenced Message 6-72
  - Referenced message commands 6-71
  - Referenced Msg 6-72
  - Referenced Msg 6-71
  - Referenced Msgs 6-71
  - Referenced Msgs (m-X) Zmail command 6-68
  - Reference Guide 6-1
  - Reference Information 6-85
  - reference material 1-83
  - Reference Material: Default Handlers and Complex Modularity 2-510
  - Reference Material: Establishing Handlers 2-488
  - Reference Material: Packets 9-197
  - Reference Material: Proceeding 2-521
  - Reference Material: Restart Handlers 2-514
  - Reference Material: Signalling Conditions 2-503
  - Reference Material: Starting Servers 9-216
  - Reference Material: Application: Handlers Examining the Stack 2-495
  - Reference on Networks 9-93
  - References 6-72
  - References 9-151
  - References 6-72
  - References 6-72
  - References 6-72
  - References 6-72
  - References field 6-35
  - References: Field 6-36
  - Referencing 8-20
  - Referencing byte fields 8-21
  - Referred to by the Current Message 6-71
  - Refining Stripe Density and Spacing 4-45
  - Reflecting Drawings in FED 3-243, 3-259
  - [Reflect] Font Editor menu item 3-243, 3-259
  - :ref** option for **deconstruct-define-type** 2-410
  - REFRESH 1-144
  - REFRESH 1-141
  - REFRESH Font Editor command 3-261
  - :refresh** method of **tv:menu** 7-299
  - :refresh** method of **tv:sheet** 4-116, 4-129, 7-113
  - Refusal 9-114
  - Regenerate Buffer (m-X) Converse Command 1-72, 6-103
  - Regenerating contents of windows 7-78
  - Region 3-94
  - Region 3-48
  - Region 3-87
  - Region 3-94
- Tape
    - Multiple
      - Captured free
        - CLM: Reference 2-638
      - Condition Flavors
        - Free reference 2-126
        - Locality of Reference 8-121
      - Notation Conventions Quick Reference 1-235
- Move in Place of
    - Append to
      - Select Referenced Msg 6-72
      - Delete Referenced Msg 6-71
      - Delete Referenced Msgs 6-71
      - Zmail Referenced Msgs (m-X) Zmail command 6-68
      - Zmail Reference Guide 6-1
      - Zmail Reference Information 6-85
    - Help facilities
      - reference material 1-83
      - Reference Material: Default Handlers and Complex Modularity 2-510
      - Reference Material: Establishing Handlers 2-488
      - Reference Material: Packets 9-197
      - Reference Material: Proceeding 2-521
      - Reference Material: Restart Handlers 2-514
      - Reference Material: Signalling Conditions 2-503
      - Reference Material: Starting Servers 9-216
      - Reference Material: Application: Handlers Examining the Stack 2-495
- Programmer's
    - Append Conversation by
      - Chaosnet References 6-72
    - Delete Conversation by
      - Select References 9-151
    - Select All Conversations by
      - Select References 6-72
    - Select Conversation by
      - Select References 6-72
  - Zmail Included
    - Special Memory
      - Referencing 8-20
      - Referencing byte fields 8-21
- Operating on Zmail Messages
    - Program Development:
      - Reflecting Drawings in FED 3-243, 3-259
      - [Reflect] Font Editor menu item 3-243, 3-259
      - :ref** option for **deconstruct-define-type** 2-410
      - REFRESH 1-144
      - REFRESH 1-141
      - REFRESH Font Editor command 3-261
      - :refresh** method of **tv:menu** 7-299
      - :refresh** method of **tv:sheet** 4-116, 4-129, 7-113
      - Refusal 9-114
      - Regenerate Buffer (m-X) Converse Command 1-72, 6-103
      - Regenerating contents of windows 7-78
      - Region 3-94
      - Region 3-48
      - Region 3-87
      - Region 3-94
- FUNCTION
    - Compiling a
      - Count Lines
        - Creating a
          - Deleting a
            - Region 3-94

- Evaluate Region 3-175
- Fill Region 3-95
- Filling a Region 3-94
- Hardcopying a Region 3-94
- Kill Region 1-53, 3-28
- Line region 4-297
- Make region 3-57
- Margin region 7-289
- Mark region 3-57
- Mark and the Region 3-86
- Point and the Region 3-86
- Save Region 3-94
- Saving a Region 3-94
- Two Windows Showing Region 3-129
- Indent Region (c-m-\) Zmacs command 4-26
- Compile Region (c-sh-C) Zmacs command 4-70
- Evaluate Region (c-sh-E) Zmacs command 4-75
- Save Region (m-l) Zmacs command 4-60
- Compile Region (m-X) Zmacs command 3-94, 4-316
- Evaluate Region (m-X) Zmacs command 3-175
- Format Region (m-X) Zmacs command 3-33, 3-38, RN-49
- Uncomment Region (m-X) Zmacs command 3-173
- Region-manipulating Commands 3-94
- %region-number** function 8-106
- Region-related Commands 3-95
- Region? 3-86
- Region From Here to Beginning of Buffer 3-92
- Region From Here to End of Buffer 3-92
- Region in Top 3-129
- Region in Zmacs 3-165
- Region Marking Mode Variable 3-211
- si:** **region-predicate-all-regions** function 8-108
- si:** **region-predicate-copyspace** function 8-109
- si:** **region-predicate-list** function 8-108
- si:** **region-predicate-not-stack-list** function 8-109
- Area and Region Predicates 8-108
- si:** **region-predicate-structure** function 8-108
- Region Right Margin Mode Variable 3-211
- Regions 3-86, 7-289, 8-103
- Regions 3-91
- Regions 3-94
- Regions 3-86
- regions 8-108
- Regions 3-91
- Regions 3-94
- Regions by Buffers 3-92
- Regions by Lisp Expressions 3-91
- Regions by Pages 3-92
- Regions by Paragraphs 3-92
- Regions by Paragraphs 3-92
- Regions by Words 3-91
- sys:** **%%region-scavenge-enable** option for **make-area** 8-104
- Regions in Registers 3-89
- Regions in Zmacs 3-160
- Regions in Zmacs 3-173
- Regions in Zmacs 3-85
- :region-size** option for **make-area** 8-104
- sys:** **%%region-space-type** option for **make-area** 8-104
- sys:** **region-table-overflow** flavor 2-538
- Appending a Region to a Buffer 3-124
- Appending a Region to a File 3-124
- Prepending a Region to a File 3-124
- Add region to patch file 3-186, 4-238
- Indenting Region Uniformly in Zmacs 3-165
- Evaluate Region Verbose 3-175

- Creating a Region with Keystrokes 3-87
- Creating a Region with the Mouse 3-87
- Bit Count register 9-131
- Command/Status Register 9-131
- My Address register 9-131
- Read Buffer register 9-131
- Retrieving the Contents of a FED Register 3-241
- Saving a Drawing Into a FED Register 3-241
- Start Transmission register 9-131
- Write Buffer register 9-131
- Register clearing 1-201
- Register (c-X G) Zmacs command 4-63
- Register (c-X X) Zmacs command 4-63
- Registering Hosts 0-72
- Registering Users 0-71
- Registering an ASCII Print Server on VMS 0-76
- Registering a Printer 0-73
- Registering a Tape Drive in the Namespace 0-72
- Registering Users and Hardware in the Site's Namespace 0-71
- register into buffer 3-90
- Register Pane 3-229, 3-241, 3-263
- Register Pane 3-263
- register pane 3-263
- Register Restrictions 2-258
- Registers 3-229, 4-63
- Registers 2-255
- Registers 2-257
- Registers RN-37
- Registers 3-241
- Registers 3-89
- Registers 3-89
- Registers 3-241
- registers 1-200
- Registers 4-63
- Registers and Performance 2-255
- Registers in Zmacs 3-89
- Registries 9-81
- Registry 9-82
- Registry 9-83
- :regular-pdl-area** option for **make-process** 8-85
- :regular-pdl-area** option for **make-stack-group** 8-5
- :regular-pdl-size** option for **make-process** 8-85
- :regular-pdl-size** option for **make-stack-group** 8-5
- Rehash 2-75
- :rehash-before-cold** init option for **si:eq-hash-table** 2-71
- SCL and **:rehash-size** keyword to **make-hash-table** function 2-641
- SCL and **:rehash-threshold** init option for **si:equal-hash-table** 2-72
- SCL and **:rehash-threshold** keyword to **make-hash-table** function 2-641
- Reindenting Expression in Zmacs 3-165
- Reinitializing Zmacs 1-48, 1-158, 3-12
- chaos:** **reject** function 9-136
- :reject** message 9-212
- :reject-unless-trusted** property 9-214
- :reject-unless-trusted** option for **net:define-server** 9-51
- related disk transfers 8-36
- Related to Window Selection 7-99
- Relations 2-610
- Relationship between methods and messages 2-421
- Relationship of mouse to windows 7-151
- Relative pathnames 5-140
- Grouping
- Flavors
- Interpackage

- :relative-names** option for **defpackage** 2-582
- Relative branch format directive 5-35
- :relative** relative directory specifier syntax in logical pathnames 5-186
- Translate relative file block number into disk address 5-225, 8-46
- :relative-names-for-me** option for **defpackage** 2-582
- :relative-names-for-me** Option for **defpackage** and **make-package** 2-600, 2-602
- :relative-names-for-me** option for **make-package** 2-582
- :relative-names** Option for **defpackage** and **make-package** 2-600, 2-602
- :relative-names** option for **make-package** 2-582
- Relative Package Names 2-582, 2-610
- :relative** pathname component 5-140
- Relative Pathnames: Files 5-149
- :relative-to** message to **sys:package-not-found** 2-542, 2-619
- mailer:** **relaunch** function 6-111
- :relaxed** boundary condition for **:draw-cubic-spline** 7-125
- release 0-87
- release 0-87
- Release 5.0 to Release 6.0 Documentation Map RN-4
- Release 5 and Release 6.0 concurrently 0-87
- Release 6.0 RN-75
- Release 6.0 RN-77
- Release 6.0 RN-71
- Release 6.0 RN-9
- Release 6.0 RN-55
- Release 6.0 RN-51
- Release 6.0 RN-47
- Release 6.0 RN-69
- Release 6.0 RN-69
- Release 6.0 RN-12
- Release 6.0 RN-51
- Examples of Specifications of Panes and Constraints Before Release 6.0 7-196
- Files Using **defwrapper** Forms Must Be Recompiled in Release 6.0 RN-28
- Funargs Supported in Release 6.0 RN-10
- Improvements to Lisp in Release 6.0 RN-40
- Improvements to the File System in Release 6.0 RN-71
- Improvements to the User Interface in Release 6.0 RN-66
- Improvements to Utilities in Release 6.0 RN-52
- Improvements to Zmacs in Release 6.0 RN-47
- Incompatible Changes to Lisp in Release 6.0 RN-9
- Incompatible Changes to Networks in Release 6.0 RN-75
- Incompatible Changes to the User Interface in Release 6.0 RN-55
- Incompatible Changes to Zmacs in Release 6.0 RN-47
- Incompatible Changes to Zmail in Release 6.0 RN-69
- Lexical Scoping in Release 6.0 RN-10
- New Features in Lisp in Release 6.0 RN-31
- New Features in Networks in Release 6.0 RN-75
- New Features in the User Interface in Release 6.0 RN-61
- New Features in Utilities in Release 6.0 RN-51
- New Features in Zmacs in Release 6.0 RN-48
- Notes and Clarifications for Release 6.0 RN-79
- Specifying Panes and Constraints Before Release 6.0 7-188
- Summary of Character and String Compatibility Functions in Release 6.0 RN-18
- Symbols Added to or Removed From **global** in Release 6.0 RN-24
- New Microcode in Release 6.0: 319. RN-7

- New Feature In
  - New Feature In
  - New Feature In
- Running Release 5 and
  - Release 5.0 to
  - Booting the
- Bringing up a new major
  - Installing new
  - Dumping,
- Two New Zmacs Commands for Recompiling and
  - Replying to and
  - Forgetting objects
    - fs:**
- Overview of
  - Using the
    - net:**
    - sys:**
  - chaos:**
- Messages to
  - Symbols Added to or
- Inserting and
  - Release 6.0: Introduction and Highlights RN-1
  - Release 6.0: Symbolics Common Lisp RN-45
  - Release 6.0: the Command Processor RN-61
  - Release 6.0: the Document Examiner RN-52
  - Release 6.0 concurrently 0-87
  - Release 6.0 Documentation Changes RN-2
  - Release 6.0 Documentation Map RN-4
  - Release 6.0 is Supported Only on 3600-family Machines RN-7
  - Release 6.0 world 0-87
  - :released** symbol in **make-system** **:version** option 4-222
  - :released** system status 4-251
  - release on a newly acquired machine 0-87
  - releases distributed in patch tape format 0-87
  - [Reload/Retrieve] File System Maintenance menu item 0-10, 0-39
  - Reloader program 0-10
  - Reloading, and Retrieving 0-5
  - Reloading and Retrieving 0-10
  - Reloading Patches RN-49
  - :reload** Option for **make-system** 4-223
  - Reload Patch (m-X) 3-192, 4-244, RN-49
  - Relocate cursor 3-57
  - rem** function 2-62
  - :rem-hash** message 2-73
  - rem-if** function 2-64
  - Remailing Zmail Messages 6-69
  - remainder** function 2-103
  - remarks:** User Object Attribute 9-14
  - \*remember-passwords\*** variable 5-107
  - remembered by a resource 8-135
  - remhash** function 2-74
  - remhash-equal** function 2-74
  - rem-if-not** function 2-63
  - remob** function 2-573, 2-593, 2-606
  - Remote Login 9-65
  - Remote ASCII terminal 9-69, 9-70
  - Remote file servers 5-91
  - Remote Login Capability 9-67, RN-75
  - Remote Login Facilities 9-69
  - remote-login-on** function 9-70
  - Remote login with machine in use 9-70
  - remote-network-error** flavor 2-554
  - Remote Network Problems 2-554
  - remove** function 2-62
  - Remove package 2-603
  - remove-conn** function 9-134
  - :remove-asynchronous-character** method of **si:interactive-stream** 7-18
  - Remove Characters From Windows 7-113
  - Removed From **global** in Release 6.0 RN-24
  - :remove-highlighted-item** method of **tv:menu-highlighting-mixin** 7-243
  - :remove-highlighted-value** method of **tv:menu-highlighting-mixin** 7-243
  - :remove** method of **si:heap** 2-79
  - [Remove] Zmail menu item 6-79
  - Removing flavor 2-437
  - Removing keywords 6-80
  - Removing methods 2-437
  - Removing a **defun-method** 2-437
  - Removing elements from list 2-150
  - Removing Lisp Comments From Regions in Zmacs 3-173
  - Removing symbol from package 2-606

- remprop function 2-69
  - :remprop message 2-473
  - :remprop method of fs:pathname 5-172
  - remq function 2-62
  - Rename Commands 1-29
  - Rename file 5-103
  - :rename message 5-114
  - fs: rename-failure 2-551
  - fs: rename-failure flavor 2-551
  - Rename-within 2-329
  - Rename-within Encapsulations 2-329
  - fs: rename-across-directories flavor 2-551
  - fs: rename-across-hosts flavor 2-551
  - Rename Buffer (m-X) Zmacs command 3-119
  - [Rename Char] Font Editor menu item 3-234, 3-260
  - Renamed inbox file names 6-94
  - Renamed to Save File Buffers (m-X) RN-47
  - Renamed to tv:\*function-keys\* and tv:\*select-keys\* RN-56
- File
  - rename errors 2-551
  - renamef function 5-103
  - Rename File (m-X) Zmacs command 3-133, 5-153
  - Rename File Command 1-29
- lmfs:
  - rename-local-file-tool function 5-176
  - :rename message to pathnames 5-103
  - :rename message to streams 5-103
  - Rename QFILE Command 9-180
  - fs: rename-to-existing-file flavor 2-551
  - si: rename-within-new-definition-maybe function 2-329
- FSEdit
  - [Rename] Command 5-233
  - [Rename] File System Editor menu item 5-233
- Function
  - renaming 2-329
  - Renaming Files 3-133, 3-150
  - Renaming Characters 3-234
  - Renaming FEP Files 1-212, 5-219
  - Renaming Files in Dired 3-150
  - Renaming LMFS files 5-176
  - Renaming the Buffer 3-119
  - Renaming Zmail Messages 6-81
  - Rendezvous subprotocols 9-129
  - Reordering Zmail Messages 6-71
  - Reparsing Attribute List (m-X) Zmacs command 3-137, 4-10
  - Repatriating files 0-38
  - Repeat Last Minibuffer Command 3-51, 3-74
  - repeat loop keyword 2-207
- Atom Query
  - Query
    - Replace 3-104
    - Replace 3-102
    - Replace (c-%) Zmacs command 4-57
    - Replace (m-%) Zmacs command 3-102, 4-57
    - Replace (m-X) Zmacs command 4-57
- Tags Query
  - :replace-input Message to Interactive Streams RN-67
  - :replace-input method of si:interactive-stream 5-71, 7-39
- New Optional Argument to
  - Replace Into Buffer 3-104, 3-175, 4-75
  - :replace keyword for delete-duplicates function 2-640
- Evaluate and SCL and
  - Query
    - Replace Last Kill 3-104
    - Replace Let Binding 3-104
- Query
  - Replacement Operation 3-106
  - Replacement Operations in Zmacs 3-104
  - Replacements in Zmacs 3-102
  - Replacements in Zmacs 3-102
  - Replacements in Zmacs 3-103
- Example of a Tag Tables
  - Other Types of Making Global
  - Querying While Making Global
  - Querying While Making Multiple Global
- Save All Files (m-X)
  - tv:\*escape-keys\* and tv:\*system-keys\*





- Printed Representation of Instances 2-16
- Printed Representation of Integers 2-14
- String representation of integers 2-277
- Printed Representation of Miscellaneous Data Types 2-18
- Printed Representation of Numbers 2-90
- Printed Representation of Ratios 2-14
- Printed Representation of Strings 2-16
- Printed Representation of Symbols 2-15
- :representation** option for **make-area** 8-104
- Errors Involving Lisp Printed Representations 2-543
- Array Representation Tools 2-237
- Data representation type 8-103
- Conses represented as pointers 2-56
- Reprint messages 1-73, 1-182, 6-104
- :reprompt** option 5-60, 7-28
- request 9-123
- request 9-33
- request 0-87
- :request-array-end** option for **neti:funcall-server-internal-function** 9-215
- :request-array** option for **net:define-server** 9-51
- :request-array** option for **neti:funcall-server-internal-function** 9-215
- :request-array-start** option for **neti:funcall-server-internal-function** 9-215
- Request Failures Based on **fs:file-request-failure** 2-546
- request for connection packet 9-114
- Request for connection packet 9-114
- Request for *N* longs failed. 1-44, 1-199
- :request-to-send** serial I/O parameter 5-253
- \*require-subjects\*** variable 6-88
- Required parameters 2-154
- :required-flavors** Option for **defflavor** 2-441, 2-443, 4-116
- :required-methods** Option for **defflavor** 2-441, 2-442, 4-113
- :required-init-keywords** RN-40
- :required-init-keywords** Option for **defflavor** 2-441, 2-442, RN-40
- :required-instance-variables** Option for **defflavor** 2-441, 2-442
- require** function 2-640
- Requirements for Garbage Collection 8-122
- :rescanning-p** method of **si:interactive-stream** 5-71, 7-39
- Resent-by field 6-35
- Resent-date field 6-35
- Resent-to field 6-35
- resequence-fep-filesystem** function 8-59
- reserve-audio-flags** function 7-334
- Reserved for the User 1-7, 1-147
- :reset** 8-92
- :reset** 8-92
- Reset bit 9-131
- Reset button 1-44, 1-199
- Reset command 1-44, 1-199, 1-201
- Reset Commands 1-29
- reset** function 9-142
- :reset** message 5-251, 9-212
- reset-initializations** function 8-69
- :reset** method of **si:process** 8-92
- Reset Network Command 1-30
- reset-process-queue** function 8-84
- reset-temporary-area** function 8-107
- resetting 1-201
- Printed Answer to STATUS Database deletion *who-am-i*
- FWD Forward a RFC
- zwei:**
- defflavor** Now Accepts the Option
- SCL and Storage
- si:**
- audio:** Keys
- always** option for No-unwind options for
- neti:**
- si:**
- sys:** Clock

- Disk resetting 1-201, 1-213
- FEP resetting 1-201
- Hardware resetting 1-201
- Lbus resetting 1-201
- Sequences resetting 1-201
- Tape hardware resetting 1-201
- Video resetting 1-201
- Resetting a process 8-75
- Resetting the FEP 1-44, 1-199
- reset-user-options** function 7-267
- [Reset] Profile Mode menu item 1-171, 6-57
- Resolving Package Name-conflict Errors 2-595
- resource 8-135
- resource 8-135
- Resource 7-248
- resource 8-31
- resource 8-32
- resource 7-221
- resource 7-248
- resource 7-274
- resource 7-255
- Resources 4-126, 8-131
- resources 8-131
- resources 8-131
- Respect to the Whole Buffer 3-70
- Respond 6-23
- response 3-42
- response 9-153
- Response After Zmall Error 6-24
- :response-array-end** option for
  - netl:funcall-server-internal-function** 9-215
- :response-array** option for **net:define-server** 9-51
- :response-array** option for
  - netl:funcall-server-internal-function** 9-215
- :response-array-start** option for
  - netl:funcall-server-internal-function** 9-215
- Response Format 3-51
- Response Format 9-158
- Response Help 3-51
- Response Result Values 9-172
- Responses 3-51
- Responses 9-192
- Responsibilities of Your Program 7-230
- &rest 1-231
- &rest** keyword 2-151
- Rest parameters 2-154
- rest1** function 2-47
- rest2** function 2-47
- rest3** function 2-47
- rest4** function 2-47
- Safety of **&rest** Arguments 2-157
- Restart handlers 2-501, 2-513, 4-80
- Restart points 2-479
- :restart-after-boot** option for
  - process-run-function** 8-86
- :restart-after-boot** option for
  - process-run-restartable-function** 8-87
- :restart-after-reset** option for
  - process-run-function** 8-86
- :restart-after-reset** option for
  - process-run-restartable-function** 8-87
- Restart handler functions 2-514
- Restart Handlers 2-514
- Restart Handlers Manually 2-516
- Restarting processes 8-92
- Restart Options 1-193, 4-256
- Deallocation allocated objects of a
- Forgetting objects remembered by a
- Multiple Menu Choose Mixin and
  - sl:disk-array**
  - sl:disk-event**
  - tv:momentary-menu**
  - tv:pop-up-multiple-menu-choose-resource**
  - tv:temporary-choose-variable-values-window**
  - tv:temporary-multiple-choice-window**
- Allocating and freeing Chaosnet storage
- Allocating and freeing window system storage
- Motion with
  - Zmall Does Not Cancel
  - QFILE
  - No
- Minibuffer
- QFILE Command and Minibuffer
- QFILE Open
- More Ways to Enter Minibuffer
- QFILE Error
- Reference Material:
  - invoking
- Debugger Proceed and



- :rational** returned by **typeof** 2-9
- :select-method** returned by **typeof** 2-9
- :single-float** returned by **typeof** 2-9
- :stack-group** returned by **typeof** 2-9
- :string** returned by **typeof** 2-9
- :symbol** returned by **typeof** 2-9
- SCL and Carriage returned values from **cond** macro 2-639
- return format directive 5-34
- Return from **typeof** function 2-642
- SCL and **return** function 2-639
- Returning a locative pointer 8-22
- Returning array elements 2-244
- Returning to One Window 3-130
- Return-keyboard-to-lisp command 1-201
- RETURN key in the minibuffer 3-51
- return loop** keyword 2-216, 2-218
- return multiple values 2-167
- Return **nil** 2-519
- Returns RN-79
- return** special form 2-167, 2-169, 2-185, 2-189
- return value 9-153
- return values in current stack frame 4-267
- RETURN Zmacs minibuffer command 4-8
- [Return] Inspector menu item 4-104, 4-298
- :reusable-when** option for **defwindow-resource** 7-107
- reverse** function 2-51
- Reverse Incremental Search 3-99
- Reverse Search (c-R) Zmacs command 4-57
- Dired Reverse Undelete 3-151
- :reverse-video-p** init option for **tv:menu** 7-297
- :reverse-video-p** method of **tv:sheet** 7-116
- Reversible Wildcard Pathname Translation 5-191
- Reversible wild pathname translation 5-189
- Revert Buffer (m-X) Zmacs command 3-121
- Reverting buffers 3-121, 3-122
- Reverting Buffers RN-49
- :revoke-arrest-reason** method of **si:process** 8-92
- Revoke M'sg (m-X) Zmail Command 6-25
- :revoke-run-reason** method of **si:process** 8-91
- :rewind** message to tape streams 5-273
- Rewind option to Tape when done dump parameter 0-6
- RFC/ANS transaction 9-35
- Chaosnet RFC/ANS time protocol 9-50
- RFC733 header format 6-35
- Internet RFC822 domain-addressing formats 6-95
- RFC Received connection state 9-121
- Chaos: rfc-received-state connection state 9-136
- RFC Request for connection packet 9-114
- RFC Sent connection state 9-121
- Chaos: rfc-sent-state connection state 9-136
- Variable **si:typeout-default\*** Replaces **tv:rh-typeout-default** RN-56
- Right increment 7-335
- Right justify 5-46
- Finding the Left and right command 3-45
- Right Edges of the FED Character Box 3-237
- Right horseshoe character in ITS pathnames 5-185
- :right** init option for **tv:menu** 7-297
- :right** init option for **tv:sheet** 7-163
- Right margin character flag 7-108
- :right-margin-character-flag** init option for **tv:sheet** 7-117
- Region Right Margin Mode Variable 3-211
- :right-margin-size** method of **tv:sheet** 7-167
- Zmail: Click Right on Summary Line 6-55

- Click
  - Right on Summary Line Zmail Command 6-42
  - RMAIL mail file format 6-95, 6-96
  - :roman** day-of-the-week-representation 7-370
  - Roman-I character 2-32
  - Roman-II character 2-32
  - Roman-III character 2-32
  - Roman-IV character 2-32
  - Roman numeral format directive 5-36
  - room** function 8-129
  - room** variable 8-129
- Creating More
  - Room on the Local Disk 0-43, 5-239
  - :room** option for **make-area** 8-104
- Square
  - root 2-106
  - Root directory 1-208, 5-215
  - root of a negative number error 2-536
- Square
  - Root] File System Maintenance menu item 0-39
- [List FEP FS
  - root] File System Maintenance menu item 0-39, 5-231
- [Tree edit
  - rot** function 2-115
  - Rotate bits 2-115
  - [Rotate] Font Editor menu item 3-243, 3-259
  - Rotating Drawings in FED 3-243, 3-259
  - round** function 2-111
  - Rounding 2-93
- Mapping
  - Routines 8-109
  - Routing 9-108
  - Routing packet 9-108
  - Routing table 9-108
  - Routing Information packet 9-121
- RUT
  - routing table 9-108
- Connection address in
  - routing table 9-108
- Connection cost in
  - routing table 9-108
- Connection type in
  - routing table 9-108
- Constraint frame configuration
  - row 7-179
  - Row-major order 2-235
  - Rows 7-213
  - :rows** init option for **tv:menu** 7-214, 7-297
  - rplaca** function 2-54, 2-56, 2-83, 2-236
  - rplaca** restriction 2-638
  - rplacd** function 2-54, 2-56, 2-83, 2-236
  - rplacd** restriction 2-638
  - RS-232 protocol 5-243
  - RS-232 Signals to Pins 5-247
  - RS-232 Signals to Pins in Asynchronous Null Modems 5-247
- FUNCTION
  - Rubout 1-53, 1-145, 3-28
  - RUBOUT 1-141
  - Rubout character 2-32
  - RUBOUT key 3-22
  - rubout-handler** variable 5-54, 7-22
  - RUBOUT Dired command 3-151
  - :input-editor** Message to Interactive Streams Replaces **:rubout-handler** RN-55
  - Rubout in ASCII files 5-91
  - RUBOUT Zmacs character 1-145, 3-76
  - RUBOUT Zmacs command 1-53, 3-28, 3-43
  - RUBOUT Zmacs command 1-53, 3-28, 3-83
- Disable special treatment of
  - Rule 5-192
  - Rule 5-195
  - Rule 5-194
  - Rule 5-192
  - Rule 5-192
  - Rule 5-195
  - Rule 5-194
  - Rule 5-195
  - Rule 5-195
  - Rule 5-193
  - Rule 5-192
  - Rule 5-194
- c-X
  - :new-pathname** Translation
  - :site-directory** Translation
  - :tops20-heuristicate-directory** Translation
  - :translate-wild** Translation
  - :unix-font** Translation
  - :unix-microcode** Translation
  - :unix-type-and-version** Translation
  - :vms-font** Translation
  - :vms-heuristicate** Translation
  - :vms-microcode** Translation

**:vms-heuristicate-directory** Translation Rule 5-193  
**:vms-heuristicate-name** Translation Rule 5-193  
**:vms-new-pathname** Translation Rule 5-193  
     Default translation rule 5-189  
     Defining a Translation Rule 5-191  
**fs:patch-file** Translation Rule 5-196  
     Search rule for invoking handlers 2-501, 2-509  
     Coercion rules 2-90  
     Global translation rules 5-189  
     Permanent translation rules 5-189  
     Search rules 1-113, 9-5  
     Site translation rules 5-189  
     Supplied translation rules 5-189  
     Translation Rules RN-72  
     VMS logical pathname translation rules 5-192  
     Coercion Rules for Numbers 2-90  
     Consistency Rules for Packages 2-591  
     Rules for Successful Completion 5-123, 5-161  
     CLM: Rules Governing the Passing of Multiple Values 2-639  
     Run Bars 1-6  
     Run reasons 8-75  
     Run-example with Simple Defaulting 5-130, 5-131  
     **:run-reason** method of **si:process** 8-91  
     **:run-reasons** method of **si:process** 8-91  
     Run and Arrest Reasons 8-91  
     Garbage collector run bar 8-124  
     **zwel:** **\*run-gmsgs-p\*** variable 6-91  
     **:runnable-p** method of **si:process** 8-92  
     Running Release 5 and Release 6.0 concurrently 0-87  
     Running stack group 8-3  
     **:run-reasons** option for **make-process** 8-85  
     RUT packet 9-108  
     RUT Routing Information packet 9-121  
     R Zmail command 6-39

## S

Servers (S) 1-187  
 Save Position (c-X) S) Zmacs command 4-59  
     S-expression 1-227  
     **:safe** option for **make-stack-group** 8-5  
     Safety of **&rest** Arguments 2-157  
     **:sall** output format style 5-46  
     Salvager 0-37, 0-38  
     [Salvage] File System Maintenance menu item 0-39  
 Copying From and to the Same Array 2-253  
     Samefringe problem 8-7  
     **samepnamep** function 2-293, 2-565  
     Sample Format 7-322  
     Sample pane 3-227, 3-235, 3-253, 3-262  
     Sample rate 7-329  
     Sample string 3-227, 3-253, 3-260  
     **sample-channels** function 7-336  
     **\*sample-rate\*** variable 7-329  
     **sample-add-fix** function 7-336  
     **sample-add-float** function 7-336  
     **sample-add-sample** function 7-336  
     **audio:** Sample Formats 7-335  
     **audio:** Sample Pane 3-227  
     **audio:** Sample Pane 3-262  
     **audio:** sample pane 3-262  
     **audio:** Sample Program 4-147  
     **audio:** Sample Program 4-185  
 Conversions Between FED  
     Mousing on the FED  
     Using the mouse in the Calculation Module for the Graphic Output of the

## S

## S

- Output Module for the Storing The FED
  - [Set]
    - Sample Program 4-165
    - Samples 7-333
    - Sample String 3-253
    - [Sample] Filter Creation Display menu item 6-60
    - Sample] Font Editor menu item 3-253, 3-260
    - sassoc** function 2-66
    - sassq** function 2-66
    - Satisfying filters 6-58
    - Save 3-72
    - Save Commands 1-30
    - Save File 3-30, 3-121
    - Save Region 3-94
    - Save World 0-73
    - Save (m-X) Zmail Command 6-81
    - Save-Exit menu 6-17
    - Save-Exit menu item 6-17
    - Save-Exit menu item 6-17
    - Save-Exit menu item 6-17
    - Save-Exit menu item 6-17
    - Save/Kill/Yank mouse click 3-57
    - save-all-files** RN-68
    - save-all-files** function 1-158, 1-182
    - Save All Files (m-X) Renamed to Save File Buffers (m-X) RN-47
    - [Save Char] Font Editor menu item 3-234, 3-260
    - Save current Lisp world 0-46
    - Saved Definition 3-127
    - Saved Definition 3-127
    - Saved Position (c-X J) Zmacs command 4-59
    - Save Draft as Msg Zmail Menu Item 6-41
    - Save Draft File Zmail Menu Item 6-39
    - Save File Buffers Command 1-30
    - Save File Buffers (m-X) RN-47
    - Save File Zmacs command 3-31
    - Save Mail Buffers Command 1-30
    - Save Position (c-X S) Zmacs command 4-59
    - Save Private Document 1-136
    - Save Region (m-W) Zmacs command 4-60
    - Save World Command 1-30
    - [Don't Save] Save-Exit menu item 6-17
    - [Save] Zmail menu item 1-67, 1-171, 6-17, 6-57, 6-81
    - Saving Buffers 3-120
    - Saving universes 6-66
    - Saving, Expunging, Killing, and Renaming Zmail Messages 6-81
    - Saving a Drawing Into a FED Register 3-241
    - Saving a File 3-31
    - Saving a List of Mail Files 6-78
    - Saving and Inserting Regions in Registers 3-89
    - Saving and Moving to Locations in Registers 3-89
    - Saving and Restoring Zmail Message Drafts 6-39
    - Saving a Region 3-94
    - saving a world 0-87
    - Saving Buffers and Files 3-30
    - Saving Buffers and Files 3-30
    - Saving Buffers and Files 3-30
    - Saving Characters and Pieces of Characters in FED Registers 3-241
    - Saving contents of windows 7-78
    - Saving Keyboard Macros 3-201
    - Saving Keyboard Macros 3-202
    - Saving Keyboard Macros 3-201
    - Saving messages in disk files 6-39
    - Saving New Versions of World Loads 0-45
    - Saving New Versions of World Loads 0-45
    - Saving Subsequent Worlds 0-57
- What Histories
- Start Background
  - [Abort]
  - [Ask]
  - [Don't Save]
  - [Logout]
  - M2:
- Optional Argument :ask Added to **zwei:**  
**zwei:**
- Source Compare
- Source Compare Merge
- Jump To
- Save All Files (m-X) Renamed to
- [Don't
- Customizing and Creating and Description of Creating and Summary of Creating and
- Example 1 of Writing and Example 2 of Writing and Writing and
- Concepts:  
3640:

- 3640: Customizing and Check Unbalanced Parentheses When
- Setting and
  - :clock** option for **si:**
  - :disk** option for **si:**
  - :mouse** option for **si:**
  - si:**
- Mouse
  - si:**
- Flavors and Performing arithmetic operations on characters in Processes and Self-evaluating atoms and Using Zetalisp and
  - sys:**
- Saving terminal interactions in file 1-183
- Saving the Buffer Contents to the File 3-121
- Saving the Mail File 1-67
- Saving the World 0-55
- Saving Variable 3-211
- Saving Zmail Filters 6-63
- Saving Zmail Keywords 6-76
- Saving Zmail Options 1-171, 6-57
- Saving Zmail Universes 6-66
- Sawtooth Wave Example 7-341
- sb-on** 8-80
- sb-on** 8-80
- sb-on** 8-80
- sb-on** function 8-77, 8-80
- Scale fraction 3-239
- Scaling Mouse Motion 7-159
- Scaling Now Works on 3600-family Computers RN-68
- scanning-through-memory** macro 8-111
- Scheduler 8-4, 8-77
- scheduler-stack-group** variable 8-79
- SCL 2-635
- SCL 2-265, RN-12
- SCL 2-635
- SCL 2-637
- SCL 2-633
- SCL 2-631
- SCL Documentation 2-636
- scl** package 2-633
- SCL Packages 2-633
- SCL syntax 3-140
- SCL and #+ Reader Macro 2-644, 2-645
- SCL and #- Reader Macro 2-644, 2-645
- SCL and #S macro form 2-642
- SCL and **&rest** parameters for lambda-expressions 2-638
- SCL and \* variable 2-642
- SCL and **:junk-allowed** keyword for **parse-namestring** 2-644
- SCL and **:named** option for **defstruct** 2-642
- SCL and **:rehash-size** keyword to **make-hash-table** function 2-641
- SCL and **:rehash-threshold** keyword to **make-hash-table** function 2-641
- SCL and **:replace** keyword for **delete-duplicates** function 2-640
- SCL and **:test** keyword to **make-hash-table** function 2-641
- SCL and **:type** option for **defstruct** 2-642
- SCL and adjustable arrays 2-641
- SCL and **array-row-major-index** function 2-642
- SCL and column-major order for arrays 2-641
- SCL and Common Lisp Differences 2-637
- SCL and Common Lisp Files 2-635
- SCL and **compile-file** function 2-645
- SCL and **constituent** character attribute 2-643
- SCL and **declaration** declaration 2-640
- SCL and **declare** special form 2-640
- SCL and **decode-universal-time** function 2-645
- SCL and **\*default-pathname-defaults\*** variable 2-644
- SCL and **defsetf** function 2-639
- SCL and **defstruct** macro 2-642
- SCL and **defstruct** slot initializations 2-642
- SCL and **describe** function 2-645
- SCL and **directory** function 2-645



- SCL and **documentation** as **self** argument 2-639
- SCL and **documentation** function 2-645
- SCL and **dribble** function 2-645
- SCL and **equal-typep** function 2-638
- SCL and equivalent macro definitions for special forms 2-638
- SCL and **\*features\*** variable 2-645
- SCL and file lookup errors 2-645
- SCL and **format** function directives 2-644
- SCL and **ftype** declaration 2-640
- SCL and **functionp** function 2-638
- SCL and **function** special form 2-638
- SCL and **get-macro-character** function 2-644
- SCL and **go** special form 2-639
- SCL and **ieee-floating-point** feature name 2-645
- SCL and **illegal** character attributes 2-643
- SCL and **inline** declaration 2-640
- SCL and keywords in the **\*features\*** list 2-644
- SCL and **make-concatenated-stream** function 2-643
- SCL and **make-echo-stream** function 2-643
- SCL and **mismatch** function 2-641
- SCL and multidimensional arrays 2-641
- SCL and non-null hosts 2-644
- SCL and **non-terminating macro** character attribute 2-643
- SCL and **notinline** declaration 2-640
- SCL and Optimization 2-635
- SCL and **optimize** declaration 2-640
- SCL and **parse-namestring** function 2-644
- SCL and **parse-pathname** function 2-644
- SCL and pathname components 2-644
- SCL and potential numbers 2-644
- SCL and printed character names 2-644
- SCL and printing of structures 2-642
- SCL and **proclaim** function 2-640
- SCL and **prog1** macro 2-639
- SCL and **prog2** macro 2-639
- SCL and **progv** macro 2-639
- SCL and **push** function 2-641
- SCL and **pushnew** function 2-641
- SCL and **\*read-base\*** variable 2-643
- SCL and **read-char** function 2-643
- SCL and **\*read-suppress\*** variable 2-643
- SCL and **read-delimited-list** function 2-644
- SCL and **\*read-extended-lbase-signed-numbers\*** variable 2-643
- SCL and **\*read-extended-lbase-unsigned-numbers\*** variable 2-643
- SCL and **read-from-string** function 2-643
- SCL and **require** function 2-640
- SCL and **return-from** function 2-639
- SCL and returned values from **cond** macro 2-639
- SCL and **return** function 2-639
- SCL and **rplaca** restriction 2-638
- SCL and **rplacd** restriction 2-638
- SCL and **set-macro-character** function 2-644
- SCL and **set-syntax-from-char** function 2-643
- SCL and slashification 2-644
- SCL and Standard Character Syntax Types Table 2-643
- SCL and **standard-char-p** function 2-640
- SCL and Standard Constituent Character Attributes Table 2-643
- SCL and Strings 2-634
- SCL and **substitute-if** function 2-640

- SCL and **substitute** function 2-640
- SCL and **substitute-if-not** function 2-640
- SCL and subtype variations 2-637
- SCL and Symbolics Common Lisp Extensions 2-635
- SCL and **the** special form 2-640
- SCL and type common 2-637
- SCL and type string 2-637
- SCL and type string-char 2-637
- SCL and *value-type* argument for **the** special form 2-640
- SCL and vertical bars for quoting 2-643
- SCL and **zl:si:\*flag-wrong-type-strings\*** 2-637, 2-642
- SCL and | 2-643
- SCL and `E directive 2-644
- SCL and `G directive 2-644
- SCL and `T directive 2-644
- SCL arrays and circular-structure labelling restriction 2-641
- SCL case checking in package-name lookup 2-640
- SCL character incompatibilities 2-265, RN-12
- SCL **coerce** function 2-637
- SCL **gprint** package 2-633
- SCL I/O operations and streams 2-634
- SCL **language-tools** package 2-633
- SCL **loop** macro 2-635
- SCL pathnames and **:unspecific** 2-644
- SCL sequence and list functions and two-argument predicates 2-641
- SCL string incompatibilities 2-265, RN-12
- SCL **zl-user** package 2-633
- SCL **zl** package 2-633
- scope 2-126
- scope 2-126
- Scope 2-503
- scoped compiler 2-137
- scoped interpreter 2-137
- scoping RN-11
- scoping 2-138
- scoping RN-12
- scoping RN-11
- scoping RN-12
- scoping RN-12
- Scoping 2-137, 2-142, 2-144
- scoping 2-138
- scoping 2-138
- Scoping RN-11
- scoping RN-12
- scoping RN-11
- scoping RN-12
- scoping RN-12
- scoping RN-12
- scoping RN-12
- Scoping Changes RN-12
- Scoping in Release 6.0 RN-10
- Screen 1-5, 1-6
- screen 7-283
- Screen 3-55
- Screen 3-56
- screen 5-19
- Screen 1-108, 3-268
- Screen 3-17
- Screen 1-50, 3-26
- Screen 3-17
- Screen 1-50, 3-26
- SCROLL and m-SCROLL Now Display Next Screen and Previous
- Zetalisp and
  - SCL case checking in package-name lookup 2-640
  - SCL character incompatibilities 2-265, RN-12
  - SCL **coerce** function 2-637
  - SCL **gprint** package 2-633
  - SCL I/O operations and streams 2-634
  - SCL **language-tools** package 2-633
  - SCL **loop** macro 2-635
  - SCL pathnames and **:unspecific** 2-644
  - SCL sequence and list functions and two-argument predicates 2-641
  - SCL string incompatibilities 2-265, RN-12
  - SCL **zl-user** package 2-633
  - SCL **zl** package 2-633
  - scope 2-126
  - scope 2-126
  - Scope 2-503
  - scoped compiler 2-137
  - scoped interpreter 2-137
  - scoping RN-11
  - scoping 2-138
  - scoping RN-12
  - scoping RN-11
  - scoping RN-12
  - scoping RN-12
  - Scoping 2-137, 2-142, 2-144
  - scoping 2-138
  - scoping 2-138
  - Scoping RN-11
  - scoping RN-12
  - scoping RN-11
  - scoping RN-12
  - scoping RN-12
  - scoping RN-12
  - Scoping Changes RN-12
  - Scoping in Release 6.0 RN-10
  - Screen 1-5, 1-6
  - screen 7-283
  - Screen 3-55
  - Screen 3-56
  - screen 5-19
  - Screen 1-108, 3-268
  - Screen 3-17
  - Screen 1-50, 3-26
  - Screen 3-17
  - Screen 1-50, 3-26
  - SCROLL and m-SCROLL Now Display Next Screen and Previous
- Zetalisp and
  - Dynamic
  - Lexical
  - Restriction Due to
  - Lexically
  - Lexically
  - applyhook** and lexical
  - defmacro** and lexical
  - defmacro** lambda-list keyword **&list-of** and lexical
  - evalhook** and lexical
  - global:functional-alist** and lexical
  - lambda** and lexical
  - Lexical
  - Macro-expander functions and lexical
  - macro** and lexical
  - New Special Forms for Lexical
  - si:lexical-closure** and lexical
  - Special forms and lexical
  - sys:funcall-macro** and lexical
  - sys:invalid-form** and lexical
  - sys:invalid-function** and lexical
  - sys:invalid-lambda-list** and lexical
  - Miscellaneous
  - Lexical
  - Creating mouse-sensitive-area of
  - Displaying the Next
  - Displaying the Previous
  - Flashing the
  - Hardcopying the
  - Introduction to the Organization of the
  - Next
  - Organization of the
  - Previous

- Screen RN-47
- Split Screen 3-130
- Splitting the Screen 3-130
- Screen array 7-79
- Screen manager 7-76
- Split Screen (m-X) Zmacs command 4-65
- :screen-manage** message to windows 7-86
- screen-spy** Service 9-61
- Screen After Zmail Error 6-24
- Garbage on Screen and Previous Screen RN-47
- SCROLL and m-SCROLL Now Display Next Screen Arrays and Exposure 7-79
- Clear Screen command 1-201
- Converting LGP to Screen Coordinates 4-121
- Default printer for screen copies 1-174, 3-271
- Drawing past edge of screen error 2-537
- :screen** init option for **tv:menu** 7-298
- :screen-manage-deexposed-gray-array** message 7-92
- The Screen Manager 7-86
- Screen Manager Background Process 7-86
- tv:** **screen-manage-update-permitted-windows** variable 7-90
- [Bury] Edit Screen menu item 7-86
- [Move Window] Edit Screen menu item 7-76
- Simple Screen Output 4-14
- Screens 7-78
- Black-and-white screens 7-140
- Color screens 7-103, 7-140
- [Edit] Screen] System menu item 4-66, 4-129, 7-75, 7-76, 7-175
- [Split] Screen] System menu item 4-66, 4-129
- SCROLL 1-134, 1-145
- Scroll bar 3-255
- Scroll Windows 7-301
- tv:** **scroll-window** flavor 7-305
- SCROLL and m-SCROLL Now Display Next Screen and Previous Screen RN-47
- Message window scrolling 6-13
- Slow scrolling 7-175
- Summary window scrolling 6-13
- Scrolling Windows 7-175
- Scrolling a Zmail Message 1-66
- Scrolling summary window 1-66
- Scrolling the drawing 3-255
- Scrolling the Drawing Horizontally and/or Vertically in FED 3-255
- Scrolling the Other Window 3-130
- Scrolling with the Mouse 1-149
- tv:** **scroll-item-leader-offset** variable 7-313
- tv:** **scroll-maintain-list** function 7-315
- :type-allst** init option for **tv:** **scroll-mouse-mixin** 7-311
- tv:** **scroll-mouse-mixin** flavor 7-311
- Scroll Other Window 3-130
- Scroll Other Window (c-m-v) Zmacs command 4-65
- tv:** **scroll-parse-item** function 7-307, 7-311
- Using the mouse to scroll the message window 1-64
- Basics of Scroll Windows 7-305
- Introduction to Scroll Windows 7-303
- Text Scroll Windows 7-174
- tv:** **scroll-window-with-typeout** flavor 7-305
- Zmacs Incremental SCROLL Zmacs command 1-50, 3-26
- Zmacs Reverse Incremental Search 3-98
- Zmacs String Search 3-99
- Reverse Search 3-100
- Search rules 1-113, 9-5
- Search (c-R) Zmacs command 4-57

- Incremental Tags
  - Search (c-S) Zmacs command 4-57
  - Search (m-X) Zmacs command 4-57
- Introduction to Tag Tables and Tag Tables and Table
  - search-rules**: Namespace Object Attribute 9-21
  - Search Domains 3-106
  - Search Domains in Zmacs 3-106
  - searches 2-59
  - Searching 4-57
  - Searching 2-286
  - Searching, Replacing, and Sorting in Zmacs 3-97
  - Searching Affected by Case, Style, and Bits 2-286
  - Searching and Replacing 4-57
  - searching functions 2-510
  - Searching Functions RN-23
  - Searching Ignoring Case, Style, and Bits 2-287
  - Searching in Zmacs 3-98
  - Searching in Zmacs 3-98
  - Searching Sequences for Items 2-641
  - Search rule for invoking handlers 2-501, 2-509
  - search-rules** keyword for **terminal-f-argument** attribute 9-21
- String
  - Search Spaces 6-64
  - Search String for HELP A 3-46
  - [Search] Jump menu item 6-67
- String Comparison and String
  - Second 7-356
  - second** function 2-46
  - Second Argument RN-42
  - secondary-name-server**: Namespace Object Attribute 9-22
  - secondary-name-server** keyword for terminal-f-argument attribute 9-22
- Overview of CLM:
  - Second Mode Line 1-62
  - Second Optional Argument RN-41
  - Sections in constraint frames 7-188
  - secure-subnets**: Site Object Attribute 9-20
  - Seed for random number generator 2-118
- Defining Zmail Message Example of a
  - Selecting Zmail Messages Based on the Stack of Recently Seen Messages 6-68
  - Select Buffer 3-30, 3-117
  - SELECT C 3-40
  - Select Commands 1-30
  - SELECT commands 7-137, 7-139
  - SELECT D 1-119, 3-40
  - SELECT E 1-47, 3-12, 3-40, 4-9
  - SELECT F 3-40
  - SELECT HELP 1-83
  - SELECT I 1-189, 3-40, 4-104, 4-295
  - SELECT Key 1-145, 3-40, 7-137, 7-139
  - SELECT L 3-40
  - SELECT M 3-40
  - :select** message 7-98
  - SELECT N 3-40
  - SELECT P 3-40
  - Select References 6-72
  - SELECT T 3-40
  - SELECT X 3-40
  - [Select (R)] Zmail command 6-77
- Elapsed Time in 60ths of a
  - tv**: **\*select-keys\*** variable 7-139
  - Select-method 2-305
  - Select-method functions 2-305
  - :select-method** returned by **typep** 2-9
- array-pop** Takes an Optional
  - tv**: **select-mixin** flavor 7-99
  - :select-pane** message 7-97, 7-187
  - :select-relative** message 7-96
  - :selectable-windows** message 7-96
  - Select Activity Command 1-31, 4-9
  - Select All Buffers As Tag Table (m-X) Zmacs
- si:install-microcode** Takes a
  - Zmail

- command 4-57
- Select All Conversations by References 6-72
- SELECT and FUNCTION Keys 7-135
- Select Arbitrary Format Mail File (m-X) Zmail command 6-95
- Using Two Windows,
  - Select Bottom 3-129
  - Select Buffer (c-X B) Zmacs command 4-59
  - Select Candidate List 1-127, 1-131
  - SELECT C command 1-69, 6-99
  - Select Conversation (m-X) Zmail command 6-69
  - Select Conversation by References 6-72
  - Select Default Previous Buffer 3-117
- Entering Zmacs with
  - SELECT E 1-47, 3-12
  - Selected buffer 3-116
  - :selected-pane** message 7-98, 7-187
  - :selected-window** variable 7-94
  - Selected Activity 7-94
  - :selected-choice-font** init option for
    - tv:basic-choose-variable-values** 7-275
  - selected for dumping 0-20
  - selected for dumping 0-20
  - :selected-pane** init option for
    - tv:basic-constraint-frame** 7-98, 7-187
- tv:
  - The Selected Window and the
    - 3600 FEP files
    - Systems
- The
  - Selected Window and the Selected Activity 7-94
  - SELECT F command 0-35, 5-213
  - Selecting messages 1-66, 6-67
  - Selecting paths 9-38
  - Selecting protocol 9-38
  - Selecting universes 6-64
  - Selecting, Listing, and Examining Zmacs Buffers 3-116
  - Selecting a Character in FED 3-233
  - Selecting a FED Character by Creating a New Character 3-233
  - Selecting a FED Character by Renaming Characters 3-234
  - Selecting a FED Character From the Character Select Menu 3-233
  - Selecting a FED Character From the [Show Font] Display 3-233
  - Selecting a FED Character with the C Command 3-233
  - Selecting a font 3-260
  - Selecting a Font in FED 3-230
  - Selecting a Window Temporarily 7-100
  - Selecting mail files 6-77
  - Selecting messages based on filter 6-49
  - Selecting messages based on string 6-49
  - Selecting multiple menu items 7-241
  - Selecting system to be dumped 0-20
  - Selecting Zmail Filters 6-59
  - Selecting Zmail Mail Buffers and Files 6-77
  - Selecting Zmail Messages 6-67
  - Selecting Zmail Messages Based on Characteristics 6-67
  - Selecting Zmail Messages Based on Position 6-49, 6-67
  - Selecting Zmail Messages Based on the Stack of Recently Seen Messages 6-68
  - Selecting Zmail Universes 6-64
  - Selecting Zmail Windows 6-38
- Configuring and Activities and Window Flavors Related to Window Improvements to Activity and Window Messages About Window FUNCTION Key:
  - Selection 7-94
  - Selection 7-99
  - Selection RN-66
  - Selection 7-96
  - Selection and Notification Commands 1-142

- Universe Selection Display 6-64
- [New filter] Filter Selection Display menu item 6-60
- [New universe] Universe Selection Display menu item 6-64
- [Unseen] Filter Selection Display menu item 6-81
- Changing default selections for tape access 0-17
- Selective evaluation in macro definitions 2-345
- FSEdit [Selective Open] Command 5-235
- [Selective Open] File System Editor menu item 5-233
- :selective** Option for **load-patches** 0-46, 4-245, 4-246, RN-53
- :selective** Option for **load-patches** Has Changed RN-53
- :selective** Option for **make-system** 4-222
- Leaving Zmacs with the SELECT Key 3-40
- tv:\*escape-keys\*** and **tv:\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
- Character SELECT M command 1-57, 6-17
- FED Character Select menu 3-229
- Selecting a FED Character From the Character Select Menu 3-229
- [Mark survey] Select Menu 3-233
- [Read/Create file] Zmail Select menu item 6-79
- Inspecting a select menu item 6-77
- Cannot select method 4-299
- tv:** [Select M] Zmail 6-24
- tv:** **:select** option for **fquery** 7-56
- tv:** **:select-or-create-window-of-flavor** Function 7-240
- selector** special form 2-181
- Mousing on the FED Character Select Pane 3-263
- Using the mouse in the character select pane 3-263
- Select Patch (m-X) 3-190, 4-242
- Select Previous Buffer 3-117
- Select Previous Buffer (c-m-L) Zmacs command 4-59
- selectq-every** special form 2-182
- selectq** special form 2-179
- tv:** Select Referenced Msg 6-71
- tv:** **:select-relative-mixin** flavor 7-99
- select** special form 2-180
- Select System As Tag Table (m-X) Zmacs command 4-57
- Using Two Windows, Can't SELECT T key 1-115
- Select Top 3-129
- select Zmail 6-23
- [Select] Document Examiner menu item 1-127, 1-133
- [Select] Zmail menu item 6-58, 6-64, 6-78, 6-79
- self** 7-289
- Send message to **self** 2-159
- self** variable 2-437
- Self-evaluating atoms and SCL 2-637
- Semicolon 1-233
- Semicolon comment indicator 3-171
- Semicolon macro character 2-26
- Send** Commands 1-31
- send** function 2-160, 2-430
- Send mail 1-159
- SEND protocol 9-126
- send** Service 9-61
- chaos:** **send-pkt** function 9-139
- chaos:** **send-string** function 9-139
- :send-all-exposed-panes** method of **tv:basic-constraint-frame** 7-188
- :send-all-panes** method of **tv:basic-constraint-frame** 7-188
- :send-command** method of **lgp:basic-lgp-stream** 4-124

- :send-coordinates** method of
  - lgp:basic-lgp-stream** 4-124
- Message sender 1-57
- Zmail Sender: Field 6-36
- Sender reply mode 1-67
- zwei:**
  - \*send-header-format\*** variable 6-89
  - send-if-handles** function 2-431
  - :send-if-handles** message 2-454, 5-13
  - Sending messages 2-159
  - Sending a Bug Report in the Debugger 4-264
  - Sending a CLS packet 9-118
  - Sending a message 2-421
  - Sending and Reading Mail 6-27
  - Sending and Receiving Messages and Mail 1-57
  - Sending a Packet to an Interface 9-205
  - Sending command to user process 7-229
  - Sending interactive messages 1-70, 6-101
- Commands for
  - Sending Mail 6-27
  - Sending message to all Lisp Machines at site 1-72, 6-103, 9-135
  - Sending message to another user 1-72, 1-160, 6-104
  - Sending press files to Dover printer 9-128
  - Sending Your Mail 1-62
  - Send mail about patch 3-190, 4-242
  - zwei:**
    - \*send-mail-about-patch\*** 3-190, 4-242
    - Send message to self 2-159
    - [Send Msg] Editor menu item 6-42
    - :send-pane** method of
      - tv:basic-constraint-frame** 7-188
- Chaosnet
  - chaos:**
    - [Abort] Editor menu item 6-42
  - Carrier sense 9-99
  - SNS Sense status packet 9-117
  - Mouse Sensitivities in FED 3-262
  - Mouse Sensitivity 7-311
  - Mouse sensitivity and line items 7-311
  - Case sensitivity of interning 2-604
  - Broadcast Sent connection state 9-121
  - RFC Sent connection state 9-121
  - Backward Sentence 1-50, 3-26, 3-62
  - Backward Kill Sentence 1-53, 3-28
  - Deleting the Current Sentence 3-83
  - Deleting the Previous Sentence 3-83
  - Forward Sentence 3-62
  - Kill Sentence 1-53, 3-28, 3-83
  - Motion by Sentence 3-62
  - Description of Zmacs Sentence Delimiters 3-62, 3-83
  - Deleting Sentences 3-83
  - Introduction to Deleting Sentences 3-83
  - Page separator character 5-5
  - Page separator format directive 5-34
  - Sequence break 8-4, 8-77
  - Sequence Iteration 2-225
  - SCL sequence and list functions and two-argument predicates 2-641
  - Clock sequence break 8-80
  - Disk sequence break 8-80
  - Mouse sequence break 8-80
  - Rearranging mail sequence commands 6-71
  - CLM: Modifying Sequences 2-640
  - Mail Sequences 6-11
  - Sequences resetting 1-201
  - List Sequences (m-X) Zmail Command 6-77
  - CLM: Sequences, Lists 2-641
  - CLM: Searching Sequences for Items 2-641

- CLM: Simple Sequencing 2-639
- Special Forms for Sequencing 2-164
- :get** method of **si**: **serial-stream** 5-252
- :put** method of **si**: **serial-stream** 5-252
- :read-frame** method of **si**: **serial-hdlc-mixin** 5-263
- :write-frame** method of **si**: **serial-hdlc-mixin** 5-263
- si**: **serial-hdlc-stream** flavor 5-263
- Buffered serial I/O 5-251
- Hardware Description for Serial I/O 5-247
- HDLC Serial I/O 5-263
- Introduction to Serial I/O 5-245
- Notes on Serial I/O 5-261
- Parameters for Serial I/O 5-253
- Simple Example: Serial I/O 5-257
- Troubleshooting: Serial I/O 5-259
- The Serial I/O Facility 5-243
- :ascii-characters** serial I/O parameter 5-253
- :baud** serial I/O parameter 5-253
- :carrier-detect** serial I/O parameter 5-253
- :check-framing-errors** serial I/O parameter 5-253
- :check-over-run-errors** serial I/O parameter 5-253
- :check-parity-errors** serial I/O parameter 5-253
- :clear-to-send** serial I/O parameter 5-253
- :data-terminal-ready** serial I/O parameter 5-253
- :flavor** serial I/O parameter 5-253
- :force-output** serial I/O parameter 5-251, 5-253
- :generate-xon-xoff** serial I/O parameter 5-253
- :input-error-character** serial I/O parameter 5-253
- :input-xoff-character** serial I/O parameter 5-253
- :input-xon-character** serial I/O parameter 5-253
- :mode** serial I/O parameter 5-253
- :number-of-data-bits** serial I/O parameter 5-253
- :number-of-stop-bits** serial I/O parameter 5-253
- :output-xoff-character** serial I/O parameter 5-253
- :output-xon-character** serial I/O parameter 5-253
- :parity** serial I/O parameter 5-253
- :request-to-send** serial I/O parameter 5-253
- :unit** serial I/O parameter 5-253
- :xon-xoff-protocol** serial I/O parameter 5-253
- Reading serial I/O parameters 5-251
- Setting serial I/O parameters 5-251
- Creating a serial I/O stream 5-251
- The Serial I/O Stream 5-251
- Using the Terminal Program with Hosts Connected to the Serial Line 5-265
- Serial Stream Handling of Xon - Xoff Characters RN-80
- Input operations on serial streams 5-251
- Output operations on serial streams 5-251
- Server 9-49
- :host** option for server 9-214
- :trusted-p** option for server 9-214
- Gateway server 9-127
- Invoking a server 9-216
- Namespace server 0-87
- PDP-10 file server 5-91
- Primary namespace server 9-24
- UNIX ASCII print server 0-67
- Server functions 9-136
- Server process 9-103
- chaos**: **server-alist** variable 9-51, 9-136
- netl**: **server-function** function 9-216
- netl**: **server-machine**: Host Object Attribute 9-11
- netl**: Server-side: Opening and Closing Connections 9-136
- netl**: **server-argument-descriptions** function 9-216
- netl**: File server computer 5-127



- Finding a
      - Server Description 9-214
      - [Server Errors] File System Maintenance menu item 0-39
  - Lisp Machine Namespace
    - Calling the
      - Server Files 9-24
      - Server Function 9-214
      - Server functions for datagram protocols 9-215
      - server-medium-type** function 9-216
      - server-number-of-arguments** function 9-216
      - Server on UNIX 0-67
      - Server on VMS 0-68
      - Server on VMS 0-76
    - neti:**
      - server-property-list** function 9-216
      - server-protocol-name** function 9-214, 9-216
    - Access files on network file servers 9-125
  - Configuring Large Sites for Multiple Mail Servers 0-64
  - General Arguments: Starting Servers 9-214
    - List all supported servers 9-216
  - Medium Arguments: Starting Servers 9-215
  - Reference Material: Starting Servers 9-216
    - Remote file servers 5-91
    - Starting Servers 9-214
    - TOPS-20 file servers 5-91
  - neti:**
    - Servers (S) 1-187
    - \*servers\*** variable 9-214, 9-216
    - Servers: Defining Protocols 9-51
    - [Server Shutdown] File System Maintenance menu item 0-39
  - band-transfer** Service 9-56
  - file** Service 9-56
  - file:** Service 9-56
  - hardcopy** Service 9-56
  - hardcopy-status** Service 9-58
  - hardcopy-device-status** Service 9-57
  - lispm-finger** Service 9-58
  - login** Service 9-58
  - mail-to-user** Service 9-59
  - Multiple paths to a service 9-43
  - namespace** Service 9-59
  - namespace-timestamp** Service 9-60
  - notify** Service 9-60
  - packet-gateway** Service 9-60
  - packet-gateway:** Service 9-60
  - print-disk-label** Service 9-60
  - pseudonet-gateway** Service 9-61
  - screen-spy** Service 9-61
  - send** Service 9-61
  - show-users** Service 9-62
  - status** Service 9-62
  - store-and-forward-mail** Service 9-62
  - tape** Service 9-63
  - tcp-gateway** Service 9-63
  - time** Service 9-63
  - uptime** Service 9-63
  - who-am-i** Service 9-64
  - :service** attribute 9-38, 9-44
  - Service Descriptions 9-41
  - Service Futures 9-42
  - service:** Host Object Attribute 9-10
  - Service access path 9-41
  - service-access-path-future-connected-p** function 9-42
  - Service for ITS Users 6-95
  - Service Lookup Mechanism 9-208
  - Services 9-38
  - Services 9-40
  - Services 9-38
- net:**
  - Zmail **msgs** Service for ITS Users 6-95
  - Interfacing to the Service Lookup Mechanism 9-208
  - Invoking Services 9-38
  - Protocols and Services 9-40

- Defined
- Disable
- Enable
- Show Disabled
- ASCII character
- Expanded character
- Lisp Machine Character
- Notation Conventions for the Character
- Symbolics Character
- The Character
- Services and Protocols 9-56
- Services Command 1-20
- Services Command 1-22
- Services Command 1-35
- Services supported by host 9-10
- :service** step type 9-44
- Set 1-112, 2-59, 9-4, 9-29
- set 5-5, 5-251, 5-253
- set 2-277
- Set 5-5
- Set 1-235
- Set 5-5
- Set 5-5
- Set Commands 1-31
- set** function 2-561
- Set Variable 3-212
- :set-cursorpos** message 5-20
- :set-cursorpos** method of **tv:blinker** 7-148
- :set-cursorpos** method of **tv:sheet** 7-113
- :set-edges** method of **tv:menu** 7-299
- :set-geometry** method of **tv:menu** 7-214
- set-globally** function 2-561
- :set-label** method of **tv:menu** 7-299
- :set-offline** message to tape streams 5-273
- :set-pointer** 5-115
- :set-pointer** message 5-20
- :set-priority** method of **si:process** 8-90
- :set-quantum** method of **si:process** 8-90
- :set-sheet** method of **tv:blinker** 7-149
- net:** **set-site** function 0-83
- :set-visibility** method of **tv:blinker** 7-148
- :set-vsp** method of **tv:sheet** 7-116
- Set all bits alu function 7-119
- setarg** function 2-166
- zwei:** **\*set-attribute-update-list\*** global variable 3-141, 3-143
- audio:** **set-audio-repeat-count** macro 7-334
- Set Backspace (m-X) Zmacs command 3-141, 3-143, 4-10
- Set Base (m-X) Zmacs command 3-141, 3-143, 4-10
- Set Base Command 1-31
- :set-border-margin-width** method of **tv:borders-mixin** 7-171
- :set-borders** method of **tv:borders-mixin** 7-171
- time:** **set-calendar-clock** function 7-355
- Set Calendar Clock Command 1-32
- Set Chaos-address command 1-201
- :set-character** method of **tv:character-blinker** 7-150
- set-character-translation** function 2-34
- set-char-bit** function 2-269
- Set Command Processor Command 1-32
- Set commands for file and buffer attributes 3-143
- Set Commands for File and Buffer Attributes 3-140
- Set Comment Column (c-X ;) Zmacs command 4-23
- :set-configuration** method of **tv:basic-constraint-frame** 7-188
- :set-current-font** method of **tv:sheet** 7-142
- Set Cursor Position 7-113
- :set-cursorpos** method of **si:make-hardcopy-stream** 3-274
- Set date dumped dump parameter 0-6
- :set-deexposed-typein-action** method of **tv:sheet** 7-116
- :set-deexposed-typeout-action** method of **tv:sheet** 7-116
- Messages to Read or

- Set Default-disk-unit command 1-201  
**:set-default-font** method of **tv:menu** 7-299  
**sl:** **set-default-hardcopy-device** function 1-174, 3-271  
**fs:** **set-default-pathname** 5-133  
**fs:** **set-default-pathname** function 5-163  
**tv:** **set-default-window-size** function 7-165  
**:set-deselected-visibility** method of **tv:blinker** 7-149  
Set Disk-type command 1-201  
Set Display-string command 1-201  
**:set-display-item** message 7-305  
**:set-display-item** method of  
    **tv:basic-scroll-window** 7-305  
Set edge parameters 7-296  
**:set-edges** method of **tv:essential-set-edges** 7-167  
**setf** macro 2-147, 7-308  
**setf** argument 2-639  
Set file-system QFILE Command 9-184  
Set Fill Column (c-X F) Zmacs command 3-196,  
    4-12  
**:set-fill-p** method of **tv:menu** 7-214  
Set Fill Prefix 3-95  
**:set-follow-p** method of **tv:blinker** 7-148  
New Message to Windows:  
**:set-font-map-and-vsp** RN-64  
**:set-font-map-and-vsp** method of **tv:sheet** 7-142,  
    RN-64  
**:set-font-map** method of **tv:sheet** 7-141  
**:set-font** method of  
    **sl:make-hardcopy-stream** 3-274  
Setting the Zmacs Font with  
Set Fonts (m-X) 1-80  
Set Fonts (m-X) Zmacs command 3-141, 3-143, 4-10  
**setf** special form 2-147  
Set Goal Column 3-63  
**:set-gray-array-for-inferiors** method of  
    **tv:gray-deexposed-inferiors-mixin** 7-93  
**:set-gray-array-for-unused-areas** method of  
    **tv:gray-unused-areas-mixin** 7-93  
**:set-half-period** method of **tv:blinker** 7-149  
**:set-highlighted-items** method of  
    **tv:menu-highlighting-mixin** 7-243  
**:set-highlighted-values** method of  
    **tv:menu-highlighting-mixin** 7-243  
**:set-hysteresis** method of  
    **tv:hysteretic-window-mixin** 7-158  
**set-in-closure** function 2-335  
**set-in-instance** function 2-439  
Set Input Base Command 1-33  
**:set-inside-size** method of  
    **tv:essential-set-edges** 7-166  
**:set-interval-string** message to  
    **zwei:standalone-editor-frame** 7-381  
**:set-io-buffer** message 7-132  
**:set-io-buffer** method of **tv:command-menu** 7-231  
**:set-item-list** method of **tv:menu** 7-299  
Set Key (m-X) Zmacs command 4-64  
**:set-label** method of **tv:label-mixin** 7-172  
**time:** **set-local-time** function 7-355  
**fs:** **set-logical-pathname-host** 4-218, 5-188, 5-196,  
    RN-71, RN-72  
**fs:** **set-logical-pathname-host** function 5-198  
Set Lowercase (m-X) Zmacs command 3-142, 3-143,  
    4-10  
SCL and **set-macro-character** function 2-644  
**:set-margin-choices** method of  
    **tv:margin-choice-mixin** 7-290  
Set Microcode-name-and-version command 1-201  
Set Monitor-type command 1-201

- :set-more-p** method of **tv:sheet** 7-116
- :set-name** method of
  - tv:changeable-name-mixin** 7-173
- Set Nofill (m-X) Zmacs command 3-142, 3-143, 4-10
- :set-notification-mode** message 7-131
- Set number of columns 7-214, 7-296
- Set of Condition Flavors 2-486
- Set of constraints 7-175
- set of packet numbers 9-111
- Set Output Base Command 1-33
- Set Package (m-X) Zmacs command 3-138, 3-143, 4-10
- Set Package Command 1-33
- Set Patch File (m-X) Zmacs command 3-143, 4-10
- chaos:** **set-pkt-string** function 9-139
- setplist** function 2-565
- [Set Points] Font Editor draw mode menu item 3-235
- Set Pop Mark (c-SPACE) Zmacs command 3-88, 4-59
- :set-position** method of
  - tv:essential-set-edges** 7-167
- :set-proceed-types** method of **condition** 2-530
- si:** **set-process-wait** function 8-96
- :set-property-list** message 2-474
- setq-globally** special form 1-158, 1-163
- setq** special form 1-162, 2-125, 2-128
- setq-standard-value** special form 1-152
- :set-reverse-video-p** method of **tv:sheet** 7-116
- sets 9-107, 9-125, RN-15
- sets 5-247
- Support for Nonstandard Character Sets 2-275
- [Set Sample] Font Editor menu item 3-253, 3-260
- Character Data Sets and Character Styles 2-267
- Character **:set-save-bits** message to windows 7-79
- tv:** **set-screen-background-gray** function 7-92
- tv:** **set-screen-deexposed-gray** function 7-92
- si:** **set-screen-hardcopy-device** function 1-174, 3-271
- Set Site Command 1-33
- :set-size-in-characters** method of **tv:sheet** 7-166
- :set-size** method of **tv:essential-set-edges** 7-166
- :set-size** method of **tv:rectangular-blinker** 7-150
- Set sleep time between updates Peek command 1-185, 4-303
- :set-space** method of **tv:margin-space-mixin** 7-169
- setsyntax** 2-36
- setsyntax** 2-36
- setsyntax** 2-36
- setsyntax** 2-36
- setsyntax** function 2-36
- set-syntax-#-macro-char** function 2-27, 2-36
- Set Syntax (m-X) 3-140
- set-syntax-from-char** function 2-34
- set-syntax-from-char** function 2-643
- set-syntax-from-description** function 2-34
- set-syntax-macro-char** function 2-26, 2-35
- set-syntax-macro-char** Takes an Optional Fourth Argument RN-40
- setsyntax-sharp-macro** function 2-36
- si:** **set-system-file-properties** function 4-252
- New Function **si:** **set-system-file-properties** Operates on a Declared System RN-53
- si:** **set-system-source-file** 4-217, 4-218, 4-219
- set-system-status** function 4-251
- SETTABLE-PROPERTIES file system property 9-186
- :settable-instance-variables** Option for **defflavor** 2-441

- Settable Zmacs Variables 3-211
  - Set Tab Width (m-X) Zmacs command 3-143, 4-10
- netl:**
  - set-terminal-parameters** function 9-69
  - Set Time Command 1-33
  - Setting Fonts 1-78
  - Setting variables 2-125, 2-126, 3-211
  - Setting/Popping the Mark 3-88
  - Setting and Saving Zmail Options 1-171, 6-57
  - Setting Buffer Attributes 3-141
  - Setting Chaosnet address 1-201
  - Setting Command Processor Special Characters 1-166
- Init File Form:
  - Setting Default Major Mode 1-168, 3-213
  - Setting disk type 1-201, 1-213
- Init File Form:
  - Setting Editor Variables in Init Files 1-167, 3-213
  - Setting Find File Not to Create New Files 1-168, 3-214
- Example of
  - Setting Fonts in the Input Editor 1-78
  - Setting Fonts in the Input Editor 1-79
  - Setting Fonts in Zmacs 1-79
  - Setting Generation Retention Count on Files in Dired 3-152
- Init File Form:
  - Setting Goal Column for Real Line Commands 1-168, 3-214
  - Setting Key Bindings in Init Files 1-168, 3-215
  - Setting Mode Hooks in Init Files 1-170, 3-214
  - Setting parameter options to programs 7-266
- How to Specify Zmacs Variable
  - Settings 3-210
  - Setting serial I/O parameters 5-251
- Base and Syntax Default
  - Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
  - Setting the Box Size in the FED Drawing Pane 3-256
  - Setting the Command Processor Mode 1-165
  - Setting the Command Processor Prompt 1-165
  - Setting the Height and Width of the FED Drawing Pane 3-256
  - Setting the Key 3-208
- Overview of
  - Setting the Lisp Comment Column in Zmacs 3-172
  - Setting the Major Mode 3-156
  - Setting the Package 3-138
  - Setting the Syntax for Symbolics Common Lisp 3-140
- Getting and
  - Setting the Time 7-355
  - Setting the Trap-on-exit Flag for the Current and All Outer Frames 4-266
  - Setting the Zmacs Font in the Attribute List 1-80
  - Setting the Zmacs Font with Set Fonts (m-X) 1-80
  - Setting the Zmacs Major Mode 3-155
  - Setting up Mailer options 0-61
- Special Forms for
  - Setting Variables 2-128
  - Setting Variables in Init Files Has Changed RN-10
  - Setting Zmail Keywords 6-75
- Character
  - set translation 5-10
- QFILE Character
  - Set Translation 9-156
- Disable all character
  - set translation in ASCII files 5-91
- QFILE NORMAL character
  - set translation mode 9-156
- QFILE RAW character
  - set translation mode 9-156
- QFILE SUPER-IMAGE character
  - set translation mode 9-156
- Effect of Character
  - Set Translation on Direct Access File Streams 5-10
  - :set-truncate-line-out** method of **tv:sheet** 7-118
  - :set-type-alist** message 7-311
- meter:**
  - setup-monitor** function 8-62
  - :setup** method of
    - tv:choose-variable-values-window** 7-275
    - :setup** method of **tv:multiple-choice** 7-255
  - Set User ID Command 1-34

- Set Variable (m-X) Zmacs command 3-212
- :set-variables** method of
  - tv:choose-variable-values-window** 7-276
- Set Visited File Name (m-X) Zmacs command 3-122
- Set Vsp (m-X) Zmacs command 3-143, 4-10
- :set-warm-boot-action** method of **sl:process** 8-91
- [Set \] Inspector menu item 4-298
- seventh** function 2-47
- several columns 7-203, 7-247
- Sexp 3-65
- Sexp 1-53, 3-28, 3-79
- Sexp 3-65
- Sexp 1-53, 3-28, 3-79
- Sexp 3-91
- Sexp (c-m-K) Zmacs command 4-60
- Sexp (c-m-Q) Zmacs command 4-26
- Sexp (c-m-RUBOUT) Zmacs command 4-60
- Sexps 3-79
- :sexp tv:choose-variable-values** variable
  - type 7-259, RN-59
- S Font Editor command 3-260
- :sg-area** option for **make-process** 8-85
- :sg-area** option for **make-stack-group** 8-5
- sys:** **sg-previous-stack-group** function 8-5
- shadow** function 2-574, 2-593, 2-612
- Shadowing 2-571
- Shadowing Symbols 2-574, 2-593, 2-611
- shadowing-import** function 2-573, 2-574, 2-593, 2-611
- Shadowing-import operation 2-573
- :shadowing-import** option for **defpackage** 2-573, 2-574
- :shadowing-import** proceed type 2-619
- :shadowing-import** Option for **defpackage** and **make-package** 2-600, 2-602
- :shadowing-import** option for **make-package** 2-573, 2-574
- Shadowing package names 2-582
- :shadow** option for **defpackage** 2-574
- :shadow** Option for **defpackage** and **make-package** 2-599, 2-602
- :shadow** option for **make-package** 2-574
- :shadow** proceed type 2-619
- Shadow Symbols 2-611
- shape 7-150
- shape 7-175
- Shape 1-149
- Shared file system 5-127
- :share** proceed type 2-619
- :share** symbol in **:if-locked** option for **open** 5-222, 8-43
- Sharing 2-569
- Sharing Among Packages 2-589
- Sharing I/O buffers 7-176
- Sharing of Symbols Among Packages 2-569
- Sharp-sign introducing reader macros 1-233
- Sharp-sign macro character 2-26
- sharp-sign reader macro 4-329
- sharp-sign reader macro 4-329
- Sharp-sign Reader Macros 2-27
- sheet** 7-108, 7-117
- sheet** 7-142
- sheet** 7-120
- sheet** 7-120
- sheet** 7-121
- sheet** 4-116
- Menus with
  - Backward
  - Backward Kill
  - Forward
  - Kill
  - Mark
  - Kill
  - Indent
  - Backward Kill
  - Exchange
- Functions That Import, Export, and
  - Blinker
  - Change in window
  - Mouse Cursor
- How the Package System Allows Symbol
  - Examples of Symbol
- #M**
- #Q**
- :backspace-not-overprinting-flag** init option for **tv:**
  - :baseline** method of **tv:**
  - :bitblt-from-sheet** method of **tv:**
  - :bitblt** method of **tv:**
  - :bitblt-within-sheet** method of **tv:**
  - :blinker-p** init option for **tv:**

|                               |                     |       |                     |
|-------------------------------|---------------------|-------|---------------------|
| :bottom                       | init option for tv: | sheet | 7-163               |
| :bottom-margin-size           | method of tv:       | sheet | 7-167               |
| :change-of-size-or-margins    | method of tv:       | sheet | 4-116, 7-166        |
| :character-height             | init option for tv: | sheet | 7-164               |
| :character-width              | init option for tv: | sheet | 7-164               |
| :character-width              | method of tv:       | sheet | 7-114               |
| :clear-char                   | method of tv:       | sheet | 7-113               |
| :clear-window                 | method of tv:       | sheet | 7-114               |
| :clear-rest-of-line           | method of tv:       | sheet | 7-113               |
| :clear-rest-of-window         | method of tv:       | sheet | 7-113               |
| :compute-motion               | method of tv:       | sheet | 7-114               |
| :cr-not-newline-flag          | init option for tv: | sheet | 7-108, 7-117        |
| :current-font                 | method of tv:       | sheet | 7-142               |
| :deexposed-typein-action      | init option for tv: | sheet | 7-116               |
| :deexposed-typein-action      | method of tv:       | sheet | 7-116               |
| :deexposed-typeout-action     | init option for tv: | sheet | 7-116               |
| :deexposed-typeout-action     | method of tv:       | sheet | 7-116               |
| :delete-char                  | method of tv:       | sheet | 7-114               |
| :delete-line                  | method of tv:       | sheet | 7-114               |
| :delete-string                | method of tv:       | sheet | 7-114               |
| :draw-char                    | method of tv:       | sheet | 7-121               |
| :draw-rectangle               | method of tv:       | sheet | 7-124               |
| :edges                        | init option for tv: | sheet | 7-163               |
| :edges                        | method of tv:       | sheet | 7-167               |
| :font-map                     | init option for tv: | sheet | 7-142               |
| :font-map                     | method of tv:       | sheet | 7-141               |
| :height                       | init option for tv: | sheet | 7-163               |
| :home-cursor                  | method of tv:       | sheet | 7-113               |
| :home-down                    | method of tv:       | sheet | 7-113               |
| :init                         | method of tv:       | sheet | 4-116, 7-107        |
| :insert-char                  | method of tv:       | sheet | 7-112               |
| :insert-line                  | method of tv:       | sheet | 7-112               |
| :insert-string                | method of tv:       | sheet | 7-112               |
| :inside-edges                 | method of tv:       | sheet | 7-167               |
| :inside-height                | init option for tv: | sheet | 7-163               |
| :inside-size                  | init option for tv: | sheet | 7-163               |
| :inside-size                  | method of tv:       | sheet | 4-116, 7-166        |
| :inside-width                 | init option for tv: | sheet | 7-163               |
| :integral-p                   | init option for tv: | sheet | 7-164               |
| :left                         | init option for tv: | sheet | 7-163               |
| :left-margin-size             | method of tv:       | sheet | 7-167               |
| :margins                      | method of tv:       | sheet | 7-167               |
| :more-p                       | init option for tv: | sheet | 7-115               |
| :more-p                       | method of tv:       | sheet | 7-115               |
| :name                         | init option for tv: | sheet | 7-171               |
| :name                         | method of tv:       | sheet | 7-172               |
| :position                     | init option for tv: | sheet | 7-163               |
| :position                     | method of tv:       | sheet | 7-166               |
| :read-cursorpos               | method of tv:       | sheet | 7-113               |
| :refresh                      | method of tv:       | sheet | 4-116, 4-129, 7-113 |
| :reverse-video-p              | method of tv:       | sheet | 7-116               |
| :right                        | init option for tv: | sheet | 7-163               |
| :right-margin-character-flag  | init option for tv: | sheet | 7-117               |
| :right-margin-size            | method of tv:       | sheet | 7-167               |
| :set-cursorpos                | method of tv:       | sheet | 7-113               |
| :set-vsp                      | method of tv:       | sheet | 7-116               |
| :set-current-font             | method of tv:       | sheet | 7-142               |
| :set-deexposed-typein-action  | method of tv:       | sheet | 7-116               |
| :set-deexposed-typeout-action | method of tv:       | sheet | 7-116               |
| :set-font-map-and-vsp         | method of tv:       | sheet | 7-142, RN-64        |
| :set-font-map                 | method of tv:       | sheet | 7-141               |
| :set-more-p                   | method of tv:       | sheet | 7-116               |
| :set-reverse-video-p          | method of tv:       | sheet | 7-116               |
| :set-size-in-characters       | method of tv:       | sheet | 7-166               |
| :set-truncate-line-out        | method of tv:       | sheet | 7-118               |
| :size-in-characters           | method of tv:       | sheet | 7-166               |

- :size** init option for **tv**: **sheet** 7-163
- :size** method of **tv**: **sheet** 7-166
- :string-length** method of **tv**: **sheet** 7-115
- :string-out** method of **tv**: **sheet** 7-111
- :superior** init option for **tv**: **sheet** 7-107
- :tab-nchars** init option for **tv**: **sheet** 7-108, 7-117
- :top** init option for **tv**: **sheet** 7-163
- :top-margin-size** method of **tv**: **sheet** 7-167
- :truncate-line-out** method of **tv**: **sheet** 7-118
- :tyo** method of **tv**: **sheet** 7-111
- :vsp** init option for **tv**: **sheet** 7-116
- :vsp** method of **tv**: **sheet** 7-116
- :who-line-documentation-string** method of **tv**: **sheet** 7-152
- :width** init option for **tv**: **sheet** 7-163
- :x** init option for **tv**: **sheet** 7-163
- :y** init option for **tv**: **sheet** 7-163
- tv**: **sheet** flavor 4-116, 4-133
- Drawing on unprepared **tv**: **sheet** error 2-537
- tv**: **sheet-following-blinker** function 4-133, 7-149
- tv**: **sheet-force-access** special form 7-82, 7-84
- Shift bits 2-114
- Shift keys 1-49, 3-6
- shift keys 7-160
- Shift Lock in Lisp Mode 1-170, 3-214
- Shift Lock Mode (m-X) Zmacs command 4-12
- :short** day-of-the-week-representation 7-370
- short-float** format 2-23
- short-name**: Host Object Attribute 9-7
- short-name** Option for **defsystem** 4-194
- Show** Commands 1-35
- Show Documentation 3-47
- Show Overview 1-127
- [Show (M)] Document Examiner menu item 1-127, 1-133
- [Show (R)] Document Examiner menu item 1-125, 1-133
- dbg**: **\*show-backtrace\*** variable 4-268
- si**: **show-configuration** function 1-200, 1-224
- show-users** Service 9-62
- Show Command Processor Status Command 1-35
- Show Configuration command 1-200
- Show Directory (m-X) Zmacs command 3-132
- Show Directory/View Directory 3-132
- Show Directory command 1-35, 1-200
- Show Disabled Services Command 1-35
- Show Disk-label command 1-200
- Show Documentation (an Overview) 1-122
- Show Documentation Command 1-35
- Show Draft Disposition (m-X) Zmail command 6-42
- Show FEP Directory Command 1-36
- Show File (m-X) Zmacs command 3-132
- Show File Command 1-36, 1-200
- Show Font Command 1-36
- Show Font Displays 3-263
- [Show Font] Display 3-233
- [Show Font] Font Editor menu item 3-227, 3-233, 3-234, 3-260
- [Show Font] Font Editor menu item 3-234, 3-263
- Show GC Status Command 1-37
- Show Herald Command 1-37
- Show Hosts Command 1-37
- Showing Region 3-129
- Showing the Mark 3-88
- Show Legal Notice Command 1-37
- show-line** method of
- si:make-hardcopy-stream** 3-275
- Symbolic names of  
Init File Form: Electric  
Electric
- Mousing on the FED List Fonts and  
Selecting a FED Character From the
- Using the mouse with
- Two Windows



Show Mail Command 1-38  
 Show Notifications Command 1-38  
 Show Object Command 1-38  
**tv:** **show-partially-visible-mixin** flavor 7-87  
**:show-rectangle** method of  
**si:make-hardcopy-stream** 3-274  
 Show Status command 1-200  
**FEP** Show Status Command Output 1-217  
 Show System Modifications Command 1-39  
 Show Users Command 1-40  
 Show Version command 1-200  
 [Show] 1-133  
 [Show] Document Examiner menu item 1-122  
 Shutdown command 1-201  
**[Server** Shutdown] File System Maintenance menu item 0-39  
**si** package 2-615  
**si:** prefix 1-234  
**si:advise-1** function 4-283  
**si:advised-functions** variable 4-283  
**si:alphabetic** syntax description 2-34  
**si:area-predicate-all-areas** function 8-108  
**si:area-predicate-areas-with-objects** function 8-108  
**si:\*automatically-recover-from-hung-disks\***  
 variable 8-38  
**si:\*batch-mode-p\*** variable 4-229  
**si:break** syntax description 2-34  
**si:check-memory-scan** macro 8-111  
**si:checksum-band** function 0-52  
**si:circlex** syntax description 2-34  
**si:compare-band** function 0-53  
**si:coroutine-bidirectional-stream** flavor 5-28  
**si:coroutine-input-stream** flavor 5-28  
**si:coroutine-output-stream** flavor 5-28  
**si:\*count-disk-device-checks\*** variable 8-41  
**si:\*count-disk-ecc-errors\*** variable 8-41  
**si:\*count-disk-errors-lost\*** variable 8-41  
**si:\*count-disk-hung-restarts\*** variable 8-41  
**si:\*count-disk-not-ready\*** variable 8-41  
**si:\*count-disk-other-errors\*** variable 8-41  
**si:\*count-disk-overruns\*** variable 8-41  
**si:\*count-disk-search-errors\*** variable 8-41  
**si:\*count-disk-seek-errors\*** variable 8-41  
**si:\*count-disk-select-errors\*** variable 8-41  
**si:\*count-disk-state-machine-errors\*** variable 8-41  
**si:\*count-disk-stops-lost\*** variable 8-41  
**si:\*count-total-disk-errors\*** variable 8-41  
**si:\*cp-comtab\*** variable 7-53  
**si:\*cp-prompt\*** variable 1-166  
**si:\*cp-blank-line-mode\*** variable 1-166  
**si:\*cp-command-dispatchers\*** variable 1-166  
**si:\*cp-default-blank-line-mode\*** variable 7-43  
**si:\*cp-default-dispatch-mode\*** variable 7-43  
**si:\*cp-default-prompt\*** variable 7-44  
**si:\*cp-dispatch-mode\*** variable 1-166  
**si:\*cp-form-dispatchers\*** variable 1-166  
**si:\*cp-timeout-default\*** variable 1-167  
**si:create-comtab** function 7-53  
**si:data-types** function 8-13  
**si:default-quantum** variable 8-90  
**si:\*default-sequence-break-interval\*** variable 8-81  
**si:define-defsystem-special-variable** special  
 form 4-214  
**si:define-make-system-special-variable** special  
 form 4-227  
**si:define-simple-method-combination** macro 2-459  
**si:define-simple-transformation** special form 4-214

**si:destruct-description** property 2-407  
**si:delete-comtab** function 7-53  
**si:describe-resource** function 8-136  
**si:describe-system-versions** function 0-85  
**si:digested-lambda** functions 2-297, 2-300, 2-304, 2-305  
**si:disk-array** resource 8-31  
**si:disk-event** resource 8-32  
**si:disk-array-area** variable 8-31  
**si:disk-array-block-count** function 8-31  
**si:disk-array-checkwords** function 8-31  
**si:disk-block-length-in-bytes** variable 8-30  
**si:disk-error-event** flavor 8-38  
**si:disk-event-count** function 8-33  
**si:disk-event-enq-task** function 8-33  
**si:disk-event-error-cylinder** function 8-34  
**si:disk-event-error-dcw** function 8-35  
**si:disk-event-error-flushed-transfer-count** function 8-34  
**si:disk-event-error-head** function 8-34  
**si:disk-event-error-sector** function 8-34  
**si:disk-event-error-string** function 8-34  
**si:disk-event-error-type** function 8-33, 8-36  
**si:disk-event-error-unit** function 8-34  
**si:disk-event-size** function 8-33  
**si:disk-event-suppress-error-recovery** function 8-34, 8-36  
**si:disk-event-task-done-p** function 8-33  
**si:disk-sector-data-size32** variable 8-30  
**si:display-item-list** function 7-19, 7-283, RN-57  
**si:doublequote** syntax description 2-34  
**si:edit-fep-label** function 8-58  
**si:encapsulate** macro 2-326  
**si:encapsulated-definition** debugging info alist element 2-325  
**si:encapsulated-function** variable 2-325  
**si:encapsulation-standard-order** variable 2-327  
**si:eq-hash-table** flavor 2-71  
**si:equal-hash** function 2-75  
**si:equal-hash-table** flavor 2-72  
**si:\*file-transformation-function\*** variable 4-229  
**si:find-comtab** function 7-53  
**si:\*flavor-compilations\*** variable 2-440  
**si:flavor-allowed-init-keywords** function 2-439, 4-144  
**si:\*flavor-compile-trace\*** variable 2-440  
**si:flavor-default-init-get** function 2-440  
**si:flavor-default-init-putprop** function 2-440  
**si:flavor-default-init-remprop** function 2-440  
**si:full-gc** function 8-116, 8-128  
**si:function-spec-get** function 2-322  
**si:function-spec-putprop** function 2-322  
**si:\*gc-parameters\*** variable 8-115  
**si:gc-area-reclaim-report** variable 8-125  
**si:gc-flip-inhibit-time-until-warning** variable 8-128  
**si:gc-flip-minimum-ratio** variable 8-126  
**si:gc-flip-ratio** variable 8-126  
**si:gc-process-background-priority** variable 8-128  
**si:gc-process-foreground-priority** variable 8-128  
**si:gc-process-immediate-reclaim-priority** variable 8-127  
**si:gc-reclaim-ephemeral-immediately** variable 8-127  
**si:gc-reclaim-immediately** variable 8-127  
**si:gc-reclaim-immediately-if-necessary** variable 8-127

- si:gc-report-stream** variable 8-125
- si:gc-warning-interval** variable 8-126
- si:gc-warning-ratio** variable 8-126
- si:gc-warning-threshold** variable 8-126
- si:get-release-version** function 4-250
- si:get-site-option** function 9-31
- si:get-system-version** function 0-85, 4-249
- si:\*hardcopy-default-fonts\*** variable 1-174, 3-271
- si:hardcopy-from-stream** function 3-274
- si:hardcopy-text-file** function 3-273
- si:inhibit-gc-flips** macro 8-125
- si:initial-process** variable 8-80
- si:initial-readtable** variable 1-180, 2-33
- si:initialization-keywords** variable 8-69
- si:install-microcode** function 0-49, 1-210, 5-217
- si:install-microcode** Takes a Second Optional Argument RN-41
- si:\*interactive-bindings\*** 1-152
- si:interactive-stream** flavor 7-3
- si:lexical-closure** and lexical scoping RN-12
- si:lisp-top-level** function 1-151
- si:lisp-top-level1** function 1-151
- si:login-history** variable 0-48
- si:login-to-sys-host** function 0-83
- si:loop-tassoc** function 2-228
- si:loop-tequal** function 2-228
- si:loop-tmember** function 2-228
- si:loop-named-variable** function 2-229
- si:loop-use-system-destructuring?** variable 2-221
- si:machine-model** function 1-224
- si:\*macroexpand-hook\*** RN-11
- si:\*macroexpand-hook\*** variable 2-375
- si:macro** syntax description 2-34
- si:make-coroutine-bidirectional-stream** function 5-27
- si:make-coroutine-input-stream** function 5-27
- si:make-coroutine-output-stream** function 5-27
- si:make-hardcopy-stream** function 3-274, 4-126
- si:make-process-queue** function 8-84
- si:make-serial-stream** function 5-252
- si:\*make-system-forms-to-be-evald-after\*** variable 4-229
- si:\*make-system-forms-to-be-evald-before\*** variable 4-228
- si:\*make-system-forms-to-be-evald-finally\*** variable 4-229
- si:map-over-areas** function 8-109
- si:map-over-objects** function 8-111
- si:map-over-objects-in-area** function 8-111
- si:map-over-objects-in-region** function 8-110
- si:map-over-regions** function 8-110
- si:map-over-regions-of-area** function 8-109
- si:map-system-files** function 4-252
- si:map-system-files** Operates on a Declared System RN-53
- si:mount-disk-unit** function 8-58
- si:\*n-disk-retries\*** variable 8-36, 8-38
- si:null-stream** function 5-25
- si:parse-host** function 9-31
- si:patch-loaded-p** function 4-250
- si:patch-system-pathname** function 4-237, RN-52
- si:pkg-area** variable 8-107
- si:print-list** function 5-73
- si:print-object** function 5-73
- si:print-readably** variable 2-18
- si:print-fep-filesystem** function 8-59

New Function

**si:print-login-history** function 0-48, 1-182  
**si:\*print-object-error-message\*** variable 2-543  
**si:print-system-status-warning** function 0-85  
**si:process** flavor 8-95  
**si:process-dequeue** function 8-84  
**si:process-enqueue** function 8-84  
**si:process-queue-locker** function 8-84  
**si:property-list-mixin** flavor 2-473  
**si:\*query-type\*** variable 4-229  
**si:random-initialize** function 2-119  
**si:random-create-array** function 2-119  
**si:read-recursive** function 2-27  
**si:\*read-extended-ibase-signed-number\***  
variable 2-21  
**si:\*read-extended-ibase-unsigned-number\***  
variable 2-21  
**si:read-fep-label** function 8-58  
**si:\*read-multi-dot-tokens-as-symbols\***  
variable 2-26  
**si:receive-band** function 0-50  
**si:\*redo-all\*** variable 4-229  
**si:region-predicate-all-regions** function 8-108  
**si:region-predicate-copyspace** function 8-109  
**si:region-predicate-list** function 8-108  
**si:region-predicate-not-stack-list** function 8-109  
**si:region-predicate-structure** function 8-108  
**si:rename-within-new-definition-maybe**  
function 2-329  
**si:resequence-fep-filesystem** function 8-59  
**si:reset-process-queue** function 8-84  
**si:return-disk-event-task** function 8-33  
**si:sb-on** function 8-77, 8-80  
**si:scanning-through-memory** macro 8-111  
**si:serial-hdlc-stream** flavor 5-263  
**si:set-default-hardcopy-device** function 1-174, 3-271  
**si:set-process-wait** function 8-96  
**si:set-screen-hardcopy-device** function 1-174, 3-271  
**si:set-system-file-properties** function 4-252  
**si:set-system-file-properties** Operates on a  
Declared System RN-53  
**si:set-system-source-file** 4-217, 4-218, 4-219  
**si:show-configuration** function 1-200, 1-224  
**si:\*signal-disk-errors-from-enqueue-p\***  
variable 8-38  
**si:\*silent-p\*** variable 4-229  
**si:simple-process** flavor 8-95  
**si:single** syntax description 2-34  
**si:site-initialization-list** variable 0-83  
**si:slash** syntax description 2-34  
**si:\*standard-bindings\*** 1-152  
**si:standard-readtable** RN-43  
**si:standard-readtable** variable 1-154  
**si:system-additional-info** variable 0-85  
**si:\*system-being-defined\*** variable 4-214  
**si:\*system-being-made\*** variable 4-228  
**si:system-version-info** function 4-249  
**si:\*top-level-transformations\*** variable 4-229  
**si:\*trace-bar-p\*** variable 4-279  
**si:\*trace-bar-rate\*** variable 4-279  
**si:\*trace-columns-per-level\*** variable 4-279  
**si:\*trace-old-style\*** variable 4-280  
**si:transmit-band** function 0-51  
**si:\*timeout-default\*** variable 5-71, 7-39  
**si:unadvise-1** function 4-283  
**si:unbin-file** function 4-300  
**si:unencapsulate-function-spec** function 2-328

New Function

Break and the Debugger Now Bind **readtable** to

- New Macro:
  - :disk-event** method of
  - :error-type** method of
  - :flushed-transfer-count** method of
  - :area** init option for
  - :growth-factor** init option for
  - :rehash-before-cold** init option for
  - :size** init option for
  - :rehash-threshold** init option for
  - SCL and **zl**
- si:**
- Condition
  - Signallers 2-520
  - Signalling 2-482
  - signalling 8-3
  - Signalling Conditions 2-501, 4-133
  - Signalling Errors 2-502
  - Signalling functions 2-482, 2-503
  - Signalling Mechanism 2-501, 2-509
  - Signalling a condition 2-479
  - Signalling and Handling 2-479
  - Signalling and Handling Conditions 2-479
  - Signalling Conditions 2-503
  - Signalling proceedable conditions 2-521
  - Signalling Simple Conditions 2-502
  - signal-proceed-case** special form 2-517, 2-521
  - Signals 9-150
  - signals 9-98
  - signals 5-5
  - Signals to Pins 5-247
  - Signals to Pins in Asynchronous Null Modems 5-247
  - sign character in ITS pathnames 5-185
  - sign character in logical pathnames for quoting 5-186
  - :signed** option for **format:onum** 5-45
  - Significant bits 2-115
  - sign of a number 2-97
  - signp** special form 2-97
  - signum** function 2-106
  - si:\*hardcopy-default-fonts\*** 1-174, 3-271
  - si:\*hardcopy-default-fonts\*** 1-174, 3-271
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-78
  - si:heap** 2-79
  - si:heap** 2-79
  - si:heap** 2-79
- :default-font** keyword to
  - :header-font** keyword to
  - :clear** method of
  - :delete-by-item** method of
  - :delete-by-key** method of
  - :describe** method of
  - :empty-p** method of
  - :find-by-item** method of
  - :find-by-key** method of
  - :insert** method of
  - :remove** method of
  - :top** method of
- si:unwire-words** 7-328
- si:\*user\*** variable 9-29
- si:vanilla-flavor** flavor 2-453, 4-142
- si:verify-fep-filesystem** function 8-59
- si:verticalbar** syntax description 2-34
- si:wait-for-disk-done** function 8-33
- si:wait-for-disk-event** function 8-33
- si:wait-for-disk-event-task** function 8-33
- si:whitespace** syntax description 2-34
- si:wire-structure** 7-328
- si:wire-words** 7-328
- si:wire-consecutive-words** 7-328
- si:with-disk-event-task** special form 8-32
- si:write-fep-label** function 8-58
- Side Effects 2-212
- si:define-simple-method-combination** RN-32
- si:disk-error-event** 8-38
- si:disk-error-event** 8-39
- si:disk-error-event** 8-39
- si:eq-hash-table** 2-71
- si:eq-hash-table** 2-71
- si:eq-hash-table** 2-71
- si:eq-hash-table** 2-71
- si:equal-hash-table** 2-72
- si:\*flag-wrong-type-strings\*** 2-637, 2-642
- signal** function 2-482, 2-503, 2-517, 4-112, 4-133
- :signal-condition** option for **fquery** 7-56
- \*signal-disk-errors-from-enqueue-p\*** variable 8-38

- :add-asynchronous-character** method of
- :any-tyl** method of
- :any-tyl-no-hang** method of
- :asynchronous-character-p** method of
- :asynchronous-characters** init option for
- :clear-input** method of
- :finish-typeout** method of
- :force-rescan** method of
- :handle-asynchronous-character** method of
- :input-editor** method of
- :item** method of
- :line-in** method of
- :listen** method of
- :list-tyl** method of
- :noise-string-out** method of
- :read-bp** method of
- :remove-asynchronous-character** method of
- :replace-input** method of
- :rescanning-p** method of
- :start-typeout** method of
- :string-in** method of
- :string-line-in** method of
- :tyl** method of
- :tyl-no-hang** method of
- :untyl** method of
- si:**
- si:interactive-stream** 7-17
- si:interactive-stream** 7-11
- si:interactive-stream** 7-11
- si:interactive-stream** 7-17
- si:interactive-stream** 7-17
- si:interactive-stream** 7-12
- si:interactive-stream** 5-71, 7-39
- si:interactive-stream** 5-71, 7-39
- si:interactive-stream** 7-17
- si:interactive-stream** 5-70, 7-38
- si:interactive-stream** 7-19, RN-57
- si:interactive-stream** 7-12
- si:interactive-stream** 7-12
- si:interactive-stream** 7-12
- si:interactive-stream** 5-72, 7-40
- si:interactive-stream** 5-72, 7-40
- si:interactive-stream** 7-18
- si:interactive-stream** 5-71, 7-39
- si:interactive-stream** 5-71, 7-39
- si:interactive-stream** 5-70, 7-38
- si:interactive-stream** 7-13
- si:interactive-stream** 7-14
- si:interactive-stream** 7-11
- si:interactive-stream** 7-12
- si:interactive-stream** 7-12
- \*silent-p\*** variable 4-229
- :silent** Option for **load-patches** 0-46, 4-246
- :silent** Option for **make-system** 4-222
- si:make-hardcopy-stream** 3-275
- si:make-hardcopy-stream** 3-274
- si:make-hardcopy-stream** 3-274
- si:make-hardcopy-stream** 3-274
- si:make-hardcopy-stream** 3-275
- si:make-hardcopy-stream** 3-274
- si:make-hardcopy-stream** 3-275
- Simple conditions 2-482
- simple** function 9-134
- Simple process 8-95
- Simple transaction 9-114
- :simple-p** method of **si:process** 8-91
- simple-process** flavor 8-95
- Simple Conditions 2-502
- Simple Defaulting 5-130, 5-131
- Simple Example: Serial I/O 5-257
- Simple Function Definitions 2-300
- Simple Lambda Lists 2-154
- Simple method combination definition RN-32
- Simple Momentary Menu 7-223
- Simple momentary window 7-223
- Simple pathname usage 5-129
- :simple-p** option for **make-process** 8-85
- Simple Screen Output 4-14
- Simple Sequencing 2-639
- simple transaction packet 9-114
- simple transformation 4-201
- Simple Usage of the Pathname System 5-129
- Simple Use of Flavors 2-425
- Simple Zmail Message Movement Commands 6-49
- Simultaneous linear equations 2-258
- sin** function 2-106
- sind** function 2-106
- Sine 2-106
- Sine Wave Example 7-339
- Single quote 2-161
- Single-character symbol 2-34
- cl:**
- single-float** format 2-23
- :convert-to-device-units** method of
- :eject-page** method of
- :set-cursorpos** method of
- :set-font** method of
- :show-line** method of
- :show-rectangle** method of
- :un-relative-coordinates** method of
- chaos:**
- si:**
- Signalling
- Run-example with
- Examples of
- tv:momentary-menu** Example 1:
- CLM:
- ANS Answer to a
- :fasload**

- sys:**
- Tools for Compiling
  - :active-p** method of
  - :arrest-reason** method of
  - :arrest-reasons** method of
  - :flush** method of
  - :initial-form** method of
  - :initial-stack-group** method of
  - :interrupt** method of
  - :kill** method of
  - :name** method of
  - :preset** method of
  - :priority** method of
  - :quantum-remaining** method of
  - :quantum** method of
  - :reset** method of
  - :revoke-arrest-reason** method of
  - :revoke-run-reason** method of
  - :run-reason** method of
  - :run-reasons** method of
  - :runnable-p** method of
  - :set-priority** method of
  - :set-quantum** method of
  - :set-warm-boot-action** method of
  - :simple-p** method of
  - :stack-group** method of
  - :wait-function** method of
  - :wait-argument-list** method of
  - :warm-boot-action** method of
  - :whostate** method of
  - :property-list** init option for
  - :clock** option for
  - :disk** option for
  - :mouse** option for
  - :get** method of
  - :put** method of
  - :read-frame** method of
  - :write-frame** method of
  - Configuring a
  - Configuring your
  - Defining a new
  - Sending message to all Lisp Machines at
  - Registering Users and Hardware in the
- math:**
- :single-float** returned by **typep** 2-9
- Single-floats 2-4, 2-22, 2-89
- :single** argument to **setsyntax** 2-36
- single-float-p** function 2-8
- Single Functions 4-318
- :single** option for **with-open-file** 5-91
- Single-precision floating-point numbers 2-89
- Single quotation mark 1-233
- single** syntax description 2-34
- singular-matrix** flavor 2-535
- Singular matrix operation error 2-535
- sinh** function 2-107, RN-35
- si:process** 8-92
- si:process** 8-91
- si:process** 8-91
- si:process** 8-93
- si:process** 8-89
- si:process** 8-89
- si:process** 8-93
- si:process** 8-93
- si:process** 8-89
- si:process** 8-92
- si:process** 8-90
- si:process** 8-90
- si:process** 8-90
- si:process** 8-92
- si:process** 8-92
- si:process** 8-91
- si:process** 8-91
- si:process** 8-92
- si:process** 8-90
- si:process** 8-90
- si:process** 8-91
- si:process** 8-91
- si:process** 8-89
- si:process** 8-89
- si:process** 8-90
- si:process** 8-91
- si:process** 8-90
- si:property-list-mixin** 2-474
- si:sb-on** 8-80
- si:sb-on** 8-80
- si:sb-on** 8-80
- si:serial-stream** 5-252
- si:serial-stream** 5-252
- si:serial-hdlc-mixin** 5-263
- si:serial-hdlc-mixin** 5-263
- site 0-87
- site 0-87
- site 0-87
- site 1-72, 6-103, 9-135
- Site attributes 9-18
- Site object 1-112, 9-4
- Site Operations 0-1
- Site's Namespace 0-71
- site-directory:** Site Object Attribute 9-19
- :site-directory** Translation Rule 5-195
- site-name** variable 1-157, 9-31
- Site-related Functions and Variables 0-83
- site-system:** Site Object Attribute 9-19
- site:** Host Object Attribute 9-7
- site:** Network Object Attribute 9-14
- site:** Printer Object Attribute 9-16
- site;*Logical-host*.Translations File 4-218
- site;*system-name*.system file 4-218, 4-217

- Set
  - Site Command 1-33
  - Site directory translation 5-195
- Converting
  - site files 0-87
- sl:**
  - site-initialization-list** variable 0-83
  - Site Object Attribute 9-19
- default-printer:** Site Object Attribute 9-19
- default-bitmap-printer:** Site Object Attribute 9-19
- dont-reply-to-mailing-lists:** Site Object Attribute 9-20
- host-for-bug-reports:** Site Object Attribute 9-19
- host-protocol-desirability:** Site Object Attribute 9-19
- local-namespace:** Site Object Attribute 9-19
- other-sites-ignored-in-zmail-summary:** Site Object Attribute 9-20
- pretty-name:** Site Object Attribute 9-18
- secure-subnets:** Site Object Attribute 9-20
- site-directory:** Site Object Attribute 9-19
- site-system:** Site Object Attribute 9-19
- standalone:** Site Object Attribute 9-20
- terminal-f-argument:** Site Object Attribute 9-21
- timezone:** Site Object Attribute 9-20
- validate-lmfs-dump-tapes:** Site Object Attribute 9-21
- Namespace System
  - Introduction to Site Objects 9-18
  - Site Operations 0-3
  - :site** option for **add-initialization** 8-67
  - Sites 1-113, 9-5
  - sites 0-87
  - sites 0-87
  - Sites for Multiple Mail Servers 0-64
  - Site translation rules 5-189
  - sl:\*typeout-default\*** Replaces
    - tv:rh-typeout-default** RN-56
  - sl:vanilla-flavor** 4-142
  - sl:vanilla-flavor** 4-142
  - sixth** function 2-47
  - sixty commands 3-46
  - sixty keystrokes 3-46
  - size 7-150
  - Size 3-129
  - :size** message 2-73
  - :size-macro** option for **defstruct** 2-385, 2-390
  - :size-symbol** option for **defstruct** 2-385, 2-390
  - Size and Position 7-163
  - Size and Position 7-165
  - size and position messages 7-162
  - size and position messages 7-162
  - size field of a byte specifier 2-116
  - Size in bytes of packet buffer 9-198
  - :size-in-characters** method of **tv:sheet** 7-166
  - Size Increased From 256 to 1024 Words RN-60
  - :size** init option for **sl:eq-hash-table** 2-71
  - :size** init option for **tv:sheet** 7-163
  - size init options 7-162
  - Size in the FED Drawing Pane 3-256
  - size in the receive direction 9-144
  - size in the transmit direction 9-144
  - size messages 7-162
  - :size** method of **tv:sheet** 7-166
  - Size of an Array 2-249
  - size of array elements 2-236
  - Size of boxes in the drawing pane 3-256, 3-259
  - size of FEP file 5-224, 8-45
  - Size of panes 7-188
  - Size of window 7-103
  - :size** Option for **defpackage** and **make-package** 2-600, 2-602
  - :size** option for **make-area** 8-104
  - size parameter 7-213
  - Size Problem 9-179
- Installing world loads from other
  - Standalone
  - Configuring Large
- Variable
  - :operation-handled-p** method of
  - :which-operations** method of
- List the last
  - List the last
  - Blinker
- Changing Window
  - Initializing Window
  - Messages for Window
  - :verify** option for window
  - nil** option for window
  - Extract
- Audio Wavetable
  - Window
  - Setting the Box
    - Window
    - Window
    - Window
  - Changing the
    - Bit
  - Increase
- Menu
  - The Filepos QFILE Command Byte



- Window
  - Sizes and Positions 7-162
  - :sizes** Constraint Frame Specification 7-182
  - Size Specification 7-188
- :ask-window** Constraint
  - :ask** Constraint Size Specification 7-188
  - :eval** Constraint Size Specification 7-188
  - :even** Constraint Size Specification 7-188
  - :funcall** Constraint Size Specification 7-188
  - :limit** Constraint Size Specification 7-188
- Fraction Constraint Size Specification 7-188
- Integer Constraint Size Specification 7-188
- [Grid Size] Font Editor menu item 3-256, 3-259
- :skip-file** message to tape streams 5-273
- :skip defsystem** Macro 4-213
- :skip** proceed type 2-619
- Slash 1-233
- SCL and
  - slashification 2-644
  - Slashification-related output functions 5-89
  - Slashification format directive 5-30
- Effects of
  - Slashification on Printing 2-13
  - Slashify 1-233
  - Slashifying 2-529
- sl:**
  - slash** syntax description 2-34
- Set
  - sleep time between updates Peek command 1-185, 4-303
  - Slot 2-383
  - Slot description 2-407
  - slot initializations 2-642
  - slots available in transmit window 9-144
  - slot values of structures 2-395
  - Slow scrolling 7-175
  - Snapshot files on a local LMFS 0-15
  - SNS packets 9-111
  - SNS Sense status packet 9-117
  - Software 0-49
  - Software 0-46
  - software installation 0-87
  - Software Installation: Chaosnet UNIX Implementation 9-150
  - Software Installation Guide 0-87
  - Software Interface to the Namespace System 9-29
  - software version 1-200
- SCL and **defstruct**
  - Number of packet slots available in transmit window 9-144
  - Altering slot values of structures 2-395
- Installing New
  - Updating software installation 0-87
- Disk Restore command and
  - Software Installation: Chaosnet UNIX Implementation 9-150
  - Software Installation Guide 0-87
  - Software Interface to the Namespace System 9-29
  - software version 1-200
- FEP
  - math:** **solve** function 2-259
  - some** function 2-64
- Using Keyboard Macros to
  - Sort 3-203
  - sort** function 2-56, 2-79
  - sortcar** function 2-81
  - :sorted** option for **fs:directory-list** 5-117
  - sort-grouped-array** function 2-81
  - sort-grouped-array-group-key** function 2-81
  - Sorting arrays 2-79
  - Sorting lists 2-79
  - Sorting messages 6-71
  - Sorting Arrays and Lists 2-79
  - Sorting Commands 3-112
  - Sorting compact lists 2-79
  - Sorting in Zmacs 3-112
  - Sorting in Zmacs 3-112
  - Sorting in Zmacs 3-97
  - Sort Via Keyboard Macros 3-203
  - [Sort] Zmail menu item 6-71
  - Source Compare 3-125, 3-131
  - Source machine 0-49
  - Source word 9-96, 9-98
- Compiler
  - Source-level Optimizers 4-327
  - Source Address packet header field 9-106
- File Types of Lisp
  - Source and Compiled Code Files 4-318

- Finding source code 3-170
  - Introduction to Locating Source Code in Zmacs 3-180
  - Editing the source code of a function 1-48, 1-158, 3-12
  - Locating Source Code to Edit in Zmacs 3-180
  - Use of Symbolics Lisp Machine Characters in Source Code Where ASCII Characters Are Desired RN-20
  - Use of Integers in Source Code Where Characters Are Desired RN-19
  - Use of Characters in Source Code Where Integers Are Desired RN-19
  - Example of a Source Compare 3-125
  - Source Compare (m-X) Zmacs command 3-125, 4-56
  - Source Compare Installed Definition 3-127
  - Source Compare Merge 3-125
  - Source Compare Merge (m-X) Zmacs command 3-125, 4-56
  - Source Compare Merge Installed Definition 3-128
  - Source Compare Merge Newest Definition 3-127
  - Source Compare Merge Saved Definition 3-127
  - Source Compare Newest Definition 3-127
  - Source Compare Saved Definition 3-127
  - source file 5-108
  - Source file names 6-94
  - Syntax and Base Attributes in Source Files RN-9
  - System source files 4-231
  - Transferring source files between hosts 0-15
  - Recompiling Source Files is Recommended RN-9
  - System Source Index packet header field 9-106
  - Source Policy 0-17
  - Sources 0-20
  - installing system sources 0-87
  - Newest sources 0-20
  - Loading sources from a distribution tape 0-87
- SP character 2-32
- SPACE 1-52, 3-14
- Adding a Spare World Load as LMFS File Space 1-212, 5-219
- Allocating Extra Paging Space 0-44, 5-240
- Copy space 8-117
- Delete Horizontal Space 1-53, 3-28
- Dynamic space 8-117
- Extra paging space 1-212, 5-219
- New space 8-117
- Old space 8-117
- Paging space 8-114
- Static space 8-117
- Swap space 1-201, 1-209, 1-212, 5-219, 5-216, 8-114
- Space character 2-32
- Why Can't I Write Out Files When I Have Free Disk Space? 1-229
- SPACE completion command 1-52, 3-14
- SPACE Dired command 3-149
- Init File Form: Fixing White Space for Kill/Yank Commands 1-168, 3-214
- Space format directive 5-36
- :space init option for **tv:margin-space-mixin** 7-169
- Space in Lisp Code 1-169, 3-215
- :space method of **tv:margin-space-mixin** 7-169
- Instructions for Managing Disk Space on the 3640 0-55
- Defining Zmail Message Search Spaces 6-64
- HELP SPACE Stepper command 4-94
- SPACE Zmacs command 1-51, 3-14
- SPACE Zmacs minibuffer command 4-8
- Program Development: Refining Stripe Density and Spacing 4-45
- Vertical spacing 3-143, 7-108
- Vertical spacing between lines in menu 7-222, 7-298
- Adding a Spare World Load as LMFS File Space 1-212, 5-219
- Using a Spare World Load for Paging 1-212, 5-219
- Basic definition of the function spec 2-297, 2-325
- Special characters 1-233, 2-32, 7-108
- Special Choices 7-203, 7-241, 7-247

- special** declaration 2-312
  - Special forms 2-303
  - Special functions 2-303
  - Special Keys 2-526
  - Special variables 2-126, 2-331
  - :special-command** message 2-525
  - :special-commands** method of **condition** 2-530
  - Special-purpose Stream Operations 5-19
  - Special-purpose Stream Operations 5-19
  - Special-purpose Stream Operations for Buffered Input Streams 5-20
  - Special-purpose Stream Operations for Buffered Output Streams 5-21
  - Special-purpose Stream Operations for Files 5-20
  - Special Character Names 2-32
  - Special Characters 1-166
  - Special Characters Recognized by the Inspector 4-300
  - :special-choices** init option for **tv:multiple-menu-mixin** 7-242
  - :special-command-p** method of **condition** 2-530
  - Special Commands 2-525, 4-80
  - special-commands-mixin** flavor 2-525
  - \*special-command-special-keys\*** variable 2-528
  - Special Defaulting of the Name 5-122, 5-160
  - Special Defaulting of the Type 5-122, 5-160
  - Special Files for Creating Connections 9-147
  - special form 2-162
  - special form 2-302, 4-281
  - special form 4-285
  - special form 2-178
  - special form 2-506
  - special form 2-183
  - special form 1-180, 4-98
  - special form 2-182
  - special form 2-169, 2-197
  - special form 2-169, 2-200
  - special form 2-501, 2-502, 2-513, 2-515
  - special form 2-513, 2-515
  - special form 2-576
  - special form 2-164
  - special form 2-129
  - special form 4-327
  - special form 4-323
  - special form 4-324
  - special form 2-177
  - special form 2-178
  - special form 2-488, 2-501, 2-517, 4-133
  - special form 2-492, 2-501
  - special form 2-490, 2-501
  - special form 2-489, 2-501, 2-509
  - special form 2-489
  - special form 2-489
  - special form 2-493
  - special form 2-491
  - special form 2-126, 2-311
  - special form 2-307
  - special form 2-126, 2-135, 4-70
  - special form 2-135
  - special form 2-307
  - special form 2-356
  - special form 7-44
  - special form 7-69
  - special form 2-353
  - special form 7-267
  - special form 7-267
- Basic
- Setting Command Processor
- Debugger
- dbg:
- dbg:
- #'
- advise
- advise-within
- and
- argument-typecase
- block
- break
- caseq
- catch
- \*catch
- catch-error-restart
- catch-error-restart-if
- check-arg-type
- comment
- compiler-let
- compiler:add-optimizer
- compiler:make-obsolete
- compiler:make-message-obsolete
- cond
- cond-every
- condition-bind
- condition-call
- condition-case
- condition-bind-default
- condition-bind-default-if
- condition-bind-if
- condition-call-if
- condition-case-if
- declare
- def
- defconst
- defconstant
- deff
- deffunction
- define-cp-command
- define-prompt-and-read-type
- define-symbol-macro
- define-user-option
- define-user-option-alist

|                                 |              |                            |
|---------------------------------|--------------|----------------------------|
| <b>deflambda-macro</b>          | special form | 2-356                      |
| <b>deflambda-macro-displace</b> | special form | 2-356                      |
| <b>defmacro</b>                 | special form | 2-305                      |
| <b>defmethod</b>                | special form | 2-297                      |
| <b>defpackage</b>               | special form | 2-598, 2-599               |
| <b>defprop</b>                  | special form | 2-69                       |
| <b>defresource</b>              | special form | 7-107, 8-132               |
| <b>defselect</b>                | special form | 2-297, 2-305, 2-308        |
| <b>defselect-method</b>         | special form | 2-437                      |
| <b>defsubst</b>                 | special form | 2-305, 2-351               |
| <b>defsystem</b>                | special form | 0-16, 4-57, 4-191, 4-231   |
| <b>defun</b>                    | special form | 2-297, 2-300, 2-305        |
| <b>defun-method</b>             | special form | 2-436, 2-437               |
| <b>defvar</b>                   | special form | 2-126, 2-134, 4-16, 4-70   |
| <b>defvar-resettable</b>        | special form | 1-151                      |
| <b>defvar-standard</b>          | special form | 1-152                      |
| <b>defwhopper</b>               | special form | 2-463                      |
| <b>defwindow-resource</b>       | special form | 4-126, 7-107               |
| <b>desetq</b>                   | special form | 2-133                      |
| <b>destructuring-bind</b>       | special form | 2-132                      |
| <b>dis:defpseudo-system</b>     | special form | 0-16, 0-25                 |
| <b>dispatch</b>                 | special form | 2-182                      |
| <b>dlet</b>                     | special form | 2-133                      |
| <b>dlet*</b>                    | special form | 2-133                      |
| <b>do</b>                       | special form | 2-167, 2-189, 2-359        |
| <b>do*</b>                      | special form | 2-191                      |
| <b>do*-named</b>                | special form | 2-192                      |
| <b>do-named</b>                 | special form | 2-192                      |
| <b>do-symbols</b>               | special form | 2-609                      |
| <b>do-all-symbols</b>           | special form | 2-609                      |
| <b>do-external-symbols</b>      | special form | 2-609                      |
| <b>dolist</b>                   | special form | 2-193                      |
| <b>do-local-symbols</b>         | special form | 2-609                      |
| <b>dotimes</b>                  | special form | 2-192                      |
| <b>error-restart</b>            | special form | 2-501, 2-513, 2-514        |
| <b>error-restart-loop</b>       | special form | 2-501, 2-513, 2-514, 4-129 |
| <b>eval-when</b>                | special form | 4-314                      |
| <b>*expr</b>                    | special form | 4-325                      |
| <b>*fexpr</b>                   | special form | 4-325                      |
| <b>%finish-function-call</b>    | special form | 8-23                       |
| <b>flet</b>                     | special form | 2-142                      |
| <b>format:defformat</b>         | special form | 5-42                       |
| <b>fs:define-canonical-type</b> | special form | 5-163                      |
| <b>function</b>                 | special form | 2-162                      |
| <b>go</b>                       | special form | 2-187, 2-189               |
| <b>grindef</b>                  | special form | 1-180, 5-51                |
| <b>if</b>                       | special form | 2-177                      |
| <b>ignore-errors</b>            | special form | 2-493                      |
| <b>keyword-extract</b>          | special form | 2-193                      |
| <b>labels</b>                   | special form | 2-144                      |
| <b>lambda</b>                   | special form | 2-163, RN-41               |
| <b>lambda-macro</b>             | special form | 2-355                      |
| <b>lambda is Now a</b>          | Special Form | RN-41                      |
| <b>let</b>                      | special form | 2-128, 2-142, 8-23         |
| <b>let*</b>                     | special form | 2-129                      |
| <b>let-closed</b>               | special form | 2-305, 2-335               |
| <b>let-globally</b>             | special form | 2-131                      |
| <b>let-if</b>                   | special form | 2-130, 8-23                |
| <b>letf</b>                     | special form | 2-130                      |
| <b>letf*</b>                    | special form | 2-130                      |
| <b>let-globally-if</b>          | special form | 2-131                      |
| <b>*lexpr</b>                   | special form | 4-325                      |
| <b>local-declare</b>            | special form | 2-126, 2-315               |
| <b>login-forms</b>              | special form | 1-157, 1-158, 1-162, 1-163 |
| <b>macro</b>                    | special form | 2-305, 2-339, 2-355        |
| <b>macrolet</b>                 | special form | 2-144                      |

|                                                   |              |                                |
|---------------------------------------------------|--------------|--------------------------------|
| <b>multiple-value</b>                             | special form | 2-168, 4-116                   |
| <b>multiple-value-bind</b>                        | special form | 2-168                          |
| <b>multiple-value-call</b>                        | special form | 2-168                          |
| <b>multiple-value-list</b>                        | special form | 2-168                          |
| <b>multiple-value-prog1</b>                       | special form | 2-169                          |
| <b>net:define-medium</b>                          | special form | 9-45                           |
| <b>net:define-protocol</b>                        | special form | 9-50, 9-209                    |
| <b>net:define-server</b>                          | special form | 9-51                           |
| <b>net:invoke-multiple-services</b>               | special form | 9-43                           |
| <b>or</b>                                         | special form | 2-179                          |
| <b>package-declare</b>                            | special form | 2-625                          |
| <b>prog</b>                                       | special form | 2-167, 2-194, 2-359            |
| <b>prog*</b>                                      | special form | 2-196                          |
| <b>prog1</b>                                      | special form | 2-165                          |
| <b>prog2</b>                                      | special form | 2-165                          |
| <b>progn</b>                                      | special form | 2-164                          |
| <b>progv</b>                                      | special form | 2-131, 8-23                    |
| <b>progw</b>                                      | special form | 2-132                          |
| <b>psetq</b>                                      | special form | 2-128                          |
| <b>quote</b>                                      | special form | 2-161                          |
| <b>return</b>                                     | special form | 2-167, 2-169, 2-185, 2-189     |
| <b>return-from</b>                                | special form | 2-167, 2-184, 2-218            |
| <b>SCL and declare</b>                            | special form | 2-640                          |
| <b>SCL and function</b>                           | special form | 2-638                          |
| <b>SCL and go</b>                                 | special form | 2-639                          |
| <b>SCL and the</b>                                | special form | 2-640                          |
| <b>SCL and <i>value-type</i> argument for the</b> | special form | 2-640                          |
| <b>select</b>                                     | special form | 2-180                          |
| <b>selector</b>                                   | special form | 2-181                          |
| <b>selectq</b>                                    | special form | 2-179                          |
| <b>selectq-every</b>                              | special form | 2-182                          |
| <b>self</b>                                       | special form | 2-147                          |
| <b>setq</b>                                       | special form | 1-162, 2-125, 2-128            |
| <b>setq-globally</b>                              | special form | 1-158, 1-163                   |
| <b>setq-standard-value</b>                        | special form | 1-152                          |
| <b>si:define-defsystem-special-variable</b>       | special form | 4-214                          |
| <b>si:define-make-system-special-variable</b>     | special form | 4-227                          |
| <b>si:define-simple-transformation</b>            | special form | 4-214                          |
| <b>si:with-disk-event-task</b>                    | special form | 8-32                           |
| <b>signal-proceed-case</b>                        | special form | 2-517, 2-521                   |
| <b>signp</b>                                      | special form | 2-97                           |
| <b>special</b>                                    | special form | 4-314                          |
| <b>sstatus</b>                                    | special form | 1-185                          |
| <b>%start-function-call</b>                       | special form | 8-23                           |
| <b>status</b>                                     | special form | 1-184                          |
| <b>sys:with-data-stack</b>                        | special form | 8-28                           |
| <b>sys:with-stack-array</b>                       | special form | 8-28                           |
| <b>tagbody</b>                                    | special form | 2-187                          |
| <b>throw</b>                                      | special form | 2-198                          |
| <b>trace</b>                                      | special form | 2-302, 4-92, 4-94, 4-98, 4-275 |
| <b>tv:add-typeout-item-type</b>                   | special form | 7-282                          |
| <b>tv:delaying-screen-management</b>              | special form | 7-86, 7-89                     |
| <b>tv:prepare-sheet</b>                           | special form | 7-84                           |
| <b>tv:sheet-force-access</b>                      | special form | 7-82, 7-84                     |
| <b>tv&gt;window-call</b>                          | special form | 7-101                          |
| <b>tv&gt;window-call-relative</b>                 | special form | 7-100                          |
| <b>tv&gt;window-mouse-call</b>                    | special form | 7-101                          |
| <b>tv:with-mouse-and-buttons-grabbed</b>          | special form | 7-155, RN-63                   |
| <b>tv:with-mouse-and-buttons-grabbed-on-sheet</b> | special form | 7-155, RN-64                   |
| <b>tv:with-mouse-grabbed</b>                      | special form | 7-154                          |
| <b>tv:with-mouse-grabbed-on-sheet</b>             | special form | 7-154                          |
| <b>tv:with-mouse-usurped</b>                      | special form | 7-157                          |
| <b>tv:with-terminal-io-on-typeout-window</b>      | special form | 7-175                          |
| <b>typecase</b>                                   | special form | 2-181, 2-576                   |
| <b>unadvise</b>                                   | special form | 4-282                          |
| <b>unadvise-within</b>                            | special form | 4-285                          |

- undefun-method** special form 2-437
- unspecial** special form 4-314
- untrace** special form 4-92, 4-280
- unwind-protect** special form 2-169, 2-198, 4-133, 9-195
- using-resource** special form 8-135
- variable-boundp** special form 2-562
- variable-location** special form 2-563
- variable-makunbound** special form 2-562
- with-input-editing** special form 5-57, 7-25
- with-input-editing-options** special form 5-55, 7-23
- with-input-editing-options-if** special form 5-56, 7-24
- with-input-from-string** special form 2-290
- with-notification-mode** special form 7-131
- with-open-file** special form 5-91
- with-open-stream** special form 4-126, 5-96, 5-251
- without-interrupts** special form 8-78
- without-floating-underflow-traps** special form 2-94
- with-output-to-string** special form 2-291
- with-stack-list** special form 8-27
- with-stack-list\*** special form 8-27
- New** Special Form:
  - without-floating-underflow-traps** RN-32
  - Special Form for Declaring a Named Constant 2-135
- apply** and **funcall** No Longer Work for Changes to CLM:
  - Defining **flet**, **labels**, and **macrolet** Function-defining
  - Notation Conventions for Macros and SCL and equivalent macro definitions for Some Functions and Package Functions, **New**
- Functions and**
  - New**
  - New**
  - New**
- Interaction of Some Common**
  - Evaluation of
    - Special Forms with Multiple Values 2-169
    - Special function keys character representation 5-5
    - special functions 2-303
    - :special-instance-variables** Option for **defflavor** 2-441, 2-448
    - Specialized Blinkers 7-149
    - &special** Lambda-list Keyword 2-310
    - Special Memory Referencing 8-20
    - :special-pdl-area** option for **make-process** 8-85
    - :special-pdl-area** option for **make-stack-group** 8-5
    - :special-pdl-size** option for **make-process** 8-85
    - :special-pdl-size** option for **make-stack-group** 8-5
    - special** special form 4-314
    - special treatment of Rubout in ASCII files 5-91
    - special variables 2-126
    - special variables 2-134
    - special variables 5-147
    - Special Variables 2-134
    - Specification 7-188
- Accessing Arrays**
- Disable**
- Binding local and**
  - Defining Pathname
  - Special Forms for Defining
- :ask-window** Constraint Size

- :ask** Constraint Size Specification 7-188
- :eval** Constraint Size Specification 7-188
- :even** Constraint Size Specification 7-188
- :funcall** Constraint Size Specification 7-188
- :layout** Constraint Frame Specification 7-180
- :limit** Constraint Size Specification 7-188
- :sizes** Constraint Frame Specification 7-182
  - File specification 5-151
- Fraction Constraint Size Specification 7-188
  - Input stream specification 5-75
- Integer Constraint Size Specification 7-188
  - Module specification 4-199
- Tape spec parameter specification 0-28
- :documentation** specification for **tv:choose-variable-values** 7-259
- Window Graying Specifications 7-91
  - Examples of Specifications of Panes and Constraints 7-185
  - Examples of Specifications of Panes and Constraints Before Release 6.0 7-196
- CLM: Specific Data Type Predicates 2-638
- Input Editor Options Now Specified Dynamically RN-55
  - Undelete specified file 5-104
  - Moving to a Specified Line 3-56
- \* **:wild** pathname component specifier 5-186
  - < **:oldest** version specifier 5-186
  - < **:oldest** version specifier 5-185
  - > **:newest** version specifier 5-185
  - > **:newest** version specifier 5-186
  - Create a byte specifier 2-116
- Extract position field of a byte specifier 2-116
- Extract size field of a byte specifier 2-116
  - Byte specifiers 2-115, 2-399, 8-18
- Character-related byte specifiers 5-5
  - CLM: Declaration Specifiers 2-640
  - %%ch-** byte specifiers and file characters 2-268, RN-17
  - %%kbd-** byte specifiers and keyboard characters 2-268, RN-17
- :relative** relative directory specifier syntax in logical pathnames 5-186
- Specifying radix 5-45
- Specifying a Keyword Parameter's Symbol in Lambda Lists 2-156
- Specifying and Listing Tag Tables 3-106
- Specifying Aux-variables in Lambda Lists 2-157
- Specifying compiler environments 4-329
- Specifying Default Forms in Lambda Lists 2-155
- Specifying Frame Constraints RN-57
- Specifying Internal and External Symbols in Packages 2-585
- Specifying Other Contents 3-129
- Specifying Packages in Programs 2-579
- Specifying Panes and Constraints 7-179
- Specifying Panes and Constraints Before Release 6.0 7-188
- Specifying Zmacs Variable Settings 3-210
- specs 2-316
- Defining function specs 2-297
  - Function Specs 2-297
  - Tape Specs 0-25
- How Tape Specs Are Merged 0-27
- Tape Spec Syntax 0-28
- :handler** function spec type 2-297
- :internal** function spec type 2-297
- :location** function spec type 2-297
- :method** function spec type 2-297
- :property** function spec type 2-297
- :within** function spec type 2-297
- Symbol function spec type 2-297
- :splicing** argument to **setsyntax** 2-36

- Draw a cubic spline 3-259
  - Drawing Splines on Windows 7-125
  - [Draw Spline] Font Editor menu item 3-246, 3-259
  - Split Screen 3-130
  - Split Screen (m-X) Zmacs command 4-65
  - [Split Screen] System menu item 4-66, 4-129
  - Splitting Logical Hosts Across Physical Hosts 5-196, RN-72
  - Splitting the Screen 3-130
  - spooled-printer**: Host Object Attribute 9-10
  - :spread** keyword 2-161
  - Spy bit 9-131
  - sqrt** function 2-106
  - Square brackets 1-232
  - Square root 2-106
  - SQUARE Key 1-169, 3-215
  - Square root of a negative number error 2-536
  - Square Wave Example 7-341
  - Srccom 3-150
  - s-sh-C Debugger command 4-264, 4-271
  - status** and **ssstatus** 1-184
  - ssstatus** special form 1-185
  - stable-sort** function 2-81
  - stable-sortcar** function 2-81
  - Stack 2-494
  - stack 8-26
  - stack 4-268
  - stack 8-3, 8-5
  - stack 8-28
  - Stack 8-26
  - stack 8-3, 8-5
  - stack 8-3, 8-5
  - stack 8-26
  - stack 4-264, 4-271
  - stack 6-49, 6-68
  - Stack 6-50
  - Reference Material: Application: Handlers Examining the Stack 2-495
  - The Data Stack 8-28
  - Unwinding a stack 2-197
  - Stack frame 2-494
  - Stack Groups 2-303, 8-3
  - Stack-allocated closures 2-139
  - :stack-group** init option 7-274
  - :stack-group** method of **si:process** 8-89
  - :stack-group** returned by **typep** 2-9
  - stack-let** macro 8-27
  - stack-let\*** macro 8-28
  - stack commands 6-50, 6-68
  - stack frame 4-264, 4-271
  - stack frame 4-267
  - stack frame 4-299
  - Stack Frame in the Debugger 4-262
  - %stack-frame-pointer** function 8-22
  - Stack Frames with Debugger Backtrace Commands 4-262
  - stack group 8-3
  - stack group 8-3
  - stack group 8-3
  - Stack group bindings 8-3
  - Stack Group Functions 8-5
  - :stack-group** init option for **tv:basic-choose-variable-values** 7-274
  - :stack-group** option for **make-process** 8-85
  - stack-group-preset** function 8-6
  - stack-group-resume** function 8-4, 8-6
- Init File Form: c-m-L on the
  - Dired
  - Application: Handlers Examining the
    - Arrays on the control
    - Backtrace of the call
    - Binding
    - Consing arrays on the data
    - Consing Lists on the Control
    - Control
    - Environment
    - Lists on the control
    - Manipulating the control
    - Message
  - Moving Among Zmail Messages Using the Message



- An Example of Input/Output in Resuming of Switching
- :horizontal**
- :vertical**
- Debugger Commands for Selecting Zmail Messages Based on the
- :edit** message to **zwei:**
- :interval-string** message to **zwei:**
- :set-interval-string** message to **zwei:**
- zwei:** Making
- si:**
- Break and the Debugger Now Bind **readtable** to **si:**
- si:**
- SCL and SCL and The
- SCL and
- CLM:
- The
- The
- The
- Binding
- maller:**
- meter:**
- Getting
- Getting
- stack-group-return** function 8-4, 8-6
- Stack Groups 8-7
- Stack Groups 8-7
- Stack Groups 8-4
- stack groups 8-4
- Stack group state error 2-537
- Stack groups used as functions 2-305
- Stack group switch 8-3
- stacking description 7-188
- stacking description 7-188
- Stacking in constraint frames 7-188
- Stack Manipulation 4-263
- Stack of Recently Seen Messages 6-68
- Stack overflow error 2-537
- Standalone sites 0-87
- standalone:** Site Object Attribute 9-20
- standalone-editor-frame** 7-381
- standalone-editor-frame** 7-381
- standalone-editor-frame** 7-381
- standalone-editor-frame** flavor 7-381
- Standalone Editor Windows 7-381
- Standard comtab 3-208
- Standard Conditions 2-531
- Standard facilities 7-205
- Standard Streams 5-21
- Standard Variables 1-151, 1-152
- \*standard-bindings\*** 1-152
- standard-input** variable 5-21
- standard-output** variable 4-75, 5-21
- standard-readtable** RN-43
- standard-readtable** variable 1-154
- Standard and Customizable Facilities 7-205
- Standard Character Syntax Types Table 2-643
- standard-char-p** function 2-640
- Standard Choose Variable Values Function 7-262
- Standard Communication with Interfaces 9-203
- Standard Constituent Character Attributes Table 2-643
- Standard Dispatching Macro Character Syntax 2-644
- Standard Lisp Machine Fonts 1-75
- Standard mail file formats 6-95
- Standard Momentary Menu Example 7-219
- Standard Momentary Menu Interface 7-219
- Standard Multiple Choice Function 7-252
- Standard Multiple Menu Choose Function 7-247
- Standard pathname types 5-180
- Standard TV Fonts 3-223, 7-142
- standard-value-let** macro 1-153
- standard-value-let\*** macro 1-153
- standard-value-progv** macro 1-154
- Standard Variable Bindings Now Guarantee Consistent Behavior in Break and Debugging Loops RN-42
- Standard Variables for Writing Lisp Style Command Loops 1-153
- Start command 1-201
- Start Commands 1-40
- start** function 6-111
- start-monitor** function 8-62
- Start Background Save (m-X) Zmail Command 6-81
- Started 1-1, 4-9
- Started in Zmacs 3-11
- %start-function-call** special form 8-23
- Start GC Command 1-40, 1-106
- Starting Servers 9-214
- Starting up 1-1

|                                                |                                                               |
|------------------------------------------------|---------------------------------------------------------------|
|                                                | Starting Zmacs 1-47, 3-12                                     |
|                                                | Starting a Keyboard Macro 3-200                               |
|                                                | Starting and Stopping the Audio Microtask 7-335               |
|                                                | Starting a New Line 3-22                                      |
| General Arguments:                             | Starting Servers 9-214                                        |
| Medium Arguments:                              | Starting Servers 9-215                                        |
| Reference Material:                            | Starting Servers 9-216                                        |
|                                                | Starting up Zmail 1-57                                        |
|                                                | Start Kbd Macro 3-199                                         |
| Erase backward to                              | start of line 3-82                                            |
|                                                | <b>:start</b> option for <b>zwei:open-editor-stream</b> 7-378 |
|                                                | <b>:start</b> option for <b>zwei:with-editor-stream</b> 7-378 |
|                                                | Start Patch (m-X) 3-187, 4-239                                |
|                                                | Start Private Patch (m-X) 3-188, 4-240                        |
| <b>net:</b>                                    | <b>start-service-access-path-future</b> function 9-42         |
|                                                | Start Transmission register 9-131                             |
| New Type for                                   | <b>:start-typeout</b> Message to Interactive Streams:         |
|                                                | <b>:clear-window</b> RN-67                                    |
|                                                | <b>:start-typeout</b> method of                               |
|                                                | <b>sl:interactive-stream</b> 5-70, 7-38                       |
|                                                | state 9-121                                                   |
| Broadcast Sent connection                      | state 9-136                                                   |
| Chaos:answered-state connection                | state 9-136                                                   |
| Chaos:cls-received-state connection            | state 9-136                                                   |
| Chaos:foreign-state connection                 | state 9-136                                                   |
| Chaos:host-down-state connection               | state 9-136                                                   |
| Chaos:inactive-state connection                | state 9-136                                                   |
| Chaos:listening-state connection               | state 9-136                                                   |
| Chaos:los-received-state connection            | state 9-136                                                   |
| Chaos:open-state connection                    | state 9-136                                                   |
| Chaos:rfc-received-state connection            | state 9-136                                                   |
| Chaos:rfc-sent-state connection                | state 9-136                                                   |
| Checking the                                   | State 9-144                                                   |
| Closed connection                              | state 9-121                                                   |
| Conn_st_closed VAX/VMS connection              | state 9-144                                                   |
| Conn_st_full VAX/VMS connection                | state 9-144                                                   |
| Conn_st_incom VAX/VMS connection               | state 9-144                                                   |
| Conn_st_los VAX/VMS connection                 | state 9-144                                                   |
| Conn_st_lsn VAX/VMS connection                 | state 9-144                                                   |
| Conn_st_new VAX/VMS connection                 | state 9-144                                                   |
| Conn_st_open VAX/VMS connection                | state 9-144                                                   |
| Conn_st_rfcrcv VAX/VMS connection              | state 9-144                                                   |
| Conn_st_rfcst VAX/VMS connection               | state 9-144                                                   |
| Foreign connection                             | state 9-121                                                   |
| Garbage collector process                      | state 8-124                                                   |
| In-progress patch                              | state 3-190, 4-242                                            |
| Incomplete Transmission connection             | state 9-121                                                   |
| Initial patch                                  | state 3-190, 4-242                                            |
| Listening connection                           | state 9-121                                                   |
| Lost connection                                | state 9-121                                                   |
| Open connection                                | state 9-121                                                   |
| Output Hold                                    | state 7-82                                                    |
| Process                                        | State 1-6                                                     |
| RFC Received connection                        | state 9-121                                                   |
| RFC Sent connection                            | state 9-121                                                   |
| Zmail in Arrest Process                        | State 6-23                                                    |
| Zmail in Output Hold Process                   | State 6-23                                                    |
| Zmail in Wait Forever Process                  | State 6-23                                                    |
| <b>chaos:</b>                                  | <b>state</b> function 9-136                                   |
| Stack group                                    | state error 2-537                                             |
| Zmacs Commands for Finding Out About the       | State of Buffers 1-86, 3-217                                  |
| Zmacs Commands for Finding Out About the       | State of Zmacs 1-86, 3-217                                    |
| Chaosnet Connection                            | States 9-121                                                  |
| Connection                                     | States 9-136                                                  |
| FUNCTION Key: Recovering From Stuck            | States 1-143                                                  |
| Introduction: Recovering From Errors and Stuck | States 1-43                                                   |
| Recovering From Errors and Stuck               | States 1-43                                                   |

- The Debugger: Recovering From Errors and Stuck
  - The Keyboard and Key
  - Recovering From Stuck
- Printing garbage collector
  - message
  - :broken** system
  - :experimental** system
  - : message
  - :obsolete** system
  - :released** system
  - A message
  - D message
  - Host
  - System
- chaos:**
- Show
  - Show Command Processor
  - Show GC
  - FEP Show
  - Maclisp
  - Message
- Display
  - Changing the
  - Display
  - Display
- Checking the
  - Display
- Display
  - Changing the
- SNS Sense
  - STS
  - FED
- Chaosnet
  - Host
- Answer to
  - Maclisp
- c-B
- c-E
- c-N
- c-U
- c-X
- HELP
- SPACE
- Tracing and
- States 1-44
- States 7-160
- States in Zmail 6-23
- Static space 8-117
- statistics 8-124
- status 1-57
- status 4-251
- status 4-251
- status 1-57
- status 4-251
- status 4-251
- status 1-57
- status 1-57, 6-55
- Status 1-37, 1-183, 9-141
- status 1-185, 4-303
- Status character 2-32
- Status Flags 6-75
- status** function 9-141
- Status Line 1-5, 7-103, 7-311
- Status packets 9-111, 9-117
- Status pane 3-229
- STATUS protocol 9-119, 9-123
- status** Service 9-62
- status** and **sstatus** 1-184
- Status command 1-200
- Status Command 1-35
- Status Command 1-37
- Status Command Output 1-217
- status homedir** function 5-201
- status letters 1-57
- Status line documentation 3-255
- status of active processes 1-185, 4-303
- Status of a Patchable System 4-251
- status of areas 1-185, 4-303
- status of file system display 1-185, 4-303
- Status of garbage collector 8-124
- Status of Hardcopy Devices 1-109, 3-269
- status of hostat 1-185, 4-303
- Status of registers 1-200
- status of window area 1-185, 4-303
- status of windows 7-103
- :status** option for **fquery** 7-56
- status packet 9-117
- Status packet 9-117
- Status Pane 3-229
- Status Protocols 9-123
- status report 1-183, 9-141
- STATUS request 9-123
- status** special form 1-184
- status udir** function 5-201
- step** function 4-94, 4-287
- :step** option for **trace** 4-92, 4-94, 4-276
- Stepper 4-94
- Stepper function 7-315
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepper command 4-94
- Stepping 2-221, 4-75, 4-94
- Stepping 4-92
- Stepping variables 2-221
- Stepping Through an Evaluation 4-287
- Stepping Through Compiled Code 4-267
- Debugger Commands for Dynamic Breakpoints and

- Steps 2-221, 9-44
- :local** step type 9-44
- :medium** step type 9-44
- :network** step type 9-44
- :service** step type 9-44
- [Step] **trace** menu item 4-92, 4-94
- Sticky pathname defaults 5-131, 5-133
- Sticky pathname defaults example 5-133
- mailer:** **stop** function 6-111
- meter:** **stop-monitor** function 8-62
- Stop-Output character 2-32
- Stopped processes 8-75
- Stopping processes 8-92
- Stopping the Audio Microtask 7-335
- stops 7-108
- Storage allocation 2-250, 8-131
- Storage management 8-99
- Storage allocation error 2-538
- storage area 8-107
- storage area 8-107
- storage area 8-107
- storage area 8-107
- storage area 8-107
- storage areas 8-107
- storage areas 8-103
- Storage Layout Definitions 8-18
- Storage Management 8-101
- Storage Management 8-101
- Storage Management 8-101
- Storage management of areas 8-103
- Storage of arrays 2-235
- Storage Requirements for Garbage Collection 8-122
- storage resources 8-131
- storage resources 8-131
- store-conditional** function 8-17
- store-and-forward-mail** Service 9-62
- Store-and-Forward Mailer 6-107
- store-array-leader** function 2-245
- Storing Samples 7-333
- Storing database object attributes 9-25
- Storing disk error information 8-32
- storing functions 2-297
- storing functions 2-297
- Storing functions on property lists 2-297
- Storing into array elements 2-244
- Strategy 4-13
- Strategy for Unattended Operation with the Garbage Collector 8-128
- Stream 2-290, 2-291, 5-21, 5-22, 9-134
- stream 5-222, 8-43
- stream 5-222, 8-43
- stream 5-222, 8-43
- stream 5-222, 8-43
- stream 5-21
- stream 5-251
- stream 5-22
- Stream 5-23
- stream 7-377
- stream 9-154
- stream 5-15
- stream 5-23
- Stream 5-251
- stream 2-19
- Stream compiler 4-309
- Stream connection 9-114
- Stream I/O 9-137, 9-143
- Starting and Tab
- Compiled function
- Packages
- Property list
- Symbol print names
- Symbols
- Constants
- Memory management of
- Automatic
- Manual
- Overview of
- Allocating and freeing Chaosnet
- Allocating and freeing window system
- Symbolics
- Cdr
- Flavor system
- Program
- :block** disk
- :input** disk
- :output** disk
- :probe** disk
- Buffered output
- Creating a serial I/O
- Error message
- Making Your Own
- Opening a bidirectional
- QFILE open
- Reading characters from an input
- Synonym
- The Serial I/O
- Tokens in the input



|                                                                       |                                            |                                |
|-----------------------------------------------------------------------|--------------------------------------------|--------------------------------|
| <b>:write-error-status</b> message to output tape                     | streams                                    | 5-273                          |
| Bidirectional disk                                                    | streams                                    | 5-222, 5-226, 8-43, 8-47       |
| Bidirectional file                                                    | streams                                    | 5-115                          |
| Block Disk                                                            | Streams                                    | 5-226, 8-47                    |
| Block mode disk                                                       | streams                                    | 5-221, 8-42                    |
| CLM: Creating New                                                     | Streams                                    | 2-643                          |
| CLM: Formatted Output to Character                                    | Streams                                    | 2-644                          |
| CLM: Input From Character                                             | Streams                                    | 2-643                          |
| Coroutine                                                             | Streams                                    | 5-25                           |
| Direct Access Bidirectional File                                      | Streams                                    | 5-116                          |
| Direct Access File                                                    | Streams                                    | 5-115                          |
| Direct Access Output File                                             | Streams                                    | 5-116                          |
| Disk                                                                  | streams                                    | 5-221, 8-42                    |
| Editor buffer                                                         | streams                                    | 7-377                          |
| Effect of Character Set Translation on Direct Access File             | Streams                                    | 5-10                           |
| End-of-file on input                                                  | streams                                    | 5-75                           |
| Functions for Creating Coroutine                                      | Streams                                    | 5-27                           |
| Generic byte                                                          | streams                                    | 9-44                           |
| I/O                                                                   | Streams                                    | 5-11                           |
| Input and Output Disk                                                 | Streams                                    | 5-226, 8-46                    |
| Input Editor Messages to Interactive                                  | Streams                                    | 5-70, 7-38                     |
| Input Functions for Interactive                                       | Streams                                    | 7-5                            |
| Input operations on serial                                            | streams                                    | 5-251                          |
| Interactive                                                           | streams                                    | 1-101, 5-53, 5-75, 7-1, 7-21   |
| Introduction to                                                       | Streams                                    | 5-11                           |
| Introduction to Interactive                                           | Streams                                    | 7-3                            |
| Messages for Input From Interactive                                   | Streams                                    | 7-11                           |
| Messages to file                                                      | streams                                    | 5-113                          |
| Messages to Tape                                                      | Streams                                    | 5-273                          |
| New Optional Argument to <b>:replace-input</b> Message to Interactive | Streams                                    | RN-67                          |
| Operating on Disk                                                     | Streams                                    | 5-224, 8-45                    |
| Output operations on serial                                           | streams                                    | 5-251                          |
| SCL I/O operations and                                                | streams                                    | 2-634                          |
| Special-purpose Stream Operations for Buffered Input                  | Streams                                    | 5-20                           |
| Special-purpose Stream Operations for Buffered Output                 | Streams                                    | 5-21                           |
| Standard                                                              | Streams                                    | 5-21                           |
| Synonym                                                               | streams                                    | 5-21                           |
| Tape                                                                  | streams                                    | 5-269                          |
| Windows as                                                            | streams                                    | 7-75                           |
| Windows as Input                                                      | Streams                                    | 7-132                          |
| Windows as output                                                     | streams                                    | 7-103, 7-108                   |
| Interactive                                                           | Streams and Mouse-sensitive Items          | 7-19                           |
| New Type for <b>:start-typeout</b> Message to Interactive             | Streams:                                   | <b>:clear-window</b> RN-67     |
| New Message to Input                                                  | Streams:                                   | <b>:input-wait</b> RN-62       |
| New Message to                                                        | Streams:                                   | <b>:interactive</b> RN-62      |
| New Message to Interactive                                            | Streams:                                   | <b>:noise-string-out</b> RN-63 |
| Input                                                                 | stream specification                       | 5-75                           |
| <b>:input-editor</b> Message to Interactive                           | Streams Replaces                           | <b>:rubout-handler</b> RN-55   |
| Output                                                                | Streams that read or write magnetic tape   | 5-269                          |
|                                                                       | streams to buffered asynchronous devices   | 5-18, 5-114                    |
|                                                                       | Stretching a character                     | 3-259                          |
|                                                                       | Stretching a Drawing Horizontally in FED   | 3-250                          |
|                                                                       | Stretching a Drawing Vertically in FED     | 3-250                          |
|                                                                       | Stretching and Contracting Drawings in FED | 3-246                          |
|                                                                       | [Stretch] Font Editor menu item            | 3-259                          |
|                                                                       | *                                          | string                         |
|                                                                       | Delete                                     | string                         |
|                                                                       | Erase                                      | string                         |
| Example of Listing Variables by Matching a                            | String                                     | 3-211                          |
| Listing Variables by Matching a                                       | String                                     | 3-210                          |
| Mouse documentation                                                   | string                                     | 4-129                          |
| Prompt                                                                | string                                     | 2-517, 2-528                   |
| Sample                                                                | string                                     | 3-227, 3-253, 3-260            |

- SCL and type string 2-637
- Selecting messages based on string 6-49
- The FED Sample String 3-253
- string=** function 2-282
- string≤** function 2-282
- string≥** function 2-283
- String comparisons 2-11, 2-282
- String concatenation 2-279
- String Conversions 2-285
- string** function 2-278
- String incompatibilities 2-634
- :string** message 9-31
- String Searching 2-286
- Replace String (m-X) Zmacs command 3-102
- Find String (m-X) Zmail command 6-49, 6-67
- string-append** function 2-279
- SCL and type string-char 2-637
- string-compare** function 2-285
- %string-compare** function 2-285
- string-downcase** function 2-285
- string-equal** function 2-283
- %string-equal** function 2-284
- string-flipcase** function 2-286
- string-greaterp** function 2-284
- :string-in** message 5-15
- :string-in** operation 5-12
- Testing **string-length** function 2-278
- :string-length** method of **tv:sheet** 7-115
- string-lessp** function 2-284
- string-nconc** function 2-279
- string-nreverse** function 2-280
- :string-out** message 5-15
- :string-out** method of **tv:sheet** 7-111
- string-pluralize** function 2-280
- string-reverse** function 2-280
- string-search** function 2-288
- string-trim** function 2-280
- string-upcase** function 2-285
- string<** function 2-282
- %string=** function 2-283
- string=** function 2-282
- string>** function 2-282
- Old-Zetalisp and New-Zetalisp String and Character Compatibility RN-18
- String as menu item 7-208
- string-capitalize-words** function 2-286
- CLM: String Characters 2-637
- :string** command processor argument type 7-48
- String Comparison and String Searching Functions RN-23
- String Comparisons Affected by Case, Style, and Bits 2-282
- String Comparisons Ignoring Case, Style, and Bits 2-283
- Summary of Character and String Compatibility Functions in Release 6.0 RN-18
- string-exact-compare** function 2-283
- %string-exact-compare** function 2-283
- :string-font** init option for **tv:basic-choose-variable-values** 7-275
- :string-for-directory** method of **fs:pathname** 5-171
- :string-for-dir:red** method of **fs:pathname** 5-171
- :string-for-editor** method of **fs:pathname** 5-171
- Example of a Search String for HELP A 3-46
- :string-for-host** method of **fs:pathname** 5-171
- :string-for-printing** method of **fs:pathname** 5-171
- :string-for-wholine** method of **fs:pathname** 5-171
- Documentation string functions 2-302, 2-322

- Character and Zetalisp and SCL
  - String Functions for Old-Zetalisp/New-Zetalisp Compatibility RN-24
  - string incompatibilities 2-265, RN-12
  - :string-in** method of **si:interactive-stream** 7-13
  - :string-left-trim** function 2-280
  - :string-line-in** message 5-17
  - :string-line-in** method of **si:interactive-stream** 7-14
  - :string-line-in** operation 5-12
  - :string** line item entry 7-308
  - :string-list** option for **prompt-and-read** 7-59
  - :string-list tv:choose-variable-values** variable type 7-259
- Maclisp-compatible
  - String-manipulation Functions 2-292
  - :string** message to **sys:external-symbol-not-found** 2-619
- New Function:
  - string-nconc-portion** RN-38
  - string-nconc-portion** function 2-279
  - string-not-equal** function 2-284
  - string-not-greaterp** function 2-284
  - string-not-lessp** function 2-284
- Basic
  - String Operations 2-278
  - :string** option for **prompt-and-read** 7-59
  - :string-or-nil** option for **prompt-and-read** 7-59
  - :string-or-nil tv:choose-variable-values** variable type 7-259
  - stringp** function 2-8
  - String representation of integers 2-277
  - :string** returned by **typep** 2-9
  - string-reverse-search** function 2-288
  - string-reverse-search-char** function 2-287
  - string-reverse-search-exact** function 2-287
  - string-reverse-search-exact-char** function 2-286
  - string-reverse-search-not-char** function 2-288
  - string-reverse-search-not-exact-char** function 2-287
  - string-reverse-search-not-set** function 2-290
  - string-reverse-search-set** function 2-289
  - string-right-trim** function 2-280
  - Strings 2-5, 2-236, 2-277
- Arrays, Characters, and ASCII
  - Strings 2-233
- Character
  - strings 2-277
- CLM:
  - Strings 2-637, 2-642
- Documentation
  - strings 4-39, 4-42
- Double-quote character
  - strings 1-233
- Fat
  - Strings RN-23
- How the Reader Recognizes
  - Strings 2-25
- I/O to
  - Strings 2-290
- Making
  - Strings RN-23
- Obsolete Programming Practices Using Characters and Strings RN-19
  - Strings 2-16
  - Strings 2-634
  - strings 7-111
  - strings as array elements 2-236
- Printed Representation of
  - Strings 2-16
- SCL and Typing
  - Strings 2-634
  - strings 7-111
- Character
  - strings as array elements 2-236
- Overview of Locating and Replacing
  - Strings Automatically 3-102
- Locating and Replacing
  - Strings Automatically in Zmacs 3-102
  - String Search 3-100
  - %string-search-char** function 2-289
  - string-search-char** function 2-287
  - string-search-exact** function 2-287
  - string-search-exact-char** function 2-286
  - %string-search-exact-char** function 2-287
  - String Searching Affected by Case, Style, and Bits 2-286
- Zmacs
  - String Searching Functions RN-23
- String Comparison and
  - String Searching Functions RN-23



- Drawing Characters and CLM: Translating
- QFILE
  - [Find
  - Program Development: Refining
  - Program Development: Drawing
  - Alteration of List
  - Backquote constructing list
  - Bp Zwei data
  - Inspecting a named
  - Manipulating List
  - Wiring a
- Named
  - [Active
  - Introduction to
  - compiler:make-obsolete** Now Makes a Flavor or
  - Altering slot values of
  - Analyzing
  - CLM:
  - Creating instances of
  - defstruct** Internal
  - Displaying data
  - Exit control
  - Functions That Operate on Named
  - Handler Functions for Named
  - Initialization in
  - Introduction to Named
  - Named
  - Nonlocal exit control
  - Notes on Wired
  - Printed Representation of Arrays That Are Named
  - SCL and printing of
    - Named
    - Zmail Hopelessly
    - Recovering From a
    - FUNCTION Key: Recovering From
    - Introduction: Recovering From Errors and
    - Recovering From Errors and
    - The Debugger: Recovering From Errors and
    - Recovering From
    - :editor** output format
    - :read** output format
    - :sall** output format
    - Character Comparisons Affected by Case,
- String Searching Ignoring Case, Style, and Bits 2-287
  - string-search-not-char** function 2-287
  - string-search-not-exact-char** function 2-286
  - string-search-not-set** function 2-289
  - string-search-set** function 2-289
  - Strings on Windows 7-121
  - Strings to Symbols 2-640
  - string-to-ascii** function 2-290
  - :string-trim** option for **prompt-and-read** 7-59
  - :string tv:choose-variable-values** variable type 7-259
  - String Values 9-160
  - [String] Map over menu item 6-67, 6-80
  - Stripe Density and Spacing 4-45
  - Stripes 4-27
  - Structure 8-103
  - Structure 2-54
  - structure 1-233
  - structure 7-378
  - structure 4-299
  - Structure 2-41
  - structure 8-35
  - Structure Macros 2-377
  - Structure names 2-383
  - structure-forward** function 8-14
  - structure array 2-238, 2-241
  - Structured records 2-59
  - Structure Edit] Maintenance Operations menu item 0-39
  - Structure Macros 2-379
  - Structure Obsolete RN-52
  - Structure of the Compiler 4-309
  - structures 2-395
  - Structures 8-16
  - Structures 2-642
  - structures 2-395
  - Structures 2-407
  - structures 7-303
  - structures 2-175
  - Structures 2-405
  - Structures 2-403
  - structures 2-395
  - Structures 2-403
  - Structures 2-403
  - structures 2-175
  - Structures 7-327
  - Structures 2-16
  - Printed Representation of Arrays That Are Not Named
  - Structures 2-17
  - structures 2-642
  - structure symbol 2-403
  - %structure-total-size** function 8-17
  - STS packets 9-111
  - STS Status packet 9-117
  - Stuck 6-24
  - Stuck Document Examiner 1-121
  - Stuck States 1-143
  - Stuck States 1-43
  - Stuck States 1-43
  - Stuck States 1-44
  - Stuck States in Zmail 6-23
  - style 5-46
  - style 5-46
  - style 5-46
  - Style, and Bits 2-270

- Character Comparisons Ignoring Case, String Comparisons Affected by Case, String Comparisons Ignoring Case, String Searching Affected by Case, String Searching Ignoring Case, Binding Standard Variables for Writing Lisp
  - Character objects
  - Character Sets and Character Compiler
- Change to Text
  - The Device-font and Character objects
  - Zmail
    - Add
    - Change
- Basic Locking
  - Lambda-binding
  - Data Type
  - Function-calling
  - Rendezvous
    - Closed
    - Open
  - CHAOS.B32 BLISS-32
    - sys:**
      - Array
      - Multidimensional array
      - Out-of-bounds
      - Use of Characters as Array
      - 3640: Saving
- SCL and
  - SCL and
  - SCL and
- Find Initial
  - Distribution Tape
  - FED, the
  - Peek
  - The Output
  - Frame-oriented Interactive
- SCL and
  - Rules for
- Style, and Bits 2-271
- Style, and Bits 2-282
- Style, and Bits 2-283
- Style, and Bits 2-286
- Style, and Bits 2-287
- Style Command Loops 1-153
- style field 2-265, RN-14
- Styles 2-267
- Style Warnings 4-323
- sub1** function 2-104
- Subform 2-169
- Subforms of **with-input-editing** RN-55
- subheading 3-37
- Subindex Derived Fields 2-268
- subindex field RN-16
- Subject field 1-62
- Subject: Field 6-36
- Subject Field Zmail Command 6-38
- Subject or Text Zmail display column heading 1-57
- Subject Pronouns Zmail Command 6-38
- sublis** function 2-55
- :submit** option for **open** 5-97
- SUBMIT QFILE OPEN option 9-166
- Subnet 9-104, 9-108
- subnet:** Network Object Attribute 9-15
- Subnets 9-37
- Subpackets and Coercing Packets 9-198
- Subprimitive 8-17
- Subprimitive 8-23
- Subprimitives 2-494, 8-11
- Subprimitives 8-12
- Subprimitives 8-23
- Subprograms 2-621
- subprotocols 9-129
- subroutine 2-351
- subroutine 2-351
- subroutine package 9-142
- subrp** function 2-8
- subscript-out-of-bounds** flavor 2-541
- subscripts 2-235, 2-248
- subscripts 2-245
- subscripts 2-541
- Subscripts RN-22
- Subsequent Worlds 0-57
- subset** function 2-63
- subset-not** function 2-63
- subst** function 2-55
- subst** functions 2-351
- Substitutable Functions 2-351
- substitute-if** function 2-640
- substitute** function 2-640
- substitute-if-not** function 2-640
- Substitutes for mouse commands 6-23
- Substitution 2-54
- substring** function 2-278
- Substring Candidates 1-124
- Subsystem 0-15
- Subsystem 3-227
- subsystem 7-303
- Subsystem 5-44
- subsystems 7-176
- Subtraction 2-101, 2-104, 2-105
- Subtraction of 32-bit numbers 2-119, RN-33
- subtype variations 2-637
- Successful Completion 5-123, 5-161
- sum loop** keyword 2-212

- Dired Command Summary 3-146
- Zmacs Help Command Summary 3-217
- Summary window 1-64, 6-39
- Zmail: Click Middle on Summary Line 6-55
- Zmail: Click Right on Summary Line 6-55
- [Append] Message Summary Line menu item 6-71
- [Filter] Message Summary Line menu item 6-79
- Click Right on Summary Line Zmail Command 6-42
- zwei:**
  - \*summary-mouse-middle-mode\*** variable 6-88
  - Summary of Character and String Compatibility Functions in Release 6.0 RN-18
  - Summary of Compiler Actions on Code in a Zmacs Buffer 4-71
  - Summary of Creating and Saving Buffers and Files 3-30
  - Summary of Cursor Movement 3-54
  - Summary of Debugger Commands 4-271
  - Summary of Debugging Aids 4-273
  - Summary of Erasing Text 1-53, 3-28
  - Summary of Help Functions in Different Contexts 1-86
- Quick
  - Summary of Mouse Functions 1-149
  - Summary of Moving the Cursor 1-50, 3-26
  - Summary of Zmacs Minor Modes 3-196
  - zwei:** **\*summary-scroll-fraction\*** variable 6-92
  - zwei:** **\*summary-subject-trim-spaces\*** variable 6-92
- Scrolling summary window 1-66
- Zmail Summary Window 1-57, 6-13
- Zmail Summary Window Configuration 1-57
- zwei:** **\*summary-window-fraction\*** variable 6-92
- Summary window scrolling 6-13
- summing loop** keyword 2-212
- Supdup program 1-115
- Supdup protocol 9-125
- Supdup protocols 9-125
- Supdup Protocols 9-125
- Super bit 5-5
- SUPER key 2-526
- QFILE SUPER-IMAGE character set translation mode 9-156
- :super-image** option for **with-open-file** 5-91
- :superior** RN-68
- Superior window 7-76, 7-78
- :superior** init option for
  - tv:choose-variable-values** 7-264
  - :superior** init option for **tv:sheet** 7-107
  - :superior** option for **defwindow-resource** 7-107
- SUPER QFILE OPEN option 9-166
- :supersede** symbol in **:if-exists** option for **open** 5-222, 8-43
- supervisor:** User Object Attribute 9-14
- Supplied-p variable 2-155
- Supplied translation rules 5-189
- Supplying a Command Name 1-11
- Supplying Keywords and Values for a Command 1-13
- Supplying Positional Arguments to a Command 1-11
- support 1-214
- Disk drive Support Buffers 3-109
- sys:%beep** Now Works on 3600-family Consoles That Support Digital Audio RN-68
- Zero-dimensional Arrays Are Now Supported RN-42
- Ztop Mode No Longer Supported RN-47
- Protocols supported by host 9-10
- Services supported by host 9-10
- Features Not Supported by Zmail 6-96
- Supported file formats 3-258
- Pathnames on Supported Host File Systems 5-174

- Funargs Supported in Release 6.0 RN-10
- Release 6.0 is Supported Only on 3600-family Machines RN-7
- List all supported servers 9-216
- Zmail Support for Internet Domain Addressing 6-95
- Support for Nonstandard Character Sets 2-275
- Microcode Support for the Digital Audio Facilities 7-321
- :supports-broadcast** message 9-209
- loop** Now Supports Iteration Over Hash Tables or Heaps RN-42
- :suppress-notifications** option 5-64, 7-32
- Suppress prompting for passwords 5-107
- Default surface type 5-151
- Preferred surface type 5-151
- Surface type in pathnames 5-151
- Macros That Surround Code 2-362
- [Mark] survey] Select menu item 6-79
- [Survey] Zmail menu item 6-58, 6-64
- SUSPEND 1-146, 4-75
- Swap space 1-201, 1-209, 1-212, 5-219, 5-216, 8-114
- :swap-hash** message 2-73
- swapf** macro 2-149
- [Swap Gray] 3-239
- [Swap Gray] Font Editor menu item 3-239, 3-260
- swaphash** function 2-74
- swaphash-equal** function 2-74
- Swap Point And Mark 3-88
- Swap Point And Mark (c-X c-X) Zmacs command 4-59
- :swap-recommendations** option for **make-area** 8-104
- Stack group switch 8-3
- Disk switching 1-201, 1-213
- Switching stack groups 8-4
- Common Lisp Character Switchover in Release 6.0 RN-12
- sxhash** function 2-59, 2-76
- sy-HELP 1-83
- Symbol 1-146
- symbol 9-30
- symbol 2-520
- symbol 2-520
- symbol 2-3
- symbol 2-3
- Symbol 2-607
- Symbol 2-573
- symbol 4-299
- symbol 2-566
- symbol 2-151
- lambda-list-keywords** symbol 2-151
- Named structure symbol 2-403
- nil** symbol 2-561
- otherwise** symbol 2-178
- Package cell of a symbol 2-3
- Print name of a symbol 2-3
- Private symbol 2-571
- Property list of a symbol 2-3
- Single-character symbol 2-34
- t** symbol 2-561
- The Function Cell of a Symbol 2-563
- The Package Cell of a Symbol 2-566
- The Print Name of a Symbol 2-565
- The Property List of a Symbol 2-564
- The Value Cell of a Symbol 2-561
- Unbound symbol 2-561
- Unbound-function symbol 1-177
- Uninterned symbol 2-357, 2-566
- Symbol definition 2-3, 2-563

- Where Is
  - Symbol Macros 2-353
  - Symbol (m-X) Zmacs command 2-571, 4-38
  - symbol-area** variable 8-107
  - symbol-package** function 2-573, 2-607
  - Symbol as menu item 7-208
  - Symbol as pattern in dummy description 7-188
  - Symbol associated with property list 2-67
- Find The Removing
  - Symbol Command 1-22
  - Symbol Data Type 2-3
  - symbol from package 2-606
  - Symbol function spec type 2-297
  - Symbolic host names 9-104
  - Symbolic names of shift keys 7-160
  - Symbolics Dialnet 9-73
  - Symbolics-Lisp Number Types 2-89
  - Symbolics Character Set 5-5
  - Symbolics Common Lisp 2-629
  - Symbolics Common Lisp 2-631
  - Symbolics Common Lisp RN-45
  - Symbolics Common Lisp 3-140
  - symbolics-common-lisp** package 2-633
  - Symbolics Common Lisp Extensions 2-635
  - Symbolics Lisp Machine Characters in Source Code
    - Where ASCII Characters Are Desired RN-20
  - Symbolics Store-and-Forward Mailer 6-107
  - symbol in **:if-exists** option for **open** 5-222, 8-43
  - symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
  - symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
  - symbol in **:if-does-not-exist** option for **open** 5-222, 8-43
  - symbol in **:if-exists** option for **open** 5-222, 8-43
  - symbol in **:if-exists** option for **open** 5-222, 8-43
  - symbol in **:if-exists** option for **open** 5-222, 8-43
  - symbol in **:if-exists** option for **open** 5-222, 8-43
  - symbol in **:if-locked** option for **open** 5-222, 8-43
  - symbol in **:if-locked** option for **open** 5-222, 8-43
  - Symbol in Lambda Lists 2-156
  - symbol in **make-system :version** option 4-222
  - symbol in **make-system :version** option 4-222
  - symbol in **make-system :version** option 4-222
  - Symbol line item entry 7-308
  - :symbol** message to **sys:package-locked** 2-543, 2-619
  - Symbol name conflicts 2-574
  - :symbol** option for **prompt-and-read** 7-59, RN-58
  - symbolp** function 2-7
  - Symbol print names storage area 8-107
  - :symbol** returned by **typep** 2-9
  - Symbols 2-3, 2-559, 2-561, 4-38
  - Symbols 2-643
  - Symbols 2-640
  - Symbols 2-566
  - symbols 2-357
  - symbols 2-573, 2-589, 2-593, 2-611, 2-613
  - Symbols 2-570, 2-571, 2-573
  - Symbols 2-611
  - Symbols 2-605
  - symbols 2-571
  - Symbols 2-24
  - symbols 2-573, 2-589, 2-593, 2-611
  - Symbols 2-573
  - symbols 2-570
  - symbols 2-151
  - symbols 2-559
- Introduction to New Feature in Release 6.0: Setting the Syntax for
  - SCL and Use of
- :error**
- :create**
- :error**
- nil**
- :new-version**
- nil**
- :overwrite**
- :supersede**
- :error**
- :share**
- Specifying a Keyword Parameter's
  - :latest**
  - :newest**
  - :released**
- CLM: Parsing of Numbers and
  - CLM: Translating Strings to Creating
  - Dot (.) in Exporting
  - External
- Functions That Import, Export, and Shadow
  - Functions That Map Names to Global
  - How the Reader Recognizes Importing
  - Importing and Exporting Internal
  - Keyword
  - Mapping from names to

- Mapping Names to Symbols 2-604
- Printed Representation of Symbols 2-15
- Qualified Names of Symbols 2-585
- Shadowing Symbols 2-574, 2-593, 2-611
- Uninterned symbols 2-29, 2-573
- List Matching Symbols (m-X) Zmacs command 4-38
- Symbols Added to or Removed From **global** in Release 6.0 RN-24
- Sharing of Symbols Among Packages 2-569
- How the Package System Allows Symbol Sharing 2-569
- Examples of Symbol Sharing Among Packages 2-589
- Specifying Internal and External Symbols in compiled code files 4-331, 5-241
- Adding new Symbols in Packages 2-585
- #: symbols storage area 8-107
- CC symbols to locked packages 2-626
- #: **symbol-syn-stream** 5-23
- CC symbol table 0-54
- #: **symeval** function 2-3, 2-561
- #: **symeval-globally** function 2-562
- #: **symeval-in-closure** function 2-335
- #: **symeval-in-instance** function 2-439
- #: **symeval-in-stack-group** function 8-6
- Length of **:symeval** line item 7-308
- Width of **:symeval** line item 7-308
- #: **:symeval** line item entry 7-308
- Load **syn-stream** 5-23
- #: Sync-program command 1-201
- Load Synchronization Flags 7-334
- QFILE Synchronization Functions 8-32
- QFILE synchronization check 9-166
- QFILE Synchronizing disk transfers 8-32
- QFILE Close and synchronous marks 9-176
- #: Synchronous Marks 9-176
- Load Synonym stream 5-23
- Load Synonym streams 5-21
- #: **loop** Synonyms 2-218
- #: **#"** syntax 2-637, 2-642
- Circumflex in integer syntax 2-20
- CLM: Declaration CLM: Standard Dispatching Macro Character syntax 2-640
- Default syntax 2-644
- Functions That Change Character syntax 3-140
- Keeping Track of Lisp Syntax 2-34
- Logical Pathname Wildcard syntax 4-23
- QFILE syntax 5-188, RN-71
- SCL syntax 9-160
- Tape Spec syntax 3-140
- Underscore in integer syntax 0-28
- Zetalisp syntax 2-20
- Set syntax 3-140
- Base and Syntax (m-X) 3-140
- Base and Syntax and Base Attributes in Source Files RN-9
- Base and Syntax Defaults 3-139
- Base and Syntax Default Settings for Lisp 1-54, 3-31, 3-120, 3-156, 3-170
- si:alphabetic** syntax description 2-34
- si:break** syntax description 2-34
- si:circlex** syntax description 2-34
- si:doublequote** syntax description 2-34
- si:macro** syntax description 2-34
- si:single** syntax description 2-34
- si:slash** syntax description 2-34
- si:verticalbar** syntax description 2-34
- si:whitespace** syntax description 2-34
- Invalid pathname syntax errors 2-550
- Syntax errors in read functions 2-543

- Setting the
  - :relative relative directory specifier
  - SCL and Standard Character
  - Non-real-time
  - Non-real-time
- Syntax for Symbolics Common Lisp 3-140
- syntax in logical pathnames 5-186
- Syntax Types Table 2-643
- synthesis 7-343, 7-344
- Synthesis Example 7-343
- Sys host 0-87
- sys package 2-615
- sys:%1d-a1oc function 2-246
- sys:%1d-aref function 2-246
- sys:%1d-aset function 2-246
- sys:%beep 7-327
- sys:%beep Now Works on 3600-family Consoles That Support Digital Audio RN-68
- sys:%block-store-cdr-and-contents function 8-22
- sys:%block-store-tag-and-pointer function 8-22
- sys:%change-list-to-cons function 8-13
- sys:%disk-error-device-check constant 8-39
- sys:%disk-error-ecc constant 8-40
- sys:%disk-error-misc constant 8-40
- sys:%disk-error-not-ready constant 8-39
- sys:%disk-error-overrun constant 8-40
- sys:%disk-error-search constant 8-40
- sys:%disk-error-peek constant 8-40
- sys:%disk-error-select constant 8-39
- sys:%disk-error-state-machine constant 8-40
- sys:%draw-line function 7-126
- sys:%draw-rectangle function 7-126
- sys:%draw-triangle function 7-126
- sys:%fixnum function 8-14
- sys:%flonum function 8-13
- sys:%instance-flavor function 8-13
- sys:%pointer-lessp function 8-16
- sys:%pointerp function 8-15
- sys:%pointer-type-p function 8-15
- sys:%p-store-cdr-and-contents function 8-21
- sys:%p-store-cdr-type-and-pointer function 8-21
- sys:%p-structure-offset function 8-20
- sys:%string-compare function 2-285
- sys:%string-exact-compare function 2-283
- sys:%unsynchronized-device-read function 8-23
- sys:abort flavor 2-502, 2-526, 2-532, 4-129
- sys:active-processes variable 8-80
- sys:all-processes variable 8-80
- sys:area-overflow flavor 2-537
- sys:arithmetic-error flavor 2-534
- sys:array-register 2-255
- sys:array-register declaration 2-312
- sys:array-column-span function 8-18
- sys:array-has-no-leader flavor 2-540
- sys:array-register-1d 2-245
- sys:array-register-1d declaration 2-312
- sys:array-wrong-number-of-dimensions flavor 2-540
- sys:array-wrong-number-of-subscripts flavor 2-541
- sys:bad-array-type flavor 2-540
- sys:bad-connection-state flavor 2-555
- sys:bad-data-type-in-memory flavor 2-534
- sys:bitblt-array-fractional-word-width flavor 2-537
- sys:bitblt-destination-too-small flavor 2-537
- sys:\*break-bindings\* variable 1-181
- sys:call-trap flavor 2-523
- sys:cell-contents-error flavor 2-533
- sys:clock-function-list variable 8-80
- sys:connection-closed flavor 2-555
- sys:connection-error flavor 2-555
- sys:connection-lost flavor 2-556

## The Beep Feature

**sys:connection-refused** flavor 2-555  
**sys:connection-closed-locally** flavor 2-555  
**sys:connection-no-more-data** flavor 2-556  
**sys:cons-in-fixed-area** flavor 2-538  
**sys:\*data-types\*** variable 8-13  
**sys:defsubst-with-parent** macro 2-319  
**sys:disk-error** flavor 2-538  
**sys:disk-read** function 8-36  
**sys:disk-write** function 8-36  
**sys:\*disk-error-codes\*** constant 8-39  
**sys:display-notification** function 7-128  
Sys:distribution; directory 0-18, 0-19  
**sys:divide-by-zero** flavor 2-479, 2-534  
**sys:double-float-p** function 2-8  
**sys:downward-funarg** declaration 2-139, 2-141, 2-313  
**sys:downward-function** declaration 2-139, 2-140, 2-312  
**sys:%%dpn-unit** constant 8-30  
**sys:%%dpn-page-num** constant 8-30  
**sys:draw-off-end-of-screen** flavor 2-537  
**sys:draw-on-unprepared-sheet** flavor 2-537  
**sys:dump-forms-to-file** function 4-331, 5-241  
**sys:end-of-file** flavor 2-536  
**sys:external-symbol-not-found** flavor 2-619  
**sys:fceiling** function 2-112  
**sys:fdefine-file-pathname** variable 2-319  
**sys:fdefinition-location** function 2-322  
**sys:ffloor** function 2-111  
**sys:file-local-declarations** variable 4-324  
**sys:fill-pointer-not-flxnum** flavor 2-540  
**sys:float-divide-by-zero** flavor 2-535  
**sys:float-divide-zero-by-zero** flavor 2-536  
**sys:float-inexact-result** flavor 2-536  
**sys:floating-exponent-overflow** flavor 2-535  
**sys:floating-exponent-underflow** flavor 2-536  
**sys:floating-point-exception** flavor 2-535  
**sys:float-invalid-compare-operation** flavor 2-536  
**sys:float-invalid-operation** flavor 2-536  
**sys:fround** function 2-113  
**sys:fruncate** function 2-112  
**sys:funcall-macro** and lexical scoping RN-12  
**sys:function-parent** declaration 2-312  
**sys:function-parent** function 2-319  
**sys:function-parent** Declaration 2-319  
**sys:halt** function 1-223  
**sys:host-not-responding** flavor 2-555  
**sys:host-not-responding-during-connection** flavor 2-555  
**sys:host-stopped-responding** flavor 2-555  
**sys:instance-variable-pointer-out-of-range** flavor 2-538  
**sys:instance-variable-zero-referenced** flavor 2-538  
**sys:invalid-form** and lexical scoping RN-12  
**sys:invalid-function** flavor 2-542  
**sys:invalid-function** and lexical scoping RN-12  
**sys:invalid-lambda-list** and lexical scoping RN-12  
**sys:kbd-intercepted-characters** variable 7-15  
**sys:kbd-standard-abort-characters** variable 7-16  
**sys:kbd-standard-intercepted-characters** variable 7-16  
**sys:kbd-standard-suspend-characters** variable 7-16  
Sys:l-ucode; logical directory 1-210, 5-217  
**sys:local-network-error** flavor 2-554  
**sys:make-stack-array** function 8-28  
**sys:name-conflict** flavor 2-619

Using the



## Interning Errors Based on

**sys:negative-sqrt** flavor 2-536  
**sys:network-error** flavor 2-554  
**sys:network-resources-exhausted** flavor 2-554  
**sys:network-stream-closed** flavor 2-556  
**sys:no-action-mixin** flavor 2-532  
**sys:non-positive-log** flavor 2-534  
**sys:number-array-not-allowed** flavor 2-541  
**sys:package-error** 2-542  
**sys:package-error** flavor 2-542, 2-619  
**sys:package-locked** flavor 2-543, 2-619  
**sys:package-not-found** flavor 2-542, 2-619  
**sys:page-in-area** function 8-25  
**sys:page-in-array** function 8-25  
**sys:page-in-region** function 8-25  
**sys:page-in-structure** function 8-24  
**sys:page-in-words** function 8-25  
**sys:page-out-area** function 8-26  
**sys:page-out-array** function 8-25  
**sys:page-out-region** function 8-26  
**sys:page-out-structure** function 8-25  
**sys:page-out-words** function 8-26  
**sys:parse-error** flavor 2-543  
**sys:pdl-overflow** flavor 2-537  
**sys:printing-random-object** macro 2-18  
**sys:print-not-readable** flavor 2-543  
**sys:read-character** function 5-76, 7-5  
**sys:read-error** flavor 2-544  
**sys:read-end-of-file** flavor 2-544  
**sys:read-list-end-of-file** flavor 2-544  
**sys:read-premature-end-of-symbol** flavor 2-544, RN-38  
**sys:read-string-end-of-file** flavor 2-544  
**sys:redefinition** flavor 2-538  
**sys:%%region-scavenge-enable** option for make-area 8-104  
**sys:%%region-space-type** option for make-area 8-104  
**sys:region-table-overflow** flavor 2-538  
**sys:remote-network-error** flavor 2-554  
**sys:reset-temporary-area** function 8-107  
**sys:scheduler-stack-group** variable 8-79  
**sys:sg-previous-stack-group** function 8-5  
**sys:single-float-p** function 2-8  
Sys:site;Logical-host. Translations File 4-218  
Sys:site;system-name.system file 4-218, 4-217  
**sys:stream-closed** flavor 2-536  
**sys:subscript-out-of-bounds** flavor 2-541  
**sys:throw-tag-not-seen** flavor 2-538  
**sys:too-few-arguments** flavor 2-539  
**sys:too-many-arguments** flavor 2-539  
**sys:unbound-symbol** flavor 2-533  
**sys:unbound-variable** flavor 2-533  
**sys:unbound-closure-variable** flavor 2-533  
**sys:unbound-instance-variable** flavor 2-533  
**sys:unclaimed-message** flavor 2-542  
**sys:undefined-function** flavor 2-534  
**sys:undefined-keyword-argument** flavor 2-542  
**sys:unknown-address** flavor 2-554  
**sys:unknown-host-name** flavor 2-554  
**sys:unknown-locf-reference** flavor 2-534  
**sys:unknown-self-reference** flavor 2-534  
**sys:virtual-memory-overflow** flavor 2-537  
**sys:with-indentation** macro 5-49  
**sys:with-data-stack** special form 8-28  
**sys:with-open-file-search** macro 5-97  
**sys:with-stack-array** special form 8-28

- Base Flavor: **sys:write-in-read-only** flavor 2-537
- New Array Error Flavor: **sys:wrong-stack-group-state** flavor 2-537
- Base Flavor: **sys:wrong-type-argument** condition 2-505
- sys:wrong-type-argument** flavor 2-539
- sys:zero-args-to-select-method** flavor 2-539
- sys:arithmetic-error** 2-534
- sys:array-wrong-number-of-subscripts** RN-38
- sys:cell-contents-error** 2-533
- Sysdcl file 2-598
- sys:downward-funarg** Declarations 2-140
- sys:downward-function** and **sys:downward-funarg** Declarations 2-140
- sys:external-symbol-not-found** 2-619
- sys:external-symbol-not-found** 2-619
- sys:floating-point-exception** 2-535
- sys:float-invalid-compare-operation** RN-38
- SYS logical host 5-186
- New Stream Handling Error Flavors: **sys:stream-closed** and **sys:network-stream-closed** RN-38
- sys:package-locked** 2-543, 2-619
- sys:package-locked** 2-543, 2-619
- sys:package-not-found** 2-542, 2-619
- sys:package-not-found** 2-542, 2-619
- sys:read-premature-end-of-symbol** RN-38
- sys:stream-closed** and **sys:network-stream-closed** RN-38
- System 4-189
- System 9-212
- System 0-30
- System 4-251
- System 7-205
- System 2-625
- System 4-191
- System 9-200
- system 1-200, 5-221, 8-42
- System RN-1
- System 4-251
- System 4-249
- System 3-265
- system 6-94
- System 1-209, 5-216
- System 9-33
- Initialization, Reset, and Enable: Interfacing to the Network
- System 9-211
- system 0-87
- System 9-195
- System 2-417
- System 5-3
- System 1-111, 9-3
- System 7-73
- System 5-203
- System 4-221
- system 0-39
- System 2-421, 2-423
- System 9-3
- New Function **si:map-system-files** Operates on a Declared System RN-53
- New Function **si:set-system-file-properties** Operates on a Declared System RN-53
- System RN-64
- System 2-417
- system 2-566
- system 9-55
- System 7-75
- system 1-201
- system 5-127
- Byte Stream Conventions: Interfacing to the Network
- Carry-tape
- Changing the Status of a Patchable
- Choice Facilities Use the Flavor
- Compatibility with the Pre-release 5.0 Package
- Defining a
- Example: Interfacing to the Network
- FEP file
- File
- Functions That Operate on a
- Getting Information About a
- Hardcopy
- Host
- How LMFS Uses the FEP File
- Implementation of the Namespace
- Installing the graphic-lisp
- Interfacing to the Network
- Introduction to the Flavor
- Introduction to the I/O
- Introduction to the Namespace
- Introduction to Using the Window
- Lisp Machine File
- Making a
- Manipulating the local file
- Message Passing in the Flavor
- Namespace
- New Notification
- Objects and the Flavor
- Package
- Pathname
- Purpose of the Window
- Restoring a file
- Shared file



- [Edit] File System Editor menu item 5-233
- [Expunge] File System Editor menu item 5-233
- [Hardcopy] File System Editor menu item 5-233
- [Link Transparencies] File System Editor menu item 5-233
- [Load] File System Editor menu item 5-233
- [New Properties] File System Editor menu item 5-233
- [Open] File System Editor menu item 5-233
- [Rename] File System Editor menu item 5-233
- [Selective Open] File System Editor menu item 5-233
- [Undelete] File System Editor menu item 5-233
- [View Properties] File System Editor menu item 5-233
- [View] File System Editor menu item 5-233
- [Wildcard Delete] File System Editor menu item 5-233
- Miscellaneous System Errors Not Categorized by Base Flavor 2-536
- Introduction to the System Facility 4-189
- Namespace System file types 0-20
- Namespace System Functions 9-29
- Namespace System Host Objects 9-7
- Display system information 4-304
- Changes to the File :system initialization list 8-71
- Improvements to the File System Initialization Lists 8-71
- tv:\*escape-keys\*** and **tv:** System in Release 6.0 RN-71
- Namespace System in Release 6.0 RN-71
- System **\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
- System Lisp Data Types 9-29
- System **system** List Option for **load-patches** 4-245
- [Complete Dump] File System Maintenance Commands 0-39
- [Flush Free Buffer] File System Maintenance menu item 0-39
- [Flush Timeout] File System Maintenance menu item 0-39
- [Free Records] File System Maintenance menu item 0-39
- [HELP] File System Maintenance menu item 0-39
- [Incremental Dump] File System Maintenance menu item 0-39
- [Lisp Window] File System Maintenance menu item 0-39
- [List FEP FS Root] File System Maintenance menu item 0-39
- [Maintenance] File System Maintenance menu item 0-39
- [Print Herald] File System Maintenance menu item 0-39
- [QUIT] File System Maintenance menu item 0-39
- [Reload/Retrieve] File System Maintenance menu item 0-10, 0-39
- [Salvage] File System Maintenance menu item 0-39
- [Server Errors] File System Maintenance menu item 0-39
- [Server Shutdown] File System Maintenance menu item 0-39
- [Tree edit any] File System Maintenance menu item 0-39, 5-231
- [Tree edit Homedir] File System Maintenance menu item 0-39, 5-231
- [Tree edit root] File System Maintenance menu item 0-39, 5-231
- Free Records: File System Maintenance Program 0-37
- Adding an item to the System Maintenance Program 0-37
- Hardcopying From the System Menu 7-238
- [Inspect] in System Menu 1-107, 3-267
- Leaving Zmacs Via the System menu 1-189, 4-295
- [Attributes] System Menu 3-40
- [Create] System menu item 4-141
- [Edit] System menu item 7-75
- [Edit Screen] System menu item 4-9
- [Inspect] System menu item 4-66, 4-129, 7-75, 7-76, 7-175
- [Namespace] System menu item 4-104
- [Split Screen] System Menu item 9-22
- [Trace] System menu item 4-66, 4-129
- R2: System menu item 4-92, 4-94
- Flavor System menu mouse click 3-57
- Show system messages 2-453
- Namespace System Modifications Command 1-39
- System **system-name** Option for **load-patches** 4-245
- System Network Objects 9-14

Namespace  
   FEP File  
   Condition  
   Window  
   File  
   FEP File  
   Namespace  
 FREE-SPACE-DESCRIPTION file  
 SETTABLE-PROPERTIES file  
   Maclisp  
 Debugger Commands That Call Other  
   Music  
 Pathnames on Supported Host File  
   Updating  
   Distributing transportable  
   Namespace  
   Dumper  
   Matrices and  
   Writing  
   Installing  
     **:broken**  
     **:experimental**  
     **:obsolete**  
     **:released**  
 Allocating and freeing window  
   Flavor  
   [Prune  
 Upgrading an existing  
   Selecting  
   3600-family Disk  
   Namespace  
 Disk and FEP File  
   Namespace  
   File types of the  
     **si:**  
     File  
     [Add  
     c-X  
     c-X  
     System Object Definitions 9-7  
     **:system** option for **add-initialization** 8-67  
     System Overview 1-208, 5-215  
     system package 2-615  
     system package 2-615  
     system partition table 0-35, 5-213  
     System Pathnames 5-176  
     System Printer Objects 9-16  
     system property 9-186  
     system property 9-186  
     system property names 2-564  
     Systems 0-16  
     Systems 4-264  
     systems 7-324  
     Systems 5-174  
     systems 4-231  
     Systems List 0-20, 0-21  
     systems and libraries 0-15  
     System Site Objects 9-18  
     Systems List 0-20  
     Systems of Linear Equations 2-258  
     systems onto tape 0-19  
     System source files 4-231  
     System Source Policy 0-17  
     system sources 0-87  
     Systems selected for dumping 0-20  
     system status 4-251  
     system status 4-251  
     system status 4-251  
     system status 4-251  
     system storage resources 8-131  
     system storing functions 2-297  
     systems] Choice Boxes menu item 0-22  
     system to a new major release 0-87  
     system to be dumped 0-20  
     System User Interface 8-29  
     System User Objects 9-11  
     System Utilities 8-58  
     System Variables 9-29  
     System Version-directory File 4-233  
     system version-directory file 4-236  
     **system-version-info** function 4-249  
     system version number 9-26  
     [System] 0-20  
     S Zmacs command 3-30  
     S Zmail command 6-17, 6-81  
     S Zmail command 6-37

T

T

T

SELECT  
   T 3-40  
   t symbol 2-561  
   T306 disk drive 1-214  
   TAB 3-163  
   **tab** 5-47  
   **tab** 5-47  
   Tab character 2-32, 5-5  
   **tab** function 5-47  
   TAB Key 1-146  
   Tab stops 7-108  
   **:tab-nchars** init option for **tv:sheet** 7-108, 7-117  
   **:tab-period** option for formatting functions 5-44  
   Tab-Width file attribute 3-143  
   @tabclear text formatting command 3-37  
   @tabdivide text formatting command 3-37

- CC symbol table 0-54
  - Char-exists table 3-223
  - Command processor command table 7-53
  - Connection address in routing table 9-108
  - Connection cost in routing table 9-108
  - Connection type in routing table 9-108
  - Creating a command processor command table 7-53
  - Deleting a command processor command table 7-53
  - File system partition table 0-35, 5-213
  - Finding a command processor command table 7-53
  - Font indexing table 7-146
  - Hash table 2-75
  - ITS host table 9-108
  - Routing table 9-108
  - SCL and Standard Character Syntax Types Table 2-643
  - SCL and Standard Constituent Character Attributes Table 2-643
- Table searches 2-59
- Table (m-X) Zmacs command 4-57
- Table (m-X) Zmacs command 4-57
- table considerations while using multiprocessing 2-69
- table facilities 2-59
- Table Font Attribute 3-223
- table for the Boolean operations 2-114
- Table Functions 2-73
- table keys 2-69
- table keys 2-69
- table keys 2-69
- Table Messages 2-72
- Table of Contents 1-125
- Table Protocol 9-127
- Tables 2-59
- Tables 2-641
- tables 3-7, 3-208
- Tables 7-52
- Tables 2-71
- tables 0-64
- Tables 2-69
- Tables 3-7
- Tables 2-59
- Tables 3-107
- Tables 3-106
- tables 4-57
- Tables and Loop Iteration 2-75
- Tables and Search Domains 3-106
- Tables and Search Domains in Zmacs 3-106
- Tables and the Garbage Collector 2-75
- Tables or Heaps 2-224
- Tables or Heaps RN-42
- Tables Replacement Operation 3-106
- Tables to Files 2-75
- Tables Using Keyboard Macros 3-206
- Tables Using Keyboard Macros 3-206
- Tables Using Keyboard Macros 3-205
- Tables Work 3-106
- (TAB or c-m-TAB) Zmacs command 4-26
- @tabset text formatting command 3-37
- Tabulation format directive 5-35
- Tab Width (m-X) Zmacs command 3-143, 4-10
- Tag tables 4-57
- tagbody** special form 2-187
- tag error 2-538
- tags 2-189
- Tags Query Replace (m-X) Zmacs command 4-57
- Tags Search (m-X) Zmacs command 4-57
- Tag Table (m-X) Zmacs command 4-57
- Throw
- prog**
- Select All Buffers As

- Select System As Performing Operations with Specifying and Listing Introduction to
  - Example of a How
- set-syntax-macro-char**
- array-pop**
- si:install-microcode**
- New Function:
  - Copying distribution
  - Loading sources from a distribution
  - Streams that read or write magnetic
  - Verifying a backup
  - Writing FEP Files to Writing files to
  - Writing Programs That Use Magnetic Writing systems onto
- tape:**
  - report** option for
- The
  - Changing default selections for
    - :density** option for
    - :file-or-files** option for
    - :reel** option for
    - :tape-host** option for Listing of
  - tape:** Backup dump
  - Registering a Append to
  - Multiple reel
  - Installing new releases distributed in patch
    - :density** option for
    - :direction** option for
    - :host** option for
    - :input-stream-mode** option for
- Tag Table (m-X) Zmacs command 4-57
- Tag Tables 3-107
- Tag Tables 3-106
- Tag Tables and Search Domains 3-106
- Tag Tables and Search Domains in Zmacs 3-106
- Tag Tables Replacement Operation 3-106
- Tag Tables Work 3-106
- Tailoring Pathname Defaults 5-130
- tailp** function 2-61
- Takes an Optional Fourth Argument RN-40
- Takes an Optional Second Argument RN-42
- Takes a Second Optional Argument RN-41
- Talking to Other Users 1-69
- tan** function 2-106
- tand** RN-33
- tand** function 2-107, RN-33
- Tangent 2-106
- tanh** function 2-107, RN-35
- tape 0-18
- tape 0-87
- tape 5-269
- tape 0-10
- Tape 8-59
- tape 0-31
- Tape 5-267
- tape 0-19
- Tape Access 0-17
- Tape Errors 2-556
- tape** Service 9-63
- Tape Specs 0-25
- Tape streams 5-269
- tape-error** flavor 2-556, 5-277
- tape:carry-dump** 0-31
- tape:carry-dump** function 0-31
- tape:carry-list** function 0-34
- tape:carry-load** function 0-32
- tape:copy-tape** function 0-18
- tape:end-of-tape** flavor 2-556, 5-277
- tape:make-stream** function 5-269
- tape:make-stream** Function 5-269
- tape:mount-error** flavor 2-556, 5-277
- tape:tape-error** flavor 2-556, 5-277
- tape:tape-device-error** flavor 2-556, 5-277
- tape:write-fep-files-to-tape** function 0-20, 8-59
- tape access 0-17
- tape:carry-dump** 0-31
- tape:carry-dump** 0-31
- tape:carry-dump** 0-31
- tape:carry-dump** 0-31
- tape contents 0-18
- tape-device-error** flavor 2-556, 5-277
- tape directory 0-10
- Tape directory file 0-6
- Tape Drive ID 0-6
- Tape Drive in the Namespace 0-72
- tape dump parameter 0-6
- Tape Error Flavors 5-277
- tape files 1-201
- tape format 0-87
- Tape hardware resetting 1-201
- Tape Host dump parameter 0-6
- :tape-host** option for **tape:carry-dump** 0-31
- tape:make-stream** 5-269
- tape:make-stream** 5-269
- tape:make-stream** 5-269
- tape:make-stream** 5-269

|                                           |                       |                                   |       |
|-------------------------------------------|-----------------------|-----------------------------------|-------|
| <b>:lock-reason</b>                       | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:minimum-record-length-granularity</b> | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:minimum-record-length</b>             | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:no-bot-prompt</b>                     | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:norewind</b>                          | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:pad-char</b>                          | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:prompt</b>                            | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:record-length</b>                     | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:reel</b>                              | option for            | <b>tape:make-stream</b>           | 5-269 |
| <b>:unit</b>                              | option for            | <b>tape:make-stream</b>           | 5-269 |
|                                           |                       | Tape Reel ID dump parameter       | 0-6   |
|                                           |                       | Tape restore to disk              | 1-201 |
| Description of Distribution               |                       | Tapes                             | 0-16  |
|                                           |                       | Tape Spec Merging Examples        | 0-30  |
|                                           | Buffers               | tape spec parameter               | 0-26  |
|                                           | Bufs                  | tape spec parameter               | 0-26  |
|                                           | Den                   | tape spec parameter               | 0-26  |
|                                           | Dens                  | tape spec parameter               | 0-26  |
|                                           | Density               | tape spec parameter               | 0-26  |
|                                           | Dev                   | tape spec parameter               | 0-26  |
|                                           | Device                | tape spec parameter               | 0-26  |
|                                           | Granularity           | tape spec parameter               | 0-26  |
|                                           | Host                  | tape spec parameter               | 0-26  |
|                                           | Len                   | tape spec parameter               | 0-26  |
|                                           | Length                | tape spec parameter               | 0-26  |
|                                           | Machine               | tape spec parameter               | 0-26  |
|                                           | Minimum               | tape spec parameter               | 0-26  |
|                                           | Minimum-length        | tape spec parameter               | 0-26  |
|                                           | Minimum-record        | tape spec parameter               | 0-26  |
|                                           | Minimum-record-length | tape spec parameter               | 0-26  |
|                                           | Minrec                | tape spec parameter               | 0-26  |
|                                           | Minreclen             | tape spec parameter               | 0-26  |
|                                           | N-buffers             | tape spec parameter               | 0-26  |
|                                           | N-bufs                | tape spec parameter               | 0-26  |
|                                           | N-bufs                | tape spec parameter               | 0-26  |
|                                           | Number-of-buffers     | tape spec parameter               | 0-26  |
|                                           | Reclen                | tape spec parameter               | 0-26  |
|                                           | Record-length         | tape spec parameter               | 0-26  |
|                                           | Reclen                | tape spec parameter               | 0-26  |
|                                           | Reclen                | tape spec parameter               | 0-26  |
|                                           | Reel                  | tape spec parameter               | 0-26  |
|                                           | Unit                  | tape spec parameter               | 0-26  |
|                                           | Vol                   | tape spec parameter               | 0-26  |
|                                           | Volume                | tape spec parameter               | 0-26  |
|                                           |                       | Tape Spec Parameters              | 0-26  |
|                                           |                       | Tape spec parameter specification | 0-28  |
|                                           |                       | Tape Spec Prompting               | 0-25  |
|                                           | How                   | Tape Specs Are Merged             | 0-27  |
|                                           |                       | Tape Spec Syntax                  | 0-28  |
| <b>:await-rewind</b>                      | message to            | tape streams                      | 5-273 |
| <b>:bot-p</b>                             | message to            | tape streams                      | 5-273 |
| <b>:check-ready</b>                       | message to            | tape streams                      | 5-273 |
| <b>:clear-eof</b>                         | message to input      | tape streams                      | 5-273 |
| <b>:clear-error</b>                       | message to            | tape streams                      | 5-273 |
| <b>:close</b>                             | message to            | tape streams                      | 5-273 |
| <b>:discard-current-record</b>            | message to input      | tape streams                      | 5-273 |
| <b>:force-output</b>                      | message to output     | tape streams                      | 5-273 |
| <b>:host-name</b>                         | message to            | tape streams                      | 5-273 |
| <b>:record-status</b>                     | message to input      | tape streams                      | 5-273 |
| <b>:rewind</b>                            | message to            | tape streams                      | 5-273 |
| <b>:set-offline</b>                       | message to            | tape streams                      | 5-273 |
| <b>:skip-file</b>                         | message to            | tape streams                      | 5-273 |
| <b>:write-eof</b>                         | message to output     | tape streams                      | 5-273 |
| <b>:write-error-status</b>                | message to output     | tape streams                      | 5-273 |
|                                           | Messages to           | Tape Streams                      | 5-273 |
|                                           | Distribution          | Tape Subsystem                    | 0-15  |
|                                           | Using the             | Tape System                       | 0-15  |



- Leave option to
- Offline option to
- Query option to
- Rewind option to
- neti:**
- Disk event
- Disk event
- Disk event
- Upright Biphase NRZI
- Deriving Methods for Tools and
- Features Described in Tools and
- Fundamental Zmail
- HELP: Program Development Tools and
- Introduction to Tools and
- Organization of Tools and
- Program Development Tools and
- Purpose of Tools and
- Scope of Tools and
- Zmacs
- Direct-dial
- Arpanet
- Chaosnet
- zwei:**
- Lists as
- Selecting a Window
- tv:**
- tv:**
- tv:**
- tv:**
- tv:**
- [Recycled]
- Version
- TOPS-20 and
- Entering
- Remote ASCII
- Data
- descriptor-file** keyword for
- name** keyword for
- primary-name-server** keyword for
- search-rules** keyword for
- secondary-name-server** keyword for
- Editing
- Saving
- Using the
- Using the
- Tape when done dump parameter 0-6
- Tape when done dump parameter 0-6
- Tape when done dump parameter 0-6
- Tape when done dump parameter 0-6
- Tape when done dump parameter 0-6
- Target machines 0-49
- \*target-number-of-wired-packet-buffers\*** variable 9-198
- tasks 8-32
- tasks currently allocated 8-33
- tasks that can be concurrently allocated 8-33
- t** blinker visibility 7-146
- :tcp** connection 9-44
- tcp-gateway** Service 9-63
- technique 9-98
- Techniques 4-3
- Techniques 4-4
- Techniques 6-57
- Techniques 4-7
- Techniques 4-3
- Techniques 4-4
- Techniques 4-1
- Techniques 4-3
- Techniques 4-3
- Teco Mode 3-157
- telephone network 9-15
- Telnet program 1-115
- Telnet protocol 9-125
- Telnet and Supdup protocols 9-125
- Telnet and Supdup Protocols 9-125
- Temp-locked windows 7-82, 7-84
- \*temp-file-type-list\*** variable 3-135
- templates 2-345
- Temporarily 7-100
- Temporary Windows 7-84
- temporary-choose-variable-values-window** flavor 7-273
- temporary-choose-variable-values-window** resource 7-274
- temporary-multiple-choice-window** flavor 7-254
- temporary-multiple-choice-window** resource 7-255
- :temporary** option for **with-open-file** 5-91
- TEMPORARY QFILE OPEN option 9-166
- temporary-timeout-window** flavor 7-174
- temporary] Move menu item 6-79
- TENEX 6-94, 6-95
- TENEX pathnames 5-183
- TENEX mail file format 6-95, 6-96
- TENEX pathname component 5-183
- TENEX Pathnames 5-183
- Terminal 3-40
- terminal 9-69, 9-70
- Terminal character 2-32
- terminal-io** variable 4-14, 4-112, 5-22, 7-75, 8-7
- Terminal Equipment 5-247
- terminal-f-argument:** Site Object Attribute 9-21
- terminal-f-argument** attribute 9-22
- terminal-f-argument** attribute 9-7
- terminal-f-argument** attribute 9-22
- terminal-f-argument** attribute 9-21
- terminal-f-argument** attribute 9-22
- terminal input 1-101, 5-53, 7-21
- terminal interactions in file 1-183
- Terminal Program with Hosts Connected to the Serial Line 5-265
- Terminal Program with the Dial Network 9-85

- Data terminals 5-247
- Data Circuit Terminating Equipment 5-247
- Loop termination 2-212, 2-214
- Obsolete Terms 1-227
- terpri** function 5-87
- :terpri** option for **format:tab** 5-47
- Test command 1-201
- Diagnostic test for ephemeral-object garbage collector 0-87
- Testing **:line-in** operation 5-12
- Testing **:string-in** operation 5-12
- Testing **:string-line-in** operation 5-12
- Testing for even number 2-97
- Testing for negative number 2-97
- Testing for odd number 2-97
- Testing for positive number 2-97
- Testing for sign of a number 2-97
- Testing for the Existence of Audio 7-330
- Testing for zero 2-97
- Testing Zmail Message Characteristics 6-58
- :test** keyword to **make-hash-table** function 2-641
- Tests 2-215
- Aggregated Boolean text 3-34
- Boldface text 3-34
- Center Text 3-72
- Deleting Vs. Killing text 3-34
- Description text 1-53, 3-28
- Description of Erasing text 3-34
- Display text 3-34
- Enumerate text 1-145, 3-76
- Erasing text 3-34
- Example text 3-34
- Format text 3-22
- Inserting text 1-53, 3-28
- Introduction to Erasing text 1-53, 3-22
- Introduction to Inserting text 3-34
- Itemize text 4-60
- Killing text 3-91
- Marking text 4-59
- Moving text 4-59
- Moving Through text 3-72
- Overview of Deleting Vs. Killing text 3-33
- Producing Formatted text 3-43
- Restoring text 1-53, 3-28
- Summary of Erasing text RN-49
- Three New Zmacs Commands for Formatting text 3-82
- Transposing Lines of text 3-34
- Verbatim text 4-60
- Yanking text 3-33
- Zmacs Commands for Formatting text 1-67
- Zmail Decrypt text 1-67
- Zmail Encrypt text example 3-37
- Text heading 3-37
- Text processing 2-277
- Text subheading 3-37
- Text Back 3-43
- Text field in Zmail messages 6-11
- Getting text files 5-109
- Loading text formatting command 3-34
- @b** text formatting command 3-34
- @l** text formatting command 3-34
- @t** text formatting command 3-37
- @#** text formatting command 3-37
- @\*** text formatting command 3-37
- @.** text formatting command 3-37
- @=** text formatting command 3-37
- @>** text formatting command 3-37
- @blankspace** text formatting command 3-37

- @caption text formatting command 3-37
- @foot text formatting command 3-37
- @note text formatting command 3-37
- @tabclear text formatting command 3-37
- @tabdivide text formatting command 3-37
- @tabset text formatting command 3-37
- @\ text formatting command 3-37
- @^ text formatting command 3-37
- Basic Text Formatting Commands 3-37
- Zmacs text formatting commands 3-37
- Basic Text Formatting Environments 3-34
- Introduction to Text Formatting in Zmacs 3-33
- Insert text from register into buffer 3-90
- Graphical objects and text intermingled 7-279
- Repositioning Text in the Document Examiner 1-134
- Appending, Prepending, and Inserting Text in Zmacs 3-124
- Deleting and Transposing Text in Zmacs 3-71
- zwei:** **\*text-mail-file-separator\*** variable 6-91
- Init File Form: Auto Fill in Text Mode 1-170, 3-214
- Zmacs Text Mode 3-156
- tv:** TEXT pathname type abbreviation 5-180
- tv:** **text-scroll-window** flavor 7-174
- tv:** **text-scroll-window-empty-gray-hack** flavor 7-174
- Text Scroll Windows 7-174
- Example of Filling Text with Auto Fill Minor Mode 3-195
- Add More Text Zmail Command 6-38
- Subject or Text Zmail display column heading 1-57
- their loop** keyword 2-222
- the loop** keyword 2-207, 2-222
- then loop** keyword 2-207
- thereis loop** keyword 2-215
- the** special form 2-640
- the** special form 2-640
- thing mouse click 3-57
- third** function 2-46
- New Line with This Indentation in Zmacs 3-166
- Thrashing 8-121
- Three New Zmacs Commands for Formatting Text RN-49
- Throw 2-197
- \*throw** 2-482
- \*throw** function 2-200
- Throwing 8-3
- throw** special form 2-198
- Throw tag error 2-538
- sys:** **throw-tag-not-seen** flavor 2-538
- QFILE TID 9-153
- TID QFILE token 9-160
- Tilde format directive 5-34
- Date and time 1-198
- Getting and Setting the Time 7-355
- Propagation delay time 9-99
- Universal Time 7-353
- Time Conversions 7-367
- Time formats 7-353, 7-359, 7-361
- time** function 7-356
- Time intervals 7-353
- time** package 7-353
- TIME protocol 9-119, 9-127
- time** Service 9-63
- Time zone 7-353
- time-difference** function 7-356
- time-increment** function 7-356
- time-lessp** function 7-356
- Time-slot counter 9-99
- time:daylight-savings-p** function 7-369

- time:daylight-savings-time-p** function 7-369
- time:day-of-the-week-string** function 7-370
- time:decode-universal-time** function 7-367
- time:encode-universal-time** function 7-367
- time:fixnum-microsecond-time** function 7-357
- time:get-time** function 7-355
- time:get-universal-time** function 7-355
- time:initialize-timebase** function 7-369
- time:leap-year-p** function 7-369
- time:microsecond-time** function 7-357
- time:month-length** function 7-369
- time:month-string** function 7-370
- time:parse** function 7-361
- time:parse-interval-or-never** function 7-365
- time:parse-present-based-universal-time** function 7-362, RN-65
- time:parse-universal-time** function 7-362
- time:parse-universal-time-relative** function 7-362, RN-65
- time:print-date** function 7-359
- time:print-time** function 7-359
- time:print-brief-universal-time** function 7-359
- time:print-current-date** function 7-359
- time:print-current-time** function 7-359
- time:print-interval-or-never** function 7-365
- time:print-universal-date** function 7-359
- time:print-universal-time** function 7-359
- time:read-calendar-clock** function 7-355
- time:read-interval-or-never** function 7-365
- time:set-calendar-clock** function 7-355
- time:set-local-time** function 7-355
- time:\*timezone\*** variable 7-367
- time:timezone-string** function 7-371
- time:verify-date** function 7-370
- Set sleep time between updates Peek command 1-185, 4-303
- Initialize Time Command 1-24
- Set Time Command 1-33
- time-elapsed-p** function 7-356, RN-65
- Time format directive 5-42
- Date and time format directive 5-42
- CLM: Time Functions 2-645
- Internal Time Functions 7-369
- New Time Functions RN-65
- Elapsed Time in 60ths of a Second 7-356
- Elapsed Time in Microseconds 7-357
- :time-interval-60ths tv:choose-variable-values** variable type 7-259, RN-59
- Time Interval format directive 5-42
- :time-interval-or-never** option for **prompt-and-read** 7-59
- :time-interval-or-never tv:choose-variable-values** variable type 7-259
- Reading and Printing Time Intervals 7-365
- Time of day 7-353
- Time-of-day format directive 5-42
- Arpanet Time protocol 9-127
- Chaosnet Time Protocol 9-127
- Chaosnet RFC/ANS time protocol 9-50
- Timer Interrupt Enable bit 9-131
- Dates and Times 7-351
- Printing Dates and Times 7-359
- Reading Dates and Times 7-361
- Representation of Dates and Times 7-353
- times** function 2-102
- :times** option for **defstruct** 2-385, 2-390, 2-395
- Timestamp 9-26, 9-33

- Namespace **timestamp** indicator 9-33
- Timestamp Protocol 9-35
- time:** **\*timezone\*** variable 7-367
- time:** **timezone-string** function 7-371
- timezone:** Site Object Attribute 9-20
- SELECT T key 1-115
- To field 1-62
- To: prompt 1-62
- Zmail To: Field 6-35
- Append To Buffer 3-124
- Append To File (m-X) Zmacs command 3-124
- Prepend To File (m-X) Zmacs command 3-124
- Toggle 3-195
- Toggling the Trap-on-exit Flag for the Current Frame 4-266
- Token 1-112, 9-4, 9-24, 9-29
- CMD QFILE token 9-160
- FH QFILE token 9-160
- TID QFILE token 9-160
- Virtual token 9-99
- QFILE Tokens 9-160
- Tokens in the input stream 2-19
- to loop** keyword 2-207, 2-225
- too-few-arguments** flavor 2-539
- sys:** Tools 2-237
- Array Representation Tools 2-645
- CLM: Debugging Tools 8-108
- Memory Mapping Tools and Techniques 4-3
- Deriving Methods for Tools and Techniques 4-4
- Features Described in Tools and Techniques 4-7
- HELP: Program Development Tools and Techniques 4-1
- Program Development Tools and Their Differences 4-316
- Compiler Tools for Compiling Code From the Editor Into Your World 4-316
- Tools for Compiling Files 4-317
- Tools for Compiling Single Functions 4-318
- Tools for Lisp Debugging 1-189
- too-many-arguments** flavor 2-539
- sys:** Top 3-129
- Creating Two Windows with the Region in Using Two Windows, Select Top 3-129
- Motion Among Top-level loop 1-151
- Controlling the Evaluation of Top-level Expressions 3-66
- How the Stream Compiler Handles Top-level Forms 4-314
- The Top-level Forms 4-310
- CLM: the Top-level Function 4-126
- tv:** Top-level Interface to Zmail 6-13
- Top-level Loop 2-642
- top-box-label-mixin** flavor 7-173
- Top edge of menu 7-298
- Top Edge of the FED Character Box 3-237
- Beginning of Topic 1-134
- End of Topic 1-134
- Topic Indicators 6-75
- Documentation topic name 1-119, 1-120
- Displaying pruned topics 1-121
- Topics Pruned From the Documentation Database 1-121
- Documentation topic type 1-119, 1-120
- tv:** **:top** init option for **tv:menu** 7-298
- Abort At **:top** init option for **tv:sheet** 7-163
- The Lisp **top-label-mixin** flavor 7-173
- compiler:** Top Level 3-42
- Forms in a Top Level 1-151
- top-level-form** property 4-315
- Top-level **progn** Are Top-level to the Compiler RN-28

Forms in a Top-level **progn** Are  
**si:** Top-level to the Compiler RN-28  
**\*top-level-transformations\*** variable 4-229  
**:top-margin-size** method of **tv:sheet** 7-167  
**:top** method of **si:heap** 2-79  
Move To Previous Point (c-m-SPACE) Zmacs  
command 4-59  
TOPS-20 5-200, 6-94, 6-95  
TOPS-20 and TENEX Pathnames 5-183  
TOPS-20 file servers 5-91  
TOPS-20 init file 5-183  
Directory TOPS-20 pathname component 5-183  
Version TOPS-20 pathname component 5-183  
**:tops20-heuristicate-directory** Translation  
Rule 5-194  
Center-dot character in TOPS-20 pathname display 5-183  
Circle-X character in TOPS-20 pathnames 5-183  
Jump To Saved Position (c-X J) Zmacs command 4-59  
**fonts:** **tr10i** font 7-140  
**fonts:** **tr8** font 7-140  
Trace 3-48  
**:arg** option for **trace** 4-92, 4-278  
**:argpdl** option for **trace** 4-92, 4-277  
**:both** option for **trace** 4-92, 4-278  
**:break** option for **trace** 4-92, 4-98, 4-276  
**:cond** option for **trace** 4-92, 4-276  
**:entrycond** option for **trace** 4-92, 4-277  
**:entry** option for **trace** 4-92, 4-277  
**:entryprint** option for **trace** 4-92, 4-277  
**:error** option for **trace** 4-92, 4-98, 4-276  
**:exitbreak** option for **trace** 4-92, 4-98, 4-276  
**:exitcond** option for **trace** 4-92, 4-276  
**:exit** option for **trace** 4-92, 4-277  
**:exitprint** option for **trace** 4-92, 4-277  
**:nil** option for **trace** 4-92  
**:per-process** option for **trace** 4-92, 4-277  
**:print** option for **trace** 4-92, 4-277  
**:step** option for **trace** 4-92, 4-94, 4-276  
**:value** option for **trace** 4-92, 4-278  
**:wherein** option for **trace** 4-92, 4-277  
Options to **trace** 4-276  
**trace** output 4-279  
Trace (m-X) Zmacs command 3-48, 4-92, 4-94  
**trace-conditions** variable 2-523  
**trace-output** variable 5-22  
**si:** **\*trace-bar-p\*** variable 4-279  
**si:** **\*trace-bar-rate\*** variable 4-279  
**si:** **\*trace-columns-per-level\*** variable 4-279  
**trace-compile-flag** variable 4-279  
**trace** menu item 4-92  
[ARGPDL] **trace** menu item 4-92  
[Break after] **trace** menu item 4-92  
[Break before] **trace** menu item 4-92  
[Cond after] **trace** menu item 4-92  
[Cond before] **trace** menu item 4-92  
[Cond break after] **trace** menu item 4-92, 4-98  
[Cond break before] **trace** menu item 4-92, 4-98  
[Conditional] **trace** menu item 4-92  
[Error] **trace** menu item 4-92, 4-98  
[Per Process] **trace** menu item 4-92  
[Print] **trace** menu item 4-92  
[Print after] **trace** menu item 4-92  
[Print before] **trace** menu item 4-92  
[Step] **trace** menu item 4-92, 4-94  
[Untrace] **trace** menu item 4-92  
[Wherein] **trace** menu item 4-92  
**si:** **\*trace-old-style\*** variable 4-280  
Controlling the Format of **trace** Output 4-279

- ANS Answer to a simple Cable
  - Chaosnet
  - Ending the QFILE
  - QFILE File
  - Chaosnet File
  - Buffering disk
  - Disk
  - Grouping related disk
  - Minimum disk latency for
  - Synchronizing disk
  - Overlapping disk
  - QFILE EOF Ending the
  - :compile-load** compound
  - :fasload** simple
  - FED Configuration and Drawing
  - :compile**
  - :compile-load**
  - :compile-load-init**
  - :do-components**
  - :fasload**
  - :load-bfd**
  - :readfile**
  - Compile-like
  - Complex
  - defsystem**
  - List of **defsystem**
  - Load-like
  - User-defined
  - Interaction Between **defsystem**
- trace** special form 2-302, 4-92, 4-94, 4-98, 4-275
- [Trace] System menu item 4-92, 4-94
- Tracing 4-92
- Tracing Conditions 2-523
- Tracing and Stepping 4-92
- Tracing Function Execution 4-275
- Tracking the mouse 7-151, 7-157
- Track of Lisp Syntax 4-23
- Trailing decimal point 2-14
- transaction 9-35
- transaction 9-114
- transaction identifier 9-153
- transaction packet 9-114
- transceiver 9-96
- Transceiver 9-97
- Transcendental Functions 2-106
- Transcendental Functions RN-35
- Transfer 9-155
- Transfer of Control 2-187
- Transfer Philosophy 9-154
- Transfer Protocol 9-153
- Transferring Data with QFILE 9-155
- Transferring source files between hosts 0-15
- transfers 8-31
- Transfers 8-35
- transfers 8-36
- transfers 8-50
- transfers 8-32
- transfers with computation 8-50
- Transfer with QFILE 9-155
- transformation 4-201
- transformation 4-201
- Transformation 3-259
- Transformation of **defsystem** 4-209
- Transformation of **defsystem** 4-210
- Transformation of **defsystem** 4-211
- Transformation of **defsystem** 4-210
- Transformation of **defsystem** 4-209
- Transformation of **defsystem** 4-210
- Transformation of **defsystem** 4-209
- transformations 4-214
- transformations 4-214
- Transformations 4-201, 4-210, 4-211
- Transformations 4-209
- transformations 4-214
- transformations 4-214, 4-227
- Transformations and **make-system** 4-202
- Transformations on Characters in FED 3-243
- :translate-wild** Translation Rule 5-192
- :translated-pathname** method of **fs:logical-pathname** 5-199
- netl:** **translate-hosts.text-file** function 9-28
- Translate relative file block number into disk address 5-225, 8-46
- :translate-wild-pathname** message to **fs:pathname** 5-192
- :translate-wild-pathname** message to **fs:pathname** example 5-132
- :translate-wild-pathname** method of **fs:pathname** 5-173
- :translate-wild-pathname-reversible** message to **fs:pathname** 5-192
- Translating logical hosts to physical hosts 5-186
- Translating pathname type field 5-151
- Translating Strings to Symbols 2-640
- translation 5-10
- CLM: Character set

- Logical Pathname Translation 5-188, 5-189, RN-71
- Patch file logical pathname translation 5-196
- QFILE Character Set Translation 9-156
- Reversible Wildcard Pathname Translation 5-191
- Reversible wild pathname translation 5-189
- Site directory translation 5-195
- Wild pathname translation 5-189
- Translation files 0-87
- Translation Rules RN-72
- translation functions 5-145
- Translation heuristics for VAX/VMS RN-72
- translation in ASCII files 5-91
- translation mode 9-156
- translation mode 9-156
- translation mode 9-156
- Translation on Direct Access File Streams 5-10
- Translation Rule 5-192
- Translation Rule 5-195
- Translation Rule 5-194
- Translation Rule 5-192
- Translation Rule 5-195
- Translation Rule 5-194
- Translation Rule 5-195
- Translation Rule 5-193
- Translation Rule 5-192
- Translation Rule 5-194
- Translation Rule 5-193
- Translation Rule 5-193
- Translation Rule 5-193
- Translation Rule 5-193
- translation rule 5-189
- Translation Rule 5-191
- Translation Rule 5-196
- Global translation rules 5-189
- Permanent translation rules 5-189
- Site translation rules 5-189
- Supplied translation rules 5-189
- VMS logical pathname translation rules 5-192
- New Logical Pathname Translations RN-71
- Translations file 4-218
- Packet Transmission 9-210
- Transmission voltage 9-97
- Incomplete Transmission connection state 9-121
- Transmission Control Protocol 9-44, 9-129
- Start Transmission register 9-131
- Transmit list 9-202
- si:** **transmit-band** function 0-51
- transmit-packet** message 9-205
- Transmit Abort bit 9-131
- transmit direction 9-144
- Transmit Done bit 9-131
- Transmit Interrupt Enable bit 9-131
- Transmitter bit 9-131
- Transmitting inter-user messages 9-125
- Transmitting interactive messages 9-126
- transmit window 9-144
- Number of packet slots available in FSEdit [Link
- [Link
- Distributing
- Transparencies] Command 5-235
- Transparencies] File System Editor menu item 5-233
- transportable systems and libraries 0-15
- Transporting and distributing FEP files 0-15
- math:** **transpose-matrix** function 2-259
- h-T Transpose Address Zmail Command 6-45
- Transposing Characters 3-76
- Transposing Regions 3-94
- Transposing Words 3-78
- Deleting and Transposing Characters 3-76
- Deleting and Transposing Lines 3-81



- Introduction to Deleting and Transposing Lines 3-81
- Introduction to Deleting and Transposing Lines of Text 3-82
- Introduction to Deleting and Transposing Lisp Expressions 3-79
- Introduction to Deleting and Transposing Lisp Expressions 3-79
- Introduction to Deleting and Transposing Text in Zmacs 3-71
- Introduction to Deleting and Transposing Words 3-78
- Introduction to Deleting and Transposing Words 3-78
- Inexact-result trap 2-535
- Trap on exit bit 2-523
- Clearing the Trap-on-exit Flag for the Current and All Outer Frames 4-266
- Setting the Trap-on-exit Flag for the Current and All Outer Frames 4-266
- Toggling the Trap-on-exit Flag for the Current Frame 4-266
- Debugger Commands That Trap on Frame Exit 4-266
- Enabling and disabling of floating-point traps 2-535
- How Applications Programs Treat Conditions 2-481
- Disable special treatment of Rubout in ASCII files 5-91
- Tree 2-41
- [Tree edit any] File System Maintenance menu item 0-39, 5-231
- [Tree edit Homedir] File System Maintenance menu item 0-39, 5-231
- [Tree edit root] File System Maintenance menu item 0-39, 5-231
- Tree of flavors 2-431
- Trees as hash table keys 2-69
- Trigonometric functions 2-106
- trigonometric functions 2-106
- trigonometric functions 2-106
- Triple 1-112, 9-4, 9-29
- Trivial Errors in the Input Editor RN-66
- Trouble 3-42
- Trouble 3-42
- Trouble in Zmail 6-23
- Troubleshooting: Serial I/O 5-259
- true** function 2-164
- :true**name message 5-113
- :true**name FEP file property 5-227, 8-48
- true**name function 5-201
- True name of file 5-107
- tv:** **truncatable-lines-mixin** flavor 7-117
- truncate** function 2-110
- :truncate-line-out** method of **tv:sheet** 7-118
- Truncating lines 7-108, 7-117, 7-119
- tv:** **truncating-window** flavor 7-117
- tv:** **truncating-lines-mixin** flavor 7-108, 7-117
- :trusted-p** option for server 9-214
- :trusted-p** option for **net:define-server** 9-51
- Truth table for the Boolean operations 2-114
- @t text formatting command 3-34
- Tty-mode Connections 9-149
- Turning off Converse messages 1-72, 6-103
- Turning on Converse messages 1-72, 6-103
- Turning the Command Processor on and Off 1-15
- tv:** **turn-off-sheet-blinkers** function 7-149
- Zmail Tutorial Introduction 1-57
- TV Fonts 7-140
- tv** package 2-615
- tv-fonts** 3-274
- tv:abstract-dynamic-item-list-mixin** flavor 7-235
- tv:add-function-key** RN-68
- tv:add-function-key** function 7-135
- tv:add-select-key** function 7-137
- tv:add-to-system-menu-create-menu**
- Improvements to

- function 7-239
  - tv:add-to-system-menu-programs-column**  
function 7-239
  - tv:add-typeout-item-type** special form 7-282
  - tv:alu-and** variable 7-120
  - tv:alu-andca** variable 7-119
  - tv:alu-lor** variable 7-119
  - tv:alu-seta** variable 7-119
  - tv:alu-xor** variable 7-119, 7-124
  - tv:any-tyl-mixin** flavor 4-129
  - tv:autoexposing-more-mixin** flavor 7-116
  - tv:back-convert-constraints** function 7-195
  - tv:basic-frame** flavor 7-100, 7-177
  - tv:basic-menu** flavor 7-220
  - tv:basic-choose-variable-values** flavor 7-272
  - tv:basic-choose-variable-values** Init-plist  
Options 7-274
  - tv:basic-constraint-frame** flavor 7-175
  - tv:basic-momentary-menu** flavor 7-220
  - tv:basic-mouse-sensitive-items** Example 7-284
  - tv:basic-mouse-sensitive-items** flavor 7-280
  - tv:basic-mouse-sensitive-items** Init-plist  
Options 7-283
  - tv:basic-mouse-sensitive-items** Messages and  
Functions 7-283
  - tv:basic-multiple-choice** flavor 7-254
  - tv:basic-scroll-bar** flavor 7-175
  - tv:basic-scroll-window** flavor 7-305
  - tv:bordered-constraint-frame** flavor 7-177
  - tv:bordered-constraint-frame-with-shared-io-buffer**  
flavor 7-178
  - tv:borders-mixin** flavor 7-170
  - tv:box-blinker** flavor 7-150
  - tv:changeable-name-mixin** flavor 7-173
  - tv:character-blinker** flavor 7-150
  - tv:choose-variable-values** Examples 7-264
  - tv:choose-variable-values** function 4-126, 4-133,  
7-262
  - tv:choose-variable-values** Options 7-263
  - tv:choose-variable-values-keyword** property 7-269
  - tv:choose-variable-values-keyword** Property 7-270
  - tv:choose-variable-values-pane** flavor 7-272
  - tv:choose-variable-values-process-message**  
function 7-274
  - tv:choose-variable-values** Type Definition  
Example 7-271
  - tv:choose-variable-values** Variable Types RN-59
  - tv:choose-variable-values** Variable Types 7-259
  - tv:choose-variable-values-window** Example 7-276
  - tv:choose-variable-values-window** flavor 7-272
  - tv:choose-variable-values-window**  
Messages 7-275
  - tv:cold-load-stream-old-selected-window**  
variable 7-94
  - tv:column-spec-list** variable 7-236
  - tv:command-menu** Example 7-231
  - tv:command-menu** flavor 7-231, 7-293
  - tv:command-menu** Messages 7-231
  - tv:command-menu-abort-on-deexpose-mixin**  
flavor 7-230
  - tv:command-menu** Init-plist Options 7-231
  - tv:command-menu-mixin** flavor 7-230, 7-293
  - tv:command-menu-pane** flavor 7-231
  - tv:constraint-frame** flavor 7-177
  - tv:\*\*constraint-node\*\*** variable 7-184, 7-188
  - tv:\*\*constraint-stacking\*\*** variable 7-184, 7-188
- Elements of the
- Changes to  
Predefined

- Replacing `io-buffer-output-function` and Binding
- `tv:constraint-frame-with-shared-io-buffer` flavor 7-178
  - `tv:**constraint-remaining-height**` variable 7-184, 7-188
  - `tv:**constraint-remaining-width**` variable 7-184, 7-188
  - `tv:**constraint-total-height**` variable 7-184, 7-188
  - `tv:**constraint-total-width**` variable 7-184, 7-188
  - `tv:defaulted-multiple-menu-choose` function 7-248
  - `tv:delayed-redisplay-label-mixin` flavor 7-173
  - `tv:delaying-screen-management` special form 7-86, 7-89
  - `tv:dont-select-with-mouse-mixin` flavor 7-100
  - `tv:dynamic-item-list-mixin` flavor 7-235
  - `tv:dynamic-momentary-menu` flavor 7-236
  - `tv:dynamic-momentary-window-hacking-menu` flavor 7-236
  - `tv:dynamic-multicolumn-mixin` flavor 7-236
  - `tv:dynamic-pop-up-abort-on-deexpose-command-menu` flavor 7-236
  - `tv:dynamic-pop-up-command-menu` flavor 7-236
  - `tv:dynamic-pop-up-menu` flavor 7-236
  - `tv:edit-namespace-object` function 9-22
  - `tv:flashy-scrolling-mixin` flavor 7-175
  - `tv:*function-keys*` variable 7-137
  - `tv:graphics-mixin` flavor 4-116, 7-118
  - `tv:*gray-arrays*` variable 7-92
  - `tv:gray-deexposed-inferiors-mixin` flavor 7-93
  - `tv:gray-unused-areas-mixin` flavor 7-93
  - `tv:hollow-rectangular-blinker` flavor 7-150
  - `tv:hysteretic-window-mixin` flavor 7-158
  - `tv:ibeam-blinker` flavor 7-150
  - `tv:item-list-pointer` variable 7-235
  - `tv:item-type-alist` instance-variable 7-280
  - `tv:kbd-tyi-hook` Are Obsolete RN-56
  - `tv:key-state` function 7-132, 7-161
  - `tv:key-test` function 7-161
  - `tv:label-mixin` flavor 7-171
  - `tv:line-truncating-mixin` flavor 7-117
  - `tv:list-mouse-buttons-mixin` flavor 4-129
  - `tv:make-blinker` function 4-133, 7-147
  - `tv:make-window` function 4-112, 4-121, 4-126, 4-129, 7-107, 7-305
  - `tv:make-sheet-bit-array` function 7-121
  - `tv:margin-choice-mixin` Example 7-290
  - `tv:margin-choice-mixin` flavor 7-289
  - `tv:margin-choice-mixin` Messages 7-290
  - `tv:margin-choice-mixin` Init-plist Option 7-290
  - `tv:margin-scroll-mixin` flavor 7-175
  - `tv:margin-space-mixin` flavor 7-169
  - `tv:menu` 7-299
  - `tv:menu` 7-293
  - `tv:menu` flavor 7-213, 7-221, 7-293, 7-295, 7-299
  - `tv:menu-choose` function 7-212, 7-219
  - `tv:menu-highlighting-mixin` flavor 7-241
  - `tv:menu` Init-plist Options 7-222
  - `tv:menu` Messages 7-223
  - `tv:minimum-window` flavor 7-105
  - `tv:momentary-menu` flavor 7-221, 7-293
  - `tv:momentary-menu` resource 7-221
  - `tv:momentary-multiple-menu` Example 7-243
  - `tv:momentary-multiple-menu` flavor 7-242
  - `tv:momentary-window-hacking-menu` flavor 7-221
  - `tv:mouse-buttons` function 7-158
  - `tv:mouse-input` function 7-157
  - `tv:mouse-sheet` variable 7-152
- Messages Accepted by  
The Flavor Network of
- Useful  
Useful

**tv:mouse-wait** function 7-155  
**tv:mouse-wakeup** function 7-152  
**tv:mouse-x** variable 7-155  
**tv:mouse-y** variable 7-155  
**tv:mouse-button-encode** function 7-156  
**tv:mouse-double-click-time** variable 7-161  
**tv:\*mouse-incrementing-keystates\*** variable 7-161  
**tv:mouse-last-buttons** variable 7-155  
**tv:\*mouse-modifying-keystates\*** variable 7-161  
**tv:mouse-sensitive-text-scroll-window** flavor 7-174  
**tv:mouse-set-blinker-cursorpos** function 7-152  
**tv:mouse-x-scale-array** variable 7-159  
**tv:mouse-y-or-n-p** function 7-220  
**tv:mouse-y-scale-array** variable 7-160  
**tv:multiple-choice** Example 7-255  
**tv:multiple-choice** flavor 7-254  
**tv:multiple-choice** Menu Messages 7-255  
**tv:multiple-choose** function 7-252  
**tv:multiple-choose** Menu Example 7-253  
**tv:multiple-menu** flavor 7-242  
**tv:multiple-menu-choose** Example 7-248  
**tv:multiple-menu-choose** function 7-247  
**tv:multiple-menu-choose-menu** Example 7-249  
**tv:multiple-menu-choose-menu** flavor 7-249  
**tv:multiple-menu-choose-menu-mixin** flavor 7-248  
**tv:multiple-menu-mixin** flavor 7-241  
**tv:multiple-menu-mixin** Messages 7-243  
**tv:multiple-menu-mixin** Init-plist Options 7-242  
**tv:no-screen-managing-mixin** flavor 7-87  
**tv:\*notification-deliver-timeout\*** variable 7-130  
**tv:\*notification-pop-down-delay\*** variable 7-132  
**tv:notify** function 7-127  
**tv:pane-mixin** flavor 7-100, 7-176  
**tv:pane-no-mouse-select-mixin** flavor 7-100, 7-177  
**tv:pop-up-menu** Example 7-226  
**tv:pop-up-menu** flavor 7-221  
**tv:pop-up-multiple-menu-choose-menu**  
flavor 7-249  
**tv:pop-up-multiple-menu-choose-resource**  
resource 7-248  
**tv:prepare-sheet** special form 7-84  
**tv:process-mixin** flavor 4-129, 7-94  
**tv:rectangular-blinker** flavor 7-149  
**tv:screen-manage-update-permitted-windows**  
variable 7-90  
**tv:scroll-window** flavor 7-305  
**tv:scroll-item-leader-offset** variable 7-313  
**tv:scroll-maintain-list** function 7-315  
**tv:scroll-mouse-mixin** flavor 7-311  
**tv:scroll-parse-item** function 7-307, 7-311  
**tv:scroll-window-with-typeout** flavor 7-305  
**tv:\*select-keys\*** variable 7-139  
**tv:select-mixin** flavor 7-99  
**tv:selected-window** variable 7-94  
**tv:select-or-create-window-of-flavor** Function 7-240  
**tv:select-relative-mixin** flavor 7-99  
**tv:set-default-window-size** function 7-165  
**tv:set-screen-background-gray** function 7-92  
**tv:set-screen-deexposed-gray** function 7-92  
**tv:sheet** flavor 4-116, 4-133  
**tv:sheet-following-blinker** function 4-133, 7-149  
**tv:sheet-force-access** special form 7-82, 7-84  
**tv:show-partially-visible-mixin** flavor 7-87  
**tv:stream-mixin** flavor 7-108, 7-118, 7-132  
**tv:temporary-choose-variable-values-window**  
flavor 7-273

- tv:temporary-choose-variable-values-window** resource 7-274
- tv:temporary-multiple-choice-window** flavor 7-254
- tv:temporary-multiple-choice-window** resource 7-255
- tv:temporary-typeout-window** flavor 7-174
- tv:text-scroll-window** flavor 7-174
- tv:text-scroll-window-empty-gray-hack** flavor 7-174
- tv:top-box-label-mixin** flavor 7-173
- tv:top-label-mixin** flavor 7-173
- tv:truncatable-lines-mixin** flavor 7-117
- tv:truncating-window** flavor 7-117
- tv:truncating-lines-mixin** flavor 7-108, 7-117
- tv:turn-off-sheet-blinkers** function 7-149
- tv:typeout-window** flavor 7-174
- tv:typeout-window-with-mouse-sensitive-items** flavor 7-174
- tv:unexpected-select-delay** variable 7-132
- tv:value** 7-308
- tv:wait-for-mouse-button-down** function 7-156
- tv:wait-for-mouse-button-up** function 7-156
- tv:who-line-mouse-grabbed-documentation** variable 7-156
- tv:window** flavor 4-112, 4-116, 7-105
- tv:window-call** special form 7-101
- tv:window-pane** flavor 7-177
- tv:window-call-relative** special form 7-100
- tv:window-hacking-menu-mixin** flavor 7-220
- tv:window-mouse-call** special form 7-101
- tv:window-with-typeout-mixin** flavor 7-174
- tv:with-mouse-and-buttons-grabbed-on-sheet** special form 7-155, RN-64
- tv:with-mouse-and-buttons-grabbed** special form 7-155, RN-63
- tv:with-mouse-grabbed-on-sheet** special form 7-154
- tv:with-mouse-grabbed** special form 7-154
- tv:with-mouse-usurped** special form 7-157
- tv:with-terminal-io-on-typeout-window** special form 7-175
- tv:add-function-key** 7-135
- tv:add-function-key** 7-135
- tv:add-function-key** 7-135
- tv:any-tyi-mixin** 4-129
- tv:basic-choose-variable-values** 7-270
- tv:basic-choose-variable-values** 7-274
- tv:basic-choose-variable-values** 7-274
- tv:basic-choose-variable-values** 7-275
- tv:basic-choose-variable-values** 7-274
- tv:basic-choose-variable-values** 7-275
- tv:basic-choose-variable-values** 7-275
- tv:basic-choose-variable-values** 7-275
- tv:basic-choose-variable-values** 7-274
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-179
- tv:basic-constraint-frame** 7-189, 7-196
- tv:basic-constraint-frame** 7-187
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-179, 7-189, 7-196
- tv:basic-constraint-frame** 7-98, 7-187
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-188
- tv:basic-constraint-frame** 7-188
- tv:basic-mouse-sensitive-items** RN-57
- :keyboard-process** option for
- :process-name** option for
- :typeahead** option for
- :any-tyi** method of
- :decode-variable-type** method of
- :function** init option for
- :name-font** init option for
- :selected-choice-font** init option for
- :stack-group** init option for
- :string-font** init option for
- :unselected-choice-font** init option for
- :value-font** init option for
- :variables** init option for
- :configuration** init option for
- :configuration** method of
- :configurations** init option for
- :constraints** init option for
- :get-pane** method of
- :pane-name** method of
- :panes** init option for
- :selected-pane** init option for
- :send-all-exposed-panes** method of
- :send-all-panes** method of
- :send-pane** method of
- :set-configuration** method of
- :item-list** method of

|                            |                   |                                |                      |
|----------------------------|-------------------|--------------------------------|----------------------|
| :item                      | method of         | tv:basic-mouse-sensitive-items | 7-283                |
| :item-type-alist           | init option for   | tv:basic-mouse-sensitive-items | 7-283                |
| :primitive-item            | method of         | tv:basic-mouse-sensitive-items | 7-283                |
| :redisplay                 | method of         | tv:basic-scroll-window         | 7-305                |
| :set-display-item          | method of         | tv:basic-scroll-window         | 7-305                |
| :deselected-visibility     | init option for   | tv:blinker                     | 7-148                |
| :deselected-visibility     | method of         | tv:blinker                     | 7-149                |
| :follow-p                  | init option for   | tv:blinker                     | 7-148                |
| :half-period               | init option for   | tv:blinker                     | 7-149                |
| :half-period               | method of         | tv:blinker                     | 7-149                |
| :read-cursorpos            | method of         | tv:blinker                     | 7-148                |
| :set-cursorpos             | method of         | tv:blinker                     | 7-148                |
| :set-sheet                 | method of         | tv:blinker                     | 7-149                |
| :set-visibility            | method of         | tv:blinker                     | 7-148                |
| :set-deselected-visibility | method of         | tv:blinker                     | 7-149                |
| :set-follow-p              | method of         | tv:blinker                     | 7-148                |
| :set-half-period           | method of         | tv:blinker                     | 7-149                |
| :visibility                | init option for   | tv:blinker                     | 7-148                |
| :x-pos                     | init option for   | tv:blinker                     | 7-148                |
| :y-pos                     | init option for   | tv:blinker                     | 7-148                |
| :border-margin-width       | init option for   | tv:borders-mixin               | 7-171                |
| :border-margin-width       | method of         | tv:borders-mixin               | 7-171                |
| :borders                   | init option for   | tv:borders-mixin               | 7-170                |
| :set-border-margin-width   | method of         | tv:borders-mixin               | 7-171                |
| :set-borders               | method of         | tv:borders-mixin               | 7-171                |
| :set-name                  | method of         | tv:borders-mixin               | 7-171                |
| :char                      | init option for   | tv:changeable-name-mixin       | 7-173                |
| :font                      | init option for   | tv:character-blinker           | 7-150                |
| :set-character             | method of         | tv:character-blinker           | 7-150                |
| :documentation             | specification for | tv:character-blinker           | 7-150                |
| :extra-width               | init option for   | tv:choose-variable-values      | 7-259                |
| :function                  | init option for   | tv:choose-variable-values      | 7-263                |
| :function                  | option for        | tv:choose-variable-values      | 7-263                |
| :label                     | init option for   | tv:choose-variable-values      | 4-133                |
| :margin-choices            | init option for   | tv:choose-variable-values      | 7-263                |
| :near-mode                 | init option for   | tv:choose-variable-values      | 7-263                |
| :superior                  | init option for   | tv:choose-variable-values      | 7-264                |
| :width                     | init option for   | tv:choose-variable-values      | 7-263                |
| :assoc                     |                   | tv:choose-variable-values      | variable type 7-259  |
| :boolean                   |                   | tv:choose-variable-values      | variable type 7-259  |
| :character                 |                   | tv:choose-variable-values      | variable type 7-259  |
| :character-or-nil          |                   | tv:choose-variable-values      | variable type 7-259  |
| :choose                    |                   | tv:choose-variable-values      | variable type 7-259  |
| :date                      |                   | tv:choose-variable-values      | variable type 7-259  |
| :date-or-never             |                   | tv:choose-variable-values      | variable type 7-259  |
| :decimal-number            |                   | tv:choose-variable-values      | variable type 7-259, |
| :decimal-number-or-nil     |                   | RN-59                          |                      |
| :eval-form                 |                   | tv:choose-variable-values      | variable type 7-259, |
| :expression                |                   | RN-59                          |                      |
| :font-list                 |                   | tv:choose-variable-values      | variable type 7-259, |
| :host                      |                   | RN-59                          |                      |
| :host-list                 |                   | tv:choose-variable-values      | variable type 7-259  |
| :host-or-local             |                   | tv:choose-variable-values      | variable type 7-259  |
| :integer                   |                   | tv:choose-variable-values      | variable type 7-259, |
| :inverted-boolean          |                   | RN-59                          |                      |
| :keyword-list              |                   | tv:choose-variable-values      | variable type 7-259, |
| :menu-alist                |                   | RN-59                          |                      |
| :number                    |                   | tv:choose-variable-values      | variable type 7-259, |
| :number-or-nil             |                   | RN-59                          |                      |
|                            |                   | tv:choose-variable-values      | variable type 7-259, |







- :set-label** method of
- :set-default-font** method of
- :set-fill-p** method of
- :set-item-list** method of
- :top** init option for
- :vsp** init option for
- :width** init option for
- :x** init option for
- :y** init option for
- :add-highlighted-item** method of
- :add-highlighted-value** method of
- :highlighted-items** init option for
- :highlighted-items** method of
- :highlighted-values** method of
- :remove-highlighted-item** method of
- :remove-highlighted-value** method of
- :set-highlighted-items** method of
- :set-highlighted-values** method of
- :choose** method of
- :setup** method of
- :special-choices** init option for
- :process** init option for
- :height** init option for
- :set-size** method of
- :width** init option for
- Variable **si:\*timeout-default\*** Replaces
- :type-alist** init option for
- tv:\*escape-keys\*** and **tv:\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
- :backspace-not-overprinting-flag** init option for
- :baseline** method of
- :bitblt-from-sheet** method of
- :bitblt** method of
- :bitblt-within-sheet** method of
- :blinker-p** init option for
- :bottom** init option for
- :bottom-margin-size** method of
- :change-of-size-or-margins** method of
- :character-height** init option for
- :character-width** init option for
- :character-width** method of
- :clear-char** method of
- :clear-window** method of
- :clear-rest-of-line** method of
- :clear-rest-of-window** method of
- :compute-motion** method of
- :cr-not-newline-flag** init option for
- :current-font** method of
- :deexposed-typein-action** init option for
- :deexposed-typein-action** method of
- :deexposed-typeout-action** init option for
- :deexposed-typeout-action** method of
- :delete-char** method of
- :delete-line** method of
- :delete-string** method of
- :draw-char** method of
- :draw-rectangle** method of
- :edges** init option for
- tv:menu** 7-299
- tv:menu** 7-299
- tv:menu** 7-214
- tv:menu** 7-299
- tv:menu** 7-298
- tv:menu** 7-222, 7-298
- tv:menu** 7-298
- tv:menu** 7-298
- tv:menu** 7-298
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-242
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:menu-highlighting-mixin** 7-243
- tv:momentary-menu** Example 1: Simple Momentary Menu 7-223
- tv:momentary-menu** Example 3: Centered Label and Use of General List Items 7-224
- tv:momentary-menu** Example 4: Using the Mouse Buttons 7-225
- tv:momentary-menu** Example 2: Item List as Initialist Option 7-224
- tv:multiple-choice** 7-255
- tv:multiple-choice** 7-255
- tv:multiple-menu-mixin** 7-242
- tv:process-mixin** 4-129, 7-94
- tv:rectangular-blinker** 7-149
- tv:rectangular-blinker** 7-150
- tv:rectangular-blinker** 7-149
- tv:rh-typeout-default** RN-56
- tv:scroll-mouse-mixin** 7-311
- tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
- tv:sheet** 7-108, 7-117
- tv:sheet** 7-142
- tv:sheet** 7-120
- tv:sheet** 7-120
- tv:sheet** 7-121
- tv:sheet** 4-116
- tv:sheet** 7-163
- tv:sheet** 7-167
- tv:sheet** 4-116, 7-166
- tv:sheet** 7-164
- tv:sheet** 7-164
- tv:sheet** 7-114
- tv:sheet** 7-113
- tv:sheet** 7-114
- tv:sheet** 7-113
- tv:sheet** 7-113
- tv:sheet** 7-114
- tv:sheet** 7-108, 7-117
- tv:sheet** 7-142
- tv:sheet** 7-116
- tv:sheet** 7-116
- tv:sheet** 7-116
- tv:sheet** 7-116
- tv:sheet** 7-114
- tv:sheet** 7-114
- tv:sheet** 7-114
- tv:sheet** 7-121
- tv:sheet** 7-124
- tv:sheet** 7-163

|                                       |                          |                 |                        |                     |
|---------------------------------------|--------------------------|-----------------|------------------------|---------------------|
|                                       | <b>:edges</b>            | method of       | <b>tv:sheet</b>        | 7-167               |
|                                       | <b>:font-map</b>         | init option for | <b>tv:sheet</b>        | 7-142               |
|                                       | <b>:font-map</b>         | method of       | <b>tv:sheet</b>        | 7-141               |
|                                       | <b>:height</b>           | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:home-cursor</b>      | method of       | <b>tv:sheet</b>        | 7-113               |
|                                       | <b>:home-down</b>        | method of       | <b>tv:sheet</b>        | 7-113               |
|                                       | <b>:init</b>             | method of       | <b>tv:sheet</b>        | 4-116, 7-107        |
|                                       | <b>:insert-char</b>      | method of       | <b>tv:sheet</b>        | 7-112               |
|                                       | <b>:insert-line</b>      | method of       | <b>tv:sheet</b>        | 7-112               |
|                                       | <b>:insert-string</b>    | method of       | <b>tv:sheet</b>        | 7-112               |
|                                       | <b>:inside-edges</b>     | method of       | <b>tv:sheet</b>        | 7-167               |
|                                       | <b>:inside-height</b>    | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:inside-size</b>      | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:inside-size</b>      | method of       | <b>tv:sheet</b>        | 4-116, 7-166        |
|                                       | <b>:inside-width</b>     | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:integral-p</b>       | init option for | <b>tv:sheet</b>        | 7-164               |
|                                       | <b>:left</b>             | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:left-margin-size</b> | method of       | <b>tv:sheet</b>        | 7-167               |
|                                       | <b>:margins</b>          | method of       | <b>tv:sheet</b>        | 7-167               |
|                                       | <b>:more-p</b>           | init option for | <b>tv:sheet</b>        | 7-115               |
|                                       | <b>:more-p</b>           | method of       | <b>tv:sheet</b>        | 7-115               |
|                                       | <b>:name</b>             | init option for | <b>tv:sheet</b>        | 7-171               |
|                                       | <b>:name</b>             | method of       | <b>tv:sheet</b>        | 7-172               |
|                                       | <b>:position</b>         | init option for | <b>tv:sheet</b>        | 7-163               |
|                                       | <b>:position</b>         | method of       | <b>tv:sheet</b>        | 7-166               |
|                                       | <b>:read-cursorpos</b>   | method of       | <b>tv:sheet</b>        | 7-113               |
|                                       | <b>:refresh</b>          | method of       | <b>tv:sheet</b>        | 4-116, 4-129, 7-113 |
|                                       | <b>:reverse-video-p</b>  | method of       | <b>tv:sheet</b>        | 7-116               |
|                                       | <b>:right</b>            | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:right-margin-character-flag</b>   |                          | init option for | <b>tv:sheet</b>        | 7-117               |
| <b>:right-margin-size</b>             |                          | method of       | <b>tv:sheet</b>        | 7-167               |
| <b>:set-cursorpos</b>                 |                          | method of       | <b>tv:sheet</b>        | 7-113               |
| <b>:set-vsp</b>                       |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:set-current-font</b>              |                          | method of       | <b>tv:sheet</b>        | 7-142               |
| <b>:set-deexposed-typein-action</b>   |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:set-deexposed-typeout-action</b>  |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:set-font-map-and-vsp</b>          |                          | method of       | <b>tv:sheet</b>        | 7-142, RN-64        |
| <b>:set-font-map</b>                  |                          | method of       | <b>tv:sheet</b>        | 7-141               |
| <b>:set-more-p</b>                    |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:set-reverse-video-p</b>           |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:set-size-in-characters</b>        |                          | method of       | <b>tv:sheet</b>        | 7-166               |
| <b>:set-truncate-line-out</b>         |                          | method of       | <b>tv:sheet</b>        | 7-118               |
| <b>:size-in-characters</b>            |                          | method of       | <b>tv:sheet</b>        | 7-166               |
| <b>:size</b>                          |                          | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:size</b>                          |                          | method of       | <b>tv:sheet</b>        | 7-166               |
| <b>:string-length</b>                 |                          | method of       | <b>tv:sheet</b>        | 7-115               |
| <b>:string-out</b>                    |                          | method of       | <b>tv:sheet</b>        | 7-111               |
| <b>:superior</b>                      |                          | init option for | <b>tv:sheet</b>        | 7-107               |
| <b>:tab-nchars</b>                    |                          | init option for | <b>tv:sheet</b>        | 7-108, 7-117        |
| <b>:top</b>                           |                          | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:top-margin-size</b>               |                          | method of       | <b>tv:sheet</b>        | 7-167               |
| <b>:truncate-line-out</b>             |                          | method of       | <b>tv:sheet</b>        | 7-118               |
| <b>:tyo</b>                           |                          | method of       | <b>tv:sheet</b>        | 7-111               |
| <b>:vsp</b>                           |                          | init option for | <b>tv:sheet</b>        | 7-116               |
| <b>:vsp</b>                           |                          | method of       | <b>tv:sheet</b>        | 7-116               |
| <b>:who-line-documentation-string</b> |                          | method of       | <b>tv:sheet</b>        | 7-152               |
| <b>:width</b>                         |                          | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:x</b>                             |                          | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:y</b>                             |                          | init option for | <b>tv:sheet</b>        | 7-163               |
| <b>:any-tyi</b>                       |                          | method of       | <b>tv:stream-mixin</b> | 7-134               |
| <b>:any-tyi-no-hang</b>               |                          | method of       | <b>tv:stream-mixin</b> | 7-135               |
| <b>:clear-input</b>                   |                          | method of       | <b>tv:stream-mixin</b> | 7-135               |
| <b>:fresh-line</b>                    |                          | method of       | <b>tv:stream-mixin</b> | 7-112               |
| <b>:line-out</b>                      |                          | method of       | <b>tv:stream-mixin</b> | 7-112               |
| <b>:listen</b>                        |                          | method of       | <b>tv:stream-mixin</b> | 7-135               |
| <b>:untyi</b>                         |                          | method of       | <b>tv:stream-mixin</b> | 7-135               |

- tv:\*escape-keys\*** and **tv:\*system-keys\*** Renamed to **tv:\*function-keys\*** and **tv:\*select-keys\*** RN-56
- New Special Forms: **tv:with-mouse-and-buttons-grabbed**, **tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
- New Special Forms: **tv:with-mouse-and-buttons-grabbed**, **tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
- SCL sequence and list functions and
  - Two Windows 3-129
  - two-argument predicates 2-641
  - Two-dimensional bit-array 7-121
  - Two Kinds of Characters 2-268
  - Two Kinds of Characters in Old-Zetalisp RN-17
  - two modules 2-569
  - Two window mode 3-129
  - Two Windows 3-129
  - Using Two Windows 3-129
  - View Two Windows 3-129
  - View Two Windows (c-X 2) Zmacs command 4-65
  - View Two Windows (c-X 3) Zmacs command 4-65
  - Modified Two Windows (c-X 4) Zmacs command 4-65
  - Using Two Windows, Select Bottom 3-129
  - Using Two Windows, Select Top 3-129
  - Creating Two Windows, Specifying Other Contents 3-129
  - Creating Two Windows Showing Region 3-129
  - Creating Two Windows with the Region in Top 3-129
- tyi** function 5-77
- :tyi** message 5-11, 7-176
- :tyi** method of **si:interactive-stream** 7-11
- :tyi-no-hang** message 5-19, 5-251
- :tyi-no-hang** method of **si:interactive-stream** 7-12
- tyipeek** function 5-84
- :tyipeek** message 5-15
- :tyi** stream operation 5-91
- tyo** function 5-87
- :tyo** message 5-11, 7-111
- :tyo** method of **tv:sheet** 7-111
- type** 7-48
- :activity** command processor argument type 2-455, 2-457
- :after** method type 2-455, 2-458
- :and** method type 2-455
- :and** method combination type 2-455, 2-456
- :append** method combination type 2-455, 2-457
- :before** method type 5-200
- :bin** canonical type 7-48
- :boolean** command processor argument type 7-210, 7-225, 7-311
- :buttons** menu item type 9-51
- :byte-stream** medium type 2-455, 2-457
- :case** method combination type 2-619
- :choose** proceed type 2-455, 2-458
- :combined** method type 2-542, 2-619
- :create-package** proceed type 2-455
- :daemon** method combination type 2-455, 2-456
- :daemon-with-and** method combination type 2-455, 2-456
- :daemon-with-or** method combination type 2-455, 2-457
- :daemon-with-override** method combination type 7-48
- :date** command processor argument type 2-455, 2-457
- :default** method type 7-48
- :documentation-topic** command processor argument type 7-311
- :documentation** menu item type 7-48
- :enumeration** command processor argument type 7-210, 7-311
- :eval** menu item type 2-619
- :export** proceed type 7-48
- :font** command processor argument type 7-210, 7-311
- :funcall** menu item type 7-210
- :funcall-with-self** menu item type 9-44
- :gateway-pseudonet** network type 2-297
- :handler** function spec type 7-48
- :host** command processor argument type 7-48

|                                                    |                                                         |          |                            |
|----------------------------------------------------|---------------------------------------------------------|----------|----------------------------|
| <b>:integer</b>                                    | command processor argument                              | type     | 7-48                       |
|                                                    | <b>:internal</b> function spec                          | type     | 2-297                      |
| <b>:inverse-list</b>                               | method combination                                      | type     | 2-455, 2-456               |
|                                                    | <b>:kbd</b> menu item                                   | type     | 7-210, 7-311               |
|                                                    | <b>:lisp</b> canonical                                  | type     | 5-200                      |
| <b>:list</b>                                       | method combination                                      | type     | 2-455                      |
|                                                    | <b>:local</b> step                                      | type     | 9-44                       |
| <b>:location</b>                                   | function spec                                           | type     | 2-297                      |
|                                                    | <b>:make-system-version</b> command processor argument  | type     | 7-48                       |
|                                                    | <b>:medium</b> step                                     | type     | 9-44                       |
|                                                    | <b>:menu</b> menu item                                  | type     | 7-210, 7-311               |
|                                                    | <b>:method</b> function spec                            | type     | 2-297                      |
| <b>:nconc</b>                                      | method combination                                      | type     | 2-455, 2-456               |
|                                                    | <b>:network</b> step                                    | type     | 9-44                       |
|                                                    | <b>:new-name</b> proceed                                | type     | 2-542, 2-619               |
|                                                    | <b>:no-action</b> proceed                               | type     | 2-523, 2-542, 2-543, 2-619 |
|                                                    | <b>:no-select</b> menu item                             | type     | 7-210                      |
| <b>:number</b>                                     | command processor argument                              | type     | 7-48                       |
|                                                    | <b>:or</b> method                                       | type     | 2-455, 2-458               |
|                                                    | <b>:or</b> method combination                           | type     | 2-455                      |
|                                                    | <b>:override</b> method                                 | type     | 2-455, 2-457               |
| <b>:package</b>                                    | command processor argument                              | type     | 7-48                       |
|                                                    | <b>:pass-on</b> method combination                      | type     | 2-455, 2-456               |
| <b>:pathname</b>                                   | command processor argument                              | type     | 7-48                       |
| <b>:printer</b>                                    | command processor argument                              | type     | 7-48                       |
|                                                    | <b>:progn</b> method combination                        | type     | 2-455                      |
|                                                    | <b>:property</b> function spec                          | type     | 2-297                      |
|                                                    | <b>:qbin</b> canonical                                  | type     | 5-200                      |
|                                                    | <b>:service</b> step                                    | type     | 9-44                       |
|                                                    | <b>:shadowing-import</b> proceed                        | type     | 2-619                      |
|                                                    | <b>:shadow</b> proceed                                  | type     | 2-619                      |
|                                                    | <b>:share</b> proceed                                   | type     | 2-619                      |
|                                                    | <b>:skip</b> proceed                                    | type     | 2-619                      |
| <b>:string</b>                                     | command processor argument                              | type     | 7-48                       |
| <b>:system</b>                                     | command processor argument                              | type     | 7-48                       |
|                                                    | <b>:unintern</b> proceed                                | type     | 2-619                      |
|                                                    | <b>:value</b> menu item                                 | type     | 7-210, 7-212               |
|                                                    | <b>:whopper</b> method                                  | type     | 2-455, 2-458               |
| <b>:window-op</b>                                  | menu item                                               | type     | 7-210, 7-220               |
|                                                    | <b>:within</b> function spec                            | type     | 2-297                      |
|                                                    | <b>:wrapper</b> method                                  | type     | 2-455, 2-458               |
|                                                    | >DIR FEP file                                           | type     | 5-228, 8-49                |
|                                                    | <b>art-16b</b> array                                    | type     | 2-236                      |
|                                                    | <b>art-1b</b> array                                     | type     | 2-236                      |
|                                                    | <b>art-2b</b> array                                     | type     | 2-236                      |
|                                                    | <b>art-4b</b> array                                     | type     | 2-236                      |
|                                                    | <b>art-8b</b> array                                     | type     | 2-236                      |
|                                                    | <b>art-boolean</b> Array                                | Type     | 2-237                      |
|                                                    | <b>art-Nb</b> Array                                     | Type     | 2-236                      |
|                                                    | <b>art-q</b> Array                                      | Type     | 2-236                      |
|                                                    | <b>art-string</b> Array                                 | Type     | 2-236                      |
|                                                    | <b>art-fat-string</b> Array                             | Type     | 2-236                      |
|                                                    | <b>art-q-list</b> Array                                 | Type     | 2-236                      |
| <b>:assoc tv:choose-variable-values</b>            | variable                                                | type     | 7-259                      |
|                                                    | <b>bin</b> file                                         | type     | 4-318                      |
| <b>:boolean tv:choose-variable-values</b>          | variable                                                | type     | 7-259                      |
|                                                    | Bridge connection                                       | type     | 9-108                      |
|                                                    | <b>chaos</b> network                                    | type     | 9-15                       |
| <b>:character-or-nil tv:choose-variable-values</b> | variable                                                | type     | 7-259                      |
| <b>:character tv:choose-variable-values</b>        | variable                                                | type     | 7-259                      |
| <b>:choose tv:choose-variable-values</b>           | variable                                                | type     | 7-259                      |
|                                                    | Data representation                                     | type     | 8-103                      |
| <b>:date-or-never tv:choose-variable-values</b>    | variable                                                | type     | 7-259                      |
| <b>:date tv:choose-variable-values</b>             | variable                                                | type     | 7-259                      |
|                                                    | <b>:decimal-number-or-nil tv:choose-variable-values</b> | variable |                            |

|                                                      |          |              |              |
|------------------------------------------------------|----------|--------------|--------------|
|                                                      |          | type         | 7-259, RN-59 |
| <b>:decimal-number tv:choose-variable-values</b>     | variable | type         | 7-259, RN-59 |
| Default                                              | type     | 5-147        |              |
| Default surface                                      | type     | 5-151        |              |
| dial network                                         | type     | 9-15         |              |
| Direct connection                                    | type     | 9-108        |              |
| Documentation topic                                  | type     | 1-119, 1-120 |              |
| <b>dtp-array</b>                                     | data     | type         | 8-12         |
| <b>dtp-closure</b>                                   | data     | type         | 8-12         |
| <b>dtp-fix</b>                                       | data     | type         | 8-12         |
| <b>dtp-instance</b>                                  | data     | type         | 2-467, 8-12  |
| <b>dtp-list</b>                                      | data     | type         | 8-12         |
| <b>dtp-locative</b>                                  | data     | type         | 8-12         |
| <b>dtp-nil</b>                                       | data     | type         | 8-12         |
| <b>dtp-null</b>                                      | data     | type         | 8-12         |
| <b>dtp-symbol</b>                                    | data     | type         | 8-12         |
| <b>dtp-compiled-function</b>                         | data     | type         | 8-12         |
| <b>dtp-element-forward</b>                           | data     | type         | 8-12         |
| <b>dtp-even-pc</b>                                   | data     | type         | 8-12         |
| <b>dtp-extended-number</b>                           | data     | type         | 8-12         |
| <b>dtp-external-value-cell-pointer</b>               | data     | type         | 8-12         |
| <b>dtp-gc-forward</b>                                | data     | type         | 8-12         |
| <b>dtp-header-forward</b>                            | data     | type         | 8-12         |
| <b>dtp-header-l</b>                                  | data     | type         | 8-12         |
| <b>dtp-header-p</b>                                  | data     | type         | 8-12         |
| <b>dtp-instance-header</b>                           | data     | type         | 2-467        |
| <b>dtp-lexical-closure</b>                           | data     | type         | 8-12         |
| <b>dtp-odd-pc</b>                                    | data     | type         | 8-12         |
| <b>dtp-one-q-forward</b>                             | data     | type         | 8-12         |
| <b>dtp-select-method</b>                             | data     | type         | 2-467        |
| <b>:eval-form tv:choose-variable-values</b>          | variable | type         | 7-259, RN-59 |
| <b>:expression tv:choose-variable-values</b>         | variable | type         | 7-259, RN-59 |
| <b>expr</b>                                          | Maclisp  | type         | 2-305        |
| FEP                                                  | FEP file | type         | 5-228, 8-49  |
| <b>fexpr</b>                                         | Maclisp  | type         | 2-305        |
| FILE                                                 | FEP file | type         | 5-228, 8-49  |
| Fixed bridge connection                              | type     | 9-108        |              |
| FLOD                                                 | FEP file | type         | 5-228, 8-49  |
| <b>:font-list tv:choose-variable-values</b>          | variable | type         | 7-259        |
| FSPT                                                 | FEP file | type         | 5-228, 8-49  |
| <b>gateway-pseudonet</b>                             | network  | type         | 9-15         |
| <b>:host-list tv:choose-variable-values</b>          | variable | type         | 7-259        |
| <b>:host-or-local tv:choose-variable-values</b>      | variable | type         | 7-259        |
| <b>:host tv:choose-variable-values</b>               | variable | type         | 7-259        |
| <b>:integer tv:choose-variable-values</b>            | variable | type         | 7-259, RN-59 |
| internet                                             | network  | type         | 9-15         |
| <b>:inverted-boolean tv:choose-variable-values</b>   | variable | type         | 7-259, RN-59 |
| <b>:keyword-list tv:choose-variable-values</b>       | variable | type         | 7-259        |
| Lexpr                                                | Maclisp  | type         | 2-305        |
| LOAD                                                 | FEP file | type         | 5-228, 8-49  |
| <b>macro</b>                                         | Maclisp  | type         | 2-305        |
| <b>:menu-alist tv:choose-variable-values</b>         | variable | type         | 7-259        |
| MIC                                                  | FEP file | type         | 5-228, 8-49  |
| <b>:number-or-nil tv:choose-variable-values</b>      | variable | type         | 7-259, RN-59 |
| <b>:number tv:choose-variable-values</b>             | variable | type         | 7-259, RN-59 |
| PAGE                                                 | FEP file | type         | 5-228, 8-49  |
| <b>:past-date-or-never tv:choose-variable-values</b> | variable | type         | 7-259, RN-59 |
| <b>:past-date tv:choose-variable-values</b>          | variable | type         | 7-259        |
| <b>:pathname-host tv:choose-variable-values</b>      | variable | type         | 7-259        |
| <b>:pathname-list tv:choose-variable-values</b>      | variable | type         | 7-259        |
| <b>:pathname-or-nil tv:choose-variable-values</b>    | variable | type         | 7-259        |
| <b>:pathname tv:choose-variable-values</b>           | variable | type         | 7-259        |

Preferred surface type 5-151  
**:princ tv:choose-variable-values** variable type 7-259  
 Proceed type 2-517  
 Setting disk type 1-201, 1-213  
**:sexp tv:choose-variable-values** variable type 7-259, RN-59  
 Special Defaulting of the Type 5-122, 5-160  
**:string-lst tv:choose-variable-values** variable type 7-259  
**:string-or-nil tv:choose-variable-values** variable type 7-259  
**:string tv:choose-variable-values** variable type 7-259  
 Symbol function spec type 2-297  
 The Array Data Type 2-5  
 The Compiled Function Data Type 2-4  
 The Cons Data Type 2-4  
 The List Data Type 2-5  
 The Locative Data Type 2-5  
 The Symbol Data Type 2-3  
**:time-interval-60ths tv:choose-variable-values** variable type 7-259, RN-59  
**:time-interval-or-never tv:choose-variable-values** variable type 7-259  
**x25** network type 9-15  
**:type** message 5-145, 9-207  
 LOAD file type (FEP) 1-209, 5-215  
 MIC file type (FEP) 1-208, 5-215  
**:type:** Network Object Attribute 9-15  
**:type:** Printer Object Attribute 9-16  
 BABYL pathname type abbreviation 5-180  
 CWARNS pathname type abbreviation 5-180  
 INIT pathname type abbreviation 5-180  
 LISP pathname type abbreviation 5-180  
 MAIL pathname type abbreviation 5-180  
 MIDAS pathname type abbreviation 5-180  
 OUTPUT pathname type abbreviation 5-180  
 PATCH-DIRECTORY pathname type abbreviation 5-180  
 (PDIR) pathname type abbreviation 5-180  
 PRESS pathname type abbreviation 5-180  
 QFASL pathname type abbreviation 5-180  
 QWABL pathname type abbreviation 5-180  
 TEXT pathname type abbreviation 5-180  
 ULOAD pathname type abbreviation 5-180  
 UNFASL pathname type abbreviation 5-180  
 XMAIL pathname type abbreviation 5-180  
**:typeahead** option for **tv:add-function-key** 7-135  
**:type-alist** init option for  
**tv:scroll-mouse-mixin** 7-311  
**typecase** special form 2-181, 2-576  
 Invalid type code error 2-534  
 SCL and type common 2-637  
 CLM: Type Conversion Function 2-637  
 Numeric Type Conversions 2-107  
 Finding Out What You Have Typed 3-46  
 CLM: Type Declaration for Forms 2-640  
 Type Decoding Message 7-270  
 Adding a Type Decoding Method 7-269  
**tv:choose-variable-values** Type Definition Example 7-271  
 Dump Type dump parameter 0-6  
 Typefaces 7-103, 7-140  
 Destroying data type field 8-22  
 Extracting data type field 8-22  
 Translating pathname type field 5-151  
 New Type for **:start-typeout** Message to Interactive Streams: **:clear-window** RN-67  
 Type generic pathname component 5-149  
 Surface type in pathnames 5-151  
 Connection type in routing table 9-108  
 Type ITS pathname component 5-185



- Combination Method Types 2-459
- Combining abstract types 2-431
- Command Processor Argument Types 7-48
- Creating data types 2-379
- Data Types 2-3
- Database data types 1-112, 9-4, 9-29
- Defining Choose Variable Values Types 7-269
- Definition types 2-319
- Disk Types 1-214
- FEP File Types 5-228, 8-49
- Namespace System Lisp Data Types 9-29
- Numeric Data Types 2-4
- Packet types 9-114
- Predefined **tv:choose-variable-values** Variable Types 7-259
- Printed Representation of Miscellaneous Data Types 2-18
- Proceed types 4-80, 4-133
- QFILE packet types 9-162
- Standard pathname types 5-180
- Symbolics-Lisp Number Types 2-89
- System file types 0-20
- Variables and Types 7-257
- Correspondence of Canonical Types and Editor Modes 5-153
- File Types and Zmacs Major Modes 3-198
- Canonical types example 5-130
- :types-for-canonical-type** method of **fs:pathname** 5-169
- Canonical Types in Pathnames 5-151
- Canonical types in UNIX 4.2 Pathnames 5-178
- Canonical types in UNIX Pathnames 5-176
- Canonical types in VMS Pathnames 5-180
- File Types of Lisp Source and Compiled Code Files 4-318
- Types of Menu Items 7-210
- Data Types of Namespace System Attributes 1-112, 9-4
- Types of Numbers 2-4, 2-93
- Types of Patch Files 4-233
- Other Types of Replacement Operations in Zmacs 3-104
- File types of the patch directory file 4-236
- File types of the system version-directory file 4-236
- Data Types Recognized by **loop** 2-219
- SCL and Standard Character Syntax Types Table 2-643
- SCL and type string 2-637
- SCL and type string-char 2-637
- Data Type Subprimitives 8-12
- :type-wild-p** method of **fs:pathname** 5-173
- [Type] Map over menu item 6-80
- Typical use of Zmacs 3-170
- Typing messages 6-80
- Typing strings 7-111
- Correcting Typos 3-22
- c-X T Zmacs command 3-94
- c-X T Zmail command 6-37

## U

## U

## U

- U Dired command 3-151
- Maclisp **status** **udir** function 5-201
- si:** ULOAD pathname type abbreviation 5-180
- unadvise-1** function 4-283
- unadvise-within** special form 4-285
- unadvise** special form 4-282
- Strategy for Unattended Operation with the Garbage Collector 8-128
- Find Unbalanced Parentheses (m-X) Zmacs command 3-48, 4-26



- Check Unbalanced Parentheses When Saving Variable 3-211
- si: **unbin-file** function 4-300
- QFILE unbinding QFILE close-abort QFILE OPEN options 9-155
- Unbindings 2-125
- Unbound symbol 2-561
- Unbound-function symbol 1-177
- sys: **unbound-symbol** flavor 2-533
- sys: **unbound-variable** flavor 2-533
- sys: **unbound-closure-variable** flavor 2-533
- Unbound closure variable error 2-533
- sys: **unbound-instance-variable** flavor 2-533
- Unbound instance variable error 2-533
- Unbound variable errors 2-533
- unbreakon** function 2-524, 4-98
- Chaosnet UNC encapsulation interface 9-206
- sys: **unclaimed-message** flavor 2-542
- :unclaimed-message** message 2-454
- Uncomment Region (m-X) Zmacs command 3-173
- uncompile** function 2-316, 4-319
- Uncontrolled packets 9-105, 9-111
- UNC Uncontrolled Data packet 9-118, 9-129
- UNC Uncontrolled Data packet 9-118, 9-129
- Undata-connection QFILE Command 9-164
- undefflavor** function 2-437
- sys: **undefined-function** flavor 2-534
- Undefined character code 7-108
- Undefined function error 2-534
- sys: **undefined-keyword-argument** flavor 2-542
- fs: **undefined-logical-pathname-translation** flavor 2-554
- undefmethod** macro 2-437, 2-468
- undefun** function 2-322
- undefun-method** special form 2-437
- Dired Undelete 3-151
- Dired Reverse Undelete 3-151
- Undelete** Commands 1-41
- undeletef** function 5-104
- Undelete File Command 1-41
- Undelete specified file 5-104
- FSEdit [Undelete] Command 5-233
- [Undelete] File System Editor menu item 5-233
- [Undelete] Map over menu item 6-80
- [Undelete] Zmail menu item 1-66, 6-56, 6-68
- Undeleting messages 6-80
- Deleting and Undeleting Messages in Zmail 6-68
- Deleting and Undeleting Zmail Messages 1-66
- Exponent underflow 2-94
- Exponent underflow error 2-536
- Underscore in integer syntax 2-20
- Understanding Networks and the Namespace System 1-111
- Understanding Notation Conventions 1-231
- The Interpreter Understands Declarations RN-42
- Undigestify (m-X) Zmail Command 6-48
- Undo (m-X) Zmail Command 6-25
- Undo all changes to buffer 3-121
- Undoing Commands in Zmail 6-25
- Dired Next Undumped 3-153
- si: **unencapsulate-function-spec** function 2-328
- tv: **unexpected-select-delay** variable 7-132
- unexport** function 2-593, 2-611
- UNFASL pathname type abbreviation 5-180
- Un-garbage-collected arrays 2-262
- UNIBUS Chaosnet interface 9-131

- Indenting Region
  - Uniformly in Zmacs 3-165
- fs:**
  - unimplemented-option** flavor 2-552
  - Uninterned symbol 2-357, 2-566
  - Uninterned symbols 2-29, 2-573
  - :unintern** proceed type 2-619
  - union** function 2-62
  - Union of universes 6-64
- Disk
  - unit 8-29
- Initializing a Disk
  - Unit 8-58
- Mounting a Disk
  - Unit 8-58
  - Unit number 8-29
  - Unit number field in disk address 8-29
  - :unit** option for **format:tab** 5-47
  - :unit** option for **tape:make-stream** 5-269
- Multiple Disk
  - Units 1-213
  - :unit** serial I/O parameter 5-253
  - Unit tape spec parameter 0-26
  - Universal Time 7-353
- Complement of a
  - universe 6-64
  - Universe Creation Display 6-64
  - [Current] Universe Creation Display menu item 6-64
  - [Loaded] Universe Creation Display menu item 6-64
- Universes 6-64
- Creating Zmail
  - Universes 6-64
- Intersection of
  - universes 6-64
- Mail collections in
  - universes 6-64
- Predefined
  - universes 6-64
- Saving
  - universes 6-66
- Saving Zmail
  - Universes 6-66
- Selecting Zmail
  - Universes 6-64
- Union of
  - universes 6-64
- User-defined
  - universes 6-64
  - [Universes (M)] Zmail Profile Mode command 6-73
  - Universe Selection Display 6-64
  - [New universe] Universe Selection Display menu item 6-64
  - [Universes] Profile Mode menu item 6-64, 6-66
  - [New universe] Universe Selection Display menu item 6-64
- Installing an ASCII Print Server on
  - UNIX 5-200, 6-94, 6-95
  - UNIX 0-67
  - UNIX Pathnames 5-176
  - :unix-font** Translation Rule 5-195
  - :unix-microcode** Translation Rule 5-194
  - UNIX 4.2 Pathnames 5-178
  - UNIX 4.2 Pathnames 5-178
  - UNIX ASCII print server 0-67
  - UNIX Host 0-80
  - UNIX Implementation 9-146
  - UNIX Implementation 9-150
  - UNIX mail file format 6-95, 6-96
  - \*unix-microcode-translation-alist\*** 5-194
  - UNIX pathname abbreviations 5-180
  - UNIX Pathnames 5-176
  - :unix-type-and-version** Translation Rule 5-195
  - [Unkeywords] Map over menu item 6-80, 6-81
  - Unknown attribute 3-138
- Canonical types in
  - UNIX Pathnames 5-176
- Namespace Attributes for a New
  - Chaosnet
    - UNIX Implementation 9-146
    - UNIX Implementation 9-150
    - UNIX mail file format 6-95, 6-96
    - \*unix-microcode-translation-alist\*** 5-194
    - UNIX pathname abbreviations 5-180
    - UNIX Pathnames 5-176
    - :unix-type-and-version** Translation Rule 5-195
    - [Unkeywords] Map over menu item 6-80, 6-81
    - Unknown attribute 3-138
- Software Installation: Chaosnet
  - UNIX Implementation 9-146
  - UNIX Implementation 9-150
  - UNIX mail file format 6-95, 6-96
  - \*unix-microcode-translation-alist\*** 5-194
  - UNIX pathname abbreviations 5-180
  - UNIX Pathnames 5-176
  - :unix-type-and-version** Translation Rule 5-195
  - [Unkeywords] Map over menu item 6-80, 6-81
  - Unknown attribute 3-138
- Canonical types in
  - UNIX Pathnames 5-176
- sys:**
  - unknown-address** flavor 2-554
- fs:**
  - unknown-operation** flavor 2-547
  - unknown-property** flavor 2-551
  - unknown-user** flavor 2-547
- sys:**
  - unknown-host-name** flavor 2-554
- sys:**
  - unknown-locf-reference** flavor 2-534
- fs:**
  - unknown-pathname-host** flavor 2-553
- sys:**
  - unknown-self-reference** flavor 2-534
- unless** macro 2-179
- unless loop** keyword 2-216
- Unlock queue 8-84

- Drawing on
  - :unparse-address** message 9-208
  - unprepared sheet error 2-537
  - :un-relative-coordinates** method of **si:make-hardcopy-stream** 3-275
  - Unseen message property 1-57, 6-46
  - [Unseen] Filter Selection Display menu item 6-81
  - :unselected-choice-font** Init option for **tv:basic-choose-variable-values** 7-275
  - unspecial** declaration 2-312
  - unspecial** special form 4-314
- SCL pathnames and
  - sys:** **%unsynchronized-device-read** function 8-23
  - until loop** keyword 2-214
  - untrace** special form 4-92, 4-280
  - [Untrace] **trace** menu item 4-92
  - Untracing Function Execution 4-280
  - :untyl** message 5-12
  - :untyl** method of **si:interactive-stream** 7-12
  - :untyl** method of **tv:stream-mixin** 7-135
  - :untyo** message 5-19
  - :untyo-mark** message 5-19
  - unuse-package** function 2-593, 2-611
  - Unwind protection 2-197
  - unwind-protect** special form 2-169, 2-198, 4-133, 9-195
  - Unwinding a stack 2-197
- New Macro:
  - unwind-protect-case** RN-37
  - unwind-protect-case** macro 2-199
  - si:** **unwire-words** 7-328
  - Unwired memory 7-327
- Cold boot after powering
  - up 1-1
- Powering
  - up 1-1
- Starting
  - up 1-1
  - Up Line 3-63, 3-81
  - Up-Arrow character 2-32
  - up and Down Nesting Levels 3-66
  - up a new major release on a newly acquired machine 0-87
  - Up Comment Line (m-P) Zmacs command 4-23
  - Update functions 2-147
  - update-by** attribute 9-33
  - mailer:** **update-options** function 6-112
  - Update Attribute List (m-X) Zmacs command 3-138, 4-10
  - Update Attribute List Query 3-141
  - Update compiler warnings database 4-321
  - :update-directory** Option for **make-system** 4-226
  - mailer:** **update-forwarding-tables** function 6-112
  - :update-item-list** method of **tv:dynamic-...-menu** 7-237
  - :update-label** method of **tv:delayed-redisplay-label-mixin** 7-173
  - mailer:** **update-mailbox-tables** function 6-112
  - Incremental updates 9-33
  - updates Peek command 1-185, 4-303
  - Updates to network database 9-33
  - Update the namespace database 9-28
  - Updating Software 0-46
  - Updating systems 4-231
  - Updating generalized variables 2-147
  - Updating list items 7-315
  - Updating menu item list 7-235
  - Updating the Dired Display 3-145
  - Updating the display 7-303
  - Updating the Namespace Database 1-116



**home-host:** User Object Attribute 9-13  
**home-phone:** User Object Attribute 9-13  
**lispn-name:** User Object Attribute 9-12  
**login-name:** User Object Attribute 9-12  
**mail-address:** User Object Attribute 9-13  
**name:** User Object Attribute 9-12  
**nickname:** User Object Attribute 9-13  
**personal-name:** User Object Attribute 9-12  
**project:** User Object Attribute 9-14  
**remarks:** User Object Attribute 9-14  
**supervisor:** User Object Attribute 9-14  
**work-address:** User Object Attribute 9-13  
**work-phone:** User Object Attribute 9-13  
 Namespace System User Objects 9-11  
     User option facility 7-203  
     The User Option Facility 7-266  
     User Options Example 7-268  
     User options window 1-171, 6-57, 6-71  
     User Option Variables 7-267  
     Functions for Altering User Option Variables 7-267  
     Functions for Defining User Option Variables 7-267  
     Sending command to user process 7-229  
     Channels attached to user processes 9-104  
     Users 1-113, 9-5, 9-49  
     users 9-11  
     Registering Users 0-71  
     Talking to Other Users 1-69  
     Zmail **gmsgs** Service for ITS Users 6-95  
     Users: Defining Protocols 9-50  
     File Users: Defining Protocols 9-55  
     Registering Users and Hardware in the Site's Namespace 0-71  
     Show Users Command 1-40  
     Questions Users Commonly Ask 1-228  
     How LMFS Uses the FEP File System 1-209, 5-216  
     **using-resource** special form 8-135  
     **using loop** keyword 2-222, 2-225  
     Usurping the mouse 7-151, 7-157  
     Utilities RN-1  
     Disk and FEP File System Utilities 8-58  
     Changes to Utilities in Release 6.0 RN-51  
     Improvements to Utilities in Release 6.0 RN-52  
     New Features in Utilities in Release 6.0 RN-51  
     Utility Functions 1-182  
     Peek utility for disk error meters 8-41  
     Some Utility Functions 1-158  
     HELP U Zmacs command 1-51, 3-14, 3-46  
     U Zmail command 6-68  
     U Zmail Kbd Command 6-56

## V

**dbg:** **val** function 4-268  
 Checking for valid arguments 2-505  
     List **validate-lmfs-dump-tapes:** Site Object Attribute 9-21  
     Absolute value 2-101  
     Attribute value 1-112, 9-4  
     QFILE return value 9-153  
     **tv:** **value** 7-308  
     Value cell 2-3, 2-83, 2-331, 2-561, 2-563  
     SCL and **value-type** argument for **the** special form 2-640  
     External value cell 2-331  
     Internal value cell 2-331  
     **value-cell-location** function 2-563  
     The Value Cell of a Symbol 2-561

## V

## V

**:value-font** init option for  
**tv:basic-choose-variable-values** 7-275  
 Extracting value from chosen item 7-223  
**:value** line item entry 7-308  
**:value** menu item type 7-210, 7-212  
 Changing the Value of a Variable 2-125  
 Value of instance variables 2-439  
**:value** option for **trace** 4-92, 4-278  
 Values 2-212  
 Choose Variable Values 0-23, 7-203  
 CLM: Rules Governing the Passing of Multiple Values 2-639  
 Functions and Special Forms for Constant Values 2-161  
 Functions that return multiple values 2-167  
 IF-EXISTS QFILE OPEN option values 9-166  
 Interaction of Some Common Special Forms with Multiple Values 2-169  
 Menu Values 7-229  
 Menu Items and Menu Values 7-229  
 Multiple Values 2-167  
 Passing-back of Multiple Values 2-169  
 Primitive for Producing Multiple Values 2-167  
 Property list values 2-67  
 QFILE Open Response Result Values 9-172  
 QFILE String Values 9-160  
 Special Forms for Receiving Multiple Values 2-167  
**values** declaration 2-312  
**values** function 2-167  
 Values Returned 5-120, 5-159  
**values** variable 4-98, 4-276  
**values-list** function 2-167  
 Values Facility 7-257  
 The Choose Variable Values Flavor 7-272  
 The Basic Choose Variable Values Flavors 7-272  
 Instantiable Choose Variable Values for a Command 1-13  
 Supplying Keywords and Default values for instance variables 2-431  
 SCL and returned values from **cond** macro 2-639  
 The Standard Choose Variable Values Function 7-262  
 Debugger functions to return values in current stack frame 4-267  
 Dumper Choose Variable Values Menu 0-19  
 Displaying multiple values of a function 7-308  
 Examining values of instance variables 4-267  
 Values of Pathname Components 5-140  
 Altering slot values of structures 2-395  
 Modifying values of variables 7-257  
 Defining Choose Variable Values Types 7-269  
 Defining a Choose Variable Values Window 7-272  
 I/O Buffers for Choose Variable Values Windows 7-273  
 Vanilla Flavor 2-453  
**vanilla-flavor** flavor 2-453, 4-142  
**vanilla-flavor** 4-142  
**vanilla-flavor** 4-142  
**si:**  
**:operation-handled-p** method of **si:**  
**:which-operations** method of **si:**  
**\*\*** variable 1-180  
**\*\*\*** variable 1-180  
**\*** variable 1-179  
**+** variable 1-179  
**++** variable 1-180  
**+++** variable 1-180  
**-** variable 1-179  
**//** variable 1-179  
**\*all-flavor-names\*** variable 2-429  
**alphabetic-case-affects-string-comparison** variable 2-273  
**applyhook** variable 4-291  
**area-list** variable 8-106  
**arglist** variable 2-325, 4-98, 4-276  
 Array-register variable 2-255  
**array-types** variable 2-237

|                                              |          |                     |
|----------------------------------------------|----------|---------------------|
| <b>array-bits-per-element</b>                | variable | 2-238               |
| <b>array-elements-per-q</b>                  | variable | 2-238               |
| <b>audio:audio-exists</b>                    | variable | 7-330               |
| <b>audio:*number-of-polyphonic-voices*</b>   | variable | 7-330               |
| <b>audio:*sample-rate*</b>                   | variable | 7-329               |
| <b>base</b>                                  | variable | 2-14, 7-257         |
| <b>cdr-next</b>                              | variable | 8-19                |
| <b>cdr-nil</b>                               | variable | 8-19                |
| <b>cdr-normal</b>                            | variable | 8-19                |
| <b>%%ch-char</b>                             | variable | 5-6                 |
| <b>%%ch-font</b>                             | variable | 5-6                 |
| Changing the Value of a                      | Variable | 2-125               |
| <b>chaos:dat-op</b>                          | variable | 9-159               |
| <b>chaos:eof-op</b>                          | variable | 9-159               |
| <b>chaos:my-address</b>                      | variable | 0-83                |
| <b>chaos:server-alist</b>                    | variable | 9-51, 9-136         |
| Check Unbalanced Parentheses When Saving     | Variable | 3-211               |
| <b>cl:*read-default-float-format*</b>        | variable | 2-23                |
| <b>compiled-function-area</b>                | variable | 8-107               |
| <b>compiler:functions-defined</b>            | variable | 4-324               |
| <b>compiler:functions-referenced</b>         | variable | 4-325               |
| <b>constants-area</b>                        | variable | 8-107               |
| <b>current-process</b>                       | variable | 8-77, 8-78          |
| <b>dbg:*debugger-bindings*</b>               | variable | 1-181               |
| <b>dbg:*debug-io-override*</b>               | variable | 4-268, 5-22         |
| <b>dbg:*defer-package-dwim*</b>              | variable | 4-268               |
| <b>dbg:*frame*</b>                           | variable | 4-268               |
| <b>dbg:*interactive-handlers*</b>            | variable | 2-511               |
| <b>dbg:*proceed-type-special-keys*</b>       | variable | 2-528               |
| <b>dbg:*show-backtrace*</b>                  | variable | 4-268               |
| <b>dbg:*special-command-special-keys*</b>    | variable | 2-528               |
| <b>debug-io</b>                              | variable | 5-22                |
| <b>default-cons-area</b>                     | variable | 8-103, 8-104, 8-107 |
| Definition of a Zmacs                        | Variable | 3-210               |
| Describe                                     | Variable | 3-210               |
| <b>error-output</b>                          | variable | 5-22                |
| <b>evalhook</b>                              | variable | 4-289               |
| <b>fs:%file-asynchronous-mark-opcode</b>     | variable | 9-159               |
| <b>fs:%file-notification-opcode</b>          | variable | 9-159               |
| <b>fs:*default-pathname-defaults*</b>        | variable | 5-148               |
| <b>fs:*file-type-mode-alist*</b>             | variable | 3-198, 5-153        |
| <b>fs:*its-uninteresting-types*</b>          | variable | 5-186               |
| <b>fs:*known-types*</b>                      | variable | 5-149               |
| <b>fs:load-pathname-defaults</b>             | variable | 5-149               |
| <b>fs:*remember-passwords*</b>               | variable | 5-107               |
| <b>gc-on</b>                                 | variable | 8-116               |
| <b>ibase</b>                                 | variable | 2-20, 7-257         |
| <b>ibase global</b>                          | variable | 3-141, 3-143        |
| <b>ignore</b>                                | variable | 4-324               |
| <b>inhibit-fdefine-warnings</b>              | variable | 2-317               |
| <b>inhibit-scheduling-flag</b>               | variable | 8-78                |
| <b>%%kbd-char</b>                            | variable | 5-6                 |
| <b>%%kbd-control</b>                         | variable | 5-6                 |
| <b>%%kbd-hyper</b>                           | variable | 5-7                 |
| <b>%%kbd-meta</b>                            | variable | 5-6                 |
| <b>%%kbd-mouse</b>                           | variable | 5-7                 |
| <b>%%kbd-super</b>                           | variable | 5-6                 |
| <b>%%kbd-control-meta</b>                    | variable | 5-7                 |
| <b>%%kbd-mouse-button</b>                    | variable | 5-7                 |
| <b>%%kbd-mouse-n-clicks</b>                  | variable | 5-7                 |
| <b>lambda-list-keywords</b>                  | variable | 2-309               |
| <b>lisp-crash-list</b>                       | variable | 1-181               |
| <b>local-declarations</b>                    | variable | 2-316               |
| <b>logout-list</b>                           | variable | 1-157               |
| <b>net:after-network-initialization-list</b> | variable | 9-211               |
| <b>net:finger-location</b>                   | variable | 9-135               |

|                                                       |          |                     |
|-------------------------------------------------------|----------|---------------------|
| <b>net:*local-host*</b>                               | variable | 9-29                |
| <b>net:*local-site*</b>                               | variable | 9-29                |
| <b>net:*namespace*</b>                                | variable | 9-29                |
| <b>net:*namespace-search-list*</b>                    | variable | 9-29                |
| <b>neti:*interfaces*</b>                              | variable | 9-204               |
| <b>neti:*invoke-service-automatic-retry*</b>          | variable | 9-41                |
| <b>neti:*local-networks*</b>                          | variable | 9-211               |
| <b>neti:raw-packet-buffer-size</b>                    | variable | 9-198               |
| <b>neti:*servers*</b>                                 | variable | 9-214, 9-216        |
| <b>neti:*target-number-of-wired-packet-buffers*</b>   | variable | 9-198               |
| <b>*nopoint</b>                                       | variable | 2-14, 7-257         |
| One Window Default                                    | Variable | 3-211               |
| <b>package</b>                                        | variable | 2-579, 2-597, 7-257 |
| <b>permanent-storage-area</b>                         | variable | 8-107               |
| <b>pkg-global-package</b>                             | variable | 2-617               |
| <b>pkg-keyword-package</b>                            | variable | 2-617               |
| <b>pkg-system-package</b>                             | variable | 2-617               |
| <b>pname-area</b>                                     | variable | 8-107               |
| <b>prin1</b>                                          | variable | 1-155               |
| <b>prinlength</b>                                     | variable | 2-18                |
| <b>prinlevel</b>                                      | variable | 2-17, 7-257         |
| <b>property-list-area</b>                             | variable | 8-107               |
| <b>%%q-pointer</b>                                    | variable | 8-19                |
| <b>%%q-all-but-cdr-code</b>                           | variable | 8-19                |
| <b>%%q-all-but-pointer</b>                            | variable | 8-19                |
| <b>%%q-all-but-typed-pointer</b>                      | variable | 8-19                |
| <b>%%q-cdr-code</b>                                   | variable | 8-19                |
| <b>%%q-data-type</b>                                  | variable | 8-19                |
| <b>%%q-pointer-within-page</b>                        | variable | 8-19                |
| <b>%%q-typed-pointer</b>                              | variable | 8-19                |
| <b>query-lo</b>                                       | variable | 4-133, 5-22         |
| <b>*read-form-completion-alist*</b>                   | variable | 5-80, 7-8           |
| <b>*read-form-completion-delimiters*</b>              | variable | 5-80, 7-9           |
| <b>*read-form-edit-trivial-errors-p*</b>              | variable | 5-79, 7-8           |
| <b>read-preserve-delimiters</b>                       | variable | 5-76                |
| <b>readtable</b>                                      | variable | 1-180, 2-33, 7-257  |
| Region Marking Mode                                   | Variable | 3-211               |
| Region Right Margin Mode                              | Variable | 3-211               |
| <b>room</b>                                           | variable | 8-129               |
| <b>rubout-handler</b>                                 | variable | 5-54, 7-22          |
| SCL and *                                             | variable | 2-642               |
| SCL and <b>*default-pathname-defaults*</b>            | variable | 2-644               |
| SCL and <b>*features*</b>                             | variable | 2-645               |
| SCL and <b>*read-base*</b>                            | variable | 2-643               |
| SCL and <b>*read-suppress*</b>                        | variable | 2-643               |
| SCL and <b>*read-extended-ibase-signed-numbers*</b>   | variable | 2-643               |
| SCL and <b>*read-extended-ibase-unsigned-numbers*</b> | variable | 2-643               |
| <b>self</b>                                           | variable | 2-437               |
| Set                                                   | Variable | 3-212               |
| <b>si:advised-functions</b>                           | variable | 4-283               |
| <b>si:*automatically-recover-from-hung-disks*</b>     | variable | 8-38                |
| <b>si:*batch-mode-p*</b>                              | variable | 4-229               |
| <b>si:*count-disk-device-checks*</b>                  | variable | 8-41                |
| <b>si:*count-disk-ecc-errors*</b>                     | variable | 8-41                |
| <b>si:*count-disk-errors-lost*</b>                    | variable | 8-41                |
| <b>si:*count-disk-hung-restarts*</b>                  | variable | 8-41                |
| <b>si:*count-disk-not-ready*</b>                      | variable | 8-41                |
| <b>si:*count-disk-other-errors*</b>                   | variable | 8-41                |
| <b>si:*count-disk-overruns*</b>                       | variable | 8-41                |
| <b>si:*count-disk-search-errors*</b>                  | variable | 8-41                |
| <b>si:*count-disk-seek-errors*</b>                    | variable | 8-41                |
| <b>si:*count-disk-select-errors*</b>                  | variable | 8-41                |
| <b>si:*count-disk-state-machine-errors*</b>           | variable | 8-41                |
| <b>si:*count-disk-stops-lost*</b>                     | variable | 8-41                |
| <b>si:*count-total-disk-errors*</b>                   | variable | 8-41                |



|                                                   |          |              |
|---------------------------------------------------|----------|--------------|
| <b>si:*cp-comtab*</b>                             | variable | 7-53         |
| <b>si:*cp-prompt*</b>                             | variable | 1-166        |
| <b>si:*cp-blank-line-mode*</b>                    | variable | 1-166        |
| <b>si:*cp-command-dispatchers*</b>                | variable | 1-166        |
| <b>si:*cp-default-blank-line-mode*</b>            | variable | 7-43         |
| <b>si:*cp-default-dispatch-mode*</b>              | variable | 7-43         |
| <b>si:*cp-default-prompt*</b>                     | variable | 7-44         |
| <b>si:*cp-dispatch-mode*</b>                      | variable | 1-165        |
| <b>si:*cp-form-dispatchers*</b>                   | variable | 1-166        |
| <b>si:*cp-typeout-default*</b>                    | variable | 1-167        |
| <b>si:default-quantum</b>                         | variable | 8-90         |
| <b>si:default-sequence-break-interval*</b>        | variable | 8-81         |
| <b>si:disk-array-area</b>                         | variable | 8-31         |
| <b>si:disk-block-length-in-bytes</b>              | variable | 8-30         |
| <b>si:disk-sector-data-size32</b>                 | variable | 8-30         |
| <b>si:encapsulated-function</b>                   | variable | 2-325        |
| <b>si:encapsulation-standard-order</b>            | variable | 2-327        |
| <b>si:*file-transformation-function*</b>          | variable | 4-229        |
| <b>si:*flavor-compilations*</b>                   | variable | 2-440        |
| <b>si:*flavor-compile-trace*</b>                  | variable | 2-440        |
| <b>si:*gc-parameters*</b>                         | variable | 8-115        |
| <b>si:gc-area-reclaim-report</b>                  | variable | 8-125        |
| <b>si:gc-flip-inhibit-time-until-warning</b>      | variable | 8-128        |
| <b>si:gc-flip-minimum-ratio</b>                   | variable | 8-126        |
| <b>si:gc-flip-ratio</b>                           | variable | 8-126        |
| <b>si:gc-process-background-priority</b>          | variable | 8-128        |
| <b>si:gc-process-foreground-priority</b>          | variable | 8-128        |
| <b>si:gc-process-immediate-reclaim-priority</b>   | variable | 8-127        |
| <b>si:gc-reclaim-ephemeral-immediately</b>        | variable | 8-127        |
| <b>si:gc-reclaim-immediately</b>                  | variable | 8-127        |
| <b>si:gc-reclaim-immediately-if-necessary</b>     | variable | 8-127        |
| <b>si:gc-report-stream</b>                        | variable | 8-125        |
| <b>si:gc-warning-interval</b>                     | variable | 8-126        |
| <b>si:gc-warning-ratio</b>                        | variable | 8-126        |
| <b>si:gc-warning-threshold</b>                    | variable | 8-126        |
| <b>si:*hardcopy-default-fonts*</b>                | variable | 1-174, 3-271 |
| <b>si:initial-process</b>                         | variable | 8-80         |
| <b>si:initial-readtable</b>                       | variable | 1-180, 2-33  |
| <b>si:initialization-keywords</b>                 | variable | 8-69         |
| <b>si:login-history</b>                           | variable | 0-48         |
| <b>si:loop-use-system-destructuring?</b>          | variable | 2-221        |
| <b>si:*macroexpand-hook*</b>                      | variable | 2-375        |
| <b>si:*make-system-forms-to-be-evald-after*</b>   | variable | 4-229        |
| <b>si:*make-system-forms-to-be-evald-before*</b>  | variable | 4-228        |
| <b>si:*make-system-forms-to-be-evald-finally*</b> | variable | 4-229        |
| <b>si:*n-disk-retries*</b>                        | variable | 8-36, 8-38   |
| <b>si:pkg-area</b>                                | variable | 8-107        |
| <b>si:print-readably</b>                          | variable | 2-18         |
| <b>si:*print-object-error-message*</b>            | variable | 2-543        |
| <b>si:*query-type*</b>                            | variable | 4-229        |
| <b>si:*read-extended-ibase-signed-number*</b>     | variable | 2-21         |
| <b>si:*read-extended-ibase-unsigned-number*</b>   | variable | 2-21         |
| <b>si:*read-multi-dot-tokens-as-symbols*</b>      | variable | 2-26         |
| <b>si:*redo-all*</b>                              | variable | 4-229        |
| <b>si:*signal-disk-errors-from-enqueue-p*</b>     | variable | 8-38         |
| <b>si:*silent-p*</b>                              | variable | 4-229        |
| <b>si:site-initialization-list</b>                | variable | 0-83         |
| <b>si:standard-readtable</b>                      | variable | 1-154        |
| <b>si:system-additional-info</b>                  | variable | 0-85         |
| <b>si:*system-being-defined*</b>                  | variable | 4-214        |
| <b>si:*system-being-made*</b>                     | variable | 4-228        |
| <b>si:*top-level-transformations*</b>             | variable | 4-229        |
| <b>si:*trace-bar-p*</b>                           | variable | 4-279        |
| <b>si:*trace-bar-rate*</b>                        | variable | 4-279        |
| <b>si:*trace-columns-per-level*</b>               | variable | 4-279        |
| <b>si:*trace-old-style*</b>                       | variable | 4-280        |

|                                                         |          |                              |
|---------------------------------------------------------|----------|------------------------------|
| <b>si:*timeout-default*</b>                             | variable | 5-71, 7-39                   |
| <b>si:*user*</b>                                        | variable | 9-29                         |
| <b>site-name</b>                                        | variable | 1-157, 9-31                  |
| <b>standard-input</b>                                   | variable | 5-21                         |
| <b>standard-output</b>                                  | variable | 4-75, 5-21                   |
| Supplied-p                                              | variable | 2-155                        |
| <b>symbol-area</b>                                      | variable | 8-107                        |
| <b>sys:active-processes</b>                             | variable | 8-80                         |
| <b>sys:all-processes</b>                                | variable | 8-80                         |
| <b>sys:*break-bindings*</b>                             | variable | 1-181                        |
| <b>sys:clock-function-list</b>                          | variable | 8-80                         |
| <b>sys:*data-types*</b>                                 | variable | 8-13                         |
| <b>sys:fdefine-file-pathname</b>                        | variable | 2-319                        |
| <b>sys:file-local-declarations</b>                      | variable | 4-324                        |
| <b>sys:kbd-intercepted-characters</b>                   | variable | 7-15                         |
| <b>sys:kbd-standard-abort-characters</b>                | variable | 7-16                         |
| <b>sys:kbd-standard-intercepted-characters</b>          | variable | 7-16                         |
| <b>sys:kbd-standard-suspend-characters</b>              | variable | 7-16                         |
| <b>sys:scheduler-stack-group</b>                        | variable | 8-79                         |
| terminal-io                                             | variable | 4-14, 4-112, 5-22, 7-75, 8-7 |
| <b>time:*timezone*</b>                                  | variable | 7-367                        |
| <b>trace-conditions</b>                                 | variable | 2-523                        |
| <b>trace-output</b>                                     | variable | 5-22                         |
| <b>trace-compile-flag</b>                               | variable | 4-279                        |
| <b>tv:alu-and</b>                                       | variable | 7-120                        |
| <b>tv:alu-andca</b>                                     | variable | 7-119                        |
| <b>tv:alu-ior</b>                                       | variable | 7-119                        |
| <b>tv:alu-seta</b>                                      | variable | 7-119                        |
| <b>tv:alu-xor</b>                                       | variable | 7-119, 7-124                 |
| <b>tv:cold-load-stream-old-selected-window</b>          | variable | 7-94                         |
| <b>tv:column-spec-list</b>                              | variable | 7-236                        |
| <b>tv:**constraint-node**</b>                           | variable | 7-184, 7-188                 |
| <b>tv:**constraint-stacking**</b>                       | variable | 7-184, 7-188                 |
| <b>tv:**constraint-remaining-height**</b>               | variable | 7-184, 7-188                 |
| <b>tv:**constraint-remaining-width**</b>                | variable | 7-184, 7-188                 |
| <b>tv:**constraint-total-height**</b>                   | variable | 7-184, 7-188                 |
| <b>tv:**constraint-total-width**</b>                    | variable | 7-184, 7-188                 |
| <b>tv:*function-keys*</b>                               | variable | 7-137                        |
| <b>tv:*gray-arrays*</b>                                 | variable | 7-92                         |
| <b>tv:item-list-pointer</b>                             | variable | 7-235                        |
| <b>tv:mouse-sheet</b>                                   | variable | 7-152                        |
| <b>tv:mouse-x</b>                                       | variable | 7-155                        |
| <b>tv:mouse-y</b>                                       | variable | 7-155                        |
| <b>tv:mouse-double-click-time</b>                       | variable | 7-161                        |
| <b>tv:*mouse-incrementing-keystates*</b>                | variable | 7-161                        |
| <b>tv:mouse-last-buttons</b>                            | variable | 7-155                        |
| <b>tv:*mouse-modifying-keystates*</b>                   | variable | 7-161                        |
| <b>tv:mouse-x-scale-array</b>                           | variable | 7-159                        |
| <b>tv:mouse-y-scale-array</b>                           | variable | 7-160                        |
| <b>tv:*notification-deliver-timeout*</b>                | variable | 7-130                        |
| <b>tv:*notification-pop-down-delay*</b>                 | variable | 7-132                        |
| <b>tv:screen-manage-update-permitted-windows</b>        | variable | 7-90                         |
| <b>tv:scroll-item-leader-offset</b>                     | variable | 7-313                        |
| <b>tv:*select-keys*</b>                                 | variable | 7-139                        |
| <b>tv:selected-window</b>                               | variable | 7-94                         |
| <b>tv:unexpected-select-delay</b>                       | variable | 7-132                        |
| <b>tv:who-line-mouse-grabbed-documentation</b>          | variable | 7-156                        |
| user-id                                                 | variable | 1-157                        |
| values                                                  | variable | 4-98, 4-276                  |
| <b>working-storage-area</b>                             | variable | 8-107                        |
| <b>zwei:*lr-reply-mode*</b>                             | variable | 6-90                         |
| <b>zwei:*always-jump-after-get-new-mail-from-inbox*</b> | variable | 6-85                         |
| <b>zwei:*always-select-saved-current-msg*</b>           | variable | 6-93                         |
| <b>zwei:*calendar-mode-week-starts-on-monday*</b>       | variable | 6-93                         |
| <b>zwei:*complete-get-inbox-in-background*</b>          | variable | 6-86                         |
| <b>zwei:*comtab*</b>                                    | variable | 7-381                        |

|                                                              |                                     |              |
|--------------------------------------------------------------|-------------------------------------|--------------|
| <b>zwei:*configure-middle-mode*</b>                          | variable                            | 6-93         |
| <b>zwei:*converse-mode*</b>                                  | variable                            | 1-172, 6-105 |
| <b>zwei:*converse-append-p*</b>                              | variable                            | 1-173, 6-106 |
| <b>zwei:*converse-beep-count*</b>                            | variable                            | 1-173, 6-106 |
| <b>zwei:*converse-end-exits*</b>                             | variable                            | 1-174, 6-106 |
| <b>zwei:*default-cc-list*</b>                                | variable                            | 6-88         |
| <b>zwei:*default-draft-file-name*</b>                        | variable                            | 6-91         |
| <b>zwei:*default-fcc-list*</b>                               | variable                            | 6-89         |
| <b>zwei:*default-initial-window-configuration*</b>           | variable                            | 6-87         |
| <b>zwei:*default-mail-buffer-generation-retention-count*</b> | variable                            | 6-92         |
| <b>zwei:*default-mail-window-configuration*</b>              | variable                            | 6-89         |
| <b>zwei:*default-move-mail-file-name*</b>                    | variable                            | 6-91         |
| <b>zwei:*default-summary-template*</b>                       | variable                            | 6-92         |
| <b>zwei:*delete-after-move-to-buffer*</b>                    | variable                            | 6-85         |
| <b>zwei:*delete-expired-msgs*</b>                            | variable                            | 6-89         |
| <b>zwei:*delete-middle-mode*</b>                             | variable                            | 6-86         |
| <b>zwei:*dont-reply-to*</b>                                  | variable                            | 6-90         |
| <b>zwei:*file-versions-kept*</b>                             | variable                            | 3-135        |
| <b>zwei:*filter-summary-window-fraction*</b>                 | variable                            | 6-92         |
| <b>zwei:*forwarded-add-subject*</b>                          | variable                            | 6-85         |
| <b>zwei:*forwarded-message-begin*</b>                        | variable                            | 6-91         |
| <b>zwei:*forwarded-message-end*</b>                          | variable                            | 6-91         |
| <b>zwei:*forwarded-message-separator*</b>                    | variable                            | 6-91         |
| <b>zwei:*generate-in-reply-to-field*</b>                     | variable                            | 6-88         |
| <b>zwei:*gmsgs-other-switches*</b>                           | variable                            | 6-91         |
| <b>zwei:*header-window-nlines*</b>                           | variable                            | 6-92         |
| <b>zwei:*inhibit-background-mail-checks*</b>                 | variable                            | 6-86         |
| <b>zwei:*inhibit-background-saves*</b>                       | variable                            | 6-86         |
| <b>zwei:*keyword-alist-sort-predicate*</b>                   | variable                            | 6-85         |
| <b>zwei:*local-mail-header-force*</b>                        | variable                            | 6-89         |
| <b>zwei:*local-mail-include-subject*</b>                     | variable                            | 6-89         |
| <b>zwei:*mail-file-for-drafts*</b>                           | variable                            | 6-91         |
| <b>zwei:*mail-middle-mode*</b>                               | variable                            | 6-87         |
| <b>zwei:*major-mode-translations*</b>                        | variable                            | 3-198        |
| <b>zwei:*map-middle-mode*</b>                                | variable                            | 6-87         |
| <b>zwei:*middle-reply-mode*</b>                              | variable                            | 6-90         |
| <b>zwei:*middle-reply-window-mode*</b>                       | variable                            | 6-90         |
| <b>zwei:*new-mail-file-append-p*</b>                         | variable                            | 6-92         |
| <b>zwei:*next-after-delete*</b>                              | variable                            | 6-86         |
| <b>zwei:*next-middle-mode*</b>                               | variable                            | 6-87         |
| <b>zwei:*one-window-after-yank*</b>                          | variable                            | 6-86         |
| <b>zwei:*preserve-msg-references-across-expunge*</b>         | variable                            | 6-85         |
| <b>zwei:*previous-middle-mode*</b>                           | variable                            | 6-87         |
| <b>zwei:*prompt-for-missing-headers*</b>                     | variable                            | 6-88         |
| <b>zwei:*prune-headers-after-yanking*</b>                    | variable                            | 6-86         |
| <b>zwei:*query-before-expunge*</b>                           | variable                            | 6-85         |
| <b>zwei:*query-before-selecting-empty-sequence*</b>          | variable                            | 6-93         |
| <b>zwei:*reply-mode*</b>                                     | variable                            | 6-90         |
| <b>zwei:*reply-header-format*</b>                            | variable                            | 6-89         |
| <b>zwei:*reply-window-mode*</b>                              | variable                            | 6-90         |
| <b>zwei:*require-subjects*</b>                               | variable                            | 6-88         |
| <b>zwei:*run-gmsgs-p*</b>                                    | variable                            | 6-91         |
| <b>zwei:*send-header-format*</b>                             | variable                            | 6-89         |
| <b>zwei:*set-attribute-update-list*</b>                      | global                              | 3-141, 3-143 |
| <b>zwei:*summary-mouse-middle-mode*</b>                      | variable                            | 6-88         |
| <b>zwei:*summary-scroll-fraction*</b>                        | variable                            | 6-92         |
| <b>zwei:*summary-subject-trim-spaces*</b>                    | variable                            | 6-92         |
| <b>zwei:*summary-window-fraction*</b>                        | variable                            | 6-92         |
| <b>zwei:*temp-file-type-list*</b>                            | variable                            | 3-135        |
| <b>zwei:*text-mail-file-separator*</b>                       | variable                            | 6-91         |
| <b>zwei:*zmail-startup-file-name*</b>                        | variable                            | 6-91         |
|                                                              | Variable Apropos                    | 3-210        |
| Describe                                                     | Variable (m-X) Zmacs command        | 3-210        |
| Set                                                          | Variable (m-X) Zmacs command        | 3-212        |
|                                                              | <b>variable-boundp</b> special form | 2-562        |

- :variable-choice** I/O buffer command 7-273
  - variable-location** special form 2-563
  - variable-makunbound** special form 2-562
  - Variable-width fonts 3-222, 7-108, 7-144
  - Variable Apropos Zmacs command 3-210
  - Variable argument number without consing list 8-23
  - Variable At Point 3-48
  - Variable At Point (c-sh-v) Zmacs command 4-39
  - variable binding 8-3
  - Variable Bindings During Evaluation 4-260
  - Variable Bindings Now Guarantee Consistent Behavior in Break and Debugging Loops RN-42
  - Variable Declarations RN-27
  - Variable-defined-but-never-referenced Warnings 4-326
  - variable error 2-533
  - variable error 2-533
  - variable errors 2-538
  - variable errors 2-533
  - Variable of iteration 2-207
  - variable out-of-bounds 2-541
  - variable output 5-44
  - Variables 2-125, 4-39
  - Variables 8-104
  - Variables 2-125, 2-331
  - variables 2-126
  - Variables 2-639
  - variables 4-324
  - variables 1-172, 6-105
  - Variables 4-268
  - variables 2-149
  - variables 2-431
  - variables 2-134
  - Variables 3-210
  - Variables 8-38
  - variables 2-126
  - variables 4-267
  - Variables 3-210
  - Variables 7-267
  - Variables 7-267
  - Variables 2-147
  - variables 2-126, 8-3
  - Variables 0-85
  - variables 1-177
  - variables 2-149
  - variables 2-425, 2-435, 2-455
  - variables 2-126, 2-418, 2-485, 4-113, 4-124, 4-126
  - Variables 1-151, 1-152
  - variables 1-234
  - variables 2-221
  - Variables 2-126
  - Variables 3-210
  - Variables 3-210
  - variables 2-126, 2-331, 8-23
  - variables 2-147
  - variables 8-18
  - variables 7-257
  - Variables 9-29
  - Variables 1-233
  - Variables 2-597
  - variables 5-147
  - Variables 3-211
  - variables 2-125, 2-126, 3-211
  - Variables 0-83
  - variables 2-126, 2-331
  - Variables 2-128
- Describe
  - Describe
  - Dynamic
  - Rebound
  - Standard
  - Interpreter Caches Global
  - Overriding
  - Unbound closure
  - Unbound instance
  - Instance
  - Unbound
  - Instance
  - Concatenating constant and
  - Area Functions and
  - Binding
  - Binding local and special
  - CLM: Generalized
  - Compiler
  - Converse
  - Debugger
  - Decrementing generalized
  - Default values for instance
  - Defining special
  - Describing Zmacs
  - Disk Error
  - Effect of compiler on
  - Examining values of instance
  - Finding Out About Zmacs
  - Functions for Altering User Option
  - Functions for Defining User Option
  - Generalized
  - Global
  - Herald Functions and
  - Identifying callers of
  - Incrementing generalized
  - Initializing instance
  - Instance
  - Interactive
  - Internal
  - Iteration
  - Kinds of
  - List
  - Listing Zmacs
  - Local
  - Locating generalized
  - Memory word field
  - Modifying values of
  - Namespace System
  - Notation Conventions for Methods and
  - Package Functions, Special Forms, and
  - Pathname special
  - Settable Zmacs
  - Setting
  - Site-related Functions and
  - Special
  - Special Forms for Binding



- Defining Choose
- Defining a Choose
- I/O Buffers for Choose
- SCL and subtype
- Conn\_st\_closed
- Translation heuristics for
  - Conn\_st\_full
  - Conn\_st\_incom
  - Conn\_st\_los
  - Conn\_st\_lsn
  - Conn\_st\_new
  - Conn\_st\_open
  - Conn\_st\_rfcrcv
  - Conn\_st\_rfcsnt
- Chaosnet
- Evaluate Region
  - time:**
  - si:**
- Default
- FEP
- FEP software
  - Major
  - Minor
- Mode Line's
- File types of the system
  - System
  - Show
- File system
  - Major
  - Minor
- :latest** symbol in **make-system**
- :newest** symbol in **make-system**
- :released** symbol in **make-system**
- Comparing/Merging Current/Installed
- Comparing/Merging Current/Newest
- Comparing/Merging Current/Saved
- Comparing file
- Deleting Multiple
  - File
- LMFS Deletion, Expunging, and System
  - Deleting Multiple File
  - Comparing Recent
- Concepts: Saving New
  - Saving New
  - < **:oldest**
  - < :oldest
  - > **:newest**
- Variable Values Types 7-269
- Variable Values Window 7-272
- Variable Values Windows 7-273
- variations 2-637
- VAX/VMS connection state 9-144
- VAX/VMS RN-72
- VAX/VMS Pathnames 5-180
- VAX/VMS character output 9-143
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS connection state 9-144
- VAX/VMS file system 6-96
- VAX/VMS Implementation 9-142
- VAX/VMS mail file format 6-95
- VAX/VMS pathname abbreviations 5-180
- V Dired command 3-150
- Verbatim text 3-34
- Verbose 3-175
- :verbose** Option for **load-patches** 0-46, 4-245, 4-246
- verify-date** function 7-370
- verify-fep-filesystem** function 8-59
- Verifying a backup tape 0-10
- Verifying a FEP File System 8-59
- :verify** option for window size and position messages 7-162
- version 5-147
- version 1-197
- version 1-200
- version 4-236
- version 4-236
- Version** 3-21
- version-directory file 4-236
- Version-directory File 4-233
- Version command 1-200
- version** descriptor file indicator 9-24
- Version generic pathname component 5-149
- Version ITS pathname component 5-185
- :version** method of **fs:pathname** 5-166
- version number 9-26
- version number 4-231
- version number 3-186, 4-231, 4-238
- :version** option 4-222
- :version** option 4-222
- :version** option 4-222
- :version** Option for **make-system** 4-223
- Versions 3-127
- Versions 3-127
- Versions 3-127
- versions 3-150
- Versions 3-135
- versions 3-114
- Versions 5-209
- versions 4-231
- Versions in Dired 3-151
- Versions of Files in Dired 3-150
- Versions of World Loads 0-45
- Versions of World Loads 0-45
- version specifier 5-186
- version specifier 5-185
- version specifier 5-185

- > **:newest** version specifier 5-186
- Version TENEX pathname component 5-183
- Version TOPS-20 pathname component 5-183
- :version-wild-p** method of **fs:pathname** 5-173
- eq** versus **equal** 2-10, 2-11
- Vertical spacing 3-143, 7-108
- Vertical-bars 1-233
- SCL and vertical bars for quoting 2-643
- si:** **verticalbar** syntax description 2-34
- Contracting a Drawing Vertically in FED 3-250
- Moving the Drawing Horizontally and/or Vertically in FED 3-255
- Scrolling the Drawing Horizontally and/or Vertically in FED 3-255
- Stretching a Drawing Vertically in FED 3-250
- Vertical spacing between lines in menu 7-222, 7-298
- :vertical** stacking description 7-188
- V Font Editor command 3-253, 3-260
- Video resetting 1-201
- View Buffer (m-X) Zmacs command 3-119
- View Directory (m-X) Zmacs command 3-132, 4-45
- Viewer 1-129
- [Viewer (M)] 1-133
- [Viewer (R)] 1-133
- viewers 1-129
- [Viewer] 1-133
- viewf** function 5-105
- View File 3-150
- View File (m-X) Zmacs command 3-132
- View File Properties (m-X) Zmacs command 3-133
- Viewing a Buffer 3-119
- Viewing a File 3-132
- Viewing a Keyboard Macro 3-200
- Viewing and Altering a Character in the FED Character Box 3-237
- Viewing and Editing File Contents in Dired 3-149
- Viewing File Attributes in Dired 3-149
- Viewing the Editor Command History 3-73
- Viewing the Kill History 3-73
- Viewing the Properties of a File 3-133
- View Kbd Macro (m-X) Zmacs command 3-200
- View Mail (m-X) Zmacs Command 6-48
- View Patches (m-X) 3-190, 4-242
- FSEdit [View Properties] Command 5-233
- [View Properties] File System Editor menu item 5-233
- View Two Windows 3-129
- View Two Windows (c-X 3) Zmacs command 4-65
- FSEdit [View] Command 5-234
- [View] File System Editor menu item 5-233
- [Center] View] Font Editor menu item 3-255, 3-259
- [Move] View] Font Editor menu item 3-255, 3-259
- Virtual Memory 1-209, 5-216, 8-114
- Virtual token 9-99
- Virtual List Maintenance 7-315
- virtual memory 8-129
- virtual-memory-overflow** flavor 2-537
- visibility 7-146
- :blink** blinker visibility 7-146
- :off** blinker visibility 7-146
- :on** blinker visibility 7-146
- Deselected visibility 7-146
- nil** blinker visibility 7-146
- t** blinker visibility 7-146
- :visibility** init option for **tv:blinker** 7-148
- Visibility of blinkers 7-146
- Visible windows 7-75, 7-79
- :visible-default** example 5-130, 5-132, 5-133, 5-134
- visible windows 7-75, 7-86
- prompt-and-read (:pathname**
- Partially

Set  
 Visited File Name (m-X) Zmacs command 3-122  
 VMS 5-200  
 VMS 0-68  
 VMS 0-76  
 Installing an ASCII Print Server on  
 Registering an ASCII Print Server on  
 :vms-font Translation Rule 5-193  
 :vms-heuristicate Translation Rule 5-192  
 :vms-microcode Translation Rule 5-194  
 :vms-heuristicate-directory Translation Rule 5-193  
 :vms-heuristicate-name Translation Rule 5-193  
 Namespace Attributes for a New  
 VMS Host 0-80  
 VMS logical pathname translation rules 5-192  
 :vms-new-pathname Translation Rule 5-193  
 Canonical types in  
 VMS Pathnames 5-180  
 Vnn-debug.flod files 1-222  
 Voices 7-324  
 Transmission  
 voltage 9-97  
 Vol tape spec parameter 0-26  
 Volume tape spec parameter 0-26  
 Overview of Deleting  
 Deleting  
 Vs. Killing Text 3-72  
 Vs. Killing Text 3-72  
 Vsp Attribute 3-143, 7-108, 7-116  
 Set  
 Vsp (m-X) Zmacs command 3-143, 4-10  
 :vsp init option for tv:menu 7-222, 7-298  
 :vsp init option for tv:sheet 7-116  
 :vsp method of tv:sheet 7-116  
 c-HELP  
 V Zmacs command 3-210  
 c-X  
 V Zmacs command 3-119  
 c-m-?  
 V Zmacs command 3-210  
 HELP  
 V Zmacs command 1-51, 3-14, 3-46, 3-210

## W

## W

## W

Windows (W) 1-187  
 Wait 8-75  
 chaos:  
 wait function 9-137  
 Wait-function 8-77  
 :wait-function method of si:process 8-89  
 Wait-argument-list 8-77  
 :wait-argument-list method of si:process 8-90  
 audio:  
 si: wait-for-audio-flag function 7-335  
 si: wait-for-disk-done function 8-33  
 si: wait-for-disk-event function 8-33  
 si: wait-for-disk-event-task function 8-33  
 Zmail in  
 Wait Forever Process State 6-23  
 tv: wait-for-mouse-button-down function 7-156  
 tv: wait-for-mouse-button-up function 7-156  
 Waiting for Acknowledgement of the EOF Packet on  
 Writing with QFILE 9-177  
 Wallpaper file 1-183  
 Warm Booting 1-44, 1-201  
 :warm-boot-action method of si:process 8-91  
 :warm-boot-action option for make-process 8-85  
 :warm-boot-action option for  
 process-run-function 8-86  
 :warm-boot-action option for  
 process-run-restartable-function 8-87  
 Warm boot initialization 8-67  
 :warm initialization list 8-71  
 :warm option for add-initialization 8-67  
 Warning Against Deleting LMFS File  
 Partitions RN-80  
 Compiler  
 warnings 4-65, 4-70, 4-79  
 Compiler Style  
 Warnings 4-323  
 Controlling Compiler  
 Warnings 4-323



- Function-referenced-but-never-defined Warnings 4-324
- Garbage collector warnings 8-124
- Lisp Compiler Warnings 3-176
- Overriding Variable-defined-but-never-referenced Warnings 4-326
- Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Edit Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Edit File Warnings (m-X) Zmacs command 4-321
- Load Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Warnings about file attribute lists 3-138
- Compiler Warnings Database 4-79, 4-321
- Print compiler warnings database 4-321
- Update compiler warnings database 4-321
- Sawtooth Wave Example 7-341
- Sine Wave Example 7-339
- Square Wave Example 7-341
- Wavetable 7-325
- Wavetable cursor 7-325
- wavetable increments 7-337
- Polyphonic Wavetable Size Increased From 256 to 1024
- Audio Words RN-60
- More Ways to Enter Minibuffer Responses 3-51
- Days of the week 7-353
- Finding Out What an Extended Command Does 3-45
- Finding Out What a Prefix Command Does 3-45
- What Are Fonts? 1-75
- Example of Finding Out What a Zmacs Command Does 3-44
- Finding Out What a Zmacs Command Does 3-44
- what-files-call** function 1-178, 4-38
- What Histories Save 3-72
- What is a Dynamic Closure? 2-331
- What is a Function? 2-297
- What is a Handler? 2-487
- What is a Logical Pathname? 1-228
- What is a World Load? 1-228
- What is a Zmacs Region? 3-86
- What is Customizing? 1-161
- Clarification of What **readline** Returns RN-79
- What the Lines Mean in the FED Character Box 3-237
- Checking on What the Machine is Doing 1-177
- What the Printer Produces 2-14
- CLM: What the Print Function Produces 2-644
- CLM: What the Reader Recognizes 2-20
- CLM: What the Read Function Accepts 2-643
- What to Do After Reading a Zmail Message 1-66
- What to Do When the Mailer Crashes 6-117
- Finding Out What You Have Typed 3-46
- when** macro 2-179
- When and How to Use the Garbage Collector 1-105
- when done dump parameter 0-6
- when done dump parameter 0-6
- when done dump parameter 0-6
- when done dump parameter 0-6
- when done dump parameter 0-6
- when done dump parameter 0-6
- Why Can't I Write Out Files When I Have Free Disk Space? 1-229
- when loop** keyword 2-216
- Check Unbalanced Parentheses When Saving Variable 3-211
- What to Do When the Mailer Crashes 6-117
- where-is** function 1-178, 2-571, 2-612, 2-625, 4-38
- Where Am I 3-47
- Where Am I 3-47
- Fast Use of Symbolics Lisp Machine Characters in Source Code
- Where ASCII Characters Are Desired RN-20
- Use of Integers in Source Code Where Characters Are Desired RN-19
- Use of Characters in Source Code **:wherein** option for **trace** 4-92, 4-277
- Where Integers Are Desired RN-19

- [Wherein] **trace** menu item 4-92
- Where Is Symbol (m-X) Zmacs command 2-571, 4-38
- :which-operations** message 2-453, 5-13
- :which-operations** symbol 2-520
- :which-operations** keyword for
  - named-structure-invoke** 2-403, 2-404
- :which-operations** method of **sl:vanilla-flavor** 4-142
- while loop** keyword 2-214
- :white** pattern in dummy description 7-188
- White Space for Kill/Yank Commands 1-168, 3-214
- White Space in Lisp Code 1-169, 3-215
- si:**
  - whitespace** syntax description 2-34
  - who-calls** function 1-177, 4-38
  - :who-line** property 9-214
  - who-am-I** request 0-87
  - who-am-I** Service 9-64
- Whole (c-X H) Zmacs command 4-63
- Whole Buffer 3-70
- &whole** Lambda-list Keyword 2-311, 2-374, RN-39
- Find
  - Whole Word Candidates 1-126
  - :who-line-documentation-string** method 4-129
  - :who-line-documentation-string** method of
    - tv:sheet** 7-152
  - tv:**
    - who-line-mouse-grabbed-documentation** variable 7-156
    - :who-line** option for **net:define-server** 9-51
    - :whopper** method type 2-455, 2-458
  - Whoppers 4-116
  - Whoppers and Wrappers 2-461
  - :whostate** method of **sl:process** 8-90
- Wide Configuration 3-227
- Blinker
  - width 3-223, 7-145, 7-146
- Border margin
  - width 7-170
- Character
  - width 3-222, 3-238, 7-108, 7-144, 7-145, 7-162
- Inside
  - width 7-213
- Maximum
  - width 7-213
- Raster
  - width 7-146
- Set Tab
  - Width (m-X) Zmacs command 3-143, 4-10
- Blinker*
  - Width and *Blinker Height* Font Attributes 3-223, 7-145
- Messages About Character
  - Width and Cursor Motion 7-114
  - Character*
    - Width Font Attribute 3-222, 7-144
    - :width** init option for
      - tv:choose-variable-values** 7-263
    - :width** init option for **tv:menu** 7-298
    - :width** init option for **tv:rectangular-blinker** 7-149
    - :width** init option for **tv:sheet** 7-163
  - Width of **:function** line item 7-308
  - Width of **:symeval** line item 7-308
- Height and
  - width of the drawing pane 3-256
- Setting the Height and
  - Width of the FED Drawing Pane 3-256
- :wild** keyword 5-153
- :wild-inferiors** in logical pathnames 5-188, RN-71
- :wild-inferiors** pathname component 5-140
- :wild-p** example 5-132
- :wild-p** method of **fs:pathname** 5-172
- Wildcard pathnames 5-153
- FSEdit
  - [Wildcard Delete] Command 5-233
  - [Wildcard Delete] File System Editor menu item 5-233
- Wildcard Directory Mapping 5-155
- Pathname
  - wildcard example 5-132
- fs:**
  - wildcard-not-allowed** flavor 2-550
- Wildcard Pathname Mapping 5-153
- Reversible
  - Wildcard Pathname Translation 5-191
- Wildcards 5-188, 9-30, RN-71

- Logical Pathname
  - Wildcard Syntax 5-188, RN-71
  - :wild** pathname component 5-140
  - :wild** pathname component specifier 5-186
  - Wild pathname translation 5-189
  - wild pathname translation 5-189
- Reversible
    - Activate window 7-295
  - Choose-variable-values window 4-126, 4-129
  - Choosing the Other Window 3-130
  - Controlling the Mouse Outside a Window 7-158
  - Converse Pop-up Message Window 1-70, 6-101
  - Creating a Window 7-106
  - Deactivating menu window 7-223, 7-299
  - Defining a Choose Variable Values Window 7-272
  - Delete contents of window 7-114
  - Delete to end of window 7-113
  - Document Examiner Window 1-129
  - Erase window 7-114
  - Erase to end of window 7-113
  - Exposing menu window 7-223
  - Grow Window 3-129
  - Headers window 1-67
  - Inferior typeout window 7-174
  - Introduction to Redisplaying the Window 3-55
  - Main Zmail window 6-11, 6-13
  - Message window 1-57, 1-67, 6-38
  - Mouse documentation window 7-311
  - Number of packet slots available in transmit window 9-144
  - One Window 3-130
  - Other Window 3-130
  - Position of window 7-103
  - Recentering the Window 3-55
  - Redisplaying the Window 3-55
  - Reposition Window 3-56
  - Returning to One Window 3-130
  - Scrolling summary window 1-66
  - Scrolling the Other Window 3-130
  - Scroll Other Window 3-130
  - Simple momentary window 7-223
  - Size of window 7-103
  - Summary window 1-64, 6-39
  - Superior window 7-76, 7-78
  - The Basic Arrow Window 4-116
  - Typeout window 3-17, 3-44
  - User options window 1-171, 6-57, 6-71
  - Using the mouse to scroll the message window 1-64
  - Using the mouse with multiple choice window 7-251
  - Wraparound Lines in the Editor Window 3-54
  - Zmacs Editor Window 3-17
  - Zmail Error Window 6-24
  - Zmail Message Window 1-60, 6-13
  - Zmail Summary Window 1-57, 6-13
- Window attributes 7-108
  - Window Borders 7-170
  - tv:** **window** flavor 4-112, 4-116, 7-105
  - Window Graying 7-90
  - Window inside 7-103, 7-162, 7-168
  - Window Labels 7-171
  - Window margin 7-103, 7-162, 7-168
  - Window name 7-297
  - Window panes 7-76
  - Window's Buffer 3-17
  - Window's Cursor and Point 3-17
  - Window's Typeout 3-17
  - One Window (c-X 1) Zmacs command 4-65
  - Other Window (c-X 0) Zmacs command 4-65
  - Scroll Other Window (c-m-V) Zmacs command 4-65



- Inactive windows 7-76
- Inferior windows 7-78, 7-103
- Input From Windows 7-132
- Input operations on windows 7-75
- Interaction with Completion and Timeout Windows 1-84
- Introduction to Scroll Windows 7-303
- Line-truncating Windows 7-117
- Locked windows 7-82
- Making Standalone Editor Windows 7-381
- Messages for Input From Windows 7-134
- Messages to Display Characters on Windows 7-111
- Messages to Remove Characters From Windows 7-113
- Modified Two Windows 3-129
- Multiple windows 3-114, 4-65
- Output operations on windows 7-75
- Overlapping windows 7-75
- Partially visible windows 7-75, 7-86
- Programming Aids for Flavors and Windows 4-141
- Regenerating contents of windows 7-78
- Relationship of mouse to windows 7-151
- Saving contents of windows 7-78
- Scroll Windows 7-301
- Scrolling Windows 7-175
- Temp-locked windows 7-82, 7-84
- Temporary Windows 7-84
- Text Scroll Windows 7-174
- Two Windows 3-129
- Timeout Windows 7-174
- Using Flavors and Windows 4-111
- Using Multiple Windows 4-65
- Using Two Windows 3-129
- View Two Windows 3-129
- Visible windows 7-75, 7-79
- Zmacs and Other Windows 4-66
- Windows (W) 1-187
- Windows (c-X 2) Zmacs command 4-65
- Windows (c-X 3) Zmacs command 4-65
- Windows (c-X 4) Zmacs command 4-65
- Windows, Select Bottom 3-129
- Windows, Select Top 3-129
- Windows, Specifying Other Contents 3-129
- Windows and Processes 7-94
- Windows as Input Streams 7-132
- Windows as output streams 7-103, 7-108
- Windows as streams 7-75
- Window scrolling 6-13
- Window scrolling 6-13
- Windows Display Characters 7-108
- Windows Display Graphic Output 7-118
- Window Selection 7-94
- Window Selection 7-99
- Window Selection RN-66
- Window Selection 7-96
- Window shape 7-175
- Windows in Zmacs 1-85
- Windows is Obsolete RN-60
- Windows is Obsolete RN-57
- Window Size 3-129
- Window Size and Position 7-163
- Window Size and Position 7-165
- Window size and position messages 7-162
- Window size and position messages 7-162
- Window size init options 7-162
- Window size in the receive direction 9-144
- Window size in the transmit direction 9-144
- Window size messages 7-162

- New Message to Two
  - Creating Two
- Introduction to Using the Purpose of the Using the
  - Window Sizes and Positions 7-162
  - Windows: **:set-font-map-and-vsp** RN-64
  - Windows Showing Region 3-129
  - Windows with the Region in Top 3-129
  - Window System 7-73
  - Window System 7-75
  - Window System 7-71
  - Window System Choice Facilities 7-201
  - Window System Concepts 7-75
  - Window system package 2-615
  - window system storage resources 8-131
  - Window Temporarily 7-100
  - Window to Use 7-105
  - :window** window-positioning mode 7-167
  - window-with-typeout-mixin** flavor 7-174
  - [Move] Edit Screen menu item 7-76
  - [Lisp Window] File System Maintenance menu item 0-39
  - si: wire-structure** 7-328
  - si: wire-words** 7-328
  - si: wire-consecutive-words** 7-328
  - Wired memory 7-327
  - Wired packets 9-195
  - Wired Structures 7-327
  - Wiring a structure 8-35
  - Wiring Memory 7-328
  - with-audio** macro 7-330
  - with-indentation** macro 5-49
  - with-key loop** keyword 2-224
  - with-monitoring** macro 8-63
  - with-data-stack** special form 8-28
  - with-disk-event-task** special form 8-32
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** 7-378
  - with-editor-stream** macro 7-377
  - with-erring-frame** macro 2-494, 2-495
  - Within Another 4-285
  - :within** function spec type 2-297
  - with-input-editing** RN-55
  - with-input-editing-options-if** special form 5-56, 7-24
  - with-input-editing-options** special form 5-55, 7-23
  - with-input-editing** special form 5-57, 7-25
  - with-input-from-string** special form 2-290
  - within window frame 7-231
  - with loop** keyword 2-210
  - with-mouse-and-buttons-grabbed**,  
**tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
- Allocating and freeing
  - Selecting a
  - Getting a
- Notes on
  - Lisp Primitives for
    - audio: sys:**
    - meter: sys:**
    - si:**
  - :buffer-name** option for **zwei:**
  - :create-p** option for **zwei:**
  - :defaults** option for **zwei:**
  - :end** option for **zwei:**
  - :hack-fonts** option for **zwei:**
  - :interval** option for **zwei:**
  - :kill** option for **zwei:**
  - :load-p** option for **zwei:**
  - :ordered-p** option for **zwei:**
  - :pathname** option for **zwei:**
  - :start** option for **zwei:**
  - :window** option for **zwei:**
  - zwei: dbg:**
- Advising One Function
- Change to Subforms of
  - Command menu
  - New Special Forms: **tv:**
  - New Special Forms: **tv:with-mouse-and-buttons-grabbed**, **tv:with-mouse-and-buttons-grabbed-on-sheet** RN-63
  - tv: with-mouse-and-buttons-grabbed-on-sheet** special form 7-155, RN-64
  - tv: with-mouse-and-buttons-grabbed** special form 7-155, RN-63
  - tv: with-mouse-grabbed-on-sheet** special form 7-154
  - tv: with-mouse-grabbed** special form 7-154
  - tv: with-mouse-usurped** special form 7-157



- Overview of
  - How the Input Editor
  - How the Inspector
  - How the Printer
  - How the Reader
  - Mouse Scaling Now
  - sys:%beep** Now
- 3640: Customizing and Saving the
  - A Brief Introduction to the Lisp
  - Booting a
  - Booting the Release 6.0
  - Customizing and saving a
    - New Function **note-private-patch** Adds Private Patch to Your World RN-53
- Poking Around in the Lisp
  - Save
  - Save current Lisp
- Tools for Compiling Code From the Editor Into Your Variables for Examining the Lisp
  - Copy
  - Load
  - Save
  - FED Outside
  - What is a
  - Adding a Spare
    - Using a Spare
  - Concepts: Saving New Versions of
    - Dumping
    - Saving New Versions of
    - Installing
  - 3640: Saving Subsequent
    - Distributing a new
    - Horizontal
- Modifying
  - Ordering Flavors, Methods, and Whoppers and
- The Audio
  - Disk
- tape:**
- si:**
- working-storage-area** variable 8-107
- Working with Buffers and Files in Zmacs 3-114
- Working with Buffers and Files in Zmacs 3-114
- Working with Regions in Zmacs 3-85
- Works 1-101, 5-53, 7-21
- Works 1-189, 4-295
- Works 2-13
- Works 2-19
- Works on 3600-family Computers RN-68
- Works on 3600-family Consoles That Support Digital Audio RN-68
- World 0-55
- World 1-151
- World 0-59
- world 0-87
- world 0-87
- World loading 1-201
- World Loads 1-209, 5-215
- World Command 1-19
- World command 1-201
- World Command 1-30
- World Interface Menu Items 3-260
- World Load? 1-228
- World Load as LMFS File Space 1-212, 5-219
- World load disk-saves 0-48, 1-182
- World Load for Paging 1-212, 5-219
- World Loads 0-45
- World Loads 0-20
- World Loads 0-45
- world loads from other sites 0-87
- Worlds 0-57
- world to other machines 0-87
- wraparound 7-108
- Wraparound Lines 3-54
- Wraparound Lines in the Editor Window 3-54
- :wrapper** method type 2-455, 2-458
- wrappers 2-468
- Wrappers 2-467
- Wrappers 2-461
- Wrapping Lines 3-23
- Wrapping Form 7-330
- write 8-35
- Write File 3-30, 3-121
- :write-eof** message to output tape streams 5-273
- Write-locked 5-228, 8-48
- Write a breakpoint into a program 1-180
- Write Buffer (m-X) Converse Command 1-71, 6-102
- Write Buffer register 9-131
- Write Conversation (m-X) Converse Command 1-71, 6-102
- :write-data-map** message 5-225, 8-46
- Write Draft File Zmail Menu Item 6-39
- :write-error-status** message to output tape streams 5-273
- write-fep-files-to-tape** function 0-20, 8-59
- write-fep-label** function 8-58
- Write File Zmacs command 1-55, 3-32
- [Write File] Font Editor menu item 3-258, 3-260
- :write-frame** method of **si:serial-hdlc-mixin** 5-263



**netl:** **write-hosts.text-file** function 9-28  
**sys:** **write-in-read-only** flavor 2-537  
Streams that read or write magnetic tape 5-269  
**:write** option for **fs:complete-pathname** 5-120, 5-158  
**:write** option for **with-open-file** 5-91  
Why Can't I Write Out Files When I Have Free Disk Space? 1-229  
WRITE QFILE OPEN option 9-166  
Hints to Macro Writers 2-357  
**write-user-options** function 7-268  
Writing and Editing Code 4-7  
Writing and Saving Keyboard Macros 3-201  
Example 1 of Writing and Saving Keyboard Macros 3-201  
Example 2 of Writing and Saving Keyboard Macros 3-202  
Writing FED Files 3-258  
Reading and Writing FED Files 3-257  
Writing FEP Files to Tape 8-59  
Writing files to tape 0-31  
Writing font files 3-258  
Binding Standard Variables for Writing Lisp Style Command Loops 1-153  
Writing Programs That Use Magnetic Tape 5-267  
Writing systems onto tape 0-19  
Writing the Buffer Contents to a File 3-121  
Writing with QFILE 9-177  
Waiting for Acknowledgement of the EOF Packet on  
**fs:** **wrong-kind-of-file** 2-550  
**fs:** **wrong-kind-of-file** flavor 2-550  
**sys:** **wrong-stack-group-state** flavor 2-537  
**sys:** **wrong-type-argument** condition 2-505  
**sys:** **wrong-type-argument** flavor 2-539  
c-X **W** Zmacs command 3-30  
HELP **W** Zmacs command 1-51, 3-14, 3-46

## X

**X**  
SELECT X 3-40  
Put Register (c-X) X) Zmacs command 4-63  
CCITT Recommendation **:x-pos** init option for **tv:blinker** 7-148  
X.25 interface 9-15  
**:x25** example 9-44  
**x25** network type 9-15  
X= date directory last expunged indicator 5-236  
NETWORK X command 1-115  
**xcons** function 2-45, 2-56  
**xcons-in-area** function 2-45  
**:x** init option for **tv:menu** 7-298  
**:x** init option for **tv:sheet** 7-163  
XMAIL pathname type abbreviation 5-180  
Serial Stream Handling of Xon - Xoff Characters RN-80  
Serial Stream Handling of Xon - Xoff Characters RN-80  
XON/XOFF protocol parameters 5-253  
**:xon-xoff-protocol** serial I/O parameter 5-253  
Maxtor XT-1140 disk drive 1-214

## Y

**Y**  
**:y-pos** init option for **tv:blinker** 7-148  
Yank 3-74  
Yank Pop 3-51, 3-74  
Yank (c-Y) Zmacs command 4-60  
c-Y yank command 3-15  
c-Ø c-m-Y yank command 3-15, 3-73  
c-m-Y yank command 3-15  
c-Ø c-Y yank command 3-15

m-Y yank command 3-15, 3-51, 3-74  
 c-X c-Y Yank Current Message Zmail Command 6-45  
 c-X Y Prune Yanked Headers Zmail Command 6-45  
 Prune headers of yanked messages 6-86  
 Yanking 3-15, 3-43  
 Yanking 3-15  
 Yanking 4-60  
 Yanking messages 6-69  
 Yanking text 4-60  
 Yanking in the command history 3-15  
 Yanking in the kill history 3-15  
 Yanking in the Minibuffer 3-51  
 Yank Pop (m-Y) Zmacs command 4-60  
 Year 7-353  
 Yes-or-no question 7-55  
**yes-or-no-p** function 7-55  
**:y** init option for **tv:menu** 7-298  
**:y** init option for **tv:sheet** 7-163  
**y-or-n-p** function 7-55  
 c-X Y Prune Yanked Headers Zmail Command 6-45

**Z****Z****Z**

Testing for zero 2-97  
**sys:** Zero-dimensional Arrays Are Now Supported RN-42  
 Division by **zero-args-to-select-method** flavor 2-539  
 zero error 2-534  
**zerop** function 2-97  
 Zero window mode 6-38  
 Zetalisp syntax 3-140  
 Zetalisp and SCL 2-631  
 Zetalisp and SCL character incompatibilities 2-265,  
 RN-12  
 Zetalisp and SCL string incompatibilities 2-265,  
 RN-12  
 ZJ Zmail command 6-67  
**zl-user** package 2-633  
**zl** package 2-633  
**zl:sl:\*flag-wrong-type-strings\*** 2-637, 2-642  
 Zmacs RN-1  
 Zmacs 3-115  
 Zmacs 3-165  
 Zmacs 3-124  
 Zmacs 3-137  
 Zmacs 3-164  
 Zmacs 3-159  
 Zmacs 3-160  
 Zmacs 3-160  
 Zmacs 3-160  
 Zmacs 3-160  
 Zmacs 3-160  
 Zmacs 3-171  
 Zmacs 3-125  
 Zmacs 3-175  
 Zmacs 3-172  
 Zmacs 3-71  
 Zmacs 3-167  
 Zmacs 3-166  
 Zmacs 3-144  
 Zmacs 3-169  
 Zmacs 3-12, 3-40, 4-9  
 Zmacs 3-174  
 Zmacs 3-174  
 Zmacs 3-179  
 Zmacs 3-41  
 Zmacs 3-11  
 SCL  
 SCL  
 SCL and  
 + flag in  
 Aligning Indentation in  
 Appending, Prepending, and Inserting Text in  
 Buffer and File Attributes in  
 Centering the Current Line in  
 Changing Case and Indentation in  
 Changing Case in  
 Changing Case of Buffers in  
 Changing Case of Regions in  
 Changing Case of Words in  
 Commenting Lisp Code in  
 Comparing Files and Buffers in  
 Compiling Lisp Programs in  
 Creating a New Indented Lisp Comment Line in  
 Deleting and Transposing Text in  
 Deleting Blank Line in  
 Deleting Indentation in  
 Dired Mode in  
 Editing Lisp Programs in  
 Entering  
 Evaluating and Compiling Lisp Programs in  
 Evaluating Lisp Programs in  
 Expanding Lisp Expressions in  
 Getting Help in  
 Getting Started in

- Going Back to First Indented Character in Zmacs 3-165
  - Hardcopying From Zmacs 1-107, 3-267
  - Indentation in Zmacs 3-162
  - Indenting Current Line in Zmacs 3-162
  - Indenting for Lisp Comment in Zmacs 3-171
  - Indenting New Line in Zmacs 3-164
  - Indenting Region in Zmacs 3-165
  - Indenting Region Uniformly in Zmacs 3-165
- Inserting and Removing Lisp Comments From Regions in Zmacs 3-173
  - Inserting Blank Line in Zmacs 3-167
  - Introduction to Zmacs 3-6
  - Introduction to Customizing Zmacs 3-194
  - Introduction to Editing Lisp Programs in Zmacs 3-170
  - Introduction to Entering Zmacs 1-47, 3-12
  - Introduction to Locating Source Code in Zmacs 3-180
  - Introduction to Text Formatting in Zmacs 3-33
  - Invoking Zmacs 1-47, 3-12
  - Killing a Lisp Comment in Zmacs 3-171
  - Leaving Zmacs 3-40
- Locating and Replacing Strings Automatically in Zmacs 3-102
  - Locating Source Code to Edit in Zmacs 3-180
- Lookup Commands Available At a Lisp Listener and in Zmacs 1-128
  - Making Global Replacements in Zmacs 3-102
  - Manipulating Buffers and Files in Zmacs 3-113
  - Mouse Documentation Line in Zmacs 3-57
  - Moving Down to Lisp Comment on Next Line in Zmacs 3-172
  - Moving Rest of Line Down in Zmacs 3-166
  - Moving the Cursor in Zmacs 3-53
  - Moving up to Lisp Comment on Previous Line in Zmacs 3-172
  - New Line with This Indentation in Zmacs 3-166
  - Other Types of Replacement Operations in Zmacs 3-104
  - Overview of Zmacs 1-47, 3-6
  - Overview of Changing Case in Zmacs 3-160
  - Overview of Commenting Lisp Code in Zmacs 3-171
- Overview of Evaluating and Compiling Lisp Programs in Zmacs 3-174
  - Overview of Indentation in Zmacs 3-162
  - Overview of Leaving Zmacs 3-40
  - Overview of Searching in Zmacs 3-98
  - Overview of Sorting in Zmacs 3-112
  - Overview of Working with Buffers and Files in Zmacs 3-114
  - Parenthesizing Lisp Expressions in Zmacs 3-178
  - Patching Programs in Zmacs 3-186
- Querying While Making Global Replacements in Zmacs 3-102
  - Querying While Making Multiple Global Replacements in Zmacs 3-103
    - Registers in Zmacs 3-89
    - Reindenting Expression in Zmacs 3-165
    - Reinitializing Zmacs 1-48, 1-158, 3-12
    - Searching, Replacing, and Sorting in Zmacs 3-97
    - Searching in Zmacs 3-98
    - Setting Fonts in Zmacs 1-79
    - Setting the Lisp Comment Column in Zmacs 3-172
    - Sorting in Zmacs 3-112
    - Starting Zmacs 1-47, 3-12
    - Tag Tables and Search Domains in Zmacs 3-106
    - Typeout Windows in Zmacs 1-85
    - Typical use of Zmacs 3-170
    - Using the mouse to enter Zmacs 1-48, 3-12
    - Working with Buffers and Files in Zmacs 3-114
    - Working with Regions in Zmacs 3-85
- Zmacs Commands for Finding Out About the State of Zmacs 1-86, 3-217
  - Zmacs Completion 1-84

|                                          |                             |                               |
|------------------------------------------|-----------------------------|-------------------------------|
|                                          | Zmacs Help                  | 3-14                          |
|                                          | Zmacs Manual                | 3-1                           |
|                                          | Zmacs variables             | 3-46                          |
| <b>zwel:</b>                             | <b>*zmacs-comtab*</b>       | 3-201                         |
|                                          | Zmacs and Other Windows     | 4-66                          |
|                                          | Zmacs Bolio Mode            | 3-157                         |
| Compiling Code in a                      | Zmacs Buffer                | 4-70                          |
| Current                                  | Zmacs Buffer                | 3-116                         |
| Summary of Compiler Actions on Code in a | Zmacs Buffer                | 4-71                          |
|                                          | Zmacs Buffer and File Names | 3-114                         |
|                                          | Zmacs Buffer Commands       | 3-117                         |
|                                          | Zmacs Buffer History        | 3-116                         |
| Selecting, Listing, and Examining        | Zmacs Buffers               | 3-116                         |
| RUBOUT                                   | Zmacs character             | 1-145, 3-76                   |
| ABORT                                    | Zmacs command               | 3-42                          |
| Append To File (m-X)                     | Zmacs command               | 3-124                         |
| Arglist (m-X)                            | Zmacs command               | 3-48                          |
| Atom Word Mode (m-X)                     | Zmacs command               | 4-12                          |
| Auto Fill Mode (m-X)                     | Zmacs command               | 4-12                          |
| Backward Kill Sexp (c-m-RUBOUT)          | Zmacs command               | 4-60                          |
| Beep (c-G)                               | Zmacs command               | 4-59                          |
| Brief Documentation (c-sh-D)             | Zmacs command               | 4-39, 4-42                    |
| c-%                                      | Zmacs command               | 3-102                         |
| c-;                                      | Zmacs command               | 3-171                         |
| c- =                                     | Zmacs command               | 3-47                          |
| c-A                                      | Zmacs command               | 1-50, 3-26, 3-63, 3-81        |
| c-B                                      | Zmacs command               | 1-50, 3-26, 3-61              |
| c-D                                      | Zmacs command               | 1-53, 3-28, 3-43, 3-76        |
| c-E                                      | Zmacs command               | 1-50, 3-26, 3-63, 3-81        |
| c-F                                      | Zmacs command               | 1-50, 3-26, 3-61              |
| c-G                                      | Zmacs command               | 3-42                          |
| c-HELP V                                 | Zmacs command               | 3-210                         |
| c-K                                      | Zmacs command               | 1-53, 3-28, 3-81              |
| c-L                                      | Zmacs command               | 3-55                          |
| c-N                                      | Zmacs command               | 1-50, 3-26, 3-63, 3-81, 3-199 |
| c-O                                      | Zmacs command               | 3-167                         |
| c-P                                      | Zmacs command               | 1-50, 3-26, 3-63, 3-81        |
| c-SPACE                                  | Zmacs command               | 3-88                          |
| c-T                                      | Zmacs command               | 3-76                          |
| c-U                                      | Zmacs command               | 3-24                          |
| c-V                                      | Zmacs command               | 1-50, 3-26, 3-55              |
| c-W                                      | Zmacs command               | 1-53, 3-28, 3-94              |
| c-X                                      | Zmacs command               | 3-199                         |
| c-X )                                    | Zmacs command               | 3-199                         |
| c-X 1                                    | Zmacs command               | 3-130                         |
| c-X 2                                    | Zmacs command               | 3-129                         |
| c-X 3                                    | Zmacs command               | 3-129                         |
| c-X 4                                    | Zmacs command               | 3-129                         |
| c-X 8                                    | Zmacs command               | 3-129                         |
| c-X ;                                    | Zmacs command               | 3-172                         |
| c-X =                                    | Zmacs command               | 3-47                          |
| c-X A                                    | Zmacs command               | 3-124                         |
| c-X B                                    | Zmacs command               | 1-55, 3-30, 3-31, 3-117       |
| c-X D                                    | Zmacs command               | 3-144                         |
| c-X E                                    | Zmacs command               | 3-200                         |
| c-X F                                    | Zmacs command               | 3-30, 3-196                   |
| c-X L                                    | Zmacs command               | 3-48                          |
| c-X O                                    | Zmacs command               | 3-130                         |
| c-X Q                                    | Zmacs command               | 3-202                         |
| c-X RUBOUT                               | Zmacs command               | 1-53, 3-28, 3-83              |
| c-X S                                    | Zmacs command               | 3-30                          |
| c-X T                                    | Zmacs command               | 3-94                          |
| c-X V                                    | Zmacs command               | 3-119                         |
| c-X W                                    | Zmacs command               | 3-30                          |
| c-X [                                    | Zmacs command               | 1-50, 3-26, 3-69              |
| c-X ]                                    | Zmacs command               | 1-50, 3-26, 3-69              |

|                                                |             |               |                     |
|------------------------------------------------|-------------|---------------|---------------------|
|                                                | c-X ^       | Zmacs command | 3-129               |
| Call Last Kbd Macro (c-X E)                    |             | Zmacs command | 4-64                |
| Change File Properties (m-X)                   |             | Zmacs command | 3-133               |
| Clean Directory (m-X)                          |             | Zmacs command | 3-136               |
|                                                | CLEAR INPUT | Zmacs command | 3-82                |
|                                                | c-m-]       | Zmacs command | 3-67                |
|                                                | c-m-)       | Zmacs command | 3-66                |
|                                                | c-m-(       | Zmacs command | 3-66                |
|                                                | c-m-;       | Zmacs command | 3-171               |
|                                                | c-m-? V     | Zmacs command | 3-210               |
|                                                | c-m-@       | Zmacs command | 3-91                |
|                                                | c-m-A       | Zmacs command | 3-66                |
|                                                | c-m-B       | Zmacs command | 3-65                |
|                                                | c-m-D       | Zmacs command | 3-66                |
|                                                | c-m-E       | Zmacs command | 3-67                |
|                                                | c-m-F       | Zmacs command | 3-65                |
|                                                | c-m-H       | Zmacs command | 3-91                |
|                                                | c-m-K       | Zmacs command | 1-53, 3-28, 3-79    |
|                                                | c-m-L       | Zmacs command | 3-117               |
|                                                | c-m-N       | Zmacs command | 3-65                |
|                                                | c-m-O       | Zmacs command | 3-166               |
|                                                | c-m-P       | Zmacs command | 3-65                |
|                                                | c-m-Q       | Zmacs command | 3-165               |
|                                                | c-m-R       | Zmacs command | 3-56                |
|                                                | c-m-RUBOUT  | Zmacs command | 1-53, 3-28, 3-79    |
|                                                | c-m-sh-E    | Zmacs command | 3-175               |
|                                                | c-m-SPACE   | Zmacs command | 3-88                |
|                                                | c-m-T       | Zmacs command | 3-79                |
|                                                | c-m-U       | Zmacs command | 3-66                |
|                                                | c-m-V       | Zmacs command | 3-130               |
|                                                | c-m-Z       | Zmacs command | 3-175               |
|                                                | c-m-[       | Zmacs command | 3-66                |
|                                                | c-m-\       | Zmacs command | 3-165               |
|                                                | c-m-^       | Zmacs command | 3-166               |
| Compile Buffer (m-X)                           |             | Zmacs command | 4-70                |
| Compile Changed Definitions (m-X)              |             | Zmacs command | 4-70                |
| Compile Changed Definitions Of Buffer (m-sh-C) |             | Zmacs command | 4-70                |
| Compile File (m-X)                             |             | Zmacs command | 4-73                |
| Compile Region (c-sh-C)                        |             | Zmacs command | 4-70                |
| Compile Region (m-X)                           |             | Zmacs command | 3-94, 4-316         |
| Compiler Warnings (m-X)                        |             | Zmacs command | 4-79, 4-321         |
| Copy File (m-X)                                |             | Zmacs command | 3-134, 5-105, 5-153 |
| Create Directory (m-X)                         |             | Zmacs command | 3-131               |
| Create Link (m-X)                              |             | Zmacs command | 3-135               |
|                                                | c-sh-A      | Zmacs command | 3-47                |
|                                                | c-sh-C      | Zmacs command | 3-94, 4-316         |
|                                                | c-sh-D      | Zmacs command | 3-47                |
|                                                | c-sh-E      | Zmacs command | 3-175               |
|                                                | c-sh-V      | Zmacs command | 3-48                |
|                                                | c-X c-;     | Zmacs command | 3-173               |
|                                                | c-X c-B     | Zmacs command | 3-115, 3-118        |
|                                                | c-X c-D     | Zmacs command | 3-132               |
|                                                | c-X c-F     | Zmacs command | 1-55, 3-31, 3-32    |
|                                                | c-X c-I     | Zmacs command | 3-165               |
|                                                | c-X c-L     | Zmacs command | 3-160               |
|                                                | c-X c-m-L   | Zmacs command | 3-117               |
| c-X c-m-SPACE                                  |             | Zmacs command | 3-88                |
|                                                | c-X c-N     | Zmacs command | 3-63                |
|                                                | c-X c-O     | Zmacs command | 1-53, 3-28, 3-167   |
|                                                | c-X c-P     | Zmacs command | 3-92                |
|                                                | c-X c-S     | Zmacs command | 3-31, 3-121         |
|                                                | c-X c-T     | Zmacs command | 3-82                |
|                                                | c-X c-U     | Zmacs command | 3-160               |
|                                                | c-X c-V     | Zmacs command | 3-120               |
|                                                | c-X c-W     | Zmacs command | 1-55, 3-32, 3-121   |
|                                                | c-X c-X     | Zmacs command | 3-88                |

|                                                 |               |                         |
|-------------------------------------------------|---------------|-------------------------|
| Deinstall Macro (m-X)                           | Zmacs command | 3-204, 4-64             |
| Delete File (m-X)                               | Zmacs command | 3-135                   |
| Describe Flavor (m-X)                           | Zmacs command | 4-141                   |
| Describe Variable (m-X)                         | Zmacs command | 3-210                   |
| Describe Variable At Point (c-sh-V)             | Zmacs command | 4-39                    |
| Dired (m-X)                                     | Zmacs command | 3-144, 4-45             |
| Disassemble (m-X)                               | Zmacs command | 4-104                   |
| Display Directory (c-X c-D)                     | Zmacs command | 4-45                    |
| Down Comment Line (m-N)                         | Zmacs command | 4-23                    |
| Edit Buffers (m-X)                              | Zmacs command | 3-118                   |
| Edit Callers (m-X)                              | Zmacs command | 4-44                    |
| Edit Changed Definitions (m-X)                  | Zmacs command | 4-56                    |
| Edit Changed Definitions Of Buffer (m-X)        | Zmacs command | 4-56                    |
| Edit Combined Methods (m-X)                     | Zmacs command | 4-142                   |
| Edit Compiler Warnings (m-X)                    | Zmacs command | 4-79, 4-321             |
| Edit Definition (m-.)                           | Zmacs command | 4-40, 4-141, 4-142      |
| Edit Directory (m-X)                            | Zmacs command | 3-144                   |
| Edit File Warnings (m-X)                        | Zmacs command | 4-321                   |
| Edit Methods (m-X)                              | Zmacs command | 4-65, 4-142             |
| Electric Shift Lock Mode (m-X)                  | Zmacs command | 4-12                    |
| End Kbd Macro                                   | Zmacs command | 3-199                   |
| Evaluate and Replace Into Buffer (m-X)          | Zmacs command | 3-175, 4-75             |
| Evaluate Buffer (m-X)                           | Zmacs command | 3-175, 4-75             |
| Evaluate Changed Definitions (m-X)              | Zmacs command | 3-175, 4-75             |
| Evaluate Changed Definitions of Buffer (m-X)    | Zmacs command | 3-175                   |
| Evaluate Changed Definitions Of Buffer (m-sh-E) | Zmacs command | 4-75                    |
| Evaluate Into Buffer (m-X)                      | Zmacs command | 3-175, 4-75             |
| Evaluate Minibuffer (m-ESCAPE)                  | Zmacs command | 4-75                    |
| Evaluate Region (c-sh-E)                        | Zmacs command | 4-75                    |
| Evaluate Region (m-X)                           | Zmacs command | 3-175                   |
| Fill Long Comment (m-X)                         | Zmacs command | 4-23                    |
| Find File                                       | Zmacs command | 1-55, 3-31, 3-32        |
| Find File (c-X c-F)                             | Zmacs command | 4-9                     |
| Find File In Fundamental Mode (m-X)             | Zmacs command | 3-122                   |
| Find Unbalanced Parentheses (m-X)               | Zmacs command | 3-48, 4-26              |
| Format Buffer (m-X)                             | Zmacs command | 3-33, 3-38, RN-49       |
| Format File (m-X)                               | Zmacs command | 3-33, 3-38, RN-49       |
| Format Region (m-X)                             | Zmacs command | 3-33, 3-38, RN-49       |
| Function Apropos (m-X)                          | Zmacs command | 4-41                    |
| Hardcopy Buffer (m-X)                           | Zmacs command | 1-107, 3-119, 3-267     |
| HELP                                            | Zmacs command | 4-7, 4-64               |
| HELP ?                                          | Zmacs command | 1-51, 3-14              |
| HELP A                                          | Zmacs command | 1-51, 3-14, 3-45        |
| HELP C                                          | Zmacs command | 1-51, 3-14, 3-45        |
| HELP D                                          | Zmacs command | 1-51, 3-14, 3-45        |
| HELP L                                          | Zmacs command | 1-51, 3-14, 3-46        |
| HELP SPACE                                      | Zmacs command | 1-51, 3-14              |
| HELP U                                          | Zmacs command | 1-51, 3-14, 3-46        |
| HELP V                                          | Zmacs command | 1-51, 3-14, 3-46, 3-210 |
| HELP W                                          | Zmacs command | 3-46                    |
| HELP W                                          | Zmacs command | 1-51, 3-14              |
| Incremental Search (c-S)                        | Zmacs command | 4-57                    |
| Indent For Comment (c-; or m-;)                 | Zmacs command | 4-23                    |
| Indent For Lisp (TAB or c-m-TAB)                | Zmacs command | 4-26                    |
| Indent New Comment Line (m-LINE)                | Zmacs command | 4-23                    |
| Indent New Line (LINE)                          | Zmacs command | 4-26                    |
| Indent Region (c-m-\)                           | Zmacs command | 4-26                    |
| Indent Sexp (c-m-Q)                             | Zmacs command | 4-26                    |
| Insert Buffer (m-X)                             | Zmacs command | 3-124, 4-63             |
| Insert File (m-X)                               | Zmacs command | 3-124, 4-63             |
| Install Command (m-X)                           | Zmacs command | 3-209                   |
| Install Macro (m-X)                             | Zmacs command | 3-203, 4-64             |
| Install Mouse Macro (m-X)                       | Zmacs command | 4-64                    |
| Jump To Saved Position (c-X J)                  | Zmacs command | 4-59                    |
| Kill Backward Up List (c-m-X)                   | Zmacs command | 3-79                    |
| Kill Comment (c-m-;)                            | Zmacs command | 4-23                    |

- Kill Sexp (c-m-K) Zmacs command 4-60
- LINE Zmacs command 3-164
- Lisp Mode (m-X) Zmacs command 3-170, 4-12
- List Buffers Zmacs command 3-115
- List Callers (m-X) Zmacs command 1-177, 4-38, 4-44
- List Changed Definitions (m-X) Zmacs command 4-56
- List Changed Definitions of Buffer (m-X) Zmacs command 3-183, 4-56
- List Combined Methods (m-X) Zmacs command 4-142
- List Definitions (m-X) Zmacs command 3-183
- List Files (m-X) Zmacs command 3-131
- List Fonts (m-X) Zmacs command 1-75, 1-174, 3-223, 3-271, 7-142
- List Matching Lines (m-X) Zmacs command 4-57
- List Matching Symbols (m-X) Zmacs command 4-38
- List Methods (m-X) Zmacs command 4-142
- List Variables (m-X) Zmacs command 3-210
- Load Compiler Warnings (m-X) Zmacs command 4-79, 4-321
- Load File (m-X) Zmacs command 4-73
- Long Documentation (m-sh-D) Zmacs command 4-39, 4-42
  - m-J Zmacs command 1-50, 3-26, 3-68
  - m-) Zmacs command 3-67
  - m-% Zmacs command 3-102
  - m-; Zmacs command 3-171
  - m-< Zmacs command 1-50, 3-26, 3-70
  - m-= Zmacs command 3-48
  - m-> Zmacs command 1-50, 3-26, 3-70
  - m-@ Zmacs command 3-91
  - m-A Zmacs command 1-50, 3-26
  - m-B Zmacs command 1-50, 3-26, 3-61
  - m-C Zmacs command 3-160
  - m-D Zmacs command 1-53, 3-28, 3-78
  - m-E Zmacs command 3-62
  - m-ESCAPE Zmacs command 3-175
  - m-F Zmacs command 1-50, 3-26, 3-61
  - m-H Zmacs command 3-92
  - m-K Zmacs command 1-53, 3-28, 3-83
  - m-L Zmacs command 3-160
  - m-LINE Zmacs command 3-172
  - m-N Zmacs command 3-172
  - m-O Zmacs command 3-166
  - m-P Zmacs command 3-172
  - m-R Zmacs command 3-56
  - m-RUBOUT Zmacs command 1-53, 3-28, 3-78
  - m-S Zmacs command 3-164
  - m-SCROLL Zmacs command 1-50, 3-26, 3-56
  - m-T Zmacs command 3-78
  - m-U Zmacs command 3-160
  - m-V Zmacs command 1-50, 3-26, 3-56
  - m-W Zmacs command 3-94
  - m-Z Zmacs command 3-176
  - m-[ Zmacs command 1-50, 3-26, 3-68
  - m-\ Zmacs command 1-53, 3-28
  - m-^ Zmacs command 1-53, 3-28, 3-166
- Macro Expand Expression (c-sh-M) Zmacs command 4-100
- Macro Expand Expression All (m-X) Zmacs command 4-100
- Mark Definition (c-m-H) Zmacs command 4-60
- Mark Whole (c-X H) Zmacs command 4-63
- Modified Two Windows (c-X 4) Zmacs command 4-65
- Move To Previous Point (c-m-SPACE) Zmacs command 4-59
  - m-sh-D Zmacs command 3-47
  - m-sh-E Zmacs command 3-175
- Multiple Edit Callers (m-X) Zmacs command 4-44
- Multiple List Callers (m-X) Zmacs command 4-44
- Name Last Kbd Macro (m-X) Zmacs command 3-203, 4-64
  - One Window (c-X 1) Zmacs command 4-65
- Open Get Register (c-X G) Zmacs command 4-63
- Other Window (c-X O) Zmacs command 4-65

|                                       |               |                    |
|---------------------------------------|---------------|--------------------|
| Prepend To File (m-X)                 | Zmacs command | 3-124              |
| Print Modifications (m-X)             | Zmacs command | 4-56               |
| Push Pop Point Explicit (m-SPACE)     | Zmacs command | 4-59               |
| Put Register (c-X X)                  | Zmacs command | 4-63               |
| Query Replace (m-%)                   | Zmacs command | 4-57               |
| Query Replace (m-X)                   | Zmacs command | 3-102              |
| Quick Arglist (c-sh-A)                | Zmacs command | 4-43               |
| Quit (c-Z)                            | Zmacs command | 4-80               |
| Reap File (m-X)                       | Zmacs command | 3-136              |
| Rename Buffer (m-X)                   | Zmacs command | 3-119              |
| Rename File (m-X)                     | Zmacs command | 3-133, 5-153       |
| Repars Attribute List (m-X)           | Zmacs command | 3-137, 4-10        |
| Replace (c-%)                         | Zmacs command | 4-57               |
| Replace String (m-X)                  | Zmacs command | 3-102              |
| Reverse Search (c-R)                  | Zmacs command | 4-57               |
| Revert Buffer (m-X)                   | Zmacs command | 3-121              |
| RUBOUT                                | Zmacs command | 1-53, 3-28, 3-43   |
| Save File                             | Zmacs command | 3-31               |
| Save Position (c-X S)                 | Zmacs command | 4-59               |
| Save Region (m-W)                     | Zmacs command | 4-60               |
| SCROLL                                | Zmacs command | 1-50, 3-26         |
| Scroll Other Window (c-m-V)           | Zmacs command | 4-65               |
| Select All Buffers As Tag Table (m-X) | Zmacs command | 4-57               |
| Select Buffer (c-X B)                 | Zmacs command | 4-59               |
| Select Previous Buffer (c-m-L)        | Zmacs command | 4-59               |
| Select System As Tag Table (m-X)      | Zmacs command | 4-57               |
| Set Backspace (m-X)                   | Zmacs command | 3-141, 3-143, 4-10 |
| Set Base (m-X)                        | Zmacs command | 3-141, 3-143, 4-10 |
| Set Comment Column (c-X ;)            | Zmacs command | 4-23               |
| Set Fill Column (c-X F)               | Zmacs command | 4-12               |
| Set Fonts (m-X)                       | Zmacs command | 3-141, 3-143, 4-10 |
| Set Key (m-X)                         | Zmacs command | 4-64               |
| Set Lowercase (m-X)                   | Zmacs command | 3-142, 3-143, 4-10 |
| Set Nofill (m-X)                      | Zmacs command | 3-142, 3-143, 4-10 |
| Set Package (m-X)                     | Zmacs command | 3-138, 3-143, 4-10 |
| Set Patch File (m-X)                  | Zmacs command | 3-143, 4-10        |
| Set Pop Mark (c-SPACE)                | Zmacs command | 4-59               |
| Set Tab Width (m-X)                   | Zmacs command | 3-143, 4-10        |
| Set Variable (m-X)                    | Zmacs command | 3-212              |
| Set Visited File Name (m-X)           | Zmacs command | 3-122              |
| Set Vsp (m-X)                         | Zmacs command | 3-143, 4-10        |
| Show Directory (m-X)                  | Zmacs command | 3-132              |
| Show File (m-X)                       | Zmacs command | 3-132              |
| Source Compare (m-X)                  | Zmacs command | 3-125, 4-56        |
| Source Compare Merge (m-X)            | Zmacs command | 3-125, 4-56        |
| Split Screen (m-X)                    | Zmacs command | 4-65               |
| Swap Point And Mark (c-X c-X)         | Zmacs command | 4-59               |
| Tags Query Replace (m-X)              | Zmacs command | 4-57               |
| Tags Search (m-X)                     | Zmacs command | 4-57               |
| Trace (m-X)                           | Zmacs command | 3-48, 4-92, 4-94   |
| Two Windows (c-X 2)                   | Zmacs command | 4-65               |
| Uncomment Region (m-X)                | Zmacs command | 3-173              |
| Up Comment Line (m-P)                 | Zmacs command | 4-23               |
| Update Attribute List (m-X)           | Zmacs command | 3-138, 4-10        |
| Variable Apropos                      | Zmacs command | 3-210              |
| View Buffer (m-X)                     | Zmacs command | 3-119              |
| View Directory (m-X)                  | Zmacs command | 3-132, 4-45        |
| View File (m-X)                       | Zmacs command | 3-132              |
| View File Properties (m-X)            | Zmacs command | 3-133              |
| View Kbd Macro (m-X)                  | Zmacs command | 3-200              |
| View Mail (m-X)                       | Zmacs Command | 6-48               |
| View Two Windows (c-X 3)              | Zmacs command | 4-65               |
| Where Is Symbol (m-X)                 | Zmacs command | 2-571, 4-38        |
| Write File                            | Zmacs command | 1-55, 3-32         |
| Yank (c-Y)                            | Zmacs command | 4-60               |
| Yank Pop (m-Y)                        | Zmacs command | 4-60               |



- Zmacs Command: Describe Flavor 2-471
  - Zmacs Command: Edit Combined Methods 2-472
  - Zmacs Command: Edit Methods 2-471
  - Zmacs Command: List Combined Methods 2-471
  - Zmacs Command: List Methods 2-471
  - Zmacs Command: m-. 2-471
  - Zmacs Commands 3-44
  - Zmacs Commands 3-46
  - Zmacs Commands 1-49, 3-6
  - Zmacs Commands 3-45
  - Zmacs Commands 3-46
  - Zmacs commands 3-57
  - Zmacs Commands 3-44
  - Zmacs Commands 3-45
  - Zmacs Commands for Finding Out About  
Flavors 1-87, 3-218
  - Zmacs Commands for Finding Out About Lisp 1-86,  
3-217
  - Zmacs Commands for Finding Out About the State of  
Buffers 1-86, 3-217
  - Zmacs Commands for Finding Out About the State of  
Zmacs 1-86, 3-217
  - Zmacs Commands for Flavors 2-471
  - Zmacs Commands for Formatting Text 3-33
  - Zmacs Commands for Formatting Text RN-49
  - Zmacs Commands for Interacting with Lisp 1-87,  
3-218
  - Zmacs Commands for Recompiling and Reloading  
Patches RN-49
  - Zmacs Commands for Reverting Buffers RN-49
  - Zmacs Commands with HELP 3-44
  - Zmacs Commands with Keyboard Macros 3-199
  - Zmacs Commands with Keyboard Macros 3-199
  - Zmacs Command Tables 3-7
  - Zmacs Customization in Init Files 1-167
  - Zmacs Echo Area 3-19
  - Zmacs Edit Callers Commands 3-183
  - Zmacs Edit Definition Commands 3-180
  - Zmacs Editor Window 3-17
  - Zmacs Electric Pll Mode 3-157
  - Zmacs Environment 3-193
  - Zmacs Environment 3-194
  - Zmacs Extended Commands 1-49, 3-7
  - Zmacs File Manipulation Commands 3-131
  - Zmacs File Manipulation Commands 3-131
  - Zmacs Font Commands 1-81
  - Zmacs Font in the Attribute List 1-80
  - Zmacs Font with Set Fonts (m-X) 1-80
  - Zmacs Format Commands 3-38
  - Zmacs Fortran Mode 3-156
  - Zmacs Fundamental Mode 3-156
  - Zmacs Help 1-51, 3-14
  - Zmacs Help Command Summary 3-217
  - Zmacs Incremental Search 3-98
  - Zmacs in Init Files 3-213
  - Zmacs in Init Files 3-213
  - Zmacs in Release 6.0 RN-47
  - Zmacs in Release 6.0 RN-47
  - Zmacs in Release 6.0 RN-47
  - Zmacs in Release 6.0 RN-48
  - Zmacs Key Bindings 3-208
  - Zmacs Keyboard Macro 3-199
  - Zmacs Keyboard Macros Work 3-199
  - Zmacs Keystrokes 1-49, 3-6
  - Zmacs Lisp Mode 3-156
  - Zmacs List Definition Commands 3-182
- Finding Out About  
General Information-giving  
Introduction to  
Method for Searching for Appropriate  
More HELP Commands for Finding Out About  
Mouse-sensitive  
Overview of Finding Out About  
Searching for Appropriate
  - Three New
  - Two New
  - Two New  
Finding Out About  
Creating New  
Procedure for Creating  
Introduction to
  - The  
The
  - Customizing the  
Overview of Customizing the  
Introduction to
  - Overview of
  - Setting the  
Setting the
  - Introduction to
  - Customizing  
Introduction to Customizing  
Changes to  
Improvements to  
Incompatible Changes to  
New Features in
  - Definition of a  
How  
Introduction to
  - The

- Setting the
  - File Types and User-defined
  - Introduction to the Organization of the Overview of the Scope of the
  - c-?
  - COMPLETE
  - END
  - HELP
  - RETURN
  - SPACE
- Built-in Customization Using
  - Definition of
  - Summary of
  - How
  - Example 1 of
  - Example 2 of
  - Example 3 of
- What is a
  - Description of
- Definition of a
  - Describing
  - Finding Out About
    - Listing
    - Settable
  - How to Specify
    - Leaving
    - Leaving
    - Entering
    - Entering
    - Entering
    - Leaving
    - Entering
- Adding Bug Lists to
  - Can't select
  - Cannot [Select M]
  - Customizing
- Deleting and Undeleting Messages in
  - Disk File Names for
    - Entering
    - Entering and Exiting
  - Features Not Supported by
    - Getting Fancy with
  - Getting Out of the Debugger in
    - Getting Out of Trouble in
      - Hardcopying From
    - Leaving Mail Mode in
    - Mail File Formats for
- Zmacs
  - Macsyma Mode 3-157
  - Major Editing Modes 3-156
  - Major Mode 3-155
  - Major Modes 3-198
  - Major Modes 3-198
  - Major Modes 3-198
  - Manual 3-3
  - Manual 3-4
  - Manual 3-4
  - Manual 3-4
  - Manual Notation Conventions 3-9
  - Midas Mode 3-157
  - minibuffer command 4-8
  - minibuffer command 4-8
  - minibuffer command 4-8
  - minibuffer command 4-8
  - minibuffer command 4-8
  - minibuffer command 4-8
  - Minor Modes 3-195
  - Minor Modes 3-195
  - Minor Modes 3-196
  - Minor Modes Work 3-195
  - Mode Line 3-19
  - Notation Conventions 3-9
  - Notation Conventions 3-9
  - Notation Conventions 3-9
  - Notation Conventions and Examples 3-9
  - PI1 Mode 3-157
  - Region? 3-86
  - Reverse Incremental Search 3-99
  - Sentence Delimiters 3-62, 3-83
  - Sorting Commands 3-112
  - String Search 3-100
  - Teco Mode 3-157
  - text formatting command 3-37
  - Text Mode 3-156
  - Variable 3-210
  - Variables 3-210
  - Variables 3-210
  - Variables 3-210
  - Variables 3-211
  - Variable Settings 3-210
  - Via the System Menu 3-40
  - Window Commands 3-129
  - with c-Z 3-40
  - with ed 1-48, 3-12
  - with SELECT E 1-47, 3-12
  - with the Mouse 1-48, 3-12
  - with the SELECT Key 3-40
  - with **zwel:edit-functions** 1-48, 3-13
  - Zmail
    - RN-1
    - 6-31
    - 6-23
    - 6-24
    - 1-170, 6-57
    - 6-68
    - 6-94
    - 3-40
    - 6-17
    - 6-96
    - 1-67
    - 6-23
    - 6-23
    - 1-108, 3-268
    - 6-42
    - 6-95

|                                 |                                           |             |
|---------------------------------|-------------------------------------------|-------------|
| Mail Mode in                    | Zmail                                     | 6-37        |
| Online Help for                 | Zmail                                     | 6-5         |
| Overview of                     | Zmail                                     | 6-3         |
| Recovering From Stuck States in | Zmail                                     | 6-23        |
| Starting up                     | Zmail                                     | 1-57        |
| Top-level Interface to          | Zmail                                     | 6-13        |
| Undoing Commands in             | Zmail                                     | 6-25        |
| Using                           | Zmail                                     | 1-57        |
|                                 | <b>zmail :reload</b>                      | 6-23, 6-24  |
|                                 | Zmail Architecture                        | 6-11        |
|                                 | Zmail display                             | 6-13        |
|                                 | Zmail Inboxes                             | 6-12        |
|                                 | Zmail Messages                            | 6-11        |
|                                 | Zmail Minibuffer                          | 1-60        |
|                                 | Zmail objects                             | 6-11        |
|                                 | Zmail package                             | 2-615       |
|                                 | Zmail problems                            | 6-23        |
|                                 | Zmail Profile                             | 1-171, 6-58 |
|                                 | (zmail) Lisp Listener command             | 6-17        |
|                                 | Zmail: Apropos Command                    | 6-6         |
|                                 | Zmail: Click Middle on Summary Line       | 6-55        |
|                                 | Zmail: Click Right on Summary Line        | 6-55        |
|                                 | Zmail: Get Inbox                          | 1-64        |
|                                 | Zmail: Help Displayed Automatically       | 6-5         |
|                                 | Zmail: Help Key                           | 6-5         |
|                                 | Zmail: Mouse Documentation Line           | 6-5         |
| Conceptual                      | Zmail Architecture                        | 6-11        |
|                                 | Zmail Backward-references: Field          | 6-36        |
|                                 | Zmail Bcc: Field                          | 6-35        |
|                                 | Zmail Bfcc Field                          | 6-35        |
| Listing                         | Zmail Buffers, Mail Files and Collections | 6-77        |
|                                 | Zmail bug lists                           | 6-31        |
|                                 | Zmail Cc: Field                           | 6-35        |
| Add Cc Field                    | Zmail Command                             | 6-37        |
| Add Fcc Field                   | Zmail Command                             | 6-37        |
| Add From Field                  | Zmail Command                             | 6-38        |
| Add In-reply-to Field           | Zmail Command                             | 6-38        |
| Add More Text                   | Zmail Command                             | 6-38        |
| Add Subject Field               | Zmail Command                             | 6-38        |
| Add to Field                    | Zmail Command                             | 6-37        |
| Apropos (m-X)                   | Zmail command                             | 6-5, 6-15   |
| Bug (m-X)                       | Zmail Command                             | 6-29        |
| C                               | Zmail command                             | 6-43        |
| c-]                             | Zmail command                             | 6-42        |
| c-D                             | Zmail command                             | 6-68        |
| c-N                             | Zmail command                             | 6-49        |
| c-P                             | Zmail command                             | 6-49        |
| c-SPACE                         | Zmail command                             | 6-50, 6-68  |
| c-X 0                           | Zmail Command                             | 6-39        |
| c-X 1                           | Zmail Command                             | 6-39        |
| c-X 2                           | Zmail Command                             | 6-39        |
| c-X A                           | Zmail command                             | 6-38        |
| c-X C                           | Zmail command                             | 6-37        |
| c-X M                           | Zmail Command                             | 6-46        |
| c-X O                           | Zmail Command                             | 6-38        |
| c-X S                           | Zmail command                             | 6-37        |
| c-X T                           | Zmail command                             | 6-37        |
| c-X Y Prune Yanked Headers      | Zmail Command                             | 6-45        |
| c-Z                             | Zmail command                             | 6-17, 6-19  |
| Change Subject Pronouns         | Zmail Command                             | 6-38        |
| Check for New Mail (m-X)        | Zmail Command                             | 6-48        |
| Click Right on Summary Line     | Zmail Command                             | 6-42        |
| c-m-L                           | Zmail command                             | 6-77        |
| c-m-SPACE                       | Zmail command                             | 6-50        |
| c-U c-SPACE                     | Zmail command                             | 6-50, 6-68  |
| c-U c-U c-SPACE                 | Zmail command                             | 6-50, 6-68  |

|                                         |                                               |             |
|-----------------------------------------|-----------------------------------------------|-------------|
| c-X c-m-S                               | Zmail command                                 | 6-39        |
| c-X c-R                                 | Zmail command                                 | 6-39        |
| c-X c-S                                 | Zmail command                                 | 6-39        |
| c-X c-W                                 | Zmail command                                 | 6-39        |
| c-X c-Y Yank Current Message            | Zmail Command                                 | 6-45        |
| D                                       | Zmail command                                 | 6-68        |
| Decrypt Msg (m-X)                       | Zmail command                                 | 1-67        |
| Delete Duplicate Messages m-X           | Zmail Command                                 | 6-56        |
| Delete Duplicate Msgs (m-X)             | Zmail command                                 | 6-68        |
| Delete Referenced Msgs (m-X)            | Zmail command                                 | 6-68        |
| E                                       | Zmail command                                 | 6-81        |
| End                                     | Zmail Command                                 | 6-38        |
| F (Kbd)                                 | Zmail Command                                 | 6-29        |
| Find String (m-X)                       | Zmail command                                 | 6-49, 6-67  |
| Forward (m-X)                           | Zmail Command                                 | 6-29        |
| G                                       | Zmail command                                 | 1-64, 6-46  |
| h-F Move Forward Over Address           | Zmail Command                                 | 6-45        |
| h-K Kill Address                        | Zmail Command                                 | 6-45        |
| h-RUBOUT Kill Previous Address          | Zmail Command                                 | 6-45        |
| h-T Transpose Address                   | Zmail Command                                 | 6-45        |
| Insert File (m-X)                       | Zmail Command                                 | 6-45        |
| J                                       | Zmail command                                 | 6-49, 6-67  |
| L                                       | Zmail command                                 | 6-75        |
| List Sequences (m-X)                    | Zmail Command                                 | 6-77        |
| M (Kbd)                                 | Zmail Command                                 | 6-29        |
| [Mail (R)]                              | Zmail command                                 | 6-70        |
| [Move (M)]                              | Zmail command                                 | 6-77        |
| Move to Default Previous Point (m-X)    | Zmail command                                 | 6-50        |
| Move to Previous Point (m-X)            | Zmail command                                 | 6-50        |
| N                                       | Zmail command                                 | 6-49, 6-67  |
| nc-N                                    | Zmail command                                 | 6-67        |
| nc-P                                    | Zmail command                                 | 6-67        |
| nJ                                      | Zmail command                                 | 6-67        |
| nN                                      | Zmail command                                 | 6-67        |
| nP                                      | Zmail command                                 | 6-67        |
| Occur (m-X)                             | Zmail command                                 | 6-49        |
| P                                       | Zmail command                                 | 6-49, 6-67  |
| [Profile]                               | Zmail command                                 | 1-170, 6-57 |
| Q                                       | Zmail command                                 | 6-17        |
| R                                       | Zmail command                                 | 6-39        |
| Redistribute Msg (m-X)                  | Zmail Command                                 | 6-29        |
| Redo (m-X)                              | Zmail Command                                 | 6-25        |
| Reply with Draft Messages               | Zmail Command                                 | 6-42        |
| RESUME                                  | Zmail command                                 | 6-43        |
| Revoke Msg (m-X)                        | Zmail Command                                 | 6-25        |
| S                                       | Zmail command                                 | 6-17, 6-81  |
| [Select (R)]                            | Zmail command                                 | 6-77        |
| Select Arbitrary Format Mail File (m-X) | Zmail command                                 | 6-95        |
| Select Conversation (m-X)               | Zmail command                                 | 6-69        |
| Show Draft Disposition (m-X)            | Zmail command                                 | 6-42        |
| Start Background Save (m-X)             | Zmail Command                                 | 6-81        |
| U                                       | Zmail command                                 | 6-68        |
| Undigestify (m-X)                       | Zmail Command                                 | 6-48        |
| Undo (m-X)                              | Zmail Command                                 | 6-25        |
| ZJ                                      | Zmail command                                 | 6-67        |
|                                         | Zmail Command Documentation                   | 6-15        |
|                                         | Zmail Command Menu                            | 1-60        |
| Aborting                                | Zmail Commands                                | 6-23        |
| Format Conventions for                  | Zmail Commands                                | 6-3         |
| List of                                 | Zmail commands                                | 6-5         |
| Other                                   | Zmail Commands                                | 6-45        |
|                                         | Zmail Commands for Editing the Recipient List | 6-45        |
|                                         | Zmail Date: Field                             | 6-35        |
|                                         | Zmail Decrypt Text                            | 1-67        |
| Subject or Text                         | Zmail display column heading                  | 1-57        |
|                                         | Zmail documentation item                      | 6-61        |

- Zmail Does Not Respond 6-23
- Zmail Draft File Facility 6-39
- Zmail Draft Message Facility 6-41
- Zmail Encrypted: Field 6-36
- Zmail Encrypt Text 1-67
- Garbage on Screen After Zmail Error 6-24
- No Response After Zmail Error 6-24
- Zmail Error Window 6-24
- Zmail Expiration-date: Field 6-37
- Zmail Fcc: Field 6-35
- Creating Zmail Filters 6-60
- Saving Zmail Filters 6-63
- Selecting Zmail Filters 6-59
- Zmail Fonts: Field 6-36
- Zmail Forward-references: Field 6-36
- Zmail From: Field 6-35
- Zmail **gmsgs** Service for ITS Users 6-95
- Altering Zmail Header Fields 6-37
- Zmail Header Formats 6-35
- Zmail Hopelessly Stuck 6-24
- Zmail in Arrest Process State 6-23
- Zmail Included Messages: Field 6-35
- Zmail Included References: Field 6-36
- Zmail in Output Hold Process State 6-23
- Changes to Zmail in Release 6.0 RN-69
- Incompatible Changes to Zmail in Release 6.0 RN-69
- Zmail In-reply-to: Field 6-36
- Zmail in Wait Forever Process State 6-23
- c-D Zmail Kbd Command 6-55
- D Zmail Kbd Command 6-55
- U Zmail Kbd Command 6-56
- Saving Zmail Keywords 6-76
- Setting Zmail Keywords 6-75
- Selecting Zmail Mail Buffers 6-77
- Zmail Mail Buffers and Files 6-77
- Zmail Mail Command 6-27
- [Continue] Zmail menu item 6-43
- Continue Zmail Menu Item 6-39, 6-41
- [Continue (R)] Draft File Zmail Menu Item 6-39
- [Continue (R)] Draft Message Zmail Menu Item 6-41
- [Delete] Zmail menu item 1-66, 6-55, 6-68, 6-79
- [Find file] Zmail menu item 6-77
- [Get inbox] Zmail menu item 6-12, 6-46
- [Hardcopy] Zmail menu item 1-108, 3-268, 6-70
- [Jump] Zmail menu item 6-49, 6-50, 6-58, 6-64, 6-67, 6-68
- [Keywords] Zmail menu item 6-58, 6-75
- [Kill] Zmail menu item 6-81
- [Mail] Zmail menu item 1-62, 6-27
- [Mail (M)] Zmail Menu Item 6-27
- [Mail (R)] Zmail Menu Item 6-27
- [Map over] Zmail menu item 1-108, 3-268, 6-67, 6-69, 6-70, 6-71, 6-80, 6-81
- [Move] Zmail menu item 1-108, 3-268, 6-58, 6-70, 6-77, 6-79, 6-81
- [Move (R)] Zmail menu item 6-70
- [Next] Zmail menu item 1-66, 6-49, 6-67
- [Previous] Zmail menu item 1-66, 6-49, 6-67
- [Profile] Zmail menu item 1-170, 6-57
- [Quit] Zmail menu item 6-18
- [Remove] Zmail menu item 6-79
- [Reply] Zmail menu item 1-67, 6-69
- Restore Draft File Zmail Menu Item 6-39
- [Save] Zmail menu item 1-67, 1-171, 6-17, 6-57, 6-81
- Save Draft as Msg Zmail Menu Item 6-41
- Save Draft File Zmail Menu Item 6-39
- [Select] Zmail menu item 6-58, 6-64, 6-78, 6-79

- [Sort] Zmail menu item 6-71
- [Survey] Zmail menu item 6-58, 6-64
- [Undelete] Zmail menu item 1-66, 6-56, 6-68
- Write Draft File Zmail Menu Item 6-39
- Scrolling a Zmail Message 1-66
- What to Do After Reading a Zmail Message 1-66
- Testing Zmail Message-id: Field 6-37
- Testing Zmail Message Characteristics 6-58
- Testing Zmail Message Deletion Commands 6-55
- Saving and Restoring Zmail Message Drafts 6-39
- Saving and Restoring Zmail Message Movement and Deletion 6-49
- Saving and Restoring Zmail Message Movement Commands 6-49
- Saving and Restoring Zmail Message Movement Commands 6-49
- Simple Zmail Messages 6-75
- Classifying Zmail Messages 6-43
- Continuing Completed or Aborted Zmail Messages 1-66
- Deleting and Undeleting Zmail Messages 6-71
- Editing Zmail Messages 1-67
- Encrypting Zmail Messages 1-69
- Fonts in Zmail Messages 6-70
- Forwarding and Redistributing Zmail Messages 6-70
- Hardcopying Zmail Messages 6-70
- Header fields in Zmail messages 6-11, 6-85
- Manipulating Zmail Messages 6-67
- Moving Around Zmail Messages 1-66
- Operating on a Group of Zmail Messages 6-80
- Reordering Zmail Messages 6-71
- Replying to Zmail Messages 6-69, 6-80
- Replying to and Remailing Zmail Messages 6-69
- Saving, Expunging, Killing, and Renaming Zmail Messages 6-81
- Selecting Zmail Messages 6-67
- Text field in Zmail messages 6-11
- Selecting Zmail Messages Based on Characteristics 6-67
- Selecting Zmail Messages Based on Position 6-49, 6-67
- Selecting Zmail Messages Based on the Stack of Recently Seen Messages 6-68
- Defining Zmail Message Search Spaces 6-64
- Operating on Zmail Messages Referred to by the Current Message 6-71
- Moving Among Zmail Messages Using the Message Stack 6-50
- Moving a Zmail Message to a File 6-70
- Copying a Zmail Message to Another Buffer 6-77
- Copying a Zmail Message Window 1-60, 6-13
- Copying a Zmail Message Window Configuration 1-60
- Setting and Saving Zmail Mode Line 6-13
- Using Zmail Mode Line Information 1-61
- [Filters (M)] Zmail Options 1-171, 6-57
- [Universes (M)] Zmail Profile Mode 1-171, 6-58
- Zmail Profile Mode command 6-73
- Zmail Profile Mode command 6-73
- Zmail Profile Options 6-85
- Zmail programming items 6-60
- Zmail Redistributed-by: Field 6-36
- Zmail Redistributed-date: Field 6-36
- Zmail Redistributed-to: Field 6-36
- Zmail Reference Guide 6-1
- Zmail Reference Information 6-85
- Zmail Reply-to: Field 6-37
- Zmail Reply Command 6-31
- Zmail Second Mode Line 1-62
- [Read/Create file] Zmail Select menu item 6-77
- zwei: Zmail Sender: Field 6-36
- zwei: \*zmail-startup-file-name\* variable 6-91
- Zmail Subject: Field 6-36
- Zmail Summary Window 1-57, 6-13
- Zmail Summary Window Configuration 1-57
- Zmail Support for Internet Domain Addressing 6-95

- Fundamental
  - Zmail System Dependencies 6-94
  - Zmail Techniques 6-57
  - Zmail To: Field 6-35
  - Zmail Tutorial Introduction 1-57
- Creating
  - Zmail Universes 6-64
- Saving
  - Zmail Universes 6-66
- Selecting
  - Zmail Universes 6-64
- Main
  - Zmail window 6-11, 6-13
  - Zmail Window Partly Covered 6-24
- Configuring and Selecting
  - Zmail Windows 6-38
  - Zmail with a Broken Mouse 6-24
  - zone 7-353
  - Ztop Mode No Longer Supported RN-47
  - Zwei 6-11
  - Zwei Internals 7-373
  - zwei** package 2-615
  - Zwei:\*inhibit-fancy-loop indentation RN-47
  - zwei:\*1r-reply-mode\*** variable 6-90
  - zwei:add-bug-recipient** function 6-31
  - zwei:\*always-jump-after-get-new-mail-from-inbox\*** variable 6-85
  - zwei:\*always-select-saved-current-msg\*** variable 6-93
  - zwei:\*calendar-mode-week-starts-on-monday\*** variable 6-93
  - zwei:chaos-direct-send-it** is Now Obsolete RN-69
  - zwei:command-store** 3-201
  - zwei:\*complete-get-inbox-in-background\*** variable 6-86
  - zwei:\*comtab\*** variable 7-381
  - zwei:\*configure-middle-mode\*** variable 6-93
  - zwei:\*converse-gagged\*** 1-72, 6-103
  - zwei:\*converse-mode\*** variable 1-172, 6-105
  - zwei:\*converse-append-p\*** variable 1-173, 6-106
  - zwei:\*converse-beep-count\*** variable 1-173, 6-106
  - zwei:\*converse-end-exits\*** variable 1-174, 6-106
  - zwei:\*default-cc-list\*** variable 6-88
  - zwei:\*default-draft-file-name\*** variable 6-91
  - zwei:\*default-fcc-list\*** variable 6-89
  - zwei:\*default-initial-window-configuration\*** variable 6-87
  - zwei:\*default-mail-buffer-generation-retention-count\*** variable 6-92
  - zwei:\*default-mail-window-configuration\*** variable 6-89
  - zwei:\*default-move-mail-file-name\*** variable 6-91
  - zwei:\*default-summary-template\*** variable 6-92
  - zwei:define-keyboard-macro** 3-201
  - zwei:defmajor** 3-198
  - zwei:\*delete-after-move-to-buffer\*** variable 6-85
  - zwei:\*delete-expired-msgs\*** variable 6-89
  - zwei:\*delete-middle-mode\*** variable 6-86
  - zwei:\*dont-reply-to\*** variable 6-90
- Entering Zmacs with
  - zwei:edit-functions** 1-48, 3-13
  - zwei:edit-functions** function 1-48, 3-13
  - zwei:\*file-versions-kept\*** variable 3-135
  - zwei:\*filter-summary-window-fraction\*** variable 6-92
  - zwei:\*forwarded-add-subject\*** variable 6-85
  - zwei:\*forwarded-message-begin\*** variable 6-91
  - zwei:\*forwarded-message-end\*** variable 6-91
  - zwei:\*forwarded-message-separator\*** variable 6-91
  - zwei:\*generate-in-reply-to-field\*** variable 6-88
  - zwei:\*gmsgs-other-switches\*** variable 6-91
  - zwei:\*header-window-nlines\*** variable 6-92
  - zwei:\*inhibit-background-mail-checks\***





|                                        |                                           |
|----------------------------------------|-------------------------------------------|
| <b>:edit</b> message to                | <b>zwei:standalone-editor-frame</b> 7-381 |
| <b>:interval-string</b> message to     | <b>zwei:standalone-editor-frame</b> 7-381 |
| <b>:set-interval-string</b> message to | <b>zwei:standalone-editor-frame</b> 7-381 |
| <b>:buffer-name</b> option for         | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:create-p</b> option for            | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:defaults</b> option for            | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:end</b> option for                 | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:hack-fonts</b> option for          | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:interval</b> option for            | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:kill</b> option for                | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:load-p</b> option for              | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:ordered-p</b> option for           | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:pathname</b> option for            | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:start</b> option for               | <b>zwei:with-editor-stream</b> 7-378      |
| <b>:window</b> option for              | <b>zwei:with-editor-stream</b> 7-378      |

|           |                                 |
|-----------|---------------------------------|
| Backslash | \ function 2-103                |
|           | (\) character 9-24              |
|           | \ Font Editor command 3-261     |
|           | @\ text formatting command 3-37 |
|           | \\ function 2-105               |
| [Set      | \] Inspector menu item 4-298    |

|     |                                 |
|-----|---------------------------------|
|     | ^ function 2-105                |
|     | ^\$ function 2-105              |
|     | ^F font change indicators 1-69  |
|     | @^ text formatting command 3-37 |
| c-X | ^ Zmacs command 3-129           |

|         |       |
|---------|-------|
| SCL and | 2-643 |
|---------|-------|

|         |                                         |
|---------|-----------------------------------------|
|         | ~> <b>format</b> Directive 5-41         |
|         | ~♦ <b>format</b> Directive 5-34         |
|         | ~\$ <b>format</b> Directive 5-32        |
|         | ~% <b>Format</b> Directive 5-34         |
|         | ~& <b>format</b> Directive 5-34         |
|         | ~( and ~) <b>format</b> Directives 5-34 |
| ~( and  | ~) <b>format</b> Directives 5-34        |
|         | ~* <b>format</b> Directive 5-35         |
|         | ~<Cr> <b>format</b> Directive 5-35      |
|         | ~< <b>format</b> Directive 5-39         |
|         | ~? <b>format</b> Directive 5-34         |
|         | ~@* <b>format</b> Directive 5-35        |
|         | ~@T <b>format</b> Directive 5-36        |
|         | ~a <b>format</b> Directive 5-30         |
|         | ~B <b>format</b> Directive 5-31         |
|         | ~c <b>format</b> Directive 5-33         |
|         | ~d <b>format</b> Directive 5-31         |
| SCL and | ~E directive 2-644                      |
|         | ~e <b>format</b> Directive 5-32         |
|         | ~f <b>format</b> Directive 5-32         |
| SCL and | ~G directive 2-644                      |
|         | ~G <b>format</b> Directive 5-35         |
|         | ~o <b>format</b> Directive 5-31         |

SCL and

- `~P format` Directive 5-35
- `~Q format` Directive 5-41
- `~R format` Directive 5-36
- `~s format` Directive 5-30
- `~T directive` 2-644
- `~T format` Directive 5-35
- `~X format` Directive 5-32
- `~[Str0~;Str1~;...~;Strn~] format` Directive 5-36
- `~\Date\ format` Directive 5-42
- `~\Datetime\ format` Directive 5-42
- `~\Time-Interval\ format` Directive 5-42
- `~\Time\ format` Directive 5-42
- `-- format` Directive 5-41
- `~{Str~} format` Directive 5-37
- `~| format` Directive 5-34
- `-- format` Directive 5-34

