




Reference Manual

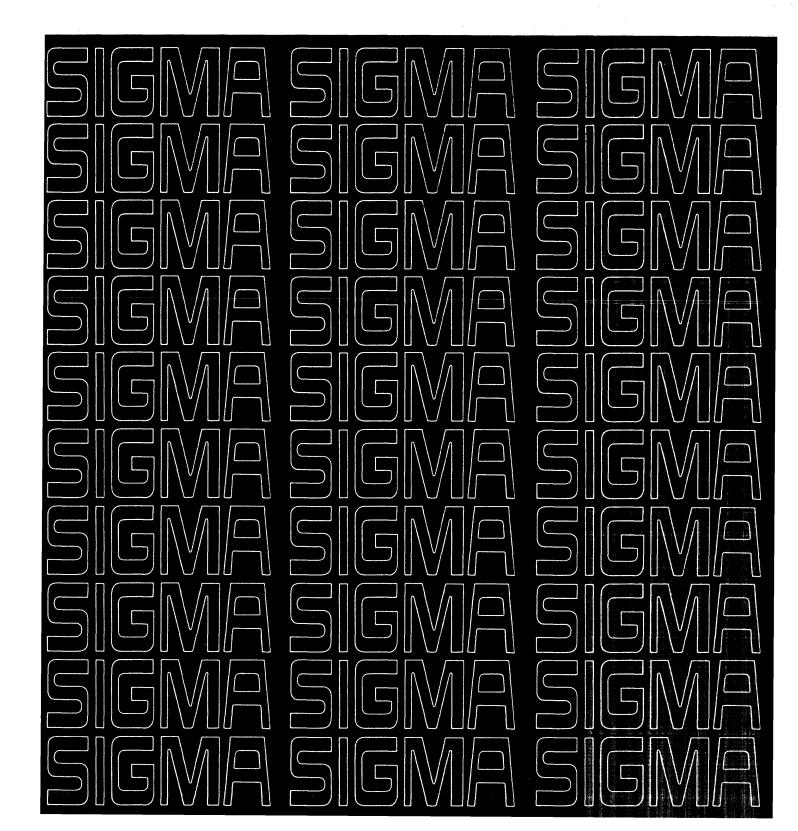

Price: \$2.25

MANAGE REFERENCE MANUAL

for

SDS SIGMA 5/7 COMPUTERS

PRELIMINARY EDITION

90 16 10A

July 1969



SCIENTIFIC DATA SYSTEMS A XEROX COMPANY /701 South Aviation Boulevard/El Segundo, California 90245

RELATED PUBLICATIONS

<u>Title</u>	Publication Number
Sigma 5 Computer Reference Manual	90 09 59
Sigma 7 Computer Reference Manual	90 09 50
Sigma 5/7 Batch Processing Monitor Reference Manual	90 09 54
Sigma 5/7 Batch Processing Monitor Operations Manual	90 11 98
Sigma 5/7 Sort/Merge Reference Manual	90 11 99

NOTICE

The specifications of the software system described in this publication are subject to change without notice. The availability or performance of some features may depend on a specific configuration of equipment such as additional tape units or larger memory. Customers should consult their SDS sales representative for details.

CONTENTS

1.	INTRODUCTION	1		APPENUIXES	
	Manage Program Characteristics Manage File Characteristics		A. S	SAMPLE MANAGE DECK SETUPS	42
	Manage System Components General Procedures	2	В. [OCB NAMES FOR MANAGE PROCESSORS	46
	Equipment Configuration Requirements	3	C. (OWN-CODE LINKAGE FOR FILEUP	48
2.	DICTNARY			SAMPLE MANAGE RUNS	49
	File Constraints	4	Į	JSAGE INCREASE PROBLEM	54
	Calling Dictnary	4 5			
	File Definition Card Field Definition Card			ILLUSTRATIONS	
	Sample File Description	7			
	Dictnary Messages	8	1.	Sample Variable-Length Record	2
3.	FILEUP		2.	Manage Dictnary Specifications	6
••	Master File Design	11	3.	Sample Personnel Master File Specifications _	8
	Transaction File Design	11	4.	Manage Fileup Specifications	15
	Audit File Design	12	5 .	Sample Transaction Records	17
	User Own-Code Field Conversion	12 12	6.	Sample Fileup Specifications	
	Calling Fileup				
	File Update Card	14	7.	Sample Comparison With OR Connector	
	Field Update Card	15	8.	Sample Comparison With AND Connector	24
	Creation of a Sample Master File		9.	Manage General Request Specifications	26
	Fileup Messages	10	10.	Manage Retrieval Specifications	28
4.	RETRIEVE		11.	Manage Retrieved Output Specifications	29
	Selection Criteria	22	12.	Sample General Request Specifications	
	Arithmetic Expressions Data Formats	23 24	13.	Sample Retrieval Specifications	
	Calling Retrieve	24	14.		
	General Request Specification Card	25		Sample Report Specifications	
	Title and Heading Card	27	D-1.	Sample Dictionary	— ⁵⁰
	Retrieval Specification CardRetrieved Output Card		D-2.	Sample Retrieved Data Report	51
	Sample Data Retrieval and Report	31	D-3.	Wage Problem General Request	
	Retrieve Messages	31		Specifications	53
5.	REPORT		D -4.	Wage Problem Retrieval Specifications	54
			D-5.	Wage Problem Report Specifications	54
	Report Specifications	39 39	D-6.	Wage Problem Report	55
	Report Conventions Horizontal Totaling				
	Text Fields	39		TABLES	
	Alphabetic Fields	39			
	Binary Fields and Expressions		1.	Manage Programs	2
	Fractional Significance	40 40			
	Calling ReportReport Messages	40	2.	Transaction Data Field Sizes	
			3.	DCB Names for Manage Processors	
11	NDEX	56	4.	Register Use for Own-Code Linkage	49

1. INTRODUCTION

SDS Manage is a generalized file management system that permits decision makers with limited programming knowledge to make use of computerized data files.

Manage eliminates the need to write individual computer programs for performing many of the tasks associated with using a flexible and responsive management information system. It is made up of several subprograms which perform the functions of building the data base or making use of it. To use any of the subprograms, the user enters control codes and data from the appropriate Manage forms into the system, and the specified job will be performed.

In a typical installation, setting up the initial data files and generating standard reports will be handled by experienced business analysts or programmers. Some companies will prefer that all Manage processing be handled by computer department personnel only. However, Manage is designed so that a businessman or manager can use the system directly, with a minimum of data processing orientation. Reports to be printed (maximum of 99) are generated from only one pass through the data file, regardless of the complexity of the specified reports.

This chapter provides the user with general information on Manage program and file characteristics, and on system component programs. These component programs are explained in detail in Chapters 2, 3, 4, and 5. Appendix A presents some sample Manage deck setups, and Appendix B gives DCB names used by the Manage processors. Appendix C describes the use of registers for own-code linkage during the FILEUP phase of operation. Appendix D shows several sample Manage runs.

In the following chapters, certain conventions have been adopted for defining Manage commands. Capital letters indicate command words that are required in the literal form shown. Lower case letters are figurative representations of parameters. Command parameters enclosed by braces ({{}}) indicate a required choice. Parameters enclosed by brackets ({{}}) are optional.

MANAGE PROGRAM CHARACTERISTICS

The programs that constitute Manage may be classed as "load and go" file-processing compilers. Each is a generalized program oriented toward a data file dictionary. Each data file dictionary describes the format of one specific data file. Using control parameters and applicable data file dictionaries, these programs perform the following functions:

- Create and maintain files in almost any format.
- Retrieve information, selectively or nonselectively, from such files.
- Report and/or summarize retrieved information according to the user's requirements.

File creation and maintenance entails setting up a new file or modifying the contents of an existing file. File maintenance functions consist of inserting, deleting, and changing records in a file.

Data retrieval includes the selection of records (or parts of records) from a single master file or two matching files. The selection criteria are specified by the user and allow him to examine the relationships between data fields, constants, and the results of arithmetic operations on data fields. Up to 99 criteria can be specified in any one request, linked by either of the logical operators AND and OR. Selection tests include "greater than", "less than", and "equal to" conditions, as well as their negatives. Data-retrieval queries involving a file can be processed in a single run, or as groups of up to 99 such queries involving the same file. It is also possible to select every record (or parts of every record) by the absence of selection criteria and the inclusion of an additional parameter.

Report generation involves editing of selected data fields into a prescribed format and sequence, automatic insertion and alignment of columnar headings, counting of items within groups, performing necessary punctuation of numeric data, and summarizing data in the report.

MANAGE FILE CHARACTERISTICS

The data file dictionary is the central control element in the Manage system. It consists of definitions (recorded in a RAD-based library) that precisely describe the characteristics of a particular data file. Because each data file dictionary relates to only one data file, a system contains as many dictionaries as there are files. All current data file dictionaries are contained in file DICT.

Control and formatting parameters need be defined only once; they are centralized in dictionary form in the RAD library. Note that this is an improvement on conventional program generators, which typically require file definition parameters to be submitted as input each time a report is prepared from a file.

Manage processes records that are organized by fields. Each field contains data in any one of the following representations.

1. Alphabetic: the standard SDS EBCDIC character set.

The various Manage programs will insert, change, or compare fields containing up to 255 bytes of this type of data. Up to 999 bytes of data of this type may be defined as a text field for insertion and change purposes. However, the various Manage processors can use a maximum of 255 of these bytes for comparison and sorting purposes. No arithmetic will be performed on alphabetic fields by these processors.

- 2. Binary: a fixed-point, signed, binary integer value, from 1 to 4 bytes in length. Arithmetic and algebraic comparisons may be performed on data of this type.
- 3. Packed Decimal: a signed, decimal digit value, from 1 to 31 digits long, packed into a 1- to 16-byte field.

 Arithmetic and algebraic comparisons may be performed on data of this type.

Files to be handled by a Manage processor must be sequential files. These sequential files may consist of either fixed- or variable-length records. If fixed-length records are specified, Manage will process blocked records from user-formatted or foreign files. Variable-length records may be blocked only in Monitor-formatted files.

A variable-length record consists of a fixed-length root segment and a variable number of multiple-entry fields. Any number of different multiple-entry fields may be specified. Every multiple-entry field must specify a counter field in the root segment of each record. This counter field contains the actual number of multiple entries existing in that record, and is controlled automatically by Manage. If more than one multiple-entry field cites the same counter field, the multiples are said to be grouped. One of the fields in a group is designated as a group key. Deleting a group key deletes the entire group.

The number of multiple-entry fields actually appended to a variable-length record is controlled by the values found in the counter fields. The order of appearance of all multiple-entry fields is specified by the user.

For example, consider a personnel master file in which each employee is represented by one logical record. The fixed portion of each record might contain identification and current status, while the multiple entries show level of education and job history. None or all of these types of fields could be present, but always in the same order of appearance, with Degree first, Major second, Job third, etc.

The value in the counter specifies how many fields actually exist. Figure 1 shows such a variable-length record.

MANAGE SYSTEM COMPONENTS

Programs that constitute the Manage system interface with the data file dictionary that describes the format of the specific data file to be processed. Using parameters from control cards and applicable data file dictionaries, the programs perform file creation and maintenance, selective and nonselective data retrieval, and report generation. The programs in the Manage system are shown in Table 1.

Table 1. Manage Programs

Program Name	Purpose
Dictnary	Creates and maintains Manage file dictionaries and generates dictionary listing.
Fileup	Creates and maintains data files.
Retrieve	Performs selective and nonselective data retrieval and formatting.
Report	Generates reports automatically (in- put is from Retrieve).
Sort	Called as a subroutine to perform preliminary sorting for Dictnary, Fileup, and Retrieve data, and for Report listings when required.

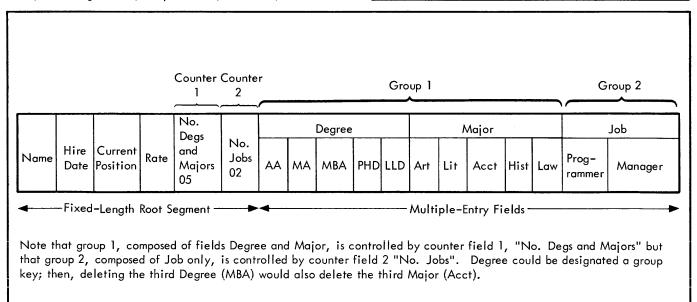


Figure 1. Sample Variable-Length Record

GENERAL PROCEDURES

The processes of file definition (via Dictnary), and file creation and maintenance (via Fileup) continue to be the responsibility of experienced computer analysts and programmers. However, the need for technical talent to make use of a Manage-oriented information system decreases markedly after the initial data base creation. Once the appropriate information has been captured in computer files, managers can make extensive use of it without any intervening computer programming effort. This reduces the delay between conception of a report and its actual delivery.

The system is extremely flexible, and is very useful for unanticipated exception reports. Additionally, the user may request output of a catalog containing either the dictionary of a particular data file, or the complete contents of file DICT (all current data file dictionaries). A catalog of an individual data file dictionary contains user-supplied information for the file and its fields, ordered by startingbyte position, and a list of field names and their startingbyte positions, ordered alphabetically.

The quick response time of a Manage information system is achieved through use of its general purpose retrieval program. This program selects requested information from a data file on any Sigma storage medium. The selection and the final disposition of the information is initiated by filling in the following set of request forms:

- 1. General Request Specifications Form
- 2. Retrieval Specifications Form
- 3. Retrieved Output Specifications Form

These simple forms are capable of describing highly complex combinations of retrieval and reporting. Each retrieval described by the forms is called a request and is given a request number. Up to 99 multiple requests can be satisfied at the same time, that is, by a single pass through the data file. The Retrieve control cards that are punched from the forms, whether for a single request or for multiple requests, need not be entered in any definite order.

The request specification forms are filled out, giving the characteristics of the retrieval and reporting operations. They are punched on cards and provided to Retrieve, which reads them and verifies them for correct syntax. The specifications for all the required reports are then placed in a report specification output file. The specified data base file is then opened and each record in it is examined. If

needed, a matching "secondary" file record can also be included in the selection process. Under this procedure, only those primary records with a matching secondary will be examined for retrieval. In the event of multiple secondary records with a matching primary, only the first secondary will be examined for retrieval. All fields in both matching records are accessible for any standard usage. The retrieval criteria for each individual request are used to select records or portions of records from the inputs and to pass the "hits" into a retrieved output file.

The report-specification and retrieved-output files are passed to Report for the final processing steps. The specifications for listing each report are examined in the following cycle:

- If the report is in a sequence different from that of the original data base, Sort is called to create a resequenced file.
- The report is formatted as specified in the originating request.
- 3. The report is printed.

EQUIPMENT CONFIGURATION REQUIREMENTS

The minimum system requirement is a Sigma 5/7 with Batch Processing Monitor capability. It is estimated that most meaningful applications can be processed with 15,000 words of storage available for the Manage processors and working areas. Also, approximately 28,000 words of RAD storage will be dedicated to Manage program storage. Each user file dictionary entered into the system will require approximately five words of RAD space per defined field.

All Manage processors use byte string operations, thus requiring the byte string simulator on the Sigma 5.

If any packed-decimal fields are defined by the user, or if print-editing functions are requested, the decimal hardware or decimal simulator is required.

The retrieval process is programmed to generate a large temporary file (the retrieved records) on the RAD. The space required is therefore user-dependent and cannot be estimated. If magnetic tape units are available, the user may reduce his RAD requirements by assigning the retrieved records to tape.

The report process may call upon Sort before listing each request. This will require temporary RAD space to hold all data records retrieved for a given request. If magnetic tape units are available, the user may reduce his RAD requirements by assigning the Sort program's files to tape.

2. DICTNARY

Dictnary is the Manage dictionary-generating program that creates and updates the data file dictionaries, which describe the user's file characteristics. These user data file dictionaries are in turn processed by other Manage programs. (Any non-Manage program may read the dictionary, but alteration by other than the dictionary generator is not allowed.) The data dictionaries are kept in the system RAD library as the file named DICT. Two records are required for each user's file description. In addition to generating dictionaries, Dictnary outputs a catalog of file dictionaries and other information, subject to user specification.

Logically, the dictionary generator must be the first Manage function to be performed, but it is independent of other Manage programs and need not be run with the others. It is important that the correct time and date be input at system load-time to ensure proper dating when the dictionary generator and the other Manage programs are called.

Each data file dictionary contains the following information:

- 1. General user file structure.
- 2. Format of the records that constitute the user file.
- 3. Attributes of the data fields contained in a record.
- 4. Processor-dependent parameters such as punctuation and column headings for the Report program.

FILE CONSTRAINTS

Each file must have at least one sort key. This parameter is required by Fileup to ensure proper sequence of the data base.

All fields (other than sort key fields) may be redefined completely or in part. For example, an alphabetic area defined as "ADDRESS" might have two other fields called "STREET" and "CITY" which reference parts of the overall area. Redefinition is also permitted for fields containing packed decimal or binary values, but is not permitted for multiple-entry fields.

In addition, each data file with variable-length records is subject to the restrictions listed below:

- Files containing blocked records must be Monitorformatted (LABEL or FILE parameter in a DCB ASSIGN). Unblocked records may be either Monitor-formatted or user-formatted (DEVICE parameter in a DCB ASSIGN).
- Multiple-entry fields, ordered consecutively must follow the fixed fields in a record.
- A multiple-entry field must reference a separate counter field (present in every record) that contains the number of iterations of the multiple-entry field in that record.

- A counter field may be referenced by more than one multiple-entry field, but each multiple-entry field may reference only one counter. Counter fields must always be defined as binary values.
- Counter fields and key fields may not be defined as multiple fields.
- 6. Groups of multiple fields that reference the same counter must always have a group key field. In a group consisting of only one data field, it also is designated as a group key.

The maximum number of fields in any one data file's dictionary is 409. The maximum number of multiple-field groups per file is 15.

Record and field sizes are generally limited by the number of digits that can be handled in the size columns of the specification cards. However, the following outline presents practical limitations:

- 1. Binary fields are limited to 4 bytes.
- 2. Packed-decimal fields are limited to 31 digits, plus an algebraic sign.
- Mixed-mode arithmetic operations or comparisons will not be performed by Retrieve or Report.
- Alphabetic fields are limited to 255 characters for comparison and sorting purposes.
- 5. Text fields are limited to 999-character fixed fields. No arithmetic or editing can be done. (If a text field is a key field, comparison is limited to the first 255 characters.) The purpose of text fields is to print horizontal text in Report regardless of other column usage.
- 6. Depending on field size, other Manage programs may truncate (from the left) or round values when doing arithmetic operations.
- If user labels consist of multiple records and/or an end-of-file gap, the file must be specified as userformatted.

CALLING DICTNARY

Input for a Dictnary run consists of the following cards:

- 1. Dictnary processor call card.
- 2. File definition cards.
- 3. Field definition cards.

Sort orders the definition cards by file name, card type, fixed fields, multiple fields, and starting position or multiple-order number. File dictionaries are processed one by one and field by field. Errors will be flagged by

4 Dictnary

diagnostic messages accompanied by the incorrect card image. If errors are found, the new version will be rejected without affecting the existing dictionary. (If the catalog is restricted to successful updates and creations, the file's dictionary will not be cataloged. If the catalog is to be of all dictionaries, the old version, if any, will apply.)

The catalog will be output after all updates and creations have been processed. The first page of the catalog contains the names of files successfully updated or created. The exceptions are dictionaries that have been deleted and those with a suppress indicator on the file definition card. Deleted file dictionaries are noted in messages output before the catalog.

Formats of Dictnary cards are given below. An asterisk (*) after column numbers indicates that the field is optional.

The format of the Dictnary processor call card is fixed. As it signals BPM to link the dictionary generator, it must be the first card in the deck. Its form is shown below,

!DICTNARY5
$$\begin{pmatrix} 6 \\ A \\ S \end{pmatrix}$$

where

!DICTNARY is required as shown, starting in column 1.

- ы indicates a blank character in column 10.
- indicates the type of catalog to be printed.

 A blank character in column 11 specifies that the catalog is to consist of those file dictionaries successfully created or updated during this run. An A indicates that the catalog is to consist of all file dictionaries in existence. An S (suppress) means that no catalog is to be printed.

Both file and field definition cards may be input for more than one file at a time without being ordered.

FILE DEFINITION CARD

See Figure 2 for a diagram of the file definition card. The file definition record is not required when an existing dictionary is being changed.

Columns	Description
1	1: identifier for file definition records.
2-9	File name: a left-justified name composed of eight alphabetic (EBCDIC) characters. Embedded blanks are not allowed, though trailing blanks are acceptable. The allowed characters are A to Z, 0 to 9, @, \$, #, and %.

10-13	Maximum logical record length: from 0001 through 9999 bytes, with leading zeros; field is blank if only a dictionary list is required (see column 18).
14-16*	Blocking factor: for user-formatted file, from 001 through 999; for Monitor-formatted file, zeros or blanks. (See column 18).
17*	<u>User header label indicator</u> : an H indicates that the header is a single record, F indicates that the header consists of one or more records ending with a file mark. (See column 18).
18*	Dictionary list option: an L means that this file's dictionary should be purged of any void entries and then listed. The L option is used when other specifications on this card are blank and no field definition cards for this file are input. An S indicates that the listing of this dictionary creation or update should be suppressed (unless the Dictnary processor card specifies that all dictionaries be listed).
19-80*	Comments: left-justified alphanumeric field to be listed in the dictionary catalog.

Columns

Description

An existing dictionary may be deleted completely by submitting a file definition card with no record characteristics or dictionary list option (that is, columns 10 to 18 blank). The complete deletion of a file dictionary will be noted in the listing output before the catalog with the file name and a suitable message. Also, the latest contents of any dictionary may be listed by submitting a file definition card with an L in the dictionary list option (column 18). A scan will take place to purge void entries. (A void entry is created when an existing definition is changed from a fixed field to a multiple-entry field. This void entry exists until the next update or list of that dictionary, at which time it is deleted.)

FIELD DEFINITION CARD

See Figure 2 for a diagram of the field definition card.

Description

Columns

1	2: identifier for field definition records.
2-9	File name: a left-justified name composed of eight alphabetic (EBCDIC) characters. Embedded blanks are not allowed, though trailing blanks are acceptable. The allowed characters are: A to Z, 0 to 9, @, \$, #, and %.
10-17	Field name: a left-justified name composed of eight alphabetic (EBCDIC) characters. Embedded blanks are not allowed, though trailing blanks are acceptable. The allowed characters are: A to Z, 0 to 9, @, \$, #, and %.

	EDE			
	SDS			
FILE NAME	SIGMA MANAGE DICTIONARY SPECIFICATIONS	AUTHOR		
1 2 3 4 5 6 7 8 9	File Description			
	riie Description	DATE		
LOG. PORTO CONTROL OF THE CONTROL OF	Comments			
10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 26 29 30 31 3	2 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58	59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 /8 /9 80		
				
FILE NAME 2	Field Description			
FIELD NAME 0 10 10 10 10 10 10 10 10 10 10 10 10 1	COUNTER NAME 13	E SYMBOL > SPECIFIES LINE FOLD)		
10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32	2 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58	59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80		
	 			
┠┵└└└┴┴┴┴┴┴┼┷┴┼┼┼┼┼┼┼				
				
} · · · · · · · · · · · · · · · · · · ·				
<u> </u>				
1732(3/69) SCIENTIFIC DATA SYSTEMS				

Figure 2. Manage Dictnary Specifications

Columns	Description	Columns	Descri	ption	
18-21	Starting-byte position or multiple-entry order: four-digit starting-byte location of this fixed field. The leftmost byte in a record is byte 0001, the second is 0002, etc. If the field is a multiple-entry field, this value indicates its ordering as to all other multiple-entry fields, that is, 0001 for the first multiple-entry field, 0002 for the second, etc. Blanks are used if		sort, 2 text fic 255 ch field m	is the secondary–l eld comparison is li	mited to the first at at least one fixed and one multiple
	this field is to be deleted.	26		rection: used for f where a blank indic	
22-24	Field length: from 001 through 999 bytes, with leading zeros. Blanks are used if this			nd D indicates a de	
	field is to be deleted.	27	Field t	ype: indicated by	one of the following
25*	Key level: if the field is blank, it is not a key field. An M indicates that this is a multiple-entry group key. It associates all		Code	Туре	Maximum Length
	multiple entries tied to the same counter. A numeral from 1 through 9 indicates that this		В	Binary	4 bytes
	is a file sort key. The specified value is the		Р	Packed decimal	16 bytes

Columns	Description		Columns	Description	
	Code Type A Alphabetic (EBCDIC)	Maximum Length 255 bytes		the counter for the number of occurrences of this field in any given record. The left-justified name is composed of eight alphabetic (EBCDIC) characters. Embedded blanks are not allowed, though trailing blanks are acceptable. The al-	Ł
	T Text (EBCDIC)	999 bytes		lowed characters are A to Z, 0 to 9, @, \$, #, and %.	
	tain an odd number o length x 2) -1. If th	cimal fields always con- f digits equal to (byte e field type is text, com- the first 255 characters.	42*	Audit: an A indicates that a change of data in this field due to a file update will cause the entire record to be dumped in an audit file.	•
28*	Decimal scaling (for specifies the number of the decimal point, a blank (no decimal a numeral from 1 throfield whose length is and has a decimal poform nnnn. nnn upon the decimal point is	packed decimal fields): of positions to the right The field may contain point will be printed), or ough 9. For example, a specified as seven digits int code of 3 takes the being printed. Note that not actually carried in ted only at the time of	mitting a fi than file an	Standard column heading: up to 38 EBCDIC characters of heading to be used when this field is printed. The > character (greater than) will indicate a new heading line for REPORT. The existing field definition may be deleted by subield definition card with no characteristics other and field name (that is, columns 18 to 80 blank). The eletion will not be noted.	
	printing.			SAMPLE FILE DESCRIPTION	
29*	of leading zeros for t column 29 is left bla	ntry inhibits the printing he field's contents. If nk, leading zeros are Id also has a C (comma) mn 30.	ciated field length reco	of a sample personnel master file and the asso- d names are listed below. The file contains fixed- ords (that is, no multiple-entry groups) and is I in employee-number sequence within each com- tion.	-
30*	inserted in a numeric	C causes commas to be field prior to printing. o the left of every third	Field Descr	ription Field Name Comments	
	digit counting from t a numeric field whos	he units position. Thus, e contents are 1000000	Corporation Number	n Division DIVISION	
	will be printed as 1,000,000. If the contents were 0600000, the displayed quantity would appear as 600,000. Note that comma inser-		Employee N	Number EMPNO A five-digit number	
	tion forces suppression	n of leading zeros,	Employee N	Name NAME	
		not (see zero suppress lumn 30 is blank, commas	Street Addr	ress L1 First line only	
	are not inserted, nor	are leading zeros sup-	Employee A	Address ADDRESS The entire address	
	•	uppression is explicitly he zero suppress code).	City and St	tate L2 Second line only	
	carred for by ose or i	ne 2010 30ppiess code).	Zip Code	ZIP	
31*	sign to precede the n	racter causes a dollar nost significant digit of intout. If column 31 is	Social Secu Number	urity SOSECNO	
	left blank, a dollar sign is not inserted.		Date of Birt	th BIRTHDTE Month, Day, Year	
32*	Minus sign: a "=" co	auses a trailing minus	Sex	SEX M or F	
U 2	sign to be printed wh	en the field's content nn 32 is blank, the sign	Marital Sta		
	of the value will not be printed regardless of the field's content.			M married S single	
33*	Multiple-entry indicates that this is a multiple	ator: an M indicates e-entry field.		D divorced	
34-41*		ter name: name of the pot-segment field that is		W widowed	

Field Description	Field Name	Comments
Citizenship Status	CITIZEN	Code Meaning
		A alien B native born N naturalized
Date of Hire	HIREDATE	Month, Day, Year
Month of Hire	HIREMO	
Year of Hire	HIREYEAR	
Rate at Time of Hire	HIRERATE	\$xx.xxx
Number of Dependents	DEPEND	
Job Description	POSITION	
Current Pay Rate	PAYRATE	\$xx.xxx
Date Pay Rate		

Dictionary specifications for this example are shown in Figure 3. The resultant dictionary is shown in Appendix D, Figure 5.

Month, Day, Year

PAYDATE

Established

DICTNARY MESSAGES

All specifications on definition cards will be examined. Errors will cause output of an appropriate message, preceded by a printout of the incorrect record. In the messages shown below, the parameter "a" represents the user's file name, and "b" or "c" represents the user's field name.

BAD SYS OR RAD I/O RETURN : nn

There has been an irrecoverable and unexpected return while processing file DICT, where nn represents the BPM return code.

DICTIONARY SPECIFICATION READ ERROR

There was an error by Sort in reading the specifications. Dictnary aborts.

FILE a DICTIONARY DELETION

This message records a successful dictionary deletion; it precedes the catalog printout.

			SDS	
FILE NAME		SIGMA MANAGE	DICTIONARY SPECIFICATIONS	AUTHOR KOPITO
MASTER 1			File Description	DATE JULY 1969
			Comments	
OG. ATOMAN ANTINGEN			Comments	
ECORD 000 000 000 000 000 000 000 000 000 0	26 27 28 29 30 31 32 3	3 34 35 36 37 38 39 40 41	42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62	63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
			NG CORP MASTER FILE	
FILE NAME		. 1011. 1111-11 10111-12		
MASTER				
1 2 3 4 5 6 7 8 9			Field Description	
	12/18/14			
FIELD NAME 0, 1, 1, 0, 10, 10, 10, 10, 10, 10, 10,		THE STATE OF THE S	STANDARD FIELD HEADING (THE SYMBOL >	PRECISIES (INF. FOLO)
PIELD NAME ON JOYA JANON		COUNTER NAME	STANDARD FIELD HEADING (THE STMBOL)	SPECIFIES LINE FOLD!
0 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25	26 27 28 29 30 31 32 33	3 34 35 36 37 38 39 40 41	42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 6	53 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
IVISION 00030011	ВЗ		DIV	
MPNG 00070022	B		EMPL> NO	
LAME 0009021	A		EMPLOYEE NAME	
DDRESS 0030039	π	1		
1 0,03,002,0	A		STREET	
2 0050019	A		CITY-STATE	
ZIP 0069003	P		Z.I.P.>.C.O.D.E.	
305ECNO 0079009	A		SOCIAL>SECURITY>NUM	B.E.R.
BIRTHDTE 00.880.06			DATE OF , BIRTH , >MO/D	Y./.Y.R.
BEX. 0094001	A		\$,>E,>,X, , , , , , , , , , , , , , , , , ,	
MARITAL 0095 001	A		M,>,R,>,T,>,L,	
CITIZEN 01,0,10,0,1	A		C,>,T,>,Z>,N, , , , , , , , , , , , , , , , , , ,	
HIRED ATE 0102006	A		DATE OF > HIRE > MO/	D,Y , / ,Y , L
	P3Z \$		RATE> AT >HIRE	
IRERATE 0,1,0,90,0,3	BZ		N.O. >O.F.>.D.E.P.	
		T	JOB>TITLE	
DEPEND 0132001	A	1 1 1 1 1 1 1 1 1		
EPEND 0132001			RATE, OF , PAY	
DEPEND, 0132001 DOSITION 0137 010 PAYRATE 0151 003	A		RATE, OF , PAY, DATE, , >RATE, SET>MO	/ <u>D</u> .Y./.Y.R
DEPEND, 0132001 POSITION 0137 010 PAYRATE 0151003	A P3ZC\$-			/_D,Y, /,Y,R

Figure 3. Sample Personnel Master File Specifications

FILE a FIELD b BOUNDARY OUTSIDE RECORD

The specified field begins at zero or ends outside the boundaries of the record. Check the field start position and length against total record length.

FILE a FIELD $\mbox{\scriptsize b}$ Counter not binary or has no group key

Output of this message is due to one of the following causes:

- A fixed field that was tagged as a counter field by a multiple field is not binary.
- 2. There is no multiple field designated as the group key associated with this counter field.

FILE a FIELD b ILLEGAL AUDIT INDICATOR

A value other than A or blank has been input.

FILE a FIELD b ILLEGAL CARD TYPE

The card type was neither a 1 nor a 2; 2 is assumed.

FILE a FIELD b ILLEGAL COMMA INSERT

A value other than C or blank has been input.

FILE a FIELD b ILLEGAL COUNTER NAME

Either a nonlegal alphabetic character combination has been found, or the given field does not exist in the current dictionary.

FILE a FIELD b ILLEGAL DECIMAL SCALING FACTOR

The value is nonnumeric.

FILE a FIELD b ILLEGAL DOLLAR SIGN INSERT

A value other than dollar sign or blank has been input.

FILE a FIELD b ILLEGAL FIELD LENGTH

Either a nonnumeric value, blanks, or all zeros have been found, or the length is too large for the type of field.

FILE a FIELD b ILLEGAL MULTIPLE ENTRY ORDERING

Either a nonnumeric value, blanks, or all zeros have been found, or there is a gap in the ordering. All further multiple-entry definitions will result in errors.

FILE a FIELD b ILLEGAL NAME

Output of this message is due to one of the following causes:

- An illegal alphabetic character combination in file or field name has been input.
- 2. A duplicate-named field definition card has been input.
- 3. A group key field has been specified as a counter field.

FILE a FIELD b ILLEGAL NEGATIVE SIGN

A value other than minus or blank has been input.

FILE a FIELD 6 ILLEGAL REPLACEMENT OF COUNTER FIELD

A change from a fixed- to a multiple-type field has been defined, but other multiple fields require this field as their fixed-field counter.

FILE a FIELD b ILLEGAL SORT KEY DIRECTION

If this field is a sort key field, a value other than A or D has been found. If this field is not a sort key, a nonblank value has been found.

FILE a FIELD b ILLEGAL SORT KEY LEVEL

One of the following conditions has occurred:

- A nonnumeric value or zero has been found for a fixed field, or the key level has already been assigned to another field.
- 2. A nonblank value other than M has been found for a multiple field.
- 3. Another multiple-entry field has been previously designated as the key to this group.

FILE a FIELD b ILLEGAL STARTING BYTE POSITION

A nonnumeric value, blanks, or all zeros have been input.

FILE a FIELD b ILLEGAL ZERO SUPPRESS INDICATOR

A value other than Z or blank has been input.

FILE a ILLEGAL BLOCKING FACTOR

A nonnumeric value or an embedded blank has been found in the user's file blocking factor. Note that an all-blank factor is legal, as it indicates a Monitor-formatted file.

FILE a ILLEGAL BLOCKING OF VARIABLE LENGTH RECORDS

Manage will not process user-blocked records with multipleentry fields. The acceptable forms for variable-length records are Monitor-formatted file or user-formatted unblocked file.

FILE a ILLEGAL HEADER INDICATOR

The indicator was not an F, an H, or a blank.

FILE a ILLEGAL LOGICAL RECORD LENGTH

A nonnumeric value, a blank, or all zeros have been found when the card is neither a delete nor a list-only option card.

FILE a KEYS IMPROPERLY SEQUENCED

Either there is not at least one sort key, or the sort key level numbers are not contiguous.

FILE a MEMORY OVERFLOW

Output of this message is due to one of the following causes:

- There are too many fields for the new dictionary. Overflow may be caused by void entries, or by an excess of definition cards being created or transferred from the old version.
- Not enough working core was available to set up the dictionary. This may happen during the update or catalog phase.
- After processing some entries, additional working core was not available to hold more standard column headers.
- 4. Work areas have become saturated by defining too many files on one pass.

Further analysis of this file's dictionary by Manage is inhibited.

FILE a NAME ILLEGAL

There is an illegal alphabetic character combination in the file name.

FILE a NO DICTIONARY OR TYPE 1 CARD

One of the following conditions has been found:

- An attempt has been made to list a nonexistant dictionary.
- Field definition cards have been input without a previous dictionary to update, or a type 1 file definition card is needed to create a new dictionary.

FILE a NONEXISTENT DICTIONARY

The file's dictionary is not in file DICT.

FILE: a TRANSFER OF FIELD: b REQUIRES IMPROPER OR DELETED COUNTER FIELD: c

Multiple-entry field b, in a previous version of the dictionary, requires field c as its counter. Field c has been deleted, changed to a nonbinary type, or made a multiple field in the current update.

MORE THAN 15 MULTIPLE FIELD GROUPS IN THIS FILE

There are too many multiple-entry field groups in the file.

3. FILEUP

Fileup is the MANAGE program that creates or maintains data files that are defined in file DICT. Two methods of file creation or updating are available to the user: the gang method, and the selection method.

- The gang method accepts a single set of data and updates every record with it, regardless of previous record values.
- The selection method accepts data that applies to each master record, and updates records according to key field selection and requested functions.

Specifications for an update may be kept permanently in the library under the user's account number. This procedure eliminates the need to submit the same parameters for each run, and shortens overhead for successive runs of the same files. The transaction file is not limited to card images. However, individual fields that are to be handled as signed numeric data must be in hardware-compatible form

Transactions can be sorted by Fileup, if requested. Replacement, algebraic addition, and blank- or zero-fill may be specified on individual fields. Other operations must be done with user own-code routines. In addition, entire records may be selectively deleted or inserted using Fileup.

MASTER FILE DESIGN

The master file is defined in file DICT. It is the file against which all changes are applied. The old version of the master file is one of several inputs to Fileup. The new version is output incorporating all changes. The Manage dictionary generator (Dictnary) imposes the following constraints on design of the master file:

- 1. Each file must have at least one sequence key.
- Each multiple group must have a group selector key field

To ensure file sequence, Fileup will not act on the sequence key fields or their overlays. Therefore, any changes to these fields must be made by deleting the original version of the record and inserting a complete new record as a separate transaction (see record function codes).

Fileup will act on variable-length records which meet the design requirements of the dictionary generator (Dictnary). Each multiple group must have one of the fields within the group designated as the group selector key. This field must have unique values so as to identify individual occurrences of the group even though Fileup is not concerned with the sequence of all occurrences. The counter field that controls the number of occurrences in a group is automatically maintained by Fileup and must not be cited in the update specifications.

Selection of an occurrence is made by identifying a group selection key value (not by its place or order of occurrence). Group selection keys can only be deleted, inserted, or replaced. The replacement option identifies the occurrence so that action on other fields within the group can take place. Usually, group selection keys will be associated with complete group occurrences rather than with individual values. Once a group selector key is established at a given level of occurrence, all multiple-entry fields within the group will continue to exist until the group selection key field is deleted. Conversely, if a group key is deleted, the entire group of fields at that level is also deleted. Any change involving a multiple field must be tied to a group selector key value as well as to the record sequence keys for complete indentification to the occurrence level.

TRANSACTION FILE DESIGN

The transaction file is defined by the specifications to Fileup with the file and field names serving as the link to the dictionary definition of the master file. The transaction file may contain interleaved records of more than one design. Though each record will have more than one field, the record will, hereafter, be called "a transaction." Transactions will contain the changes to be applied to the master file within the limits set under "Master File Design" above. Except for the following requirements, transaction design is up to the user, including overlaying and redefinition of field positions.

- 1. All transactions must be the same length.
- 2. All sequence key fields of the master file must be in every transaction.
- If transactions are of more than one design, a transaction code field must be defined to identify the various formats.
- 4. If a combination of delete-a-record, insert-a-record, or change-a-record functions is required, a record function code field must be defined to identify the function of each transaction as a whole.
- All transactions must have sequence key fields, transaction code field, and record function code field in the same locations.
- Transaction codes and record function codes will be considered alphabetic (EBCDIC).

Transactions are not restricted to card images. Record function codes for records are shown below in their order of evaluation.

Code	Meaning
D	Delete a record if all keys match.
I	Insert record in proper sequence if keys do not match.
บ	Update a record if all keys match.

If key conditions are not as expected, the transaction record is listed and no change is made to the master file. If no record function code is specified, the type of run will determine the default condition. A creation run will default to an insert function, while an update run will default to an update function.

A transaction must be input for each occurrence level of a multiple field. Sequence key values must be repeated and the corresponding group selector key field value must be present for occurrence identification.

AUDIT FILE DESIGN

Audit fields may be defined in the dictionary so that master file changes can be monitored. An audit file will be created if changes are made affecting an audit field. The file will contain the entire record from the old input version of the master file. Specific causes are given below.

- 1. An update to one or more audit fields in a record.
- 2. Deletion of a record due to the record function code.
- 3. Deletion of a record on a return from own-code (see below) to the delete function.

USER OWN-CODE

Fileup can be incorporated in the user's library as a number of special purpose programs with user own-code modules. The user assembles his program as independent relocatable object modules and then builds an overlay structure (with his new load module name) that merges his program with the Fileup root segment (FILEUPO). This results in a unique program for that particular file maintenance task. The user may then call out any desired version and specify links to his own-code at any or all of the following points:

- 1. Before opening either version of the master file.
- Immediately before writing the output master file or volume header, and after reading the input master file or volume headers.
- Immediately after reading a logical record from the input master file. (A delete record return is provided.)

- Immediately after matching a master record to a transaction, with access to both records.
- Immediately before writing à logical record on the output master file regardless of transaction changes. (A delete return is provided.)
- 6. Before closing the transaction, the audit, the input master, and the output master files.

Trailers will not be handled by Fileup; hence, they must be processed by user own-code.

Specifying user own-code accesses on the file update card will cause the link to be attempted. If the link is not successful, an immediate abort will occur.

External entry points for own-code to be defined in the user's program are given in explanations of Fileup specification cards, below.

A file update may reference:

- 1. Specifications
- 2. Transactions
- DICT
- Old master
- 5. New master
- 6. Audit

The specifications and DICT files will be read and interpreted first. Fileup will then reference the transactions, audit, and old and new master files. Therefore, a maximum of four DCBs will be active at one time; a user with linked own-code routines may use his own DCBs.

FIELD CONVERSION

Fileup will convert transaction data to the correct type for the master file. However, the user must be aware of certain size limitations. For example, the user is responsible for correctly scaled inputs (integer is assumed). Table 2 below shows transaction field size limitations and restrictions.

An alphabetic transaction field may not be all blank when a zero numeric value is intended. At least one right-most zero must be explicitly present. Note the use of the conditional replacement function code to bypass this restriction.

When an alphabetic transaction field contains negative values to be converted to packed decimal or binary form, it must have an overpunch (11-zone punch) over the least significant digit.

Table 2. Transaction Data Field Sizes

Transaction Field	Master Field Data Type								
Data Type	Alphabetic (EBCDIC) or text	Binary	Packed Decimal						
Alphabetic (EBCDIC) or text	Equal.	Maximim transaction field size is 10 bytes. †	Maximum byte length is equal to (master byte length x 2) -1.						
Binary	Maximum transaction field byte length is 4 bytes. ^{tt}	Less than or equal to master length.	Maximum transaction field byte length is 4 bytes. ^{tt}						
Packed Decimal	Maximum byte length is equal to (master byte length/2) +1. ^{††}	Maximum transaction field size is 6 bytes. [†]	Less than or equal to master length.						

An arithmetic overflow trap may occur during the actual update. Some values fall within the maximum transaction field size, but overflow the maximum hardware binary value (2³¹ - 1) upon conversion. The run will be aborted.

CALLING FILEUP

Input for a Fileup run may consist of the following cards:

- 1. Fileup processor call card.
- 2. File update card.
- 3. Field update cards.

Fileup will call Sort to read (via the M:SI DCB) and sort the specifications by card type function, transaction code, and starting byte position. If no errors exist in the specifications, the actual update occurs.

If input/output errors are encountered during a run in either the old master file or the transaction file, the record will be listed on the logging device along with an error message telling which file was in error. Any sequence error in the master or transaction files or illegal hardware arithmetic operation will immediately terminate the job. On input/output errors, the user has the option of either ending the run, or bypassing the error and continuing the update. If continuation is elected, a sort of the transaction file will also allow continuation on input/output errors. Assignments must be made for both master files and the audit files. An assignment for the sorted transactions may be made but will default to the RAD. No file releases may be entered on the assignments, but may be done later via the File Manage program.

If requested, the transaction file will be sorted according to key fields, record function codes, and transaction code. Therefore, changes with the lowest record function code and transaction code for a given master record will be performed first. Gang transactions are sorted along with other transaction types. They will not be acted upon until their key

values bring them in sequence with the master file. (Note that multiple fields cannot be ganged.) In addition, the user must ensure that only one record for each gang transaction is input, since a later record of the same transaction type will replace previously input values.

During the processing of a transaction, the fields will be processed in order of their starting byte in ascending order. More than one transaction may apply to a master field.

During creation of a new record, Fileup will preset alphabetic fields to blanks (hex. 40), binary fields to zero (hex. 00), and packed decimal fields to zero (hex. 00C). Note that this is for computational convenience only, and does not create a null state. If not updated by the user, such preset fields will be treated as valid data by Retrieve and Report. Undefined areas will be preset to binary zero.

Formats for Fileup run cards are given below. An asterisk (*) after column numbers indicates that the field is optional. Register use for own-code linkage is given in Appendix C.

The Fileup processor is called from the System Library with a Fileup call card. Its form is shown below.

$$\begin{array}{c} \text{! FILEUP } \left\{ \begin{matrix} C \\ U \\ \mathcal{E} \end{matrix} \right\} \quad \left\{ \begin{matrix} \left\{ \begin{matrix} L \\ A \\ D \end{matrix} \right\} & \text{name} \right\} \\ \mathcal{E} \end{array} \right.$$

where

! FILEUP is required as shown, starting in column 1.

Arithmetic truncation of significant data may occur if the master field is not large enough to contain the converted value. The run will be aborted. Numeric transaction fields may be smaller than the master field. An automatic left-zero fill occurs.

(C)		Columns	Description
U} indicate	s the type of run. One of the fol-		
しも」 lowing cod	les must be in column 11.	1	3: identifier for a file update card.
	Meaning Create a new file.	3–10	Master file name: name of the file being updated.
U	Update an existing file.	12-15	Transaction record length: logical rec-
	Delete the library, where 5 repre-	12-13	ord length in the transaction data file.
$ \left\{ \begin{bmatrix} L \\ A \\ D \end{bmatrix} name \right\} $	sents a blank character. is the library action code. One of e following codes must be in col-	17-19*	Transaction blocking factor: blocking factor for user-formatted transaction file. A blank indicates a Monitor-formatted file.
(K) um	n 13.	21*	Transaction file header: for user- formatted files only. An H indicates that the header label is to be skipped. An F signals the presence of one or more labels followed by an EOF mark.
А	Specifications are to be obtained from the M:SI device and are to be added to the	23*	Own-code on opening: a Y specifies own-code linkage to FUPOP before opening any files.
_	library under the name in columns 14 to 17.	24*	Own-code on header: a Y specifies own-code linkage to FUPHD for val-
D	Delete the library specifications named in columns 14 to 17. No new specifications should follow this processor call card. (When D is used, column 11 should	25*	idating an input user header, and for creating an output user header. Own-code on input: a Y specifies own-code linkage to FUPIM after reading each input master record.
nai	(left-justified) of the specifica- tions in columns 14 to 17. This field should be blank if column	26*	Own-code on transaction: a Y indicates own-code linkage to FUPMT after successfully matching a change transaction to an input master record.
К	13 is blank. Specifications are to be obtained from the M:SI device and are not to be saved.	27*	Own-code on output: a Y signals own-code linkage to FUPOM before writing each output master record.
If a change to library set must be input via	specifications is made, the entire the M:SI device.	28*	Own-code on closing: a Y indicates own-code linkage to FUPCL after all record processing is complete, but be-
transaction file descri action record format i gether all the type 4 code. The sequence	ow define the format of the input bed by the type 3 card. Each trans- s derived by Fileup by grouping to- cards with the same transaction ID key fields in the transaction records	30*	fore closing any files. Sort: an S means sort the transaction file according to keys and record function code prior to update process.
type of transaction re- given the same name t	, and are assumed to apply to every cord. The transaction fields are that is used in the dictionary for the association of new data with the old.	32*	I/O error bypass: a B indicates bypass any transaction or input master file input/output errors and continue processing.
FIL	E UPDATE CARD	34-37*	Transaction ID starting byte: indicates the starting byte (from 0001 to 9999)

in transactions of the field that determines the format of the transaction. This parameter is not needed if there

is only one transaction format.

FILE UPDATE CARD

See Figure 4 for a diagram of the file update card.

	SDS	
	SIGMA MANAGE FILEUP SPECIFICATIONS	AUTHOR
	Maintenance File Definition	DATE
OWN-CODE INDICATORS	Dr. Dr.	
MASTER FILE NAME PLON TO THE PROPERTY OF THE P		COMMENTS
1 3 4 5 6 7 8 9 10 12 13 14 15 17 18 19 21 23 24	25 26 27 28 30 32 34 35 36 37 39 41 42 43 44 46 47 4	48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70
3		
	Maintenance Field Definition	
		COMMENTS
1 3 4 5 6 7 8 9 10 12 13 14 15 16 17 18 19 21 22 23 24	26 27 28 30 32 34 35 36 37 39 40 41 42 43 44 45 46 47	48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70
4		
4		
4		
4		
4		
4		
4		
		
4		
4		
4		
4		
4		
4		
4		
4		
4		
4		
4		
1734(3/69) SCIENTIFIC DATA SYSTEMS		

Figure 4. Manage Fileup Specifications

Columns	Description	Columns	Description
39*	Transaction code length: byte length of transaction code (1 to 4). This parameter is not needed if there is only one transaction format.	21-24*	Transaction starting position: starting byte position (0001 to 9999) of transaction data associated with the master field. The field must be blank for the B or N function (see field function code
41-44*	Record function code field position: byte position of single character record		below).
	function code (0001 - 9999).	26-28*	Transaction field length: byte length (001–999) of transaction data. This
	FIELD UPDATE CARD		field must be blank for the B or N function of the field function code (column 32 below).
See Figure 4 for	a diagram of the field update card.		,
Columns	Description	30*	Data type: code for type of transaction, where A means alphabetic (EBCDIC), T
1	4: identifier for a field update card.		means text, B represents binary, and P specifies packed decimal data. Note
3-10	Master file name: name of the file being updated.		that Fileup automatically converts trans- action data to the appropriate master form as specified in "Field Conversion"
12-19	Master field name: name of the master field associated with the transaction data.		above. This field is blank for the B or N function of the field function code.

Description

32 <u>Field functi</u>

<u>Field function code</u>: action code for specified transaction fields when applied to corresponding master field.

Code Meaning

- A Algebraic add. Add the transaction field value to the master field. Illegal when master field is alphabetic or a multiple-entry group selector field.
- B Blank fill. Clear master field to blanks. No field in the transaction is required for this action. Illegal for nonalphabetic fields or multiple-entry group selector fields.
- C Conditional replacement. If the transaction field is not blank or zero (depending on data type), replace old master field value with transaction field value; otherwise, take no action.
- D Delete occurrence of the multipleentry group identified by this group selection key. Only allowed for multiple-entry group key fields.
- G Gang Replacement. Replace master field value with transaction field value in every master file record from the one identified by the sequence keys until the end of the file or until the transaction is replaced by another. Not allowed with multiple-entry field.
- I Insert occurrence of multiple group identified by the multiple-entry group key. Only allowed for multiple-entry key fields.
- N Numeric zero fill. Clear master field to the correct type of zeros for the field type. No field in the transaction is required for this action. Illegal for multiple-entry group key fields.
- R Replacement. Unconditionally replace master field value with transaction field value.
- S Sequence key field. This field applies to all transaction records; therefore, transaction code is not applicable.

Columns

Description

34-37*

<u>Transaction code</u>: left-justified value of code that identifies type of record associated with this specification. Blank for sequence key fields.

CREATION OF A SAMPLE MASTER FILE

A system for creating and updating the Amalgamated Corporation's personnel master file is described below. It assumes that a complete record is generated for each new employee by keypunching two transactions (coded as 10 and 11) from a hiring form. Changes in job title and pay rate result in a third type of transaction (coded 22) which changes an existing master record. The transaction records are shown in Figure 5, and the required Fileup definitions in Figure 6. The record function code (column 80) would normally be an I in transactions coded 10 and 11, since these represent a new hire and should not match a previous master record. Similarly, transactions coded 22 would have a function code of U in column 80, since they represent changes to existing records.

The Fileup specifications show that the field in columns 70 to 74 of the transactions coded 11 is to be placed in both the hire rate and current pay rate fields in the master. Similarly, the field in columns 64 to 69 of the transaction is both the hire date and date of current pay rate. However, the submission of a transaction coded 22 at a later date will change only the current pay rate, date of current rate, and job title.

The Fileup specifications show either field function codes of S, which identifies the transaction file key fields, or C, which specifies conditional replacement of nonblank transaction fields. This permits partial transaction records to be generated. Note that sequence key fields are defined only once in the Fileup specifications, but apply to all transactions. If any item of information is unknown for a new hire, it may be left blank in the transaction record and will be ignored by Fileup. At some later date, the missing information may be submitted on a transaction with a record function code of U in column 80. This will cause Fileup to seek a match between the transaction and the previously established master record. At this point, Fileup will again ignore any blank transaction fields (which by now are already in the file) and will pick up only the items being filled in.

FILEUP MESSAGES

The following messages are output during Fileup. A printout of the incorrect record may accompany the message.

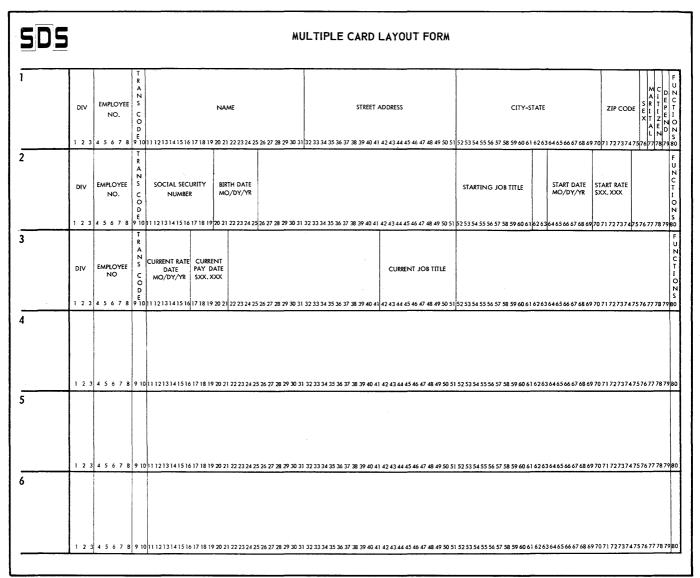


Figure 5. Sample Transaction Records

ALL KEYS NOT SPECIFIED

Either not all of the master file sort keys have been identified in the transaction record, or one or more have been rejected due to other errors.

ARITHMETIC TRAP IN THE FOLLOWING TRANSACTION RECORD

An arithmetic overflow or an illegal decimal digit trap has occurred during a field conversion operation. A mandatory abort occurs.

FILEUP SPECIFICATION READ ERROR

An error has occurred while sorting the specification input through the M:SI DCB. A mandatory abort occurs.

ILLEGAL BOUNDARY - FIELD xx

The specified transaction field, as defined by its starting position and length, is outside the bounds of the record.

ILLEGAL CARD TYPE

The card type code is not 3 or 4, or multiple type 3 cards were found.

ILLEGAL DATA TYPE - FIELD xx

The data type code must be A, B, P, or T. If the field function code specifies a blank or numeric zero fill (B or N), it must be blank.

ILLEGAL FUNCTION-FIELD xx

An error has been found in the field function code, which is subject to the following restrictions.

- If the field is a master sort key, the field function code must be S.
- If the transaction field is defined as text, or if the master field is defined as alphabetic or text, the field function code may not be A (addition).
- 3. If the master field is defined as binary or packed decimal, the field function code may not be B (blank fill).
- 4. If the master field is a multiple-entry field, the field function code may not be G (gang replacement).
- 5. If the master field is a multiple-entry field and:
 - a group selector key, the field function code must be I, D, C, or R.
 - b. not a group selector key, the field function code must not be I or D.

ILLEGAL GROUP KEY MATCH

One of the following conditions has been found.

- An insert has been requested for a multiple-entry field but the group key to be inserted already exists in the master record.
- A delete, replace, or update group is requested but the group key does not exist in the master record.

ILLEGAL HEADER INDICATOR

Either the transaction file header indicator is not H, F, or blank, or is F for a Monitor–formatted file.

ILLEGAL I/O ERROR CODE

The input/output error bypass indicator is not B or blank.

ILLEGAL ITEMS SPECIFIED - FIELD xx

The transaction field starting byte, length, and data type must be blank when the record function code is B or N (blank or numeric zero fill).

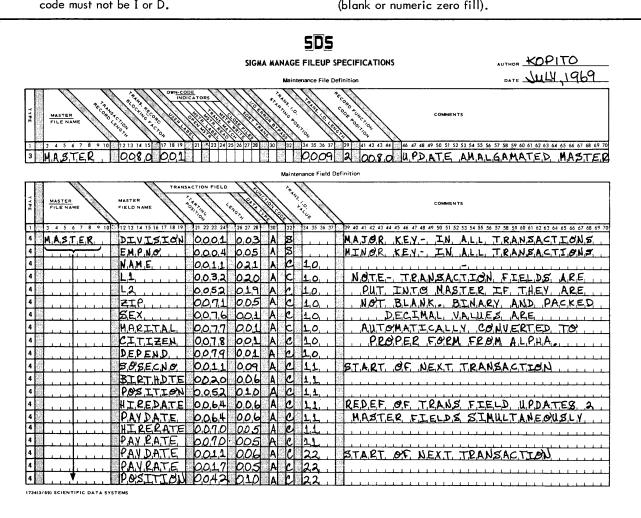


Figure 6. Sample Fileup Specifications

ILLEGAL LIBRARY CODE

The library action code in column 13 of the Fileup processor call card is subject to the following conventions.

- 1. Must be L or A if library name is specified.
- 2. Must be D if run type is blank and library name is specified.
- 3. Must be blank if library name is blank.

ILLEGAL LIBRARY NAME

The library name in columns 14 to 17 of the Fileup processor call card must be blank if the library action code is blank.

ILLEGAL MASTER LENGTH - FIELD xx

The master field is greater than 31 bytes and therefore cannot be completely filled by converting the numeric transaction field to EBCDIC.

ILLEGAL NAME - FIELD xx

Either the master file name in a type 4 card is different from the name in the type 3 card, or the field name cannot be found in the dictionary of the master file.

ILLEGAL OWN CODE INDICATOR - CLOSE

ILLEGAL OWN CODE INDICATOR - HEADER

ILLEGAL OWN CODE INDICATOR - INPUT MASTER

ILLEGAL OWN CODE INDICATOR - OPEN

ILLEGAL OWN CODE INDICATOR - OUTPUT MASTER

ILLEGAL OWN CODE INDICATOR - TRANSACTION

The specified own-code indicator is not Y or blank. If the dictionary indicates a master file header, own-code to process the header is always required. If no header is specified in the dictionary, own-code for headers is not allowed.

ILLEGAL RECORD FUNCTION CODE

A record function code field is not I, U, or D.

ILLEGAL RECORD FUNCTION CODE MATCH

One of the following conditions has been found:

 There is no key match between the V or D-type transaction record and a master record during an update run.

- There is a match between the I-type transaction record and a master record during an update run.
- V and D function codes were encountered in a creation run without a preceding I-type record.

ILLEGAL RECORD FUNCTION CODE POSITION

The record function code position must be either all numeric (nonzero) or all blank, and must lie within the bounds of the transaction record.

ILLEGAL SORT INDICATOR

The transaction file sort indicator is neither S nor blank.

ILLEGAL SPECIFICATION - FIELD xx

Output of this message is caused by one of the following two conditions.

- A transaction data field overlaps a master sequence key field or a multiple-entry counter field.
- A master key field or multiple-entry group selector key has been specified more than once on the same transaction record.
- A multiple-entry counter field has been specified on a transaction.

ILLEGAL START POSITION - FIELD xx

The transaction field starting position must be either all numeric (nonzero), or blank if the field function code specifies a blank or numeric zero fill (B or N).

ILLEGAL TRANSACTION BLOCKING FACTOR

The transaction blocking factor must be either all numeric (nonzero) or blank if the transaction file is Monitor-formatted.

ILLEGAL TRANSACTION CODE

The value in the transaction code field does not correspond to any value supplied in the transaction specifications to Fileup.

ILLEGAL TRANSACTION CODE POSITION

Output of this message is caused by one of the following conditions:

- The starting byte or length of the transaction identification code is not all blank or all numeric.
- The transaction identification code length is greater than 4 bytes.
- 3. The transaction identification code field does not fall within the boundaries of the transaction record.

ILLEGAL TRANSACTION CODE SPECIFIED - FIELD xx

Output of this message is caused by one of the following conditions:

- 1. The specified transaction code is longer than the code length shown in column 39 of the type 3 card.
- 2. The transaction code must be blank if no code position is shown in columns 34 to 37 of the type 3 card.
- The transaction code must be blank if the field function card is S (sequence key field).

ILLEGAL TRANSACTION LENGTH-FIELD xx

Output of this message is caused by one of the following conditions:

- The transaction field length is not all numeric (non-zero), or blank if the field function code specifies a blank or numeric zero fill (B or N).
- The transaction field length exceeds the maximum permitted for the type of data, where unpacked decimal fields may not exceed 31 bytes, packed decimal fields may not exceed 16 bytes, and binary fields may not exceed 4 bytes.
- The transaction field length violates the rules of conversion to master field data.

ILLEGAL TRANSACTION LOGICAL RECORD LENGTH

The transaction record length either contains a nonnumeric character or is zero.

ILLEGAL RUN TYPE CODE

Either the run type code in column 11 of the Fileup processor call card must be U or C, or it must be blank if a specification library entry is to be deleted. If nonblank, a library deletion will not be performed.

INITIALIZATION COMPLETE – READY TO PROCESS FILES

This message signals the completion of an error-free initialization.

IRRECOVERABLE I/O ERROR xx

An irrecoverable input/output error has occurred, where xx represents the BPM error code. The job will be continued or aborted according to Fileup option.

LABEL END MARK REQUIRES DEVICE ASSIGNMENT FOR INPUT MASTER

LABEL END MARK REQUIRES DEVICE ASSIGNMENT FOR OUTPUT MASTER

LABEL END MARK REQUIRES DEVICE ASSIGNMENT FOR TRANSACTION

A header, consisting of one or more records ending with a file mark, is indicated for the named file, but it is not assigned to a device. Processing the file mark requires a device assignment.

MANAGE FILE UPDATE LIBRARY: bb FILE: cc

This message precedes the listing of specifications read through the M:SI DCB, where bb is the library name of the Fileup processor call card, and cc is the master file name from the type 3 card. The message names the master file to be processed, and the name that is associated with the new specification library entry, if any.

MASTER FILE SEQUENCE ERROR

An out-of-sequence condition has been detected in the master file, necessitating a mandatory abort.

MULTIPLE FIELD PRESENT WITHOUT ITS GROUP KEY THIS TRANSACTION

One or more members of a multiple-entry group have been defined for the indicated transaction record, but the group selector key is missing. Any transaction record containing a multiple-entry group field must also contain a group selector key.

NONEXISTENT DICTIONARY

Manage was unable to find the required master file dictionary under the specified name and current account number.

NONEXISTENT LIBRARY

Manage was unable to find the specification library entry under the name indicated on the Fileup processor call card and the current account number.

NO SPECIFICATIONS ALLOWED FOR GIVEN LIBRARY ACTION

Transaction specifications are not expected if the Fileup processor call card indicated a library deletion. The specifications will be validated but not saved, and the run will be aborted.

NO SPECIFICATIONS INPUT

Specifications were not available through either the M:SI DCB or the library.

OBSOLETE LIBRARY

The specification library entry has been made obsolete by the generation of a new master file dictionary. The complete set of transaction specifications must be revalidated and added to the specification library.

OWN CODE LINKAGE UNSATISFIED - CLOSE

OWN CODE LINKAGE UNSATISFIED - HEADER

OWN CODE LINKAGE UNSATISFIED — INPUT MASTER

OWN CODE LINKAGE UNSATISFIED - OPEN

OWN CODE LINKAGE UNSATISFIED — OUTPUT MASTER

OWN CODE LINKAGE UNSATISFIED – TRANSACTION

The own-code linkage named is not satisfied, but is requested in the Fileup specifications.

TRANSACTION CAUSES MASTER RECORD TO EXCEED MAXIMUM SIZE

A multiple entry group insertion transaction has been found which causes the master record to exceed the maximum logical record length specified in the Dictionary. The transaction is listed and rejected. A Dictionary update run is required to indicate a higher maximum length.

TRANSACTION FILE SEQUENCE ERROR

An out-of-sequence condition has been detected in the transaction file, necessitating a mandatory abort.

TRANSACTION FILE SORT ERROR

The input transaction file could not be sorted successfully.

The messages shown below give the specified record counts after the successful completion of a Fileup run.

MASTER RECORDS INPUT xxxxxx

MASTER RECORDS ADDED xxxxx

MASTER RECORDS DELETED xxxxx

MASTER RECORDS OUTPUT xxxxx

AUDIT FILE SIZE xxxxxx

TRANSACTION RECORDS IN xxxxxx

4. RETRIEVE

The Retrieve program extracts data from a data base file according to user-specified search criteria. Retrieve analyzes the user's specifications to generate the code necessary to satisfy the request. Requests are expected to be batched. A maximum of 99 requests will be processed with a single reading of a data base file. Retrieve performs the following operations:

- Reads the retrieval/report specifications from the standard input device (M:SI).
- Transmits the report specifications to the Report program.
- Interprets the retrieval search and extraction specifications.
- Reads file DICT, which describes the file from which the requested information is to be extracted.
- Generates a set of routines that satisfy the request.
- Formats the intermediate output file records and transmits these formats to the Report program.
- Executes the retrieval routines, which extract the requested information from the selected records of the request file.
- Writes the extracted data into an intermediate output file for further processing by the Report program or by a user program.
- Saves request specifications in the Manage request library, if desired.
- Obtains a standard request from the request library, if specified.

The Manage user controls the retrieval function by specifying the following:

- 1. Name of the file which contains the required information.
- Criteria to be used in determining those records in the request file from which information is to be extracted.
- 3. Information to be extracted from the selected records.

Additionally, the user may specify whether he wishes the extracted information to be formatted and listed as hard copy, or whether he requires an intermediate file for further processing by a non-Manage program.

The user may specify that data from two files is required to satisfy his request. This procedure is allowed when the two files have the same key (at least to the level of the file with the fewest key fields), and permits positive association of related records.

File matching is subject to the following constraints:

Both files must have the same key structure to the level of the file with the fewest key fields, as in,

Pr	imary File	Sec	ondary File			
Key	Field Name	Key	Field Name			
1	Div	1	Division			
2	Location	2	Location			
3	Shop Number	3	Shop Number			
4	E					

- Equipment Class
- 2. Key fields at the same level must be of the same data type, that is, both binary, alphabetic, or packed decimal.
- 3. The sequence of both files must be the same, that is, both ascending or both descending.
- Key fields at the same level are not required to have the same field name or length. If the lengths are different, the following comparison procedure will be followed:
 - Alphabetic fields will be matched from left to right, using the length of the shorter of the two fields.
 - The shorter of two numeric fields will be left zero filled and matched to the length of the longer field.

Record selection criteria are presented to the Retrieve program as search specifications. A record is selected when the criteria are satisfied. Specifications may range from a "bypass search", which will yield information from every record in the file, to the specification of a unique key value criterion, which is satisfied by only one record in the entire file.

Output specifications name the field(s) whose contents are required by the user. It is possible to request the contents of one field in a single record in the file, the contents of every field in every file record, or anything between these two extremes.

SELECTION CRITERIA

The user describes his record selection criteria as a list of two-term relationships separated by one of the logical operators AND and OR. A maximum of 20 consecutive AND criteria will be accepted in Retrieve in any given request. Note that an intervening OR criteria restarts this count. A criterion is specified as a relationship between a field in the file, and one of the following:

- 1. A different field
- A constant
- 3. The result of an evaluated arithmetic expression.

The relational operators that may be used are given below.

Operator	Meaning					
EQ	Equal to					
LS	Less than					
GR	Greater than					
NE	Not equal to					
GE	Greater than or equal to					
LE .	Less than or equal to					

Numeric fields that are being compared must be of the same data type, that is, both binary or both packed decimal.

ARITHMETIC EXPRESSIONS

An arithmetic expression consists of two terms connected by an add, a subtract, a multiply, or a divide operator. The terms may be

- 1. Two separate fields
- Evaluated results from two previously specified expressions
- 3. A field and an expression result
- 4. A field and a constant
- 5. An expression result and a constant.

Note that if two fields are specified, they must be of the same data type, that is, both binary or both packed decimal. Expressions are evaluated and saved to be used as search criteria or in subsequent expressions and may be included in the Retrieve output data. The size of a saved expression is always set at 15 digits plus an algebraic sign if it is packed decimal, or 64 bits if it is binary. Some sample arithmetic expressions are given below.

First Term	Arithmetic Operator	Second Term	Arithmetic Result Name
Field 1	+	Field 2	xxx
Field 3	-	xxx	ууу
Field 4	*	+ 15.7	ZZZ
ууу	/	+ 37	nnn

Although an expression consists of an arithmetic operation involving only two terms, it is possible to build up expressions of almost any desired complexity by successive iterations of this process. For example, to evaluate

$$X = A + \frac{B+2C}{D} - E$$

set up the problem as follows.

First Term	Arithmetic Operator	Second Term	Arithmetic Result Name
С	*	+2	T ₁
В	+	τ_1	Т2
T_2	/	D	τ ₁
т ₁	-	E	т2
Α	+	т2	X

where X, T₁, and T₂ are internal storage fields to be defined at run-time by the Retrieve processor.

Arithmetic expression results are made available for all subsequent comparisons and may be included in the retrieved output data.

Retention of fractional significance (number of decimal places) in arithmetic-expression results is as follows:

- 1. Addition and subtraction: the result is carried to the greatest number of decimal places in either term.
- 2. Multiplication: the result is rounded to the greatest number of decimal places in either term.
- 3. Division: the result is truncated to the greatest number of decimal places in either term.

Since arithmetic expressions may be randomly interspersed with the criteria in a request, it is not always apparent which expressions will be evaluated under a given set of conditions. Retrieve always begins with the first line of a request and processes the following lines in consecutive order. However, the request contains implied branch points that are governed by the contents of the record being examined. There are two conditions that cause portions of the request to be ignored. They are:

- 1. A comparison that is true, that is, one that satisfies the conditions imposed by the user, and that has OR as a logical connector. In this case, the record will be selected, and all subsequent request lines will be ignored. In the example of Figure 7, lines 01 and 02 are always evaluated, but if line 03 is true, all further lines will be ignored for that data record.
- 2. A comparison that is false, that is, one that does not satisfy the user's conditions, and that has AND as a logical connector. In this case, the next line to be evaluated or compared will be the line following the next OR connector, if there is another OR in the request. If there are no more OR connectors before the END connector, the record will be rejected. In the example of Figure 8, if line 01 is false, then lines 02 and 03 are inconclusive and are skipped. Line 04 will be compared but may be in error since NEW % may not have been evaluated.

As long as neither of these conditions obtains, evaluation of arithmetic expressions and examination of comparison criteria will continue in sequence until the END connector is reached.

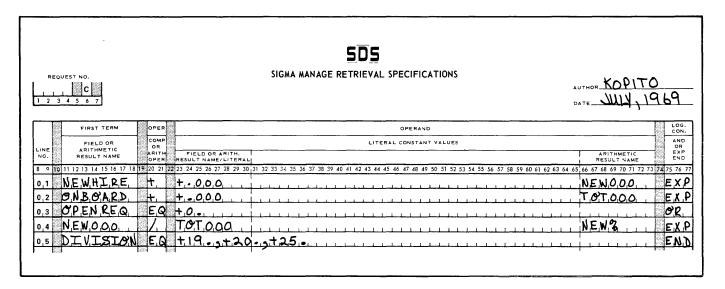


Figure 7. Sample Comparison with OR Connector

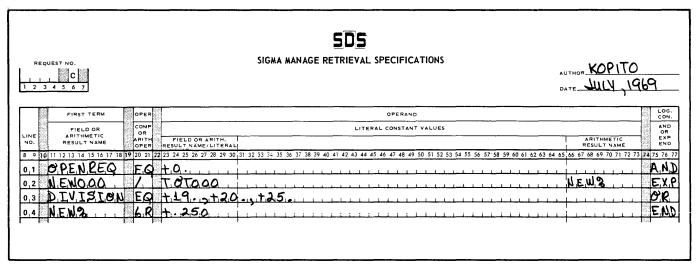


Figure 8. Sample Comparison with AND Connector

DATA FORMATS

Some of the significant characteristics of the data base file from which data can be retrieved are given below.

- 1. Variable-length records are permitted. A variable-length record differs from a fixed-length record in that a variable-length record will contain one or more multiple-entry fields. These fields contain a list of different values which the field has assumed or might assume at different times or under different conditions.
- Data base fields may be binary integer, packed decimal, or alphabetic (EBCDIC).
- 3. A binary field must be from 1 to 4 bytes long and must lie within byte boundaries.

- 4. Variable-length fields are not permitted. A given field is the same size in every record of the file. However, in the case of a multiple-entry field, the fixedlength value may occur a variable number of times.
- 5. A counter field in the root segment must be specified for every multiple-entry field. This binary field contains the number of occurrences of the multiple-entry field in any given record. One field may serve as a counter for several multiple-entry fields.

CALLING RETRIEVE

The Retrieve program uses the Batch Processing Monitor for file services and for overlay loading, and Dictnary to determine the format of the request file. Retrieve passes those parameters that describe the report format to Report, as well as the intermediate file data and intermediate file format information.

Input for a Retrieve run consists of the following cards:

- 1. Retrieve processor call card.
- 2. General request specification card (type A).
- 3. Title and heading card (type B).
- 4. Retrieval specification card (type C).
- 5. Retrieved output card (type D).

Up to 99 requests (sets of A, B, C, and D cards) may follow the Retrieve processor call card.

After the processor call card, general request specifications are input on card types A and B. Following these may be a list of retrieval specifications (card type C). These specifications will define record selection criteria and arithmetic expressions, if a selective search is required (that is, search mode in column 30 of card type A record is S). Retrieval specifications typically contain:

- 1. One of the following conditions:
 - a. The name of a field, which is a record selection criterion, and a constant or list of constants against which the criterion field value is to be compared.
 - b. The name of a criterion field and the name of another field in the record, the contents of which are to be compared against the criterion value.
 - c. The two terms of an arithmetic expression, which can be a combination of field names, constants, or the results of previously evaluated expressions.
 - d. The name of a previously defined arithmetic expression result, and any other criterion field or constant.
- 2. One of the following relational operators for a criterion expression:

Operator	Meaning
EQ	Equal to
LS	Less than
GR	Greater than
NE	Not equal to
GE	Greater than or equal to
LE	Less than or equal to

One of the following algebraic operators for an arithmetic expression:

Operator	Meaning
+	Add
-	Subtract
*	Multiply
/	Divide

- 4. One of the following:
 - a. A logical operator that connects two criterion statements (AND, OR).
 - b. An expression identifier (EXP).
 - c. An end identifier (END).

The next input form is the retrieved output card (type D). Although this form contains a great deal of information, the Retrieve program is concerned only with the names of the fields that are to be extracted from the selected records, and the order in which these fields are listed by Report. The order of listing the extracted field names determines the format of the intermediate file record. Each request in a given batch generates its own specific output format. In a batch of 99 requests, the maximum record size that can be listed is 1648 bytes (412 words). The maximum increases by four bytes for each request under 99 in a batch. These specifications are brought in during Retrieve and validated there, so as to maintain a single entry point of parameters into the system.

Every request will undergo a thorough validity check. Diagnostics will be returned to the requestor to indicate such conditions as:

- 1. Required parameters missing or in the wrong place.
- A field named in the request not defined for the request field.
- 3. A field mode inconsistent with its use.

If errors are found in a request, the request is aborted after identifying as many of the errors as possible. If the dictionary for the request file is unreadable, the entire run is aborted.

Formats of these cards are given below. In the following card definitions, an asterisk (*) after column numbers indicates that the field is optional.

The format of the Retrieve processor call card is given below.

!RETRIEVE

where !RETRIEVE is required as shown, starting in column 1.

GENERAL REQUEST SPECIFICATION CARD

See Figure 9 for a diagram of the general request specification card (type A).

Columns Description

201	UIIIIIS	Description
1-4		Request number: any four characters identifying all the specification records that pertain to a given request.
6		\underline{A} : identifier for a general request specification card.
8		library request: an I means that the Manage

Library request: an L means that the Manage request library should be searched for specifications previously saved under this request number. The library specifications will constitute the request to be processed. The only changes accepted from the current request specifications will be reporting system parameters (columns 36 to 54).

					_											
SDS																
SIGMA MANAGE GENERAL REQUEST SPECIFICATIONS																
(CIRCLE DESIRED OPTIONS) Retrieval System DATE																
REQUEST NO. REQUEST SPECIFI	CATION LIBRARY CONTROL		L	ENTER NAME OF				1	SEARCH MODE				OUTPUT DISPOSITION	U	SER RETRIEVAL FORMA	_
USE MANAGE LIBI	ADD REQUEST				BE SECONDARY FILE TO BE MATCHED TO		PERFORM SEARCH S		\dashv	REPORT GENERATOR		NTIRE RECORD	Ε			
A REQUEST SPECIF						PRIMARY FILE		4	BY-PASS SEARCH		В	USER PROGRAM	U F	ACKED MULTIPLES	S	
1 2 3 4 5 6	8		10	11 12 13 14 15 16 17	18	19 20	0 21 22 23 24 25 26 27 2	28	-		I	30	VALIDATE SPECS, ONLY	V F	PERMUTED MULTIPLES	34
(CIRCLE DESIRED OPTIONS)						Rep	oorting System	ĺ						L		_
	REPORT FORMAT		PRIN	T CONTROL		PAGI	E SIZE	1	TYPE OF P	APER		٦	REPORT DATE	E	NTER:	\neg
	DETAIL	D	SING	E SPACE	1	SPEC	CIAL 0	2	1-PART	1 4	4-PART			П	NUMBER MAX. NO	
	GROUP DETAIL	-	DOUE	LE SPACE	2	14"		4		-	6-PART		PRINT CURRENT DATE ON EACH	D	PRIMARY RECORD FILE TO BE RECORDS OUTPUT	- 1 1
	SUMMARY	s				├─		+	3-PART	3		Ì	REPORT PAGE	-	SKIPPED	_
		36			38	11	WIDE X 8 1/2" 3	3		42		-		44	46 47 48 49 51 52 53	3 54
REQUEST NO.				Report Title -	Tex	ct To !	Be Printed At Top Of Eve	ery	/ Page						1	
B 0.1		_						_				_				\neg
1 2 3 4 5 6 7 8 9 10 11 12	13 14 15 16 17 18 19 20 21 22	23	24 25	26 27 28 29 30 31 32	33	34 35	5 36 37 38 39 40 41 42 43	3 .	14 45 46 47	48 49	50 51 52	53	54 55 56 57 58 59 60 61 62	63 6	4 65 66 67 68 69 70 71 7	2 73
				Title Page	· - T	ext T	o Be Printed On Initial F	Pa	је							
0,2															 	ᆈ
0,3				1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	ب			_1								
0 4		4						_1	سب							ᅫ
0.6												_				
0.7				 								-				_
0,8																
0 9								_								
1,0							<u> </u>							11_	11111	_
1,1		لــا			ш			1				_				
1,2		ш			٠				نبن		ببب	_				4
1 3		1			1				لطللل		لسلسا			ш.		4
15		1			٠		 	_			اسلسلسا	_				-
1733(3/69) SCIENTIFIC DATA SYSTEM	<u> </u>	لـــــــــــــــــــــــــــــــــــــ			1									1. J.,		لب
								-		_		_		_		

Figure 9. Manage General Request Specifications

Columns	Description	Columns	Description
8 (cont.)	The saved request will be checked to ensure that a change to file DICT has not occurred since the card was originally submitted. If a DICT change has occurred, the library copy is obsolete and must be completely resubmitted.		matched records may be considered as one logical entity, with freedom of selection of any field in either record. Primary field names take precedence over duplicated secondary field names. Note that all requests in a batch either must
	If this parameter is left blank, the primary file name (columns 12 to 19) and secondary file name		specify the same secondary file-matching param- eter, or must all be blank.
	(columns 21 to 28) parameters must be submitted.	30	Search mode: an S means to selectively search
10*	Add to request library: an A means that this request should be added to the Manage request library under this request number. If a previous request was saved under this number, it will be replaced. This parameter is ignored if the user intends to validate specifications only.		for records meeting the criteria shown in the retrieval specifications (below). B means to bypass the search criteria. Every record will be retrieved according to the output specification (type D). No retrieval specifications may be included. If column 8 is blank, this parameter is required.
12-19	Primary file name: an eight-character name of the data base file to be searched. If column 8 is blank, this parameter is required.	32	Disposition of output: an R means that the retrieved data is to be sent to the Report program. U specifies that retrieved records are to be written in a separate file for processing by a user program.
21-28	Secondary file name: an eight-character name of a second file to be matched to the primary file. If specified, retrieval will take place only when primary records have a matching secondary. The		Only one request per batch in Retrieve may specify this option. V means validate the request specifications, but bypass the actual execution. If column 8 is blank, this parameter is required.

Columns Description

34* User program retrieval format: one of the codes shown below.

Code	Meaning
E	Output the entire record in its original form to a user file for own-code manipulation.
	D t little towns One

- P Permute multiple-entry groups. One record is created in the output file for every occurrence in each group. Furthermore, each occurrence is created in an output record with all other occurrences in all groups to be retrieved.
- S Output selected fields in compact form.
 (This is the option used for files with no multiple-entry groups.) The number of output records will be equal to the highest number of occurrences in any multiple-entry group, or a minimum of one record if no groups are involved. When all the occurrences in a shorter group have been output, a null value will be used until the longest group has been exhausted.

36* Report format: one of the codes shown below.

Code	Meaning
D	Print detail records (that is, all records retrieved).
G	Print grouped detail lines (that is, the key fields for the first in the group). Break control fields will print only when their values change.
S	Print summary total lines only.
	control: a 1 means that the report is to be spaced, with double-spaced totals. A code

38* Print control: a 1 means that the report is to be single spaced, with double-spaced totals. A code of 2 means that the report should be double-spaced, and that the totals should be triple-spaced.

40* Page size: one of the codes shown below.

Code	Page Size	Print Posi - tions	Lines Per Page
1	14 inches wide, 11 inches long	132	52
2	8-1/2 inches wide, 11 inches long	85	52
3	11 inches wide, 8-1/2 inches long	108	38
0	Special form, to be mounted at list time. Print positions and total lines are entered from the operator's console.		

Reports are listed in order by page size, paper type, and request number.

42*	Type of paper: a code of 1, 2, 3, 4, or 6 speci-
	fies that the report be printed with other requests
	using a 1-, 2-, 3-, 4-, or 6-part form. No code
	is required for a special form (see page size

Columns

Description

using a 1-, 2-, 3-, 4-, or 6-part form. No code is required for a special form (see page size above). Note that those reports that require the highest number of copies of a given page size are printed first.

- Report date: a D means that the current date (in the form mon dy 'yr) is to be inserted in a heading line at the top of each page.
- 46-49* Number of records to skip: a four-digit number of primary file records to be skipped before this request becomes active. Each request in a Retrieve batch may specify a different value.
- 51-54* Maximum number of output records: a four-digit maximum number of records to be written in the output file for this request.

TITLE AND HEADING CARD

The title and heading card (type B) is shown in Figure 9. This card is optional.

Columns	Description
1-4	Request number: must be the same four-character identification that appeared in the general request specification card (type A) above.
6	$\underline{B:}$ identifier for a title and heading card.
8-9	Line number: a code of 01 identifies a single line of text (maximum of 63 characters) to be centered at the top of every page except the preface. A code of 02-99 identifies and sequences up to 98 lines of text to be printed on separate pages prefacing the request listing. The request form is preprinted with 02 to 15. If additional prefacing text is required, numbering should continue consecutively (16, 17, etc.).
11-73	Text: text lines to be used as a page heading or a report preface.

RETRIEVAL SPECIFICATION CARD

The retrieval specification card (type C) is shown in Figure 10.

Columns

Description

1-4	Request number: must be the same tour-character
	identification that appeared in the general request
	specification card (type A) above.
6	C: identifier for a retrieval specification card.
8-9	Line number: a code of 01-99 sequences lines of retrieval criteria and arithmetic expressions. The retrieval search operation and expression evaluation are carried out in line-number sequence. The form is preprinted with 01 to 25. Should a
	single search specification require more than 25

		SDS		
		SIGMA MANAGE RETRIEVAL SPE	CIFICATIONS	
REQUEST NO.		SIOMA MANAGE RETRIEVAE SI	AUTHOR	
1 2 3 4 5 6 7			DATE	
			UA 12	
FIRST TERM	OPER		PERAND	LOG.
FIELD OR	COMP	LITERAL C	ONSTANT VALUES	AND OR
LINE ARITHMETIC NO. RESULT NAME	ARITH	FIELD OR ARITH. ESULT NAME/LITERAL	ARITHMETIC RESULT NAME	EXP END
0 10 11 12 13 14 15 16 17 16			47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 7	2 73 74 75 76
0,1			 	
),2		<u> </u>		
),3		 		
4				
,5				,
.6				
7				1
, , , , , , , , , , , , , , , , , , , ,				
9				
,0				
,1 , , , , , , ,				
1,2				
.3				
4				
,5				
,6				
7				
.8				
1,9				
2,0				. 11
2,1				, 11 ,
2,2				
-1- 	- 	 		

Figure 10. Manage Retrieval Specifications

Columns	Description	Columns	Description
8-9 (cont.)	lines, numbering should continue consecutively (26, 27, etc.).	23-73 (cont.)	If the first term parameter is a packed decimal field, a numeric literal consists of a plus or minus sign, a maximum of 15 digits, and a decimal point. For example, +385. and -16.7 are literal constants.
11-18	First term: an eight-character name of the data base field (either primary or secondary) to be		
	acted upon, or the name assigned to the result of a previously defined arithmetic operation result.		If the first term is a binary field, a numeric literal consists of an algebraic sign and a maximum
20-21	Operator: the logical or arithmetic function to be applied to the value defined by the first term name.		of 10 digits (maximum value is 2 ³¹ -1). (Note that under these conditions, a numeric literal may not contain a decimal point.)
23-30	Field or expression result name: see the description of first-term name above.		If the first term parameter is alphabetic, an al- phabetic literal will consist of an equal sign fol- lowed by up to 49 characters and a trailing
or	19. 1		comma, as in =ABC,. Literals must be alphabetic if the first term parameter is alphabetic.
23-73	Literal constant: one or more literal values. An arithmetic expression may specify only one numeric literal. A retrieval criterion may specify multiple literals separated by commas. Multiple literals must all be of the same type and number of digits, with the same decimal scaling (if applicable).	66-73	Arithmetic expression result name: an eight-character name to be assigned to the result of an arithmetic expression. The resultant value takes on the computational characteristics of the first term parameter, and may be treated as a data base field on all subsequent specification

1735(3/69) SCIENTIFIC DATA SYSTEMS

Columns Description

66-73 lines. The size of the result is always 15 digits (cont.) plus algebraic sign if decimal, or 64 bits if binary.

75-77 Logical connector: one of the connectors given

Logical connector: one of the connectors given below.

Connector	<u>Function</u>
AND	Connects a given specification line (n) and the following line (n+1) with a logical AND operation. Both n and n+1 must be "true" to satisfy the retrieval criteria.
OR	Connects line (n) and line (n+1) with a logical inclusive OR. That is, the criteria are satisfied if either specification is true, or if both are true.
EXP	Identifies an arithmetic expression specification.
END	Identifies the last retrieval specification card in a request.

Note that the field from columns 23 to 73 is known as the operand field.

RETRIEVED OUTPUT CARD

The retrieved output specification card (type D) is shown in Figure 11.

Columns	Description
1-4	Request number: must be the same four-character identification that appeared in the general request specification card (type A) above.
6	$\underline{\underline{D:}}$ identifier for the retrieved output specification card.
8-9	Line number: a code of 01 to 99 that controls the format of the Manage output. Both the retrieved records and the listed report will maintain data fields in the sequence determined by the line number. A field that is entered on line 01 will be the leftmost field on the report, and so on.
11-18	Field name, numeric literal, or expression line numbers: if the parameter is a field name, Retrieve

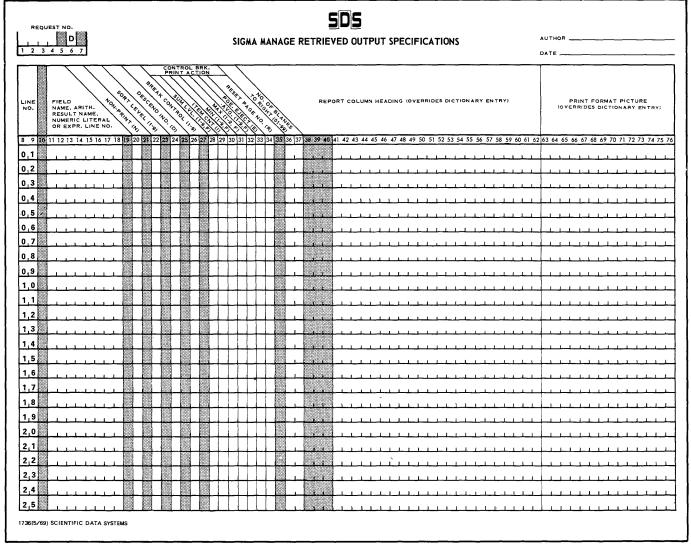


Figure 11. Manage Retrieved Output Specifications

Columns

Description

11-18 (cont.) will extract the appropriate value and place it in the output record. It will be listed by Report unless specifically suppressed. Any following arithmetic expressions may reference the output field by its line number.

A numeric literal consists of an algebraic sign followed by up to seven digits, or by up to six digits and an embedded decimal point. A numeric literal does not create an output field and will not be listed, but any following arithmetic expressions may use it at list time by referencing its line number.

An arithmetic expression consists of a two-digit line number, an arithmetic operator (+, -, *, /), and a second line number, with no embedded blanks. The two line numbers must reference a previously-defined output field or numeric literal.

- Nonprint indicator: an N suppresses the printing of the output field or arithmetic expression defined on this line.
- Sort level: a number from 1 to 9, or blank. If nonblank, it identifies this field as a report sequence field and specifies the level of sort. The highest level is 1 and the lowest is 9. If the designated report sequence fields match the data base keys, or if no sort level is found, the report is to be listed in the original file sequence and the Sort program will be bypassed. Note that the designation of sort fields is independent of the designation of control break fields.
- 24 <u>Descending sort indicator:</u> a D means that the report requence field should be sorted in descending order.
- 26 Total break control: a number from 1 to 9, or blank. The named field is to initiate the designated level of totals whenever it changes in value. The highest-level total break control value is 1. For example, a 3 means that the field is to be used as the control field for 3rd level totals or group counts. When the information in the field changes, 3rd level totals or group counts will be printed out for all total fields indicated as summing level 3 (see below), and also on all lowerlevel total fields. (Higher-level control breaks always force lower totals to be printed.) The specified level of total break control may be assigned to only one field in the output specification. The value field must be a data base field or a retrieval arithmetic result field. If no total breaks are specified, the report will be a simple list with final totals only. The total byte length of all fields used for total breaks may not exceed 255

Note that the designation of break control fields is independent of the designation of sort fields. Regardless of any sorting, a change in value of a break control field from one retrieved record to

Columns Description

26 (cont.)

33

another causes the appropriate level (and all lower levels) to become "active". All sums, item counts, minimums, maximums, and averages tied to each active level are then printed.

28 Summing level: a number from 1 to 9, F, or blank. The named field or expression result is totaled and associated with nth level total breaks (F = Final Total). Up to 15 summed fields may be displayed. For example, when a 4th level total break is taken, a total will be printed out for the field named, if summing level 4 is indicated in column 28. Several fields can be designated as summing level 4; totals for all of them will print out when a 4th level break is taken. Multiple fields to be totaled may be associated with different break levels. For example, fields 9, 10, and 13 could be associated with 2nd level breaks, while fields 8 and 12 could be associated with 3rd level breaks. Fields 9, 10, and 13 would be indicated as summing level 2, and fields 8 and 12 as summing level 3. (The 2nd level break would also force the totals on fields 8 and 12; higher levels force lower level totals.) However, 9, 10, and 13 would be printed only on level 2 or higher.

Item count: an I indicates that the field specified by field name is one for which the user wants an item count. If an I is present, there must be an entry in column 26. When a total break is taken, a count of the number of items in the group will be printed. A blank in the column indicates that no group count is to be taken. Regardless of group count or any other control feature, an overall item count is produced automatically as a final total on every report.

Minimum value: a number from 1 to 9, F, or blank. The minimum value in the named field or expression result is retained and printed with the specified level of total break. Up to nine minimum values may be displayed.

Maximum value: a number from 1 to 9, F, or blank. The maximum value in the named field or expression result is retained and printed with the specified level of total break. Up to nine maximum values may be displayed.

Average value: a number from 1 to 9, F, or blank. The average value of the named field or expression result is calculated and printed with the specified level of total break. Up to nine average values may be displayed.

New page eject: an E, in conjunction with a total break control entry in column 26, causes the printer page to advance when a control break (change in value) occurs. The advance occurs after printing of the totals or group counts. If column 33 is left blank, page ejection is controlled by line count in the Report program.

Columns Description

- Page number reset: an R, in conjunction with a new page eject specification (column 33 above), causes page numbering to restart at 1.
- 36-37

 Number of blanks to right: a number from 00 to 99. The specified number of print positions (to a maximum of one complete print line) will be skipped before the next print item is displayed. If blank, one space will occur before the next item is displayed.
- 41-62 Column heading: up to 22 EBCDIC characters to be used as a column heading for this report (overrides the standard dictionary heading). The character > (greater than) will indicate a new heading line.
- Print format picture: controls the preparation of data for printing. This specification is required for all arithmetic expression results that are listed. It is optional for fields named in the dictionary and, if specified, overrides dictionary formatting control. The picture consists of a series of code characters that specify the following information:
 - 1. The number and kind of characters that will appear in the print area assigned to this item.
 - Decimal scaling, zero suppression, comma insertion, negative sign insertion, and dollar sign insertion.

Code characters that are used in a picture depend upon the nature of the data field being formatted as outlined below.

Alphabetic fields

- An A specifies that the corresponding print position is to be occupied by a character from the data field.
- 2. Any other specified character is to be inserted in the corresponding print position. For example, assume a data field JUN0168, and a picture of AAABAABAA. The display would be JUN 01 68.

Numeric fields (packed decimal and binary)

- 1. Z specifies zero suppression.
 - 9 specifies that the corresponding print position is to be occupied by a number from the data field.
 - B specifies blank insertion.
 - O specifies zero insertion.
 - . specifies decimal point insertion and termination of zero suppression.
 - , specifies comma insertion.

Columns Description

- specifies trailing minus if negative sum.
- \$ specifies dollar sign insertion to the left of the high order position of the field.
- 2. The rules of print editing via picture control are the same as those used in SDS COBOL (other than dollar sign insertion).

SAMPLE DATA RETRIEVAL AND REPORT

The personnel director of Amalgamated Corporation must supply the State Department of Employment with a listing of all noncitizen female employees. The report is to be ordered by name, with the most recent employee listed first. The report must show name, address, marital status, social security number, and starting pay rate. An averate of the starting pay rate for each year must also be calculated. Figure 12 shows the required general specifications, while Figures 13 and 14 show retrieval criteria and report specifications, respectively. The resultant report is shown in Appendix D, Figure 15.

RETRIEVE MESSAGES

The following messages are output during Retrieve. A printout of the incorrect record precedes the message.

ABNORMAL OPEN ERROR

The request pile could not be opened. The run is aborted.

ARITHMETIC OPERATOR USED WITH ALPHA FIELD

No arithmetic is permitted on alphabetic (EBCDIC) fields. The card image is printed and the remainder of the card ignored. The request will not be executed.

CARD TYPE ERROR

The specification card type is not A, B, C, or D. The card image will be printed with the message and the request will be rejected after validation.

DATA BASE RECORD TOO LARGE FOR AVAILABLE MEMORY

The dynamic memory allocation algorithm was not able to assign sufficient space to the data base record input buffer to hold one full data base record. A minimum of 1024 words will be assigned to the input buffer under the least dynamic memory availability. The run will be aborted.

DESCENDING SORT LEVEL MISSING

The retrieved output specifications call for a report to be sorted in descending order on a field without specifying the sort level of that field. The request will be rejected after validation.

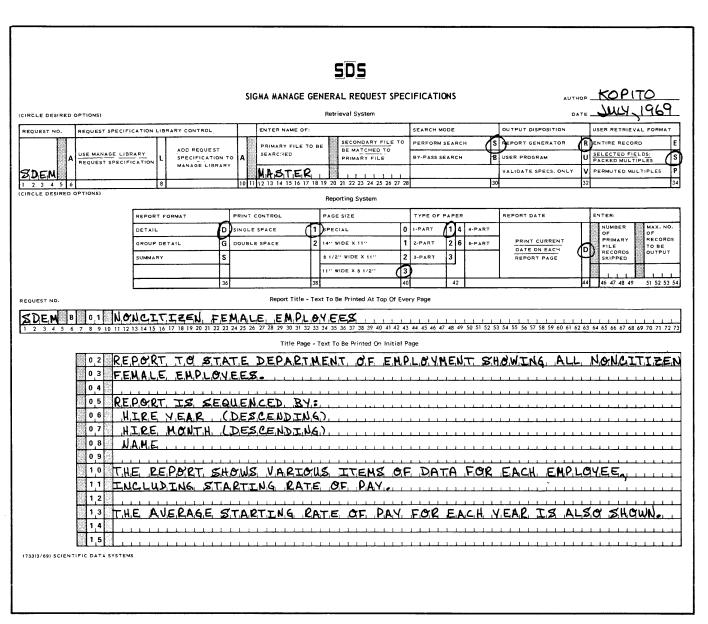


Figure 12. Sample General Request Specifications

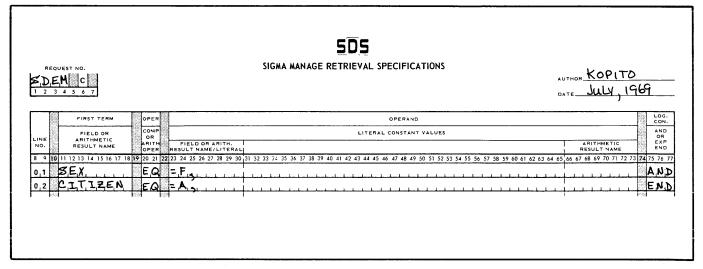


Figure 13. Sample Retrieval Specifications

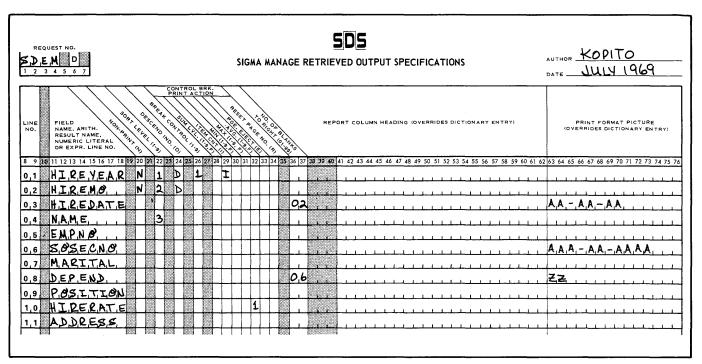


Figure 14. Sample Report Specifications

DICTIONARY READ FAILURE

The dictionary for the request file is unreadable. The run is aborted.

DUPLICATE LINE NUMBERS

The retrieved output specification line numbers are not unique. The card image on which the duplicate line numbers was detected will be printed and the request will be rejected after validation.

DUPLICATE SORT OR CONTROL BREAK LEVEL

The sort or control break level is duplicated on another report specification.

EXIT TABLE/DOUBLEWORD OVERFLOW. CUT OFF AT xxxx

The combined exit table (EXITAB) and doubleword table (DBLWD) space requirements exceed the memory allocation for these two tables. Code generation will be terminated and all requests prior to the one that caused the overflow will be executed.

EXPRESSION CONTAINS 2 LITERALS

Both line numbers in the arithmetic expression refer to literals. The expression is rejected.

EXPRESSION TERM NOT NUMERIC FIELD OR LITERAL

An expression line number refers to a retrieved output specification line that does not specify either a numeric data base field, a numeric arithmetic result field, or a numeric literal. The request will be rejected after validation.

EXTRANEOUS DATA IN EXPRESSION FIELD

An expression in a retrieved output specification may contain only two digits (0-9), an arithmetic operator (+, -, *, /), and two more digits. This message is printed along with the card image if the remainder of the field (columns 16 to 18) is not blank. The request will be rejected after validation.

FIELD NAMED NOT DICT NAME OR ARITH RESULT FIELD

One of the fields on the card was not listed in file DICT as a component field of the request file; nor has it been previously listed by the requestor as a label to be applied to the result of the evaluation of an arithmetic expression. The request will be rejected after the remaining specifications are processed.

FILE SPECIFIED NOT BATCHED REQUEST FILE

A request requires a primary or secondary data base file other than the file or files specified by the first request in the batch. It should be noted that the first request is not necessarily the one that is at the front of the input deck but rather the request that is sequenced first by the Sort program. The general request specification card is printed and the request is rejected with no further processing.

ILLEGAL SORT OR CONTROL BREAK KEY

The report specification calls for a sort or control break on a literal or arithmetic expression.

INSUFFICIENT MEMORY AVAILABLE FOR RETRIEVE

Retrieval will not be attempted without at least 15 pages of dynamic memory. This message indicates that 15 pages are not available. The run will be aborted.

INVALID DESCENDING SORT SPECIFICATION

The descending sort parameter is neither D nor blank.

INVALID DIGIT IN BLANK FILL COUNT

The blank fill count field on the retrieved output specification card was not blank and it contained a nonnumeric character. The rest of the request will be validated but it will not be executed.

INVALID DIGIT IN EXPRESSION LINE NUMBER

A character other than 0-9 was encountered in an expression on a retrieved output specification card. The card image will be printed and the remainder of the request will be validated. The request is rejected.

INVALID DIGIT IN LINE NUMBER

At least one of the two digits in the retrieved output specification line number field (columns 8,9) is not a numeric (0-9). The remainder of the request will be validated but the request will not be executed.

INVALID DIGIT IN LITERAL

An illegal decimal digit has been detected in a numeric literal. The card image is printed and the rest of the card is ignored. The request will be rejected after the rest of the request cards are processed.

INVALID DIGIT IN NUMBER OF RECORDS TO OUTPUT

The maximum number of retrieved output records specified by the user on the general request specification form (columns 51 to 54) contains a nonnumeric character, if it is not blank. The remainder of the request will be validated but it will not be executed.

INVALID DIGIT IN NUMBER OF RECORDS TO SKIP

An illegal character (not 0-9 or all blanks) was found in the general request specification card field stipulating the number of initial primary file records to be skipped or ignored (columns 46 to 49). The remainder of the request will be validated, but it will not be executed.

INVALID EXPRESSION LINE NUMBER

One or both line numbers do not exist, or they contain a nonnumeric character.

INVALID FILE DICTIONARY NAME

No dictionary could be found for the named request file. Either the file name was misspelled or the dictionary has been lost. The entire run is aborted.

INVALID ITEM COUNT

The item count parameter on the above report specification line is neither I nor blank.

INVALID LOGICAL CONNECTOR

A logical comparison is followed by a connector other than AND, OR, or END. The request will be rejected.

INVALID NON-PRINT SPECIFICATION

The nonprint parameter is neither N nor blank.

INVALID NUMERIC LITERAL

A literal in the above report specification is incorrect. Probable causes are:

- 1. An embedded blank or all blanks.
- 2. Multiple decimal points.
- 3. A nonnumeric character.

INVALID OPERATOR

The operator on a retrieval specification card is not one of the following: EQ, NE, GR, LS, GE, LE, +, -, *, /. The card image is printed and the rest of the card ignored. The request will be rejected.

INVALID PAGE COUNT SPECIFICATION

The page count parameter is neither R nor blank.

INVALID PAGE EJECT SPECIFICATION

The page eject parameter is neither E nor blank.

INVALID SIGN IN NUMERIC LITERAL

A numerical literal on a retrieval specification card has a sign character other than + or -. The request will be rejected after validation.

INVALID SORT OR CONTROL BREAK LEVEL

The sort or control break level parameter is neither 1 to 9 nor blank.

INVALID SPEC IN COL. xx

The general request specification is in error in the column specified. The request will be rejected after validation.

INVALID SUM-MIN-MAX-AVG LEVEL

One or more of the above parameters is not a number from 1 to 9 or ${\sf F.}$

I/O ERROR $\times\!\!\times$ TRYING TO READ OR WRITE REQUEST $\times\!\!\times\!\!\times\!\!\times$

The Monitor has returned an error type xx upon being asked to read request xxxx from the request library, or to write the request into the library. If the error occurred in trying to read the request from the library, the request cannot be processed. If the error occurred in attempting to write the request into the library, the request will be processed but it cannot subsequently be called from the library.

I/O ERROR xx TRYING TO WRITE RPT SPECS

The Monitor was unable to write a record into the report specification file (RPTSPC) for the reason given (xx). This message will be followed by a JOB ABORTED message, and the run will be terminated.

ITEM COUNTING RESTRICTED TO CONTROL BREAK FIELDS ONLY

An item count was specified for a field that is not a control break key.

LIBRARY REQ ID xxxx REJECTED. DICTIONARY OBSOLETE

The request file DICT and, presumably, the request file itself have been changed since the request was put into the library. It is necessary to resubmit the request deck after making any changes necessary to accommodate the current file structure.

LITERAL SIZE INCONSISTENCY

This message indicates that all literal constants in a multiple literal string do not contain the same number of characters, that a binary constant contains more than 10 digits, or that a packed decimal constant contains more than 15 digits. The card image is printed and the remainder of the card is ignored. The request will not be executed.

LITERAL SPECIFIED AS LEFT TERM

A literal or numeric constant is not allowed as the first or left term of a criterion or arithmetic expression on a retrieval specification (type C) card. The card image will be printed out and the request rejected. The rest of the card will not be examined.

LITERALS EXTEND BEYOND COL.73

The literal is too large. Retrieve will continue validating the remaining request specifications, but the request will not be executed.

MISSING CONTROL BREAK LEVEL

Levels must be ascending, from 1, with no gaps.

MISSING CONTROL BREAK REQUIRED FOR AVG FUNCTION

MISSING CONTROL BREAK REQUIRED FOR MAX FUNCTION

MISSING CONTROL BREAK REQUIRED FOR MIN FUNCTION

MISSING CONTROL BREAK REQUIRED FOR SUM FUNCTION

The designated function was specified to appear at a given control break level, but no control break key has been assigned at that level.

MISSING GENERAL REQUEST SPECIFICATION

The general request specification card (type A) was omitted for this request. The remainder of the specifications for this request will be skipped.

MISSING SORT LEVEL

Levels must be ascending, from 1, with no gaps.

MORE THAN 9 AVG VALUES SPECIFIED

The indicated report limitation has been exceeded.

MORE THAN 20 CONSECUTIVE AND ED CRITERIA

Retrieve allows 20 successive AND criteria without an intervening OR. If this limit is exceeded, the remaining specifications will be validated, but the request will not be executed.

MORE THAN 9 MAX VALUES SPECIFIED

The indicated report limitation has been exceeded.

MORE THAN 9 MIN VALUES SPECIFIED

The indicated report limitation has been exceeded.

MORE THAN ONE DECIMAL POINT IN DECIMAL LITERAL

The remainder of the request will be validated, but it will not be executed.

MORE THAN ONE GENERAL REQUEST SPEC FOR REQUEST

Only one type A card is allowed per request. The second card will be printed and skipped and the remainder of the request will be rejected after validation.

MORE THAN ONE HEADER SPECIFICATION

Only one page header card (type B, number 01) is allowed for each report. If more than one header card is submitted, the request specifications will be validated, but the request will not be executed.

MORE THAN 15 VERTICAL SUMS SPECIFIED

The indicated report limitation has been exceeded.

MULTIPLE LITERALS IN ARITHMETIC EXPRESSION

An arithmetic operation was specified between a previouslydefined field and a list of compound numeric constants. The second term in an expression may contain only one numeric literal. The request will be rejected.

NO RETRIEVAL SPECIFICATION END CARD

No retrieval specification card with END in columns 75 to 77 was found in a request. The retrieved output specifications, if any, will be validated but the request will not be executed.

NO VALID GENERAL REQUEST SPEC IN BATCH

Retrieve will not begin processing specifications until the first general request specification card (type A) is read. This message indicates that there are no general request specifications cards in the request input. The run is aborted.

NO VALID REQUESTS IN THIS RUN

Every request in the batch contains discrepancies. The job is terminated.

NUMERIC LITERAL SCALING ERROR

Multiple packed decimal literals do not all have the decimal point in the same position. The request will be rejected after validation.

OUTPUT SPECS SPECIFIED WITH ENTIRE RECORD OPTION

Retrieved output specifications were included in a request for which "entire record" was specified on the general request specifications. The entire record will be retrieved.

PRIMARY AND SECONDARY FILE KEYS INCOMPATIBLE RUN ABORTED

This message indicates one of three possible conditions:

- 1. The files to be matched have no common key field.
- The mode of a key field (EBCDIC, binary, or packed decimal) is not the same in the two files to be matched.
- The two files are not sorted in the same direction on a common key field. That is, one file is sorted in ascending order and the other in descending order.

If any one of these conditions obtains, the files cannot be matched. The run will be aborted.

REQUEST ID xxxx ABORTED. ARITHMETIC TRAP

When an arithmetic trap is encountered during the execution of any request, this message will be output and the request will be terminated. Any previously-retrieved data, and possibly the current record, will be saved and processed normally either by Report or as a partial user file.

REQUEST ID xxxx AND ALL FOLLOWING NOT DONE. EXECUTION PROGRAM OVERFLOW

Memory allocation for the execution program is not adequate to generate the code necessary to execute all the requests. The requests that do fit are executed.

REQUEST ID xxxx REJECTED. MULTIPLE ENTRY ARITH OFLOW

The 511-word multiple-entry arithmetic-table (MEATBL) capacity has been exceeded. The request will be rejected without further processing.

REQUEST ID xxxx REJECTED. NO REPORT SPECS.

The general request specification card identified the output for this request as a report. No report specifications (retrieved output specifications) were submitted with this request identification. The request will not be executed.

REQUEST ID xxxx REJECTED - NO SEARCH OR RETRIEVE SPECIFICATIONS

Search or retrieve specifications were omitted.

REQUEST ID xxxx REJECTED. PREVIOUS USER FILE REQUEST

Only one request for a nonreport file is permitted in a batch of requests. The first one encountered will be accepted. Any others will be rejected.

REQUEST ID xxxx REJECTED - SPECIFICATION ERROR(S)

This message is printed at the end of an incorrect request. It is preceded by one or more error messages describing the specific errors that caused the rejection.

REQUEST SPEC READ FAILURE

The input/output handler for the specification cards has returned an abnormal or error condition. The rest of the request cards are skipped.

REQUEST SPECIFICATIONS FOR XXXX OVERFLOW AVAILABLE MEMORY. REQUEST REJECTED.

Request xxxx overflowed the available space for the Retrieve working table. This request will be rejected and an attempt will be made to fit the next request into the available space. After all the requests that fit are processed, the file retrieval will be initiated. All the requests listed in this message must be rerun.

REQUEST SPECS UNEXPECTEDLY TERMINATED

The end of the batched input was encountered while processing retrieval specifications, but before the END card was found. This request will not be executed.

RESULT FIELD MODE INCONSISTENT WITH MODE OF TERMS

The user has assigned the same storage location to the result of more than one arithmetic expression evaluation,

and all the affected arithmetic expressions are not of the same mode. When the storage location is first assigned, it is given the mode of the terms of the arithmetic expressions. Expressions that use this same result field must agree with it in mode. Any disagreement will cause the request to be rejected after any remaining specifications are validated.

result field name same as data base field name

The name assigned to the storage location of the results of evaluating an arithmetic expression (as specified by the user in columns 66 to 73 of the retrieval specifications) is the same as the name of a field in the request data base file. The request will be rejected after validating remaining specifications.

RIGHT AND LEFT TERM MODES DO NOT AGREE

Mixed-mode comparison or mixed-mode arithmetic is not permitted. Both terms in a comparison must be either EBCDIC, packed decimal, or binary. If the right-hand term is either a single or multiple literal constant, the literal format must be appropriate to the left term. That is, if the left term is EBCDIC, each literal constant must begin with an equal sign and end with a comma. If the left term is binary, each literal constant must begin with a plus or minus sign, and may have no embedded blanks or decimal points. If the left term is packed decimal, each literal constant must be preceded by a plus or minus sign and must contain one decimal point and no embedded blanks. The card image will be printed, the rest of the card ignored, and the request rejected.

SPECIFICATIONS FOR LIBRARY REQUEST

Retrieval and/or retrieved output specifications were submitted for a library request. The specifications will be validated, but the request will not be executed.

SPECS FOLLOW 'END' CARD OR BYPASS SEARCH OPTION

Retrieval specifications were included in a request in which "bypass search" was specified. The specifications are ignored.

SUM-MIN-MAX-AVG OF LITERAL OR ALPHA FIELD

None of the above functions may be specified for a literal or alphabetic field.

TOO MANY DIGITS IN NUMERIC LITERAL

A packed decimal literal contains more than 15 digits or a binary literal has more than 10 digits. The request will be rejected after validation.

TOO MANY RESULT FIELDS IN xxxx. REQUEST REJECTED.

An entry is added to file DICT for each arithmetic expression result in a given request. These additional entries are cleared out between requests. If the additional entries

overflow the 2048 words allotted to DICT, the request will be aborted.

TOTAL SIZE OF BREAK FIELDS EXCEEDS 255 CHAR

The field above is specified as a sort or break control key. Its length, plus the length of all fields previously designated as keys, is greater than the allowed maximum of 255 characters. The request will be rejected.

UNREADABLE INPUT RECORD

A request file record could not be read. The run is aborted.

5. REPORT

The Report program prepares printed Reports from data extracted by the Retrieve program. Report performs the following functions:

- Reads the Report specification file for descriptions of requests to be listed.
- Reads the Report specification file for format specifications of the records applicable to requests.
- Sets up the required call for Sort if the report is in a sequence different from that of the original data base.
 Sets up sorting specifications, input/output file characteristics, and identifiers of the records to be selectively sorted. Links to the Sort.
- Builds a set of tables to control the formatting of the desired report.
- Reads the input file (from either Retrieve or Sort) and prepares the required report.
- Determines if all requests have been processed. If yes, ends the job. If any reports remain, returns to the first step in the processing cycle.

The Report program makes use of the following inputs:

- 1. Retrieved output data files, consisting of:
 - Report specifications (by request number), and retrieved record format specification (by request number).
 - b. Retrieved data records (variable formats, by request number).
- Column headings and editing information from the dictionary.

REPORT SPECIFICATIONS

Specifications governing the format of the desired report for any given request are passed to Report in a separate file on the RAD. These specifications are of three general types:

- Report format table: a single variable-length record packed with all the general and line descriptions submitted by the user. This information is used to set up the columnar arrangement of the listing, arithmetic operations, sequencing, and totaling.
- Report text string: a single variable-length record containing the report heading text and page heading text.
- Extracted data format table: a single variable-length record which defines the format of the data records extracted for this request.

REPORT CONVENTIONS

The following constraints and conventions apply to the Report program.

HORIZONTAL TOTALING

Horizontal totaling is accomplished by using the arithmetic expression capability. After two fields are initially defined, their line numbers are specified in an additive expression. If more than two fields are to be totaled, the intermediate expression results may be print-suppressed and rolled through as many horizontal additions as required. For example, the specifications below result in the printing of fields 1, 2, and 3, and the horizontal sum of all three (see line 05).

	Field Name, Arithmetic Result Name, Numeric Literal, or Expression Line Number	Non Print	Print Format Picture
01	Field 1		
02	Field 2		
03	Field 3		
04	01 + 02	Ν	
05	03 + 04		\$9,999.99-

Note that the horizontal sum may be vertically totaled, averaged, or analyzed for minimum/maximum values.

TEXT FIELDS

Output fields defined as text fields (data type T) are assumed to be alphabetic. They may not be used in arithmetic expressions, and may not exceed 255 characters in length if used as a report key. The following procedures apply when printing a text field.

- Report skips to a new line.
- 2. The text is indented one inch from left and right margins.
- Automatic line folding occurs (without hyphenation) if the field exceeds one line.
- Trailing blank lines are suppressed.
- 5. The field name is listed to the left of the first line.
- 6. No column headings are used.

ALPHABETIC FIELDS

Alphabetic fields whose total length cannot be printed on the line being constructed will cause a line feed. Up to one full line will then be printed, with no blank suppression. If the field length still exceeds one line, it will be truncated.

BINARY FIELDS AND EXPRESSIONS

The print width of a binary value is equal to one-third the number of bits, plus one additional character. The maximum value that can be converted and printed is 2^{31} - 1. Print punctuation for data fields is obtained from file DICT. A print picture may be specified for arithmetic expressions, or to override field specifications in file DICT.

FRACTIONAL SIGNIFICANCE

Retention of fractional significance (number of decimal places) in arithmetic-expression results is as follows:

- Addition and subtraction: the result is carried to the greatest number of places in either term.
- 2. Multiplication: the result is rounded to the greatest number of decimal places.
- Division: the result is truncated to the greatest number of places in either term.

CALLING REPORT

The Report program uses the Batch Processing Monitor for file services and overlay loading. Report makes use of output files, created by Retrieve, that contain report/data definitions and extracted data records. If the user elects to use standard headings and printing formats (via the default print layout), Report accesses them from file DICT, which was created by the dictionary generator. Sort is used when the listing sequence differs from the original data base sequence.

Input for a Report run consists of the Report processor call card explained below. The description of the retrieved output card is given in Chapter 4.

The Report processor call card is of the form

! REPORT

where ! REPORT is required as shown starting in column 1.

After being called, the Report program opens the specification file and reads those specifications pertaining to the first request. The report sequence is compared against the original data base sequence. If they are the same, sorting is not required, and the actual list phase will be entered directly. If the sequence of the retrieved data must be changed, Sort will be called. The Sort program will read in the entire retrieved data file, select the records pertaining to the request being processed, sequence them as required, and then enter the listing phase. If errors are found in a request, it will be aborted and the next listing will be attempted. At the end of each list, the

specification file will be examined for remaining requests, and the cycle will be repeated as needed.

REPORT MESSAGES

The following messages are output during Report.

CANNOT FIND REPORT INPUT FILE

The Report program was unable to open the report input file. The file may not exist.

CANNOT READ REPORT SPECIFICATION FILE

An error or abnormal condition has occurred while reading the Report specification file. The file may not exist.

END MANAGE REPORTS-RESTORE STANDARD PRINT FORM

All user-specified special reports have been printed.

HEADINGS FOR MORE THAN 2 DETAIL LINES ARE OMITTED

Not enough headings are present for the total number of detail lines. This message is shown on the first page of the affected report listing. Each retrieved record will be completely listed with headings for the first two lines only.

MANAGE: LOAD x PART FORM - xxx WIDE - xx LINES/PAGE

Operator intervention is required to set up the specified type of paper. (Message appears at operator's console.)

MANAGE: LOAD SPECIAL FORM FOR REQUEST xxxx

Operator intervention is required to set up the special form. (Message appears at operator's console.)

MANAGE REQUEST XXXX FORM SPECIFICATIONS REQUIRED — ENTER 2 DIGIT NUMBER OF LINES

The two-digit line-number parameter is required. (Message appears at operator's console.)

MANAGE REQUEST xxxx FORM SPECIFICATIONS REQUIRED — ENTER 3 DIGIT NUMBER OF PRINT POSITIONS

A three-digit print-position-number parameter is required. (Message appears at operator's console.)

MEMORY OVERFLOW

Either there is insufficient memory to read in the report specification file from Retrieve, or there is no common page for Sort communication.

MISSING FIELD NAME IN FORMAT RCD

A field name has not been transferred properly from Retrieve to Report.

MISSING REPORT CONTROL ENTRY-REQ xxxx

A report specification record key has not been transferred properly from Retrieve to Report.

MISSING REPORT FORMAT RCD - REQ xxxx

A report format record has not been transferred properly from the Retrieve program to Report.

NUMBER OF PRINT LINES PER RCD OVER 255

The request is aborted because the number of print lines exceeds the allowed maximum.

READ ERR ON STANDARD HEADING DICTIONARY

The Report program was unable to read successfully the dictionary record containing the standard column headings.

REQ TERMINATED — ARITH TRAP PROCESSING PRINT ENTRY xx

An illegal arithmetic procedure was detected in the indicated line. The request is aborted and the next request is attempted.

unable to complete report — inadequate memory

Available memory space is insufficient for complete processing of the report.

UNREADABLE RCD ENCOUNTERED – REQUEST ABORTED

An unreadable data record has been found in the Report input file. The next request in the batch will be attempted.

APPENDIX A. SAMPLE MANAGE DECK SETUPS

Manage operating examples are given below. The first four describe deck structures required to enter the four Manage processors into the System Library. The remaining five examples describe required deck setups for using the processors. Note that these illustrations do not show any limit cards since they are installation-dependent. The deck setups will also vary for different combinations of RAD, tape, and device assignments. Appendix B contains DCB information necessary when complex input/output assignments are required.

During execution, the Manage processors send various messages to the operator's console, such as tape mount and dismount commands. Required responses are described in the Batch Processing Monitor manual. The only nonstandard operator responses that may be required occur in the Report process, as outlined below.

- Reports are grouped by paper type and number of copies. At the start of each group, the operator is informed of the form required in the printer, and printing is suspended until the operator keys in the appropriate BPM continue command.
- Each report requiring a special form causes a suspension of processing until the operator keys in the number of print positions and line depth pertaining to that form. The console key-in procedure is prompted by Report after identification of the request being processed.

The standard Dictnary processor is constructed from the three temporary element files produced by the deck shown in Example A-1.

The deck in Example A-2 produces three element files from which are constructed either the standard Fileup processor, or the Fileup processor with user own-code. This module is callable with an OWNUP card.

The standard Retrieve processor is constructed from the four temporary element files produced by the deck shown in Example A-3.

The standard Report processor is produced by the deck shown in Example A-4.

The deck in Example A-5 illustrates a run that either updates a previous dictionary or creates a new one. The resulting file will contain all dictionaries defined under the current account number.

The deck in Example A-6 illustrates the updating of an existing RAD file. The Fileup specifications and the change transactions are on cards. The sorted transaction file UPTRAN is deleted at the end of the update process.


The deck in Example A-7 illustrates the updating of an existing tape file. The Fileup specifications are taken


from a library named SPEC, and the change transactions are to be read from tape. The transactions are to be sorted and placed on another tape before the update begins. An audit file is also to be created on tape.


The deck in Example A-8 illustrates a retrieval and report generation run containing one or more requests. The data base is a RAD file, and all intermediate outputs are also defaulted to the RAD.

The deck in Example A-9 illustrates a retrieval run in which all requests require a match between a primary tape file and a secondary RAD file. A user file is to be created on tape, and requests to be listed are on another tape. During the Report process, any required sorting is to be done using 9-track tapes.


Example A-1. Forming the Dictnary Processor

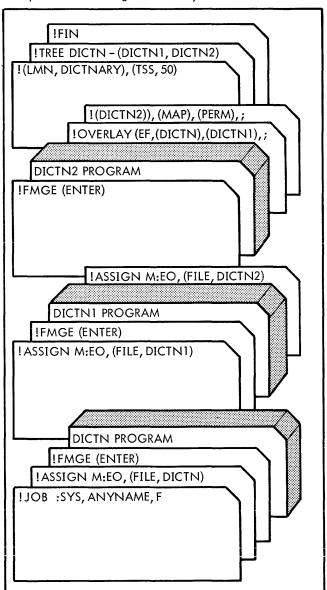

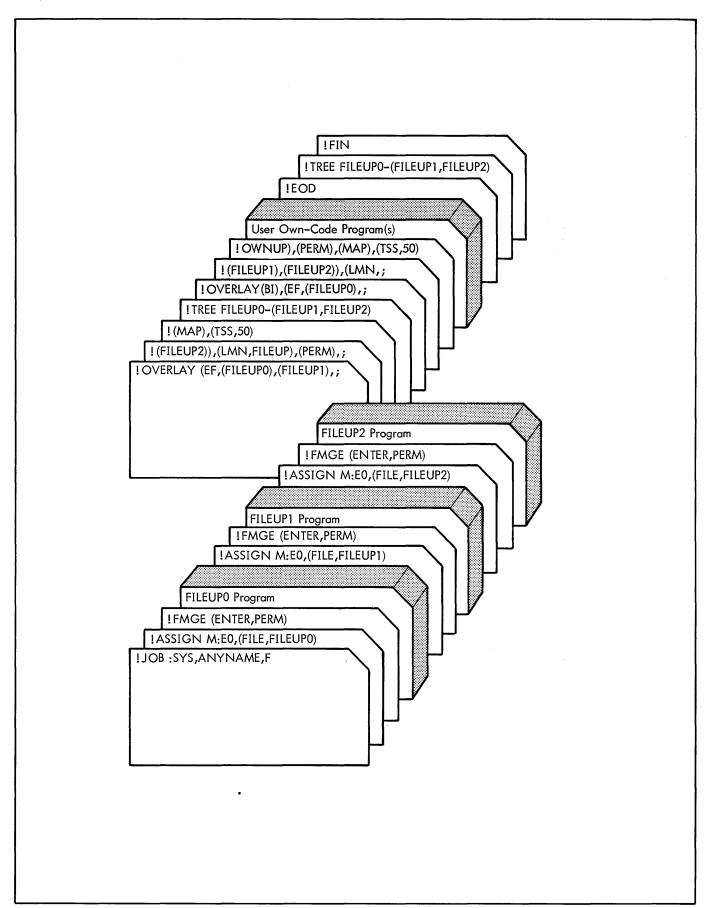


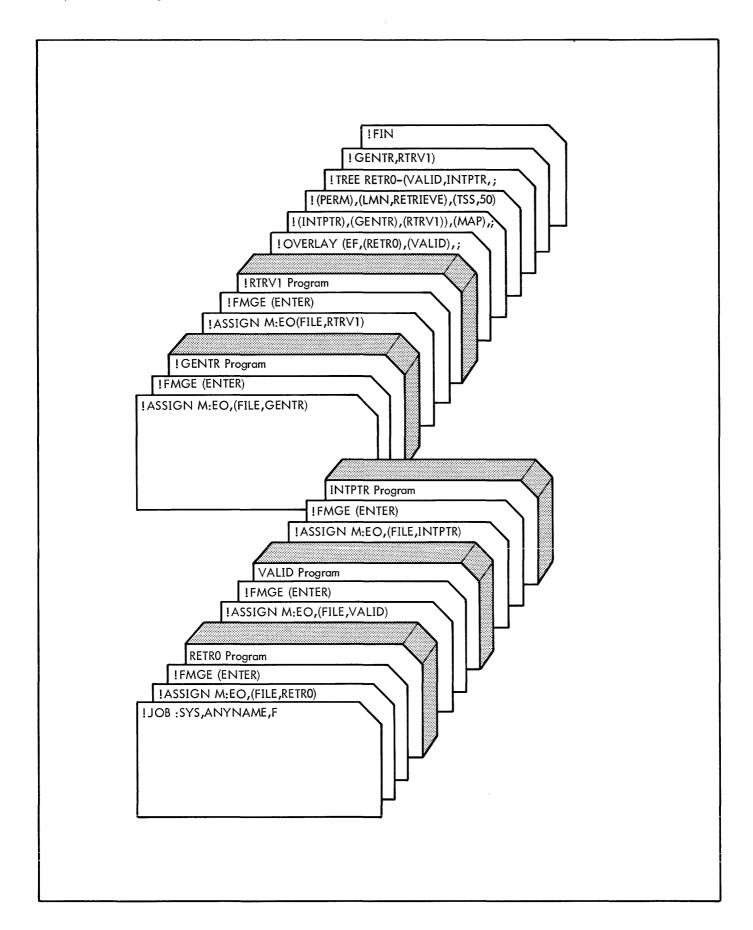


Example A-4. Forming the Report Processor

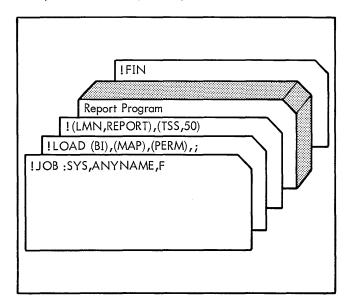


Example A-5. Dictnary Creation or Modification

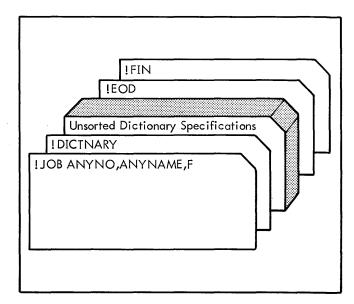



Example A-6. Updating a RAD File

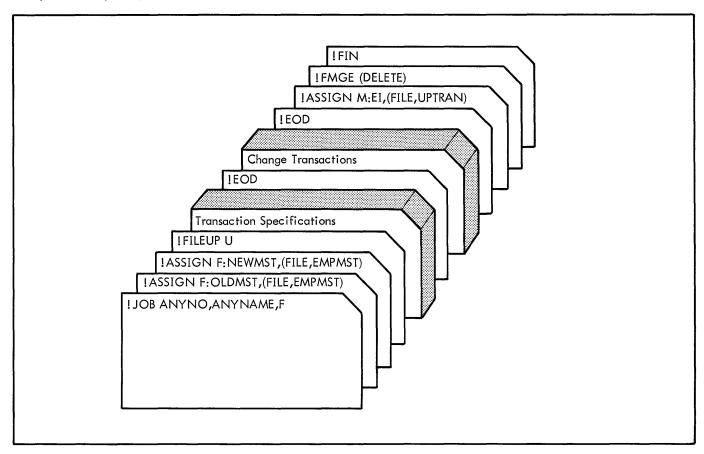

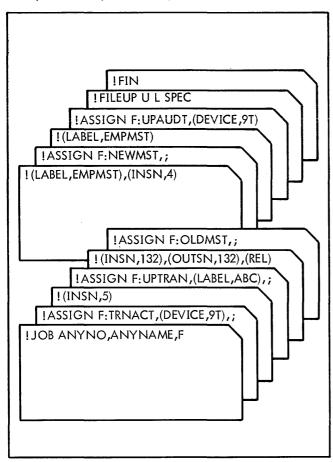

Example A-8. Retrieval and Report Generation

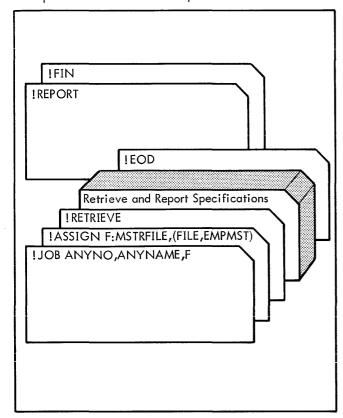

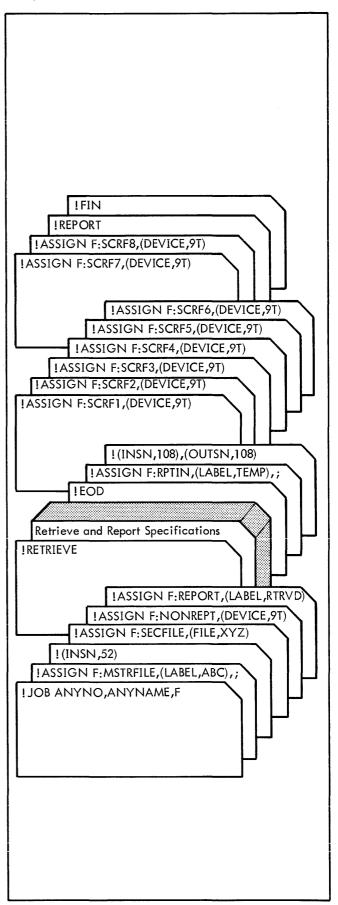

APPENDIX B. DCB NAMES FOR MANAGE PROCESSORS

Table 3 below gives the DCB names used by the Manage processors. Note that DCB defaults in Manage are arranged so that if all jobs are run under the same account number and if RAD space is available to handle the intermediate files, ASSIGNs are required for the following DCB names only.

DCB Name	Description
F:OLDMST	The input master file in Fileup
F:NEWMST	The output master file in Fileup
F:UPAUDT	The optional audit file in Fileup
F:MSTRFILE	The input data base file in Retrieve

DCB Name Description F:SECFILE The optional secondary input data base in Retrieve F:NONREPT The optional user output file in

Retrieve

In such a situation, all parameter specifications and change transactions will be read through the SI device (usually cards).

In addition to the DCBs shown, all processors write error messages and diagnostics through the M:LO DCB. All DCBs accept account and password information via ASSIGN records.

Table 3. DCB Names for Manage Processors

DCB Name	Function	ASSIGN Required	Comments
		Dictnary	
M:SI	Input specification records.	No	Defaults to system SI device.
F:DCTSPC	Sorted input specification records.	No	Defaults to RAD. If assigned to tape, INSN and OUTSN are required.
F:DICT	Central dictionary input/ output.	No	To RAD only.
		Fileup	
M:SI	Input specification records.	No	Defaults to system SI device.
F:DICT	Central dictionary input.	No	To RAD only.
F:TRANS	Specification library input/output.	No	To RAD only.
F:UPSPCS	Sorted input specification records.	No	Defaults to RAD. If assigned to tape, INSN and OUTSN are required.
F:TRNACT	Input change transactions.	No	Defaults to system SI device.
F:UPTRAN	Sorted input change trans- actions (optional).	No	Defaults to RAD. If assigned to tape, INSN and OUTSN are required. To release the sorted transaction file, use FMGE after a successful run.
F:OLDMST	Input master file.	Yes	May be to RAD, tape, or device.
F:NEWMST	Output master file.	Yes	May be to RAD, tape, or device.
F:UPAUDT	Output audit file (optional).	Yes	May be to RAD, tape, or device.
· · · · · · · · · · · · · · · · · · ·		Retrieve	<u></u>
M:SI	Input specification records.	No	Defaults to system SI device.
F:DICT	Central dictionary input.	No	RAD only.
F:MSTRFILE	Input data base.	Yes	May be to RAD, tape, or device.

Table 3. DCB Names for Manage Processors (cont.)

DCB Name	Function	ASSIGN Required	Comments
		Retrieve (cont.)	
F:SECFILE	Input secondary data base (matching option).	Yes	May be to RAD, tape, or device.
F:NONREPT	Output user file (optional).	Yes	May be to RAD, tape, or device.
F:SI	Sorted input specification records.	No	Defaults to RAD. If assigned to tape, INSN and OUTSN are required.
F:REQLIB	Retrieve specification library input/output.	No	To RAD only.
F:RPTSPC	Output report specification file.	No	To RAD only.
F:REPORT	Retrieved data output file.	No	Defaults to RAD. May be assigned to tape.
		Report	
F:DICT	Central dictionary input.	No	To RAD only.
F:RPTSPC	Input report specification file.	No	To RAD only.
F:RTRVD	Retrieved data input file.	No	F:REPORT DCB from Retrieve is carried over automatically.
F:RPTIN	Sorted report data input file.	No	Defaults to RAD. If assigned to tape, INSN and OUTSN are required.

APPENDIX C. OWN-CODE LINKAGE FOR FILEUP

Registers 5 to 7 are used for communication between Fileup and the various user modules. In Table 4, below, these registers are described at the time of entry into the user's code and at the exit back to Fileup. Address values are at

word resolution unless otherwise specified. An x indicates that the value in the designated retister is not significant. A method for generating a Fileup processor with user owncode is shown in Appendix A.

Table 4. Register Use for Own-Code Linkage

Entry Poir	nt	Register 5	Register 6	Register 7
FUPOP	Entry	x	Return address.	x
rurur	Exit	×	x	×
	Entry	0 means that the input master label has been read. †	Return address.	Byte address of input label buffer. ^{tt}
FUPHD	Exit	х	x	х
rurnu	Entry	1 means the output master label is ready to be written.†	Return address.	х
	Exit	×	×	Byte address of user's output label buffer.††
FUPIM	Entry	Return address to delete this input master record.	Return address to use this input master record.	Byte address of input master record.
	Exit	×	х	x
FUPMT	Entry	Byte address of matched change transaction record.	Return address.	Byte address of matched input master record.
	Exit	×	×	×
FUPOM	Entry	Return address to delete this output master record.	Return address to write this output master record.	Byte address of output master record.
_	Exit	х	х	×
FLLDCI	Entry	x	Return address.	×
FUPCL	Exit	х	x	x

[†]The entry to FUPHD for output label processing is made before the entry for input label processing.

INPUT AND OUTPUT LABEL FORMATS

The following conventions are observed in the processing of input and output label buffers:

- The first byte of the buffer contains the length of the label which follows.
- 2. The second byte of the buffer contains the start of the label information.
- Since the buffer is assumed to start on a word boundary, the label length byte occupies the first byte of a word.
- 4. Label length should not exceed either 255 bytes, or the length of a data block, else truncation will occur.

th Does not apply to master files with one or more header records ending with a file mark (F in user header label indicator of Dictnary file definition card). The user is responsible for reading and writing all such header records and file mark. Fileup will enter FUPHD after opening the input or output file. However, all required reading and writing of header records and file mark must be done in the user own-code. Fileup will resume processing under the assumption that the input or output file is positioned for reading or writing master data records.

APPENDIX D. SAMPLE MANAGE RUNS

The sample dictionary printout shown below results from the file description given in Chapter 2.

			NARY							2:14 JUN		•••	1
***	FILE:			MONITOR F	SRMAT	TED,	UNLA	GTH: 1284; BLFD RP.= MASTER		ING FACT	'eR: O		
HAR	FIELD CHAR LENGTH	FIELD NAME	FIELD TYPE	FIELD	ORDE	R DIR	FIELD AUDIT FLAG	POINT		COMMA INSERT	SIGN	TRAIL MINUS SIGN	LEF' CHAI
• • •	•••	•••••		•••••	•	•	••••	STANDARS			IN HEADIN	IGS	•••
3	1	DIVISION	BINRY		1	A	!	DIV	Z				:
7	5	EMPNO	BINRY		2	A	, 1	EMPL> NO					
9	21	NAME	ALPHA				!	EMPLOYEE NAI	1E				
30	39	ADDRESS	TF,XT										3
30	50	L1	ALPHA					STREET					3
50	19	rs	ALPHA					CITY-STATE					5
69	3	ZIP	PACKD					ZIP>CODE					۴
79	9	SØSECNE	ALPHA					SOCIAL>SECU	URITY	NUMBER			7
88	6	BIRTHDIE	ALPHA					DATE PF> BIF	RTH >*	18/DY/YR			Я
94	1	SEX	ALPHA					S>E>X					ģ
95	1	MARITAL	ALPHA					M>R>T>L					ç
101	1	CITIZEN	ALPHA					C>T>Z>N					1.0
102	6	HIREDATE	ALPHA					DATE OF> H	IRE >	M8/DY/Y	₹		10
102	5	HIREMB	ALPHA										1 (
106	2	HIREYEAR	ALPHA									•	10
109	3	HIRERATE	PACKD					3 RATE> AT >H	Z IRE		\$		10
132	1	DEPEND	BINRY					N@>@F>DEP	Z				13
137	10	POSITION	ALPHA					JOE>TITLE					13
151	3	PAYRATE	PACKD					B RATE> 9F > I	Z Pay	· c	\$	•	1 5
154	6	STACYAC	ALPHA					DATE >RAT	r 0=*:	יט, טחו פע	5		15

Figure D-1. Sample Dictionary

. SDS SIGMA MANAGE .

MANAGE REQUEST SDEM

REPORT TO STATE DEPARTMENT OF EMPLOYMENT SHOWING ALL NONCITIZEN FEMALE EMPLOYEES.

REPORT IS SEQUENCED BY:

HIRE YEAR (DESCENDING)

HIRE MONTH (DESCENDING)

NAME

THE REPORT SHOWS VARIOUS ITEMS OF DATA FOR EACH EMPLOYEE,

INCLUDING STARTING RATE OF PAY.

THE AVERAGE STARTING RATE OF PAY FOR FACH YEAR IS ALSO SHOWN.

JUN 11,16						EMPLOYEES	1
DATE 9F HIRE M9/DY/YR	EMPLOYEE NAME	E MPL N O	SECURITY NUMBER	M R T L	NA EF DEP	J98 TITLE	

10-12-69 ADDRESS	HBLAHAN MARY 1479 BEVERLY DR	015508 S LBNG BEAR	570=39=6608 CH CAL•	M	S	WIRER	
08-10-69	DIEKMAN EVONNE	026936	580 -47- 6832	M	8	ASSEMBLER	± 1•850
08-10-69 ADDRESS	DIXUN MARILYN 4210 EART AVE	013974 (LYNR88D	560=83=3186 CAL•	M	5	ASSEMBLER	1 • 855
08=10=69 ADDRESS HIREYEAR	ORISCOLL SARAH 1704 1314 ST AVERAGE	026262 !	554=62+5384 RK CAL•	٣	2	ASSEMBLER	\$ 1 · R75
							\$ 1.845
HIREYEAR	TTEM COUNT DODOO4						
10-12-68 ADDRESS	HELT CAREL 312 MERAGA AVE	027796 ! LONG BEAR	536=39=6167 CH CAL•	۲	2	*!RER	\$ 1.755
	HERNEMAN RESERTA A 4812 IALAY AVE			۳	2	CLERK	\$ 1.800
10-10-68 ADDRESS	HEWARD MARTHA 1514 VHIT ST	027909 MARVISTA	575-72-1489 CAL•	м	4	CLESK	\$ 1.R25
07=17=68 ADDRESS	GALINDO RUTH 376 ALMA ST	012472 HERMOSA	394-32-2812 BEACH CAL•	м	1	SECRETARY	¢ ?•750
03+03+68 ADDRESS	LESTER SUSAN 3122 ARIZANA ST	017254 8CEAN PA	535=19=5447 RK CAL•	W	1	∞IRER	\$ 2.100
03-03-68 ADDRESS HIREYLAR	LBGAN JEAN 212 CELERADE AVE AVERAGE	n29542 VENICE	522=20=7169 CAL •	W	1	*IRER	\$ 2.110
							\$ 2∙057
HIREYEAR	ITEM COUNT 000006						
09-07-67 ADDRESS	HUTH HURTENSE H 696 CLARK ST	028242 SANTA MO	570=39=1142 NICA CAL•	Ö	2	ASSEMBLER	\$ 2•000
07+17-67 ADDRESS	GABLE GRETA F 3763-MOTOR AVE	026062 SANTA MB	525*62*7036 NICA CAL•	M	4	SECRETARY	\$ 2.550
07-17-67 ADDRESS	GAGE KAREN 2205 MATRIX DR	018514 SANTA M5	537=40=2956 NICA CAL•	ч	3	SECRETARY	\$ 2.550

Figure D-2. Sample Retrieved Data Report

JUN 11.16			NONCITIZEN				5
DATE OF HIRE MO/DY/YR	EMPLOYEE NAME	EMPL No	SOCIAL SECURITY NUMBER	R	NO OF	JOB TITLE	RATE AT HIRE
••••••	•••••••	• • • • • • • •			• • • • • •	• • • • • • • • • • • • •	
	GALLER CARMEN 428 VISTA AVE		532-48-7034 BNICA CAL+	М	1	SECRETARY	\$ 2•400
07-17-67 ADDRESS	GALLOWAY LORI 52286 MART LANE	027186 VENICE	428-62-3078 CAL•	M	5	SECRETARY	\$ 2.375
	STOUT MICHELE 422 KELTON AVE AVERAGE		548-62-7031 ELES CAL•	M	3	SECRETARY	\$ 2.625
							\$ 2.417
HIREYEAR	A00000 TRUES MATE						
	CRUSE MAYBELLINE 7177 SUNSET BLVD		580-33-1414 YW88D CAL:	M	3	ASSEMBLER	\$ 2·000
05=23=66 ADDRESS	DEDRICK SYLVIA R 3756 STEWART DR	013822 SYLMAR	580~47~6683 CAL•	м	5	EXPEDITER	\$ 2.900
	DEMPSEY ELLEN 1271 WALTER DR		450-47-4688 ELES CAL:	M	5	EXPEDITER	\$ 3*010
	EVANS JEAN 556 16TH ST APT D AVERAGE	011215 LOS ANG	621-47-6681 ELES CAL•	М	5	EXPEDITER	s 2·875
							\$ 2.696
HIREYEAR	ITEM COUNT 000004						
04-08-65 ADDRESS HIREYEAR	DEAN CLAIR 1548 HARVARD AVE AVERAGE	013811 SANTA M	580-47-8827 Bnica cal.	N	S	ASSEMBLER	\$ 2.100
							\$ 2.100
HIREYEAR	ITEM COUNT 000001						
⇒FINAL=	AVERAGE						
							\$ 2.243
	69 TITEMS RETRIEVED 000 TITEMS READ IN 000		NƏNCITIZEN	F	EMALE	EMPL®YEES	

Figure D-2. Sample Retrieved Data Report (cont.)

WAGE INCREASE PROBLEMS

The Amalgamated Corporation is engaged in wage negotiations. The management wishes to evaluate the annual wage costs of two alternative proposals covering assemblers, wirers, and group leaders. The alternatives are

- 1. A 6.75% rate increase for all three classifications.
- 2. A \$.13 cents per hour increase for assemblers; a \$.16 cents per hour increase for wirers; and a \$.25 cents per hour increase for group leaders.

The Director of Industrial Relations has analyzed overtime patterns for these classifications and has arrived at the following formula:

 Estimated annual gross wages for assemblers = (rate x 2080) + (rate x 1.5 x 102.5)

- Estimated annual gross wages for wirers = (rate x 2080)
 + (rate x 1.5 x 156.0)
- 3. Estimated annual gross wages for group leaders = (rate × 2080) + (rate × 240) + \$90.00

The Manage specifications shown in Figures D-3, D-4, and D-5 will retrieve the relevant employees and show the impact of the alternative wage increases on each department. Extensive use of arithmetic expressions is shown. In the retrieval specifications, these expressions calculate annual straight time and overtime earnings for each employee and the anticipated earnings if different increases were applied to each job type. The report specifications summarize the results of the expressions evaluated in Retrieve and also compute the effect of the 6.75% uniform increase. The resulting report is shown in Figure D-6.

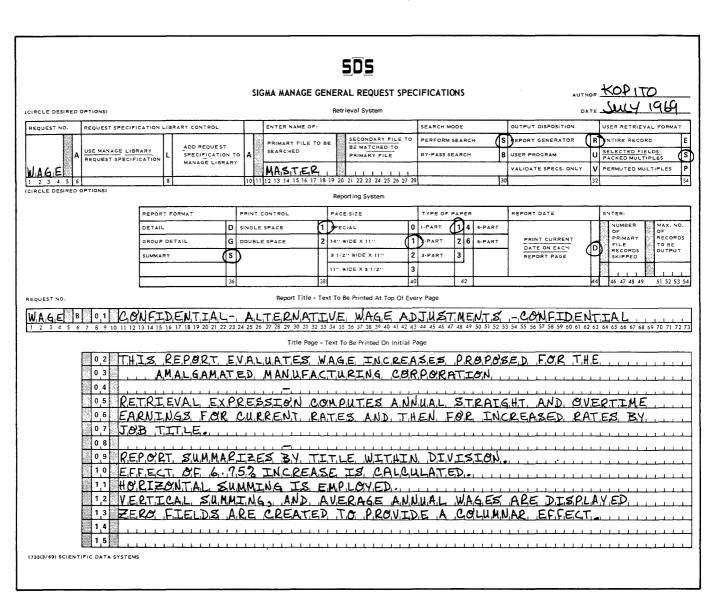


Figure D-3. Wage Problem General Request Specifications

REQUEST NO.		SIGMA MANAGE RETRIEVAL SPECIFICATIONS	AUTHOR KOPITO
2 3 4 5 6 7			DATE JULY 1969
FIRST TERM	OPER	OPERAND	LOG
FIELD OR E ARITHMETIC	COMP	LITERAL CONSTANT VALUES	ANI
RESULT NAME	ARITH OPER	FIELD OR ARITH. RESULT NAME/LITERAL	ARITHMETIC EXT RESULT NAME EN
9 10 11 12 13 14 15 16 17 18		23 24 25 26 27 28 29 30 31 32 33 3+ 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 5	
1 PAYRATE	*.	t.2080.	CURANNUL EX
2 PAYRATE	- *-	t.1.05	OTRATE EX
3 OTRATE	*.	+.1.0.25	
PAYRATE	+		NEWANALEEX NEWANNULLEX
	*	t2080	NEWOTLAT EX
6 NEWRATE 7 NEWATEAT	*.	†.1.0.25	NEWS, TER CEX
8 POSITION	E.Q	= ASSEMBLER.	SC S
9 BTRATE	*	+,1,56.0	OTGROSS EX
PAY PATE	+	+ <u>1.6.</u>	NEWPATE EX
1 NEWPATE	*	+2080.	NEWANNULEX
2 NEWRATE	*.	+15	NEWOTRAT EX
3 NEWOTRAT	*	+,1,5,6,0,0,	BR
4 POSITION	EΘ	=WIRER,	TEMP EX
5 PAYRATE	*	+ ,2,4,0,	OTGROSS EX
6 TEMP	۲,	+90.00	NEWRATE EX
7 PAYRATE	† .	425	NEWANNUL EX
8 NEWRATE	*.	t,2,0 <i>8.0</i> ,	TEMP EX
9 NEWRATE	*	+240.	NEWOTER EX
O TEMP.	+	t.9.0.0.0	E,N

Figure D-4. Wage Problem Retrieval Specification

VAG	EST NO. EDD 4 5 6 7					S	IGMA I	MANAG	E RI	SDS ETRIEVED OUTPUT SPECIFICATIONS	AUTHOR KOPITO DATE JULY 1969
ZE NO.	OR EXPR. CINE NO.	SAIN, AJ	SAEA+ CO.	(0) \ \ \ \ \ \ \ \ \ \		\$ 10 mm	7. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.	(A)	2	REPORT COLUMN HEADING (OVERRIDES DICTIONARY ENTRY)	PRINT FORMAT PICTURE (OVERRIDES DICTIONARY ENTRY)
		• FOOT 10	1 22 23	24 25 2	5 27 28	29 30	31 32 33	3 34 35 3	16 37	38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 63	· · · · · · · · · · · · · · · · · · ·
0,1	<u>DIVISIO</u> Positio	• 100 B	2	1	#	T	++-	+++	-1-	> JOB>TITLE	99-9
1,2		4	-^-		4	-	++		-		
	<u> </u>	+++	++-	+++	+	+	╁┼┼		-1-		
14	0.1%03		++-		++-	\vdash	-	+++	-	CUR.	2
,5 🕖	C.U.R.A.N.N.U.	4	44	44	<u> </u>	-		+++		>STRAIGHT.	ZZZ, ZZZ.99
200203	OTG POSS	444	44-	444	12	4	111			>Ø.T	ZZ3ZZZ-99
7 (0.5.+.0.6		44	$\sqcup \sqcup$	1 2	Ц.	12			>T. OTAL	\$222,222,99
8 (0,1,4,0,3			Ш	Ш					1, 1.6, 7.5.2	2
9.	+1.0675										
1,0	0.5×09.				a					, >STRAI6HT	ZZZ ZZZ 99
1 (0.6*.09				12	\prod				, >Θ.τ.,	22,222.99
.2	10+11				12	П	2			>TOTAL	\$222.222.99
1,3	01*03		\Box		T	\sqcap				ALT.2	Z
. 4	NEWANNII			$\Pi \uparrow$	12				, 1	. >STRAIGHT	222,272,99
- 100	NEWOTER	4	11		2		\Box		-	78.7.	22.222.99
1.5			2003 R000	A 10000		4		1 6883	- 1 - 1		1616 016 GO 1111111111111111111111111111111111

Figure D-5. Wage Problem Report Specifications

. SDS SIGMA MANAGE .

MANAGE REQUEST WAGE

THIS REPORT EVALUATES WAGE INCREASES PROPOSED FOR THE AMALGAMATED MANUFACTURING CORPORATION

RETRIEVAL EXPRESSION COMPUTES ANNUAL STRAIGHT AND OVERTIME EARNINGS FOR CURRENT RATES AND THEN FOR INCREASED RATES BY JOB TITLE.

REPORT SUMMARIZES BY TITLE WITHIN DIVISION, EFFECT OF 6.75% INCREASE IS CALCULATED. HORIZONTAL SUMMING, IS EMPLOYED, VERTICAL SUMMING, AND AVERAGE ANNUAL WAGES ARE DISPLAYED, ZERO FIELDS ARE CREATED TO PROVIDE A COLUMNAR EFFECT.

	59 . • • • • • • • • • • • •	••••••	CANE	IDENTIAL - AL	• • • • • •	VE WAGE AD	JUSTMENTS		• • • • • • • • • • • • • • • • •	• • • • • • • • •	1
	CUR JOB TITLE	STRAIGHT	9•⊤•	TOTAL	+6•75%	STRAIGHT	0•⊤•	TOTAL	ALT+2 STRAIGHT	0.T.	TOTAL
0-0 ASSE											
esitien	TOTAL										
esitien	AVERAGE	258#377•60		\$277,476.43		2/5,818.09	20,388.00			20,218.15	*
OSITION	ITEM COUNT	000056		\$ 4,954.94				\$ 5,289.39			\$ 5,245.
GRP	LEADER										
esitien	TSTAL										
PESITION	AVERAGE	41,392.00	5,496.00	\$ 46,888.00		44,185.96	5,866.98	\$ 50,052,94	45 <i>,</i> 552•00	5,976.00	\$ 51,528.
esitien	ITEM COUNT	800000		\$ 5,861.00				\$ 6,256.62			\$ 6,441.
WIRE	R										
esitien	TOTAL										
esitien	AVERAGE	185,972.80	20,921.94	\$206,894.74		198,525.96	22,334.17	\$220,860.14	199,617.60	22,456.98	\$222,074.
esitien	ITEM COUNT	000041		\$ 5,046.21				\$ 5,386.83			\$ 5,416.
IVISION											
DIVISION		485,742.40	45.516.77	\$531,259.17		518,530.01	48,589•15	\$567,119.16	518,689.60	48,651.13	\$567,340.
714151014	HYENNOE			\$ 5,059.61				\$ 5,401.13			\$ 5,403.
FINAL-	TOTAL	485,742.40	45,516.77	\$531,259.17		518,530.01	48,589•15	\$567,119.16	518,689.60	48,651.13	\$ \$567,340.
FINAL-	AVERAGE			\$ 5,059.61				\$ 5,401-13			\$ 5,403.

Figure D-6. Wage Problem Report

INDEX

Note: For each entry in this index, the most significant description appears first.

```
delete multiple group, 16
$ character, 7
> character, 7
                                                                   deletion of a file dictionary, 5
                                                                   descending sort, 6, 30
                                                                   dictionary list option, 5
                                                                   Dictnary, 4
                                                                   Dictnary cards, 5
add to request library, 26
algebraic add, 16
                                                                   Dictnary messages, 8
allowed characters, 5,7
                                                                   Dictnary processor call card, 5
alphabetic fields, 31,39
                                                                   disposition of output, 26
alphabetic transaction field, 12
                                                                   dollar sign, 7
arithmetic expression result name, 28
arithmetic expressions, 23
                                                                   E
arithmetic operators, 23, 25
arithmetic overflow, 13
                                                                   embedded blanks, 5,7
arithmetic truncation, 13
                                                                   equipment configuration requirements, 3
ascending sort, 6
                                                                   errors, 8, 4, 5, 9, 10, 13, 17, 18, 19, 20, 21, 25, 31, 33, 34, 35,
assignments, 13
                                                                        36, 37, 38, 40, 41
asterisk, 5, 13, 25
                                                                   expression line numbers, 29
audit, 12,7
audit file design, 12
average value, 30
                                                                   F
                                                                   field conversion, 12
B
                                                                   field definition card, 5
                                                                   field function code, 16
binary fields and expressions, 40
                                                                   field length, 6
blank fill, 16
                                                                   field name, 5,29
blanks, 13
                                                                   field or expression result name, 28
blocked records, 4
                                                                   field type, 6
blocking factor, 5
                                                                   field update card, 15
byte string simulator, 3
                                                                   file constraints, 4
                                                                   file creation or updating, 11
                                                                   file definition card, 5
C
                                                                   file name, 5
calling Dictnary, 4
                                                                   file update card, 14
calling Fileup, 13
                                                                   Fileup, 11,12
calling Report, 40
                                                                   Fileup call card, 13
calling Retrieve, 24
                                                                   Fileup messages, 16
column heading, 31
                                                                   Fileup run cards, 13
comma insertion, 7
                                                                   first term, 28
comments, 5
                                                                   fixed fields, 4
conditional replacement, 16, 12
                                                                   fractional significance, 40
constraints, 39,11
conventions, 39,1
                                                                   G
counter field, 4
creation of a sample master file, 16
                                                                   gang method, 11
                                                                   gang replacement, 16
                                                                   gang transactions, 13
D
                                                                   general procedures, 3
data dictionaries, 4
                                                                   general request specification card, 25
data formats, 24
                                                                   group key, 4
data type, 15
                                                                   group selection keys, 11
DCB names for Manage processors, 46
DCBs active at one time, 12
decimal scaling, 7
```

horizontal totaling, 39

decimal simulator, 3

ı

I/O error bypass, 14 input/output errors, 13 insert multiple group, 16 item count, 30

K

key level, 6

L

leading zeros, 7 left-zero fill, 13 library action code, 14 library name, 14 library request, 25 line number, 27,29 literal constant, 28 literals, 28 logical connector, 29

M

Manage file characteristics, 1 Manage program characteristics, 1 Manage programs, 2 Manage system components, 2 master field name, 15 master file design, 11 master file name, 14,15 maximum logical record length, 5 maximum number of fields, 4 maximum number of output records, 27 maximum value, 30 minimum value, 30 minus sign, 7 multiple field's counter name, 7 multiple fields, 13 multiple literals, 28 multiple-entry fields, 11,4,6 multiple-entry groups, 27 multiple-entry indicator, 7

N

negative values, 12 nonprint indicator, 30 number of blanks to right, 31 number of records to skip, 27 numeric fields, 31 numeric literal, 30,29 numeric zero fill, 16

0

operator, 28 own-code linkage for Fileup, 48 own-code on closing, 14 own-code on header, 14 own-code on input, 14 own-code on opening, 14 own-code on output, 14 own-code on transaction, 14

P

packed decimal fields, 7
page eject, 30
page number reset, 31
page size, 27
partial transaction records, 16
primary file name, 26
print control, 27
print format picture, 31
programs in the Manage system, 2

R

record and field sizes, 4 record function code field position, 15 record function codes, 12 relational operators, 23, 25 replacement, 16 Report, 39 Report conventions, 39 Report date, 27 Report format, 27 Report messages, 40 Report processor call card, 40 Report specifications, 39 request number, 25, 27, 29 retrieval specification card, 27 retrieval specifications, 25 Retrieve, 22, 24, 25 Retrieve messages, 31 Retrieve processor call card, 25 retrieved output card, 29

S

sample data retrieval and report, 31 sample Manage deck setups, 42 sample Manage runs, 49 scaling, 28 search mode, 26 secondary file name, 26 selection criteria, 22 selection method, 11 sequence key field, 16 sort, 14 sort direction, 6 sort key, 4 sort level, 30 special purpose programs, 12 standard column heading, 7

Note: For each entry in this index, the most significant description appears first.

starting-byte position or multiple-entry order, 6 summing level, 30 suppression of leading zeros, 7

T

text fields, 39
text lines, 27
title and heading card, 27
total break control, 30
totaling, 39
trailers, 12
trailing blanks, 5, 7
transaction blocking factor, 14
transaction code, 16
transaction data field sizes, 13
transaction field length, 15
transaction file design, 11
transaction file header, 14
transaction ID starting byte, 14

transaction record length, 14 transaction starting position, 15 type of paper, 27 type of run, 14

U

unblocked records, 4 undefined areas, 13 user header label indicator, 5 user own-code, 12 user program retrieval format, 27

V

validity check, 25 void entry, 5

Ζ

zero suppression, 7