

The Amlyn 5850

Five times a maxi floppy in less space

Completely interface compatible with the Shugart Associates SA850 or equivalent 8-inch floppy disk drive, the 5850 appears to your controller and system software as five SA850 drives, with 8-Mbytes of on-line storage. All in a mini-floppy package!

This high capacity results from a cartridge holding five, 5¼ inch single sided diskettes with a recording density of 9,500 bits per inch (BPI), using 154 tracks per diskette at 170 tracks per inch (TPI). Microprocessor control enables the Amlyn Model 5850 to be read-compatible with existing mini-floppy diskettes, enabling data base conversions to be conveniently made from a standard to an Amlyn diskette.

CONTROL ELECTRONICS

Drive electronics are contained on two printed circuit cards: the Motor Drive card and the Drive Control card. The Drive Control card includes the Intel 8051 microprocessor and associated support chips, the read/write circuits, and the reference track detection circuits. Also provided are self diagnostics and photo interrupter circuitry for control sensors such as: door closed, diskette picker, Pac home, write protect, index/segment and head carriage home, as well as the car-



riage scale sensors which detect the direction of motion and location of the R/W head cartridge.

The Motor Drive card contains the drive circuitry for the head carriage motor, the spindle drive motor, the Pac articulator motor and the diskette picker motor.

PAC ARTICULATOR This mecha-


nism positions the MiniPac cartridge for selection of a diskette using a stepper motor under microprocessor control to move a predetermined number of steps from the "Pac home" position. This position is determined when a flag on the cartridge tray passes between a photo-interrupter switch module designated as the Pac home sensor.

DISKETTE PICKER The diskette picker is controlled in a manner similar to the Pac articulator. The picker selects the appropriate diskette from the articulated cartridge, moves and centers it over the spindle and clamps the diskette to the spindle. When a different diskette is addressed, the action is reversed and then repeated to load the new diskette.

SPINDLE DRIVE Two microprocessor controlled rotational speeds are provided: Normal operating speed is 360 RPM; a second speed of 600 RPM is used to rotate standard diskettes recorded at 48, 96 or 100 TPI so that read data is provided at the rates required by the Amlyn drives.

The spindle drive motor is a DC motor, eliminating belt and drive pulleys changes for 50 or 60 Hz. power.

READ/WRITE HEAD The R/W head which records and reads data on the disk-

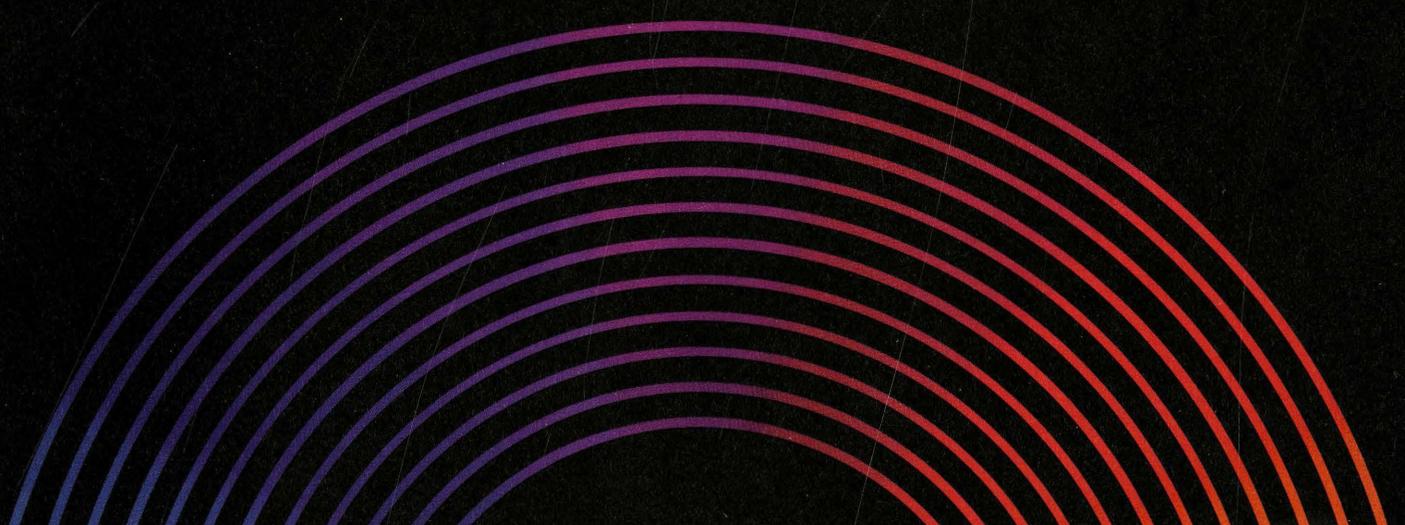

ettes is a single element, hot pressed manganese/zinc/ferrite device which has tunnel erase elements to erase data between tracks.

The head surface has been designed to obtain maximum signal transfer to and from the magnetic surface of the diskette with minimal wear of both the head and the diskette. The diskettes used with the Amlyn drives are multiple sourced.

HEAD CARRIAGE POSITIONING

The R/W head carriage assembly is positioned via a heliband which connects the drive motor to the assembly. The drive motor is a 1.8 degree stepper motor which drives the R/W head in 5.9 mil increments which are equivalent to the 5.9 mil spacing of the data tracks on the diskette. Microprocessor control of this assembly results in virtually noiseless positioning of the R/W head. Ultra fine movements in increments as small as 59 microinches provide a high degree of accuracy.

The assembly contains an optical scale which passes between LED and photo-transistor sensors. The lines on the scale are spaced at .59 mil increments, or 1/10th

the spacing of the data tracks. The control circuitry counts the lines on the scale by monitoring the output of the four scale sensors and uses a quadrature detection scheme to determine the direction of the scale motion and the number of lines that pass between the sensors. Intelligent control allows much faster access speed than blind stepping techniques.

Since the scale is made of Mylar, the same material used in the diskettes, it expands and contracts at the same rate as the diskette media under typical environmental conditions. This means that the location of all the data tracks can be determined by counting the scale reticle lines from the reference track and moving the head carriage assembly accordingly, eliminating touchy field or installation adjustments.

REFERENCE TRACK LOCATION

The reference track on any individual diskette is determined each time a diskette is removed from the cartridge and clamped to the spindle. To find the reference point from which the data tracks are located, the head/carriage assembly is moved to the carriage home

position, which is well outside the reference track on the edge of the diskette. Once in this position, the assembly is microstepped in toward the reference track until the reference track is detected.

Eccentricities are determined by locating the reference point at eight locations around the diskette. Any eccentricity offsets are stored for those eight locations to automatically microstep the head cartridge assembly in compensating directions as the diskette rotates to accurately follow the data tracks.

ADVANTAGES

- 8-Mbyte capacity
- SA850 compatible
- 5 drives in the space of one
- No touchy installation/field adjustments
- Flexible formats
- High data rates
- Cartridge diskette protection/versatility
- Self contained diagnostics
- Quiet stepping, fast access
- Changeable diskettes within cartridge
- Energy efficient motors

Physical Specifications

Environmental Limits (Operational)

Ambient Temperature = 40° to 104° F (4° to 40°C)

Relative Humidity = 20% to 80%
Noncondensing

Maximum Wet Bulb = 78°F (25°C)

DC Power Requirements

+12 VDC ±5% @ 1.2 A typical

+ 5 VDC ±5% @ 0.9 A typical

Weight = 2.5 lbs. (1.2 kg)

Mounting Envelope Dimensions

Height = 3.25 inches (82.6 mm)

Width = 5.75 inches (146.0 mm)

Depth = 7.88 inches (200.2 mm)

Heat Dissipation = 86 BTU/hr. typical (25 watts)

Media Requirements

5 each UHR I or equiv. Mini-Diskettes

Diskette Cartridge Requirements

1 each MiniPac cartridge

Performance Specifications

Unformatted Capacity Double Density

Per MiniPac Cartridge 8 mbytes

Per Diskette Surface 1600 kbytes

Per Track 10.4 kbytes

Formatted Capacity

IBM Format

256 Byte Sectors

Per MiniPac Cartridge 5.1 mbytes

Per Diskette Surface 1025 kbytes

Per Track 6656 bytes

Transfer Rate = 500 kbits/sec

Average Rotational Latency = 83 ms

Access Time:

Adjacent Track to Track = 3 msec

Track 00 to Track 153 = 230 msec

Average Access Time = 85 msec

Settling Time = 15 msec

Diskette to Diskette = 1.9 sec average, 2.9 sec max.

Functional Specifications

Rotational Speed = 360 rpm

Recording Density = 9500 bpi (inside track double density)

Flux Density = 9500 fci

Track Density = 170 tpi

Track Width = 3.5 mils

Cylinders = 154

Tracks = 770

Heads = 1

Encoding Method = FM, MFM, M²FM

Reliability Specifications

MTBF: 8000 POH under typical usage

MTR: 30 minutes

Component Life: 15,000 POH

Error Rates:

Soft Read Errors = 1 per 10⁹ bits read

Hard Read Errors = 1 per 10¹² bits read

Seek Errors = 1 per 10⁶ seeks

Media Life:

Passes per Track = 3.5 x 10⁶

Insertions = 30,000 +